

# MPI: A Message-Passing Interface Standard

Version 2.2

ticket0.

Message Passing Interface Forum

September 4, 2009

ticket166. 1 This document describes the Message-Passing Interface (MPI) standard, version 2.2.  
2 The MPI standard includes point-to-point message-passing, collective communications, group  
3 and communicator concepts, process topologies, environmental management, process cre-  
4 ation and management, one-sided communications, extended collective operations, external  
5 interfaces, I/O, some miscellaneous topics, and a profiling interface. Language bindings for  
6 C, C++ and Fortran are defined.

7 Technically, this version of the standard is based on “MPI: A Message-Passing Interface  
ticket77. 8 Standard, [June 12, 1995” (MPI-1.1) from the MPI-1 Forum, and “MPI-2: Extensions to the  
9 Message-Passing Interface, July, 1997” (MPI-1.2 and MPI-2.0) from the MPI-2 Forum, and  
10 errata documents from the MPI Forum.]version 2.1, June 23, 2008. The MPI Forum added  
11 seven new routines and a number of enhancements and clarifications to the standard.

12 Historically, the evolution of the standards is from MPI-1.0 (June 1994) to MPI-1.1  
13 (June 12, 1995) to MPI-1.2 (July 18, 1997), with several clarifications and additions and  
14 published as part of the MPI-2 document, to MPI-2.0 (July 18, 1997), with new functionality,  
15 to MPI-1.3 (May 30, 2008), combining for historical reasons the documents 1.1 and 1.2 and  
ticket77. 16 some errata documents to one combined document, [and this document, ]and to MPI-2.1  
ticket77. 17 (June 23, 2008), combining the previous documents. [Additional clarifications and errata  
18 corrections to MPI-2.0 are also included.]This version, MPI-2.2, is based on MPI-2.1 and  
19 provides additional clarifications and errata corrections as well as a few enhancements.  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44

ticket166. 45 ©1993, 1994, 1995, 1996, 1997, 2008, 2009 University of Tennessee, Knoxville, Ten-  
46 nessee. Permission to copy without fee all or part of this material is granted, provided the  
47 University of Tennessee copyright notice and the title of this document appear, and notice  
48 is given that copying is by permission of the University of Tennessee.

Version 2.2: September 4, 2009. This document contains mostly corrections and clarifications to the MPI 2.1 document. A few extensions have been added; however all correct MPI 2.1 programs are correct MPI 2.2 programs. New features were adopted only when there were compelling needs for users, open source implementations, and minor impact on existing MPI implementations.

Version 2.1: June 23, [2008, ]2008. This document combines the previous documents MPI-1.3 (May 30, 2008) and MPI-2.0 (July 18, 1997). Certain parts of MPI-2.0, such as some sections of Chapter 4, Miscellany, and Chapter 7, Extended Collective Operations have been merged into the Chapters of MPI-1.3. Additional errata and clarifications collected by the MPI Forum are also included in this document.

Version 1.3: May 30, 2008. This document combines the previous documents MPI-1.1 (June 12, 1995) and the MPI-1.2 Chapter in MPI-2 (July 18, 1997). Additional errata collected by the MPI Forum referring to MPI-1.1 and MPI-1.2 are also included in this document.

Version 2.0: July 18, 1997. Beginning after the release of MPI-1.1, the MPI Forum began meeting to consider corrections and extensions. MPI-2 has been focused on process creation and management, one-sided communications, extended collective communications, external interfaces and parallel I/O. A miscellany chapter discusses items that don't fit elsewhere, in particular language interoperability.

Version 1.2: July 18, 1997. The MPI-2 Forum introduced MPI-1.2 as Chapter 3 in the standard "MPI-2: Extensions to the Message-Passing Interface", July 18, 1997. This section contains clarifications and minor corrections to Version 1.1 of the MPI Standard. The only new function in MPI-1.2 is one for identifying to which version of the MPI Standard the implementation conforms. There are small differences between MPI-1 and MPI-1.1. There are very few differences between MPI-1.1 and MPI-1.2, but large differences between MPI-1.2 and MPI-2.

Version 1.1: June, 1995. Beginning in March, 1995, the Message-Passing Interface Forum reconvened to correct errors and make clarifications in the MPI document of May 5, 1994, referred to below as Version 1.0. These discussions resulted in Version 1.1, which is this document. The changes from Version 1.0 are minor. A version of this document with all changes marked is available. This paragraph is an example of a change.

Version 1.0: May, 1994. The Message-Passing Interface Forum (MPIF), with participation from over 40 organizations, has been meeting since January 1993 to discuss and define a set of library interface standards for message passing. MPIF is not sanctioned or supported by any official standards organization.

The goal of the Message-Passing Interface, simply stated, is to develop a widely used standard for writing message-passing programs. As such the interface should establish a practical, portable, efficient, and flexible standard for message-passing.

1        This is the final report, Version 1.0, of the Message-Passing Interface Forum. This  
2 document contains all the technical features proposed for the interface. This copy of the  
3 draft was processed by L<sup>A</sup>T<sub>E</sub>X on May 5, 1994.

4        Please send comments on MPI to [mpi-comments@mpi-forum.org](mailto:mpi-comments@mpi-forum.org). Your comment will  
5 be forwarded to MPI Forum committee members who will attempt to respond.  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

# Contents

<b>Acknowledgments</b>	<b>viii</b>
<b>1 Introduction to MPI</b>	<b>1</b>
1.1 Overview and Goals	1
1.2 Background of MPI-1.0	2
1.3 Background of MPI-1.1, MPI-1.2, and MPI-2.0	3
1.4 Background of MPI-1.3 and MPI-2.1	3
1.5 Background of MPI-2.2	4
1.6 Who Should Use This Standard?	4
1.7 What Platforms Are Targets For Implementation?	4
1.8 What Is Included In The Standard?	5
1.9 What Is Not Included In The Standard?	6
1.10 Organization of this Document	6
<b>2 MPI Terms and Conventions</b>	<b>9</b>
2.1 Document Notation	9
2.2 Naming Conventions	9
2.3 Procedure Specification	10
2.4 Semantic Terms	11
2.5 Data Types	12
2.5.1 Opaque Objects	12
2.5.2 Array Arguments	14
2.5.3 State	14
2.5.4 Named Constants	14
2.5.5 Choice	15
2.5.6 Addresses	15
2.5.7 File Offsets	16
2.6 Language Binding	16
2.6.1 Deprecated Names and Functions	16
2.6.2 Fortran Binding Issues	17
2.6.3 C Binding Issues	19
2.6.4 C++ Binding Issues	19
2.6.5 Functions and Macros	22
2.7 Processes	22
2.8 Error Handling	23
2.9 Implementation Issues	24
2.9.1 Independence of Basic Runtime Routines	24

2.9.2	Interaction with Signals	25
2.10	Examples	25
<b>3</b>	<b>Point-to-Point Communication</b>	<b>27</b>
3.1	Introduction	27
3.2	Blocking Send and Receive Operations	28
3.2.1	Blocking Send	28
3.2.2	Message Data	29
3.2.3	Message Envelope	31
3.2.4	Blocking Receive	32
3.2.5	Return Status	33
3.2.6	Passing <code>MPI_STATUS_IGNORE</code> for Status	35
3.3	Data Type Matching and Data Conversion	36
3.3.1	Type Matching Rules	36
	Type <code>MPI_CHARACTER</code>	38
3.3.2	Data Conversion	39
3.4	Communication Modes	40
3.5	Semantics of Point-to-Point Communication	44
3.6	Buffer Allocation and Usage	48
3.6.1	Model Implementation of Buffered Mode	49
3.7	Nonblocking Communication	50
3.7.1	Communication Request Objects	52
3.7.2	Communication Initiation	52
3.7.3	Communication Completion	55
3.7.4	Semantics of Nonblocking Communications	59
3.7.5	Multiple Completions	60
3.7.6	Non-destructive Test of <code>status</code>	67
3.8	Probe and Cancel	67
3.9	Persistent Communication Requests	72
3.10	Send-Receive	76
3.11	Null Processes	79
<b>4</b>	<b>Datatypes</b>	<b>81</b>
4.1	Derived Datatypes	81
4.1.1	Type Constructors with Explicit Addresses	83
4.1.2	Datatype Constructors	83
4.1.3	Subarray Datatype Constructor	91
4.1.4	Distributed Array Datatype Constructor	93
4.1.5	Address and Size Functions	98
4.1.6	Lower-Bound and Upper-Bound Markers	100
4.1.7	Extent and Bounds of Datatypes	101
4.1.8	True Extent of Datatypes	102
4.1.9	Commit and Free	103
4.1.10	Duplicating a Datatype	104
4.1.11	Use of General Datatypes in Communication	105
4.1.12	Correct Use of Addresses	108
4.1.13	Decoding a Datatype	108
4.1.14	Examples	116

4.2	Pack and Unpack . . . . .	125	
4.3	Canonical MPI_PACK and MPI_UNPACK . . . . .	131	
<b>5</b>	<b>Collective Communication</b>	<b>135</b>	
5.1	Introduction and Overview . . . . .	135	
5.2	Communicator Argument . . . . .	138	
5.2.1	Specifics for Intracommunicator Collective Operations . . . . .	138	
5.2.2	Applying Collective Operations to Intercommunicators . . . . .	138	
5.2.3	Specifics for Intercommunicator Collective Operations . . . . .	140	
5.3	Barrier Synchronization . . . . .	141	
5.4	Broadcast . . . . .	142	
5.4.1	Example using MPI_BCAST . . . . .	142	
5.5	Gather . . . . .	143	
5.5.1	Examples using MPI_GATHER, MPI_GATHERV . . . . .	146	
5.6	Scatter . . . . .	153	
5.6.1	Examples using MPI_SCATTER, MPI_SCATTERV . . . . .	156	
5.7	Gather-to-all . . . . .	158	
5.7.1	Example[s] using MPI_ALLGATHER[, MPI_ALLGATHERV] . . . . .	161	ticket120. ticket120.
5.8	All-to-All Scatter/Gather . . . . .	161	
5.9	Global Reduction Operations . . . . .	166	
5.9.1	Reduce . . . . .	167	
5.9.2	Predefined Reduction Operations . . . . .	169	
5.9.3	Signed Characters and Reductions . . . . .	171	
5.9.4	MINLOC and MAXLOC . . . . .	171	
5.9.5	User-Defined Reduction Operations . . . . .	175	
	Example of User-defined Reduce . . . . .	178	
5.9.6	All-Reduce . . . . .	179	
5.9.7	Process-local reduction . . . . .	180	
5.10	Reduce-Scatter . . . . .	181	
5.10.1	MPI_REDUCE_SCATTER_BLOCK . . . . .	182	
5.10.2	MPI_REDUCE_SCATTER . . . . .	183	
5.11	Scan . . . . .	184	
5.11.1	Inclusive Scan . . . . .	184	
5.11.2	Exclusive Scan . . . . .	185	
5.11.3	Example using MPI_SCAN . . . . .	186	
5.12	Correctness . . . . .	188	
<b>6</b>	<b>Groups, Contexts, Communicators, and Caching</b>	<b>191</b>	
6.1	Introduction . . . . .	191	
6.1.1	Features Needed to Support Libraries . . . . .	191	
6.1.2	MPI's Support for Libraries . . . . .	192	
6.2	Basic Concepts . . . . .	194	
6.2.1	Groups . . . . .	194	
6.2.2	Contexts . . . . .	194	
6.2.3	Intra-Communicators . . . . .	195	
6.2.4	Predefined Intra-Communicators . . . . .	195	
6.3	Group Management . . . . .	196	
6.3.1	Group Accessors . . . . .	196	

6.3.2	Group Constructors	197
6.3.3	Group Destructors	202
6.4	Communicator Management	203
6.4.1	Communicator Accessors	203
6.4.2	Communicator Constructors	204
6.4.3	Communicator Destructors	212
6.5	Motivating Examples	213
6.5.1	Current Practice #1	213
6.5.2	Current Practice #2	215
6.5.3	(Approximate) Current Practice #3	216
6.5.4	Example #4	217
6.5.5	Library Example #1	219
6.5.6	Library Example #2	221
6.6	Inter-Communication	224
6.6.1	Inter-communicator Accessors	226
6.6.2	Inter-communicator Operations	228
6.6.3	Inter-Communication Examples	230
	Example 1: Three-Group “Pipeline”	230
	Example 2: Three-Group “Ring”	233
	Example 3: Building Name Service for Intercommunication	235
6.7	Caching	240
6.7.1	Functionality	240
6.7.2	Communicators	241
6.7.3	Windows	246
6.7.4	Datatypes	249
6.7.5	Error Class for Invalid Keyval	252
6.7.6	Attributes Example	252
6.8	Naming Objects	254
6.9	Formalizing the Loosely Synchronous Model	258
6.9.1	Basic Statements	258
6.9.2	Models of Execution	258
	Static communicator allocation	258
	Dynamic communicator allocation	259
	The General case	259
<b>7</b>	<b>Process Topologies</b>	<b>261</b>
7.1	Introduction	261
7.2	Virtual Topologies	262
7.3	Embedding in MPI	262
7.4	Overview of the Functions	263
7.5	Topology Constructors	264
7.5.1	Cartesian Constructor	264
7.5.2	Cartesian Convenience Function: <code>MPI_DIMS_CREATE</code>	264
7.5.3	General (Graph) Constructor	266
7.5.4	Distributed (Graph) Constructor	268
7.5.5	Topology Inquiry Functions	273
7.5.6	Cartesian Shift Coordinates	281
7.5.7	Partitioning of Cartesian structures	283



7.5.8	Low-Level Topology Functions . . . . .	284
7.6	An Application Example . . . . .	285
<b>8</b>	<b>MPI Environmental Management</b>	<b>287</b>
8.1	Implementation Information . . . . .	287
8.1.1	Version Inquiries . . . . .	287
8.1.2	Environmental Inquiries . . . . .	288
	Tag Values . . . . .	288
	Host Rank . . . . .	288
	IO Rank . . . . .	289
	Clock Synchronization . . . . .	289
8.2	Memory Allocation . . . . .	290
8.3	Error Handling . . . . .	292
8.3.1	Error Handlers for Communicators . . . . .	294
8.3.2	Error Handlers for Windows . . . . .	296
8.3.3	Error Handlers for Files . . . . .	297
8.3.4	Freeing Errorhandlers and Retrieving Error Strings . . . . .	299
8.4	Error Codes and Classes . . . . .	300
8.5	Error Classes, Error Codes, and Error Handlers . . . . .	302
8.6	Timers and Synchronization . . . . .	306
8.7	Startup . . . . .	307
8.7.1	Allowing User Functions at Process Termination . . . . .	312
8.7.2	Determining Whether MPI Has Finished . . . . .	313
8.8	Portable MPI Process Startup . . . . .	313
<b>9</b>	<b>The Info Object</b>	<b>317</b>
<b>10</b>	<b>Process Creation and Management</b>	<b>323</b>
10.1	Introduction . . . . .	323
10.2	The Dynamic Process Model . . . . .	324
10.2.1	Starting Processes . . . . .	324
10.2.2	The Runtime Environment . . . . .	324
10.3	Process Manager Interface . . . . .	326
10.3.1	Processes in MPI . . . . .	326
10.3.2	Starting Processes and Establishing Communication . . . . .	326
10.3.3	Starting Multiple Executables and Establishing Communication . . . . .	331
10.3.4	Reserved Keys . . . . .	333
10.3.5	Spawn Example . . . . .	334
	Manager-worker Example, Using MPI_COMM_SPAWN. . . . .	334
10.4	Establishing Communication . . . . .	336
10.4.1	Names, Addresses, Ports, and All That . . . . .	336
10.4.2	Server Routines . . . . .	338
10.4.3	Client Routines . . . . .	340
10.4.4	Name Publishing . . . . .	341
10.4.5	Reserved Key Values . . . . .	343
10.4.6	Client/Server Examples . . . . .	343
	Simplest Example — Completely Portable. . . . .	343
	Ocean/Atmosphere - Relies on Name Publishing . . . . .	344

Simple Client-Server Example . . . . .	344
10.5 Other Functionality . . . . .	346
10.5.1 Universe Size . . . . .	346
10.5.2 Singleton MPI_INIT . . . . .	347
10.5.3 MPI_APPNUM . . . . .	347
10.5.4 Releasing Connections . . . . .	348
10.5.5 Another Way to Establish MPI Communication . . . . .	349
<b>11 One-Sided Communications</b>	<b>353</b>
11.1 Introduction . . . . .	353
11.2 Initialization . . . . .	354
11.2.1 Window Creation . . . . .	354
11.2.2 Window Attributes . . . . .	356
11.3 Communication Calls . . . . .	357
11.3.1 Put . . . . .	358
11.3.2 Get . . . . .	360
11.3.3 Examples . . . . .	360
11.3.4 Accumulate Functions . . . . .	363
11.4 Synchronization Calls . . . . .	366
11.4.1 Fence . . . . .	369
11.4.2 General Active Target Synchronization . . . . .	371
11.4.3 Lock . . . . .	375
11.4.4 Assertions . . . . .	377
11.4.5 Miscellaneous Clarifications . . . . .	379
11.5 Examples . . . . .	379
11.6 Error Handling . . . . .	381
11.6.1 Error Handlers . . . . .	381
11.6.2 Error Classes . . . . .	382
11.7 Semantics and Correctness . . . . .	382
11.7.1 Atomicity . . . . .	387
11.7.2 Progress . . . . .	387
11.7.3 Registers and Compiler Optimizations . . . . .	390
<b>12 External Interfaces</b>	<b>391</b>
12.1 Introduction . . . . .	391
12.2 Generalized Requests . . . . .	391
12.2.1 Examples . . . . .	395
12.3 Associating Information with Status . . . . .	397
12.4 MPI and Threads . . . . .	399
12.4.1 General . . . . .	399
12.4.2 Clarifications . . . . .	400
12.4.3 Initialization . . . . .	402
<b>13 I/O</b>	<b>407</b>
13.1 Introduction . . . . .	407
13.1.1 Definitions . . . . .	407
13.2 File Manipulation . . . . .	409
13.2.1 Opening a File . . . . .	409

13.2.2	Closing a File . . . . .	411
13.2.3	Deleting a File . . . . .	412
13.2.4	Resizing a File . . . . .	413
13.2.5	Preallocating Space for a File . . . . .	413
13.2.6	Querying the Size of a File . . . . .	414
13.2.7	Querying File Parameters . . . . .	415
13.2.8	File Info . . . . .	416
	Reserved File Hints . . . . .	417
13.3	File Views . . . . .	419
13.4	Data Access . . . . .	422
13.4.1	Data Access Routines . . . . .	422
	Positioning . . . . .	423
	Synchronism . . . . .	423
	Coordination . . . . .	423
	Data Access Conventions . . . . .	424
13.4.2	Data Access with Explicit Offsets . . . . .	425
13.4.3	Data Access with Individual File Pointers . . . . .	428
13.4.4	Data Access with Shared File Pointers . . . . .	434
	Noncollective Operations . . . . .	435
	Collective Operations . . . . .	437
	Seek . . . . .	438
13.4.5	Split Collective Data Access Routines . . . . .	439
13.5	File Interoperability . . . . .	445
13.5.1	Datatypes for File Interoperability . . . . .	448
13.5.2	External Data Representation: “external32” . . . . .	449
13.5.3	User-Defined Data Representations . . . . .	450
	Extent Callback . . . . .	452
	Datarep Conversion Functions . . . . .	452
13.5.4	Matching Data Representations . . . . .	455
13.6	Consistency and Semantics . . . . .	455
13.6.1	File Consistency . . . . .	455
13.6.2	Random Access vs. Sequential Files . . . . .	458
13.6.3	Progress . . . . .	458
13.6.4	Collective File Operations . . . . .	459
13.6.5	Type Matching . . . . .	459
13.6.6	Miscellaneous Clarifications . . . . .	459
13.6.7	MPI_Offset Type . . . . .	459
13.6.8	Logical vs. Physical File Layout . . . . .	460
13.6.9	File Size . . . . .	460
13.6.10	Examples . . . . .	461
	Asynchronous I/O . . . . .	463
13.7	I/O Error Handling . . . . .	465
13.8	I/O Error Classes . . . . .	465
13.9	Examples . . . . .	465
13.9.1	Double Buffering with Split Collective I/O . . . . .	465
13.9.2	Subarray Filetype Constructor . . . . .	468

<b>14 Profiling Interface</b>	<b>471</b>
14.1 Requirements	471
14.2 Discussion	471
14.3 Logic of the Design	472
14.3.1 Miscellaneous Control of Profiling	472
14.4 Examples	473
14.4.1 Profiler Implementation	473
14.4.2 MPI Library Implementation	474
Systems with Weak Symbols	474
Systems Without Weak Symbols	474
14.4.3 Complications	475
Multiple Counting	475
Linker Oddities	475
14.5 Multiple Levels of Interception	476
<b>15 Deprecated Functions</b>	<b>477</b>
15.1 Deprecated since MPI-2.0	477
15.2 Deprecated since MPI-2.2	484
<b>16 Language Bindings</b>	<b>485</b>
16.1 C++	485
16.1.1 Overview	485
16.1.2 Design	485
16.1.3 C++ Classes for MPI	486
16.1.4 Class Member Functions for MPI	486
16.1.5 Semantics	487
16.1.6 C++ Datatypes	489
16.1.7 Communicators	492
16.1.8 Exceptions	494
16.1.9 Mixed-Language Operability	495
16.1.10 Profiling	495
16.2 Fortran Support	498
16.2.1 Overview	498
16.2.2 Problems With Fortran Bindings for MPI	499
Problems Due to Strong Typing	500
Problems Due to Data Copying and Sequence Association	501
Special Constants	502
Fortran 90 Derived Types	502
A Problem with Register Optimization	503
16.2.3 Basic Fortran Support	506
16.2.4 Extended Fortran Support	506
The <code>mpi</code> Module	506
No Type Mismatch Problems for Subroutines with Choice Arguments	507
16.2.5 Additional Support for Fortran Numeric Intrinsic Types	507
Parameterized Datatypes with Specified Precision and Exponent Range	508
Support for Size-specific MPI Datatypes	512
Communication With Size-specific Types	514
16.3 Language Interoperability	515

16.3.1	Introduction	515
16.3.2	Assumptions	516
16.3.3	Initialization	516
16.3.4	Transfer of Handles	517
16.3.5	Status	520
16.3.6	MPI Opaque Objects	521
	Datatypes	521
	Callback Functions	522
	Error Handlers	522
	Reduce Operations	523
	Addresses	523
16.3.7	Attributes	523
16.3.8	Extra State	528
16.3.9	Constants	529
16.3.10	Interlanguage Communication	529
<b>A</b>	<b>Language Bindings Summary</b>	<b>531</b>
A.1	Defined Values and Handles	531
A.1.1	Defined Constants	531
A.1.2	Types	542
A.1.3	Prototype definitions	543
A.1.4	Deprecated prototype definitions	547
A.1.5	Info Keys	547
A.1.6	Info Values	548
A.2	C Bindings	549
A.2.1	Point-to-Point Communication C Bindings	549
A.2.2	Datatypes C Bindings	550
A.2.3	Collective Communication C Bindings	552
A.2.4	Groups, Contexts, Communicators, and Caching C Bindings	553
A.2.5	Process Topologies C Bindings	556
A.2.6	MPI Environmenta Management C Bindings	557
A.2.7	The Info Object C Bindings	558
A.2.8	Process Creation and Management C Bindings	558
A.2.9	One-Sided Communications C Bindings	559
A.2.10	External Interfaces C Bindings	559
A.2.11	I/O C Bindings	560
A.2.12	Language Bindings C Bindings	562
A.2.13	Profiling Interface C Bindings	563
A.2.14	Deprecated C Bindings	563
A.3	Fortran Bindings	565
A.3.1	Point-to-Point Communication Fortran Bindings	565
A.3.2	Datatypes Fortran Bindings	567
A.3.3	Collective Communication Fortran Bindings	570
A.3.4	Groups, Contexts, Communicators, and Caching Fortran Bindings	572
A.3.5	Process Topologies Fortran Bindings	576
A.3.6	MPI Environmenta Management Fortran Bindings	577
A.3.7	The Info Object Fortran Bindings	579
A.3.8	Process Creation and Management Fortran Bindings	580

A.3.9	One-Sided Communications Fortran Bindings . . . . .	581
A.3.10	External Interfaces Fortran Bindings . . . . .	582
A.3.11	I/O Fortran Bindings . . . . .	582
A.3.12	Language Bindings Fortran Bindings . . . . .	586
A.3.13	Profiling Interface Fortran Bindings . . . . .	587
A.3.14	Deprecated Fortran Bindings . . . . .	587
A.4	C++ Bindings (deprecated) . . . . .	589
A.4.1	Point-to-Point Communication C++ Bindings . . . . .	589
A.4.2	Datatypes C++ Bindings . . . . .	592
A.4.3	Collective Communication C++ Bindings . . . . .	594
A.4.4	Groups, Contexts, Communicators, and Caching C++ Bindings . .	595
A.4.5	Process Topologies C++ Bindings . . . . .	598
A.4.6	MPI Environmenta Management C++ Bindings . . . . .	600
A.4.7	The Info Object C++ Bindings . . . . .	601
A.4.8	Process Creation and Management C++ Bindings . . . . .	602
A.4.9	One-Sided Communications C++ Bindings . . . . .	603
A.4.10	External Interfaces C++ Bindings . . . . .	604
A.4.11	I/O C++ Bindings . . . . .	604
A.4.12	Language Bindings C++ Bindings . . . . .	608
A.4.13	Profiling Interface C++ Bindings . . . . .	608
A.4.14	C++ Bindings on all MPI Classes . . . . .	609
A.4.15	Construction / Destruction . . . . .	609
A.4.16	Copy / Assignment . . . . .	609
A.4.17	Comparison . . . . .	609
A.4.18	Inter-language Operability . . . . .	609
<b>B</b>	<b>Change-Log</b>	<b>611</b>
B.1	Changes from Version 2.1 to Version 2.2 . . . . .	611
B.2	Changes from Version 2.0 to Version 2.1 . . . . .	614
	<b>Bibliography</b>	<b>619</b>
	<b>Examples Index</b>	<b>623</b>
	<b>MPI Constant and Predefined Handle Index</b>	<b>626</b>
	<b>MPI Declarations Index</b>	<b>633</b>
	<b>MPI Callback Function Prototype Index</b>	<b>635</b>
	<b>MPI Function Index</b>	<b>636</b>

# List of Figures

5.1	Collective communications, an overview . . . . .	136
5.2	Intercommunicator allgather . . . . .	140
5.3	Intercommunicator reduce-scatter . . . . .	141
5.4	Gather example . . . . .	147
5.5	Gatherv example with strides . . . . .	148
5.6	Gatherv example, 2-dimensional . . . . .	149
5.7	Gatherv example, 2-dimensional, subarrays with different sizes . . . . .	150
5.8	Gatherv example, 2-dimensional, subarrays with different sizes and strides . . . . .	151
5.9	Scatter example . . . . .	156
5.10	Scatterv example with strides . . . . .	157
5.11	Scatterv example with different strides and counts . . . . .	158
5.12	Race conditions with point-to-point and collective communications . . . . .	190
6.1	Intercommunicator create using <code>MPI_COMM_CREATE</code> . . . . .	208
6.2	Intercommunicator construction with <code>MPI_COMM_SPLIT</code> . . . . .	211
6.3	Three-group pipeline. . . . .	230
6.4	Three-group ring. . . . .	233
7.1	Set-up of process structure for two-dimensional parallel Poisson solver. . . . .	286
11.1	Active target communication . . . . .	368
11.2	Active target communication, with weak synchronization . . . . .	369
11.3	Passive target communication . . . . .	370
11.4	Active target communication with several processes . . . . .	374
11.5	Schematic description of window . . . . .	382
11.6	Symmetric communication . . . . .	388
11.7	Deadlock situation . . . . .	389
11.8	No deadlock . . . . .	389
13.1	Etypes and filetypes . . . . .	408
13.2	Partitioning a file among parallel processes . . . . .	408
13.3	Displacements . . . . .	420
13.4	Example array file layout . . . . .	468
13.5	Example local array filetype for process 1 . . . . .	469

# List of Tables

2.1	Deprecated constructs . . . . .	17
3.1	Predefined MPI datatypes corresponding to Fortran datatypes . . . . .	29
3.2	Predefined MPI datatypes corresponding to C datatypes . . . . .	30
3.3	Predefined MPI datatypes corresponding to both C and Fortran datatypes . . . . .	31
4.1	combiner values returned from MPI_TYPE_GET_ENVELOPE . . . . .	110
6.1	MPI_COMM_* Function Behavior (in Inter-Communication Mode) . . . . .	227
8.1	Error classes (Part 1) . . . . .	301
8.2	Error classes (Part 2) . . . . .	302
11.1	Error classes in one-sided communication routines . . . . .	382
13.1	Data access routines . . . . .	422
13.2	“external32” sizes of predefined datatypes . . . . .	451
13.3	I/O Error Classes . . . . .	466
16.1	C++ names for the MPI C and C++ predefined datatypes . . . . .	490
16.2	C++ names for the MPI Fortran predefined datatypes . . . . .	490
16.3	C++ names for other MPI datatypes . . . . .	491



# Acknowledgments

This document represents the work of many people who have served on the MPI Forum. The meetings have been attended by dozens of people from many parts of the world. It is the hard and dedicated work of this group that has led to the MPI standard.

The technical development was carried out by subgroups, whose work was reviewed by the full committee. During the period of development of the Message-Passing Interface (MPI), many people helped with this effort.

Those who served as primary coordinators in MPI-1.0 and MPI-1.1 are:

- Jack Dongarra, David Walker, Conveners and Meeting Chairs
- Ewing Lusk, Bob Knighten, Minutes
- Marc Snir, William Gropp, Ewing Lusk, Point-to-Point Communication[s] ticket77.
- Al Geist, Marc Snir, Steve Otto, Collective Communication[s] ticket77.
- Steve Otto, Editor
- Rolf Hempel, Process Topologies
- Ewing Lusk, Language Binding
- William Gropp, Environmental Management
- James Cownie, Profiling
- Tony Skjellum, Lyndon Clarke, Marc Snir, Richard Littlefield, Mark Sears, Groups, Contexts, and Communicators
- Steven Huss-Lederman, Initial Implementation Subset

The following list includes some of the active participants in the MPI-1.0 and MPI-1.1 process not mentioned above.

Ed Anderson	Robert Babb	Joe Baron	Eric Barszcz
Scott Berryman	Rob Bjornson	Nathan Doss	Anne Elster
Jim Feeney	Vince Fernando	Sam Fineberg	Jon Flower
Daniel Frye	Ian Glendinning	Adam Greenberg	Robert Harrison
Leslie Hart	Tom Haupt	Don Heller	Tom Henderson
Alex Ho	C.T. Howard Ho	Gary Howell	John Kapenga
James Kohl	Susan Krauss	Bob Leary	Arthur Maccabe
Peter Madams	Alan Mainwaring	Oliver McBryan	Phil McKinley
Charles Mosher	Dan Nessett	Peter Pacheco	Howard Palmer
Paul Pierce	Sanjay Ranka	Peter Rigsbee	Arch Robison
Erich Schikuta	Ambuj Singh	Alan Sussman	Robert Tomlinson
Robert G. Voigt	Dennis Weeks	Stephen Wheat	Steve Zenith

The University of Tennessee and Oak Ridge National Laboratory made the draft available by anonymous FTP mail servers and were instrumental in distributing the document.

The work on the MPI-1 standard was supported in part by ARPA and NSF under grant ASC-9310330, the National Science Foundation Science and Technology Center Cooperative Agreement No. CCR-8809615, and by the Commission of the European Community through Esprit project P6643 (PPPE).

## MPI-1.2 and MPI-2.0:

Those who served as primary coordinators in MPI-1.2 and MPI-2.0 are:

- Ewing Lusk, Convener and Meeting Chair
- Steve Huss-Lederman, Editor
- Ewing Lusk, Miscellany
- Bill Saphir, Process Creation and Management
- Marc Snir, One-Sided Communications
- Bill Gropp and Anthony Skjellum, Extended Collective Operations
- Steve Huss-Lederman, External Interfaces
- Bill Nitzberg, I/O
- Andrew Lumsdaine, Bill Saphir, and Jeff Squyres, Language Bindings
- Anthony Skjellum and Arkady Kanevsky, Real-Time

The following list includes some of the active participants who attended MPI-2 Forum meetings and are not mentioned above.

Greg Astfalk	Robert Babb	Ed Benson	Rajesh Bordawekar
Pete Bradley	Peter Brennan	Ron Brightwell	Maciej Brodowicz
Eric Brunner	Greg Burns	Margaret Cahir	Pang Chen
Ying Chen	Albert Cheng	Yong Cho	Joel Clark
Lyndon Clarke	Laurie Costello	Dennis Cottel	Jim Cownie
Zhenqian Cui	Suresh Damodaran-Kamal		Raja Daoud
Judith Devaney	David DiNucci	Doug Doefler	Jack Dongarra
Terry Dontje	Nathan Doss	Anne Elster	Mark Fallon
Karl Feind	Sam Fineberg	Craig Fischberg	Stephen Fleischman
Ian Foster	Hubertus Franke	Richard Frost	Al Geist
Robert George	David Greenberg	John Hagedorn	Kei Harada
Leslie Hart	Shane Hebert	Rolf Hempel	Tom Henderson
Alex Ho	Hans-Christian Hoppe	Joefon Jann	Terry Jones
Karl Kesselman	Koichi Konishi	Susan Kraus	Steve Kubica
Steve Landherr	Mario Lauria	Mark Law	Juan Leon
Lloyd Lewins	Ziyang Lu	Bob Madahar	Peter Madams

John May	Oliver McBryan	Brian McCandless	Tyce McLarty	1
Thom McMahon	Harish Nag	Nick Nevin	Jarek Nieplocha	2
Ron Oldfield	Peter Ossadnik	Steve Otto	Peter Pacheco	3
Yoonho Park	Perry Partow	Pratap Pattnaik	Elsie Pierce	4
Paul Pierce	Heidi Poxon	Jean-Pierre Prost	Boris Protopopov	5
James Pruyve	Rolf Rabenseifner	Joe Rieken	Peter Rigsbee	6
Tom Robey	Anna Rounbehler	Nobutoshi Sagawa	Arindam Saha	7
Eric Salo	Darren Sanders	Eric Sharakan	Andrew Sherman	8
Fred Shirley	Lance Shuler	A. Gordon Smith	Ian Stockdale	9
David Taylor	Stephen Taylor	Greg Tensa	Rajeev Thakur	10
Marydell Tholburn	Dick Treumann	Simon Tsang	Manuel Ujaldon	11
David Walker	Jerrell Watts	Klaus Wolf	Parkson Wong	12
Dave Wright				13

The MPI Forum also acknowledges and appreciates the valuable input from people via e-mail and in person.

The following institutions supported the MPI-2 effort through time and travel support for the people listed above.

Argonne National Laboratory	20
Bolt, Beranek, and Newman	21
California Institute of Technology	22
Center for Computing Sciences	23
Convex Computer Corporation	24
Cray Research	25
Digital Equipment Corporation	26
Dolphin Interconnect Solutions, Inc.	27
Edinburgh Parallel Computing Centre	28
General Electric Company	29
German National Research Center for Information Technology	30
Hewlett-Packard	31
Hitachi	32
Hughes Aircraft Company	33
Intel Corporation	34
International Business Machines	35
Khoral Research	36
Lawrence Livermore National Laboratory	37
Los Alamos National Laboratory	38
MPI Software Technology, Inc.	39
Mississippi State University	40
NEC Corporation	41
National Aeronautics and Space Administration	42
National Energy Research Scientific Computing Center	43
National Institute of Standards and Technology	44
National Oceanic and Atmospheric Administration	45
Oak Ridge National Laboratory	46
Ohio State University	47
PALLAS GmbH	48

1 Pacific Northwest National Laboratory  
2 Pratt & Whitney  
3 San Diego Supercomputer Center  
4 Sanders, A Lockheed-Martin Company  
5 Sandia National Laboratories  
6 Schlumberger  
7 Scientific Computing Associates, Inc.  
8 Silicon Graphics Incorporated  
9 Sky Computers  
10 Sun Microsystems Computer Corporation  
11 Syracuse University  
12 The MITRE Corporation  
13 Thinking Machines Corporation  
14 United States Navy  
15 University of Colorado  
16 University of Denver  
17 University of Houston  
18 University of Illinois  
19 University of Maryland  
20 University of Notre Dame  
21 University of San Fransisco  
22 University of Stuttgart Computing Center  
23 University of Wisconsin  
24

25 MPI-2 operated on a very tight budget (in reality, it had no budget when the first  
26 meeting was announced). Many institutions helped the MPI-2 effort by supporting the  
27 efforts and travel of the members of the MPI Forum. Direct support was given by NSF and  
28 DARPA under NSF contract CDA-9115428 for travel by U.S. academic participants and  
29 Esprit under project HPC Standards (21111) for European participants.  
30

### 31 32 MPI-1.3 and MPI-2.1:

33  
34 The editors and organizers of the combined documents have been:

- 35 • Richard Graham, Convener and Meeting Chair
- 36
- 37 • Jack Dongarra, Steering Committee
- 38
- 39 • Al Geist, Steering Committee
- 40
- 41 • Bill Gropp, Steering Committee
- 42
- 43 • Rainer Keller, Merge of MPI-1.3
- 44
- 45 • Andrew Lumsdaine, Steering Committee
- 46 • Ewing Lusk, Steering Committee, MPI-1.1-Errata (Oct. 12, 1998) MPI-2.1-Errata
- 47 Ballots 1, 2 (May 15, 2002)
- 48

- Rolf Rabenseifner, Steering Committee, Merge of MPI-2.1 and MPI-2.1-Errata Ballots 3, 4 (2008)

All chapters have been revisited to achieve a consistent MPI-2.1 text. Those who served as authors for the necessary modifications are:

- Bill Gropp, Frontmatter, Introduction, and Bibliography
- Richard Graham, Point-to-Point Communication[s] ticket77.
- Adam Moody, Collective Communication
- Richard Treumann, Groups, Contexts, and Communicators
- Jesper Larsson Träff, Process Topologies, Info-Object, and One-Sided Communications
- George Bosilca, Environmental Management
- David Solt, Process Creation and Management
- Bronis R. de Supinski, External Interfaces, and Profiling
- Rajeev Thakur, I/O
- Jeffrey M. Squyres, Language Bindings and MPI 2.1 Secretary ticket77.
- Rolf Rabenseifner, Deprecated Functions[,] and Annex Change-Log ticket77.
- Alexander Supalov and Denis Nagorny, Annex Language [b]Bindings ticket21. ticket77.

The following list includes some of the active participants who attended MPI-2 Forum meetings and in the e-mail discussions of the errata items and are not mentioned above.

Pavan Balaji	Purushotham V. Bangalore	Brian Barrett
Richard Barrett	Christian Bell	Robert Blackmore
Gil Bloch	Ron Brightwell	Jeffrey Brown
Darius Buntinas	Jonathan Carter	Nathan DeBardeleben
Terry Dontje	Gabor Dozsa	Edric Ellis
Karl Feind	Edgar Gabriel	Patrick Geoffray
David Gingold	Dave Goodell	Erez Haba
Robert Harrison	Thomas Herault	Steve Hodson
Torsten Hoefler	Joshua Hursey	Yann Kalemkarian
Matthew Koop	Quincey Koziol	Sameer Kumar
Miron Livny	Kannan Narasimhan	Mark Pagel
Avneesh Pant	Steve Poole	Howard Pritchard
Craig Rasmussen	Hubert Ritzdorf	Rob Ross
Tony Skjellum	Brian Smith	Vinod Tipparaju
Jesper Larsson Träff	Keith Underwood	

The MPI Forum also acknowledges and appreciates the valuable input from people via e-mail and in person.

1 The following institutions supported the MPI-2 effort through time and travel support  
2 for the people listed above.

3 Argonne National Laboratory

4 Bull

5 Cisco Systems, Inc.

ticket77. 6 Cray Inc[orporation].

7 The HDF Group

8 Hewlett-Packard

9 IBM T.J. Watson Research

ticket77. 10 Indiana University

11 [Indiana University]

12 Institut National de Recherche en Informatique et Automatique (INRIA)

13 Intel Corporation

14 Lawrence Berkeley National Laboratory

15 Lawrence Livermore National Laboratory

16 Los Alamos National Laboratory

17 Mathworks

18 Mellanox Technologies

19 Microsoft

20 Myricom

21 NEC Laboratories Europe, NEC Europe Ltd.

22 Oak Ridge National Laboratory

23 Ohio State University

24 Pacific Northwest National Laboratory

25 QLogic Corporation

26 Sandia National Laboratories

27 SiCortex

ticket77. 28 Silicon Graphics Incorporat[ion]ed

ticket77. 29 Sun Microsystems, Inc.

ticket67. 30 [

31 University of Barcelona (UAB), Dept. of Computer and Information

32 Sciences

ticket67. 33 ]

34 University of Alabama at Birmingham

35 University of Houston

36 University of Illinois at Urbana-Champaign

37 University of Stuttgart, High Performance Computing Center Stuttgart (HLRS)

38 University of Tennessee, Knoxville

39 University of Wisconsin

40

41

ticket68. 42 Funding for the MPI Forum meetings was partially supported by award #CCF-0816909

43 from the National Science Foundation.

ticket77. 44 In addition, the HDF Group provided travel support for one U.S. academic.

## MPI-2.2:

All chapters have been revisited to achieve a consistent MPI-2.2 text. Those who served as authors for the necessary modifications are:

- William Gropp, Frontmatter, Introduction, and Bibliography; MPI 2.2 chair.
- Richard Graham, Point-to-Point Communication and Datatypes
- Adam Moody, Collective Communication
- Torsten Hoefer, Collective Communication and Process Topologies
- Richard Treumann, Groups, Contexts, and Communicators
- Jesper Larsson Träff, Process Topologies, Info-Object and One-Sided Communications
- George Bosilca, Datatypes and Environmental Management
- David Solt, Process Creation and Management
- Bronis R. de Supinski, External Interfaces, and Profiling
- Rajeev Thakur, I/O
- Jeffrey M. Squyres, Language Bindings and MPI 2.2 Secretary
- Rolf Rabenseifner, Deprecated Functions, Annex Change-Log, and Annex Language Bindings
- Alexander Supalov, Annex Language Bindings

The following list includes some of the active participants who attended MPI-2 Forum meetings and in the e-mail discussions of the errata items and are not mentioned above.

Pavan Balaji	Purushotham V. Bangalore	Brian Barrett
Richard Barrett	Christian Bell	Robert Blackmore
Gil Bloch	Ron Brightwell	Greg Bronevetsky
Jeff Brown	Darius Buntinas	Jonathan Carter
Nathan DeBardeleben	Terry Dontje	Gabor Dozsa
Edric Ellis	Karl Feind	Edgar Gabriel
Patrick Geoffray	Johann George	David Gingold
David Goodell	Erez Haba	Robert Harrison
Thomas Herault	Marc-André Hermanns	Steve Hodson
Joshua Hursey	Yutaka Ishikawa	Bin Jia
Hideyuki Jitsumoto	Terry Jones	Yann Kalemkarian
Ranier Keller	Matthew Koop	Quincey Koziol
Manojkumar Krishnan	Sameer Kumar	Miron Livny
Andrew Lumsdaine	Miao Luo	Ewing Lusk
Timothy I. Mattox	Kannan Narasimhan	Mark Pagel
Avneesh Pant	Steve Poole	Howard Pritchard
Craig Rasmussen	Hubert Ritzdorf	Rob Ross
Martin Schulz	Pavel Shamis	Galen Shipman
Christian Siebert	Anthony Skjellum	Brian Smith
Naoki Sueyasu	Vinod Tipparaju	Keith Underwood
Rolf Vandevert	Abhinav Vishnu	Weikuan Yu

1       The MPI Forum also acknowledges and appreciates the valuable input from people via  
2 e-mail and in person.

3  
4       The following institutions supported the MPI-2.2 effort through time and travel support  
5 for the people listed above.

6       Argonne National Laboratory  
7       Auburn University  
8       Bull  
9       Cisco Systems, Inc.  
10       Cray Inc.  
11       Forschungszentrum Jülich  
12       Fujitsu  
13       The HDF Group  
14       Hewlett-Packard  
15       International Business Machines  
16       Indiana University  
17       Institut National de Recherche en Informatique et Automatique (INRIA)  
18       Institute for Advanced Science & Engineering Corporation  
19       Lawrence Berkeley National Laboratory  
20       Lawrence Livermore National Laboratory  
21       Los Alamos National Laboratory  
22       Mathworks  
23       Mellanox Technologies  
24       Microsoft  
25       Myricom  
26       NEC Corporation  
27       Oak Ridge National Laboratory  
28       Ohio State University  
29       Pacific Northwest National Laboratory  
30       QLogic Corporation  
31       RunTime Computing Solutions, LLC  
32       Sandia National Laboratories  
33       SiCortex, Inc.  
34       Silicon Graphics Inc.  
35       Sun Microsystems, Inc.  
36       Tokyo Institute of Technology  
37       University of Alabama at Birmingham  
38       University of Houston  
39       University of Illinois at Urbana-Champaign  
40       University of Stuttgart, High Performance Computing Center Stuttgart (HLRS)  
41       University of Tennessee, Knoxville  
42       University of Tokyo  
43       University of Wisconsin

44  
45       Funding for the MPI Forum meetings was partially supported by award #CCF-0816909  
46 from the National Science Foundation.

47       In addition, the HDF Group provided travel support for one U.S. academic.



# Chapter 1

## Introduction to MPI

### 1.1 Overview and Goals

MPI (Message-Passing Interface) is a *message-passing library interface specification*. All parts of this definition are significant. MPI addresses primarily the message-passing parallel programming model, in which data is moved from the address space of one process to that of another process through cooperative operations on each process. (Extensions to the “classical” message-passing model are provided in collective operations, remote-memory access operations, dynamic process creation, and parallel I/O.) MPI is a *specification*, not an implementation; there are multiple implementations of MPI. This specification is for a *library interface*; MPI is not a language, and all MPI operations are expressed as functions, subroutines, or methods, according to the appropriate language bindings, which for C, C++, Fortran-77, and Fortran-95, are part of the MPI standard. The standard has been defined through an open process by a community of parallel computing vendors, computer scientists, and application developers. The next few sections provide an overview of the history of MPI’s development.

The main advantages of establishing a message-passing standard are portability and ease of use. In a distributed memory communication environment in which the higher level routines and/or abstractions are built upon lower level message-passing routines the benefits of standardization are particularly apparent. Furthermore, the definition of a message-passing standard, such as that proposed here, provides vendors with a clearly defined base set of routines that they can implement efficiently, or in some cases provide hardware support for, thereby enhancing scalability.

The goal of the Message-Passing Interface simply stated is to develop a widely used standard for writing message-passing programs. As such the interface should establish a practical, portable, efficient, and flexible standard for message passing.

A complete list of goals follows.

- Design an application programming interface (not necessarily for compilers or a system implementation library).
- Allow efficient communication: Avoid memory-to-memory copying, allow overlap of computation and communication, and offload to communication co-processor, where available.
- Allow for implementations that can be used in a heterogeneous environment.

- Allow convenient C, C++, Fortran-77, and Fortran-95 bindings for the interface.
- Assume a reliable communication interface: the user need not cope with communication failures. Such failures are dealt with by the underlying communication subsystem.
- Define an interface that can be implemented on many vendor's platforms, with no significant changes in the underlying communication and system software.
- Semantics of the interface should be language independent.
- The interface should be designed to allow for thread safety.

## 1.2 Background of MPI-1.0

MPI sought to make use of the most attractive features of a number of existing message-passing systems, rather than selecting one of them and adopting it as the standard. Thus, MPI was strongly influenced by work at the IBM T. J. Watson Research Center [1, 2], Intel's NX/2 [38], Express [12], nCUBE's Vertex [34], p4 [7, 8], and PARMACS [5, 9]. Other important contributions have come from Zipcode [40, 41], Chimp [16, 17], PVM [4, 14], Chameleon [25], and PICL [24].

The MPI standardization effort involved about 60 people from 40 organizations mainly from the United States and Europe. Most of the major vendors of concurrent computers were involved in MPI, along with researchers from universities, government laboratories, and industry. The standardization process began with the Workshop on Standards for Message-Passing in a Distributed Memory Environment, sponsored by the Center for Research on Parallel Computing, held April 29-30, 1992, in Williamsburg, Virginia [48]. At this workshop the basic features essential to a standard message-passing interface were discussed, and a working group established to continue the standardization process.

A preliminary draft proposal, known as MPI1, was put forward by Dongarra, Hempel, Hey, and Walker in November 1992, and a revised version was completed in February 1993 [15]. MPI1 embodied the main features that were identified at the Williamsburg workshop as being necessary in a message passing standard. Since MPI1 was primarily intended to promote discussion and "get the ball rolling," it focused mainly on point-to-point communications. MPI1 brought to the forefront a number of important standardization issues, but did not include any collective communication routines and was not thread-safe.

In November 1992, a meeting of the MPI working group was held in Minneapolis, at which it was decided to place the standardization process on a more formal footing, and to generally adopt the procedures and organization of the High Performance Fortran Forum. Subcommittees were formed for the major component areas of the standard, and an email discussion service established for each. In addition, the goal of producing a draft MPI standard by the Fall of 1993 was set. To achieve this goal the MPI working group met every 6 weeks for two days throughout the first 9 months of 1993, and presented the draft MPI standard at the Supercomputing 93 conference in November 1993. These meetings and the email discussion together constituted the MPI Forum, membership of which has been open to all members of the high performance computing community.

### 1.3 Background of MPI-1.1, MPI-1.2, and MPI-2.0

Beginning in March 1995, the MPI Forum began meeting to consider corrections and extensions to the original MPI Standard document [21]. The first product of these deliberations was Version 1.1 of the MPI specification, released in June of 1995 [22] (see <http://www.mpi-forum.org> for official MPI document releases). At that time, effort focused in five areas.

1. Further corrections and clarifications for the MPI-1.1 document.
2. Additions to MPI-1.1 that do not significantly change its types of functionality (new datatype constructors, language interoperability, etc.).
3. Completely new types of functionality (dynamic processes, one-sided communication, parallel I/O, etc.) that are what everyone thinks of as “MPI-2 functionality.”
4. Bindings for Fortran 90 and C++. MPI-2 specifies C++ bindings for both MPI-1 and MPI-2 functions, and extensions to the Fortran 77 binding of MPI-1 and MPI-2 to handle Fortran 90 issues.
5. Discussions of areas in which the MPI process and framework seem likely to be useful, but where more discussion and experience are needed before standardization (e.g. zero-copy semantics on shared-memory machines, real-time specifications).

Corrections and clarifications (items of type 1 in the above list) were collected in Chapter 3 of the MPI-2 document: “Version 1.2 of MPI.” That chapter also contains the function for identifying the version number. Additions to MPI-1.1 (items of types 2, 3, and 4 in the above list) are in the remaining chapters of the MPI-2 document, and constitute the specification for MPI-2. Items of type 5 in the above list have been moved to a separate document, the “MPI Journal of Development” (JOD), and are not part of the MPI-2 Standard.

This structure makes it easy for users and implementors to understand what level of MPI compliance a given implementation has:

- MPI-1 compliance will mean compliance with MPI-1.3. This is a useful level of compliance. It means that the implementation conforms to the clarifications of MPI-1.1 function behavior given in Chapter 3 of the MPI-2 document. Some implementations may require changes to be MPI-1 compliant.
- MPI-2 compliance will mean compliance with all of MPI-2.1.
- The MPI Journal of Development is not part of the MPI Standard.

It is to be emphasized that forward compatibility is preserved. That is, a valid MPI-1.1 program is both a valid MPI-1.3 program and a valid MPI-2.1 program, and a valid MPI-1.3 program is a valid MPI-2.1 program.

### 1.4 Background of MPI-1.3 and MPI-2.1

After the release of MPI-2.0, the MPI Forum kept working on errata and clarifications for both standard documents (MPI-1.1 and MPI-2.0). The short document “Errata for MPI-1.1” was released October 12, 1998. On July 5, 2001, a first ballot of errata and clarifications for

MPI-2.0 was released, and a second ballot was voted on May 22, 2002. Both votes were done electronically. Both ballots were combined into one document: “Errata for MPI-2”, May 15, 2002. This errata process was then interrupted, but the Forum and its e-mail reflectors kept working on new requests for clarification.

Restarting regular work of the MPI Forum was initiated in three meetings, at EuroPVM/MPI’06 in Bonn, at EuroPVM/MPI’07 in Paris, and at SC’07 in Reno. In December 2007, a steering committee started the organization of new MPI Forum meetings at regular 8-weeks intervals. At the January 14-16, 2008 meeting in Chicago, the MPI Forum decided to combine the existing and future MPI documents to one single document for each version of the MPI standard. For technical and historical reasons, this series was started with MPI-1.3. Additional Ballots 3 and 4 solved old questions from the errata list started in 1995 up to new questions from the last years. After all documents (MPI-1.1, MPI-2, Errata for MPI-1.1 (Oct. 12, 1998), and MPI-2.1 Ballots 1-4) were combined into one draft document, for each chapter, a chapter author and review team were defined. They cleaned up the document to achieve a consistent MPI-2.1 document. The final MPI-2.1 standard document was finished in June 2008, and finally released with a second vote in September 2008 in the meeting at Dublin, just before EuroPVM/MPI’08. The major work of the current MPI Forum is the preparation of MPI-3.

## 1.5 Background of MPI-2.2

MPI-2.2 is a minor update to the MPI-2.1 standard. This version addresses additional errors and ambiguities that were not corrected in the MPI-2.1 standard as well as a small number of extensions to MPI-2.1 that met the following criteria:

- Any correct MPI-2.1 program is a correct MPI-2.2 program.
- Any extension must have significant benefit for users.
- Any extension must not require significant implementation effort. To that end, all such changes are accompanied by an open source implementation.

The discussions of MPI-2.2 proceeded concurrently with the MPI-3 discussions; in some cases, extensions were proposed for MPI-2.2 but were later moved to MPI-3.

## 1.6 Who Should Use This Standard?

This standard is intended for use by all those who want to write portable message-passing programs in Fortran, C and C++. This includes individual application programmers, developers of software designed to run on parallel machines, and creators of environments and tools. In order to be attractive to this wide audience, the standard must provide a simple, easy-to-use interface for the basic user while not semantically precluding the high-performance message-passing operations available on advanced machines.

## 1.7 What Platforms Are Targets For Implementation?

The attractiveness of the message-passing paradigm at least partially stems from its wide portability. Programs expressed this way may run on distributed-memory multiprocessors,

networks of workstations, and combinations of all of these. In addition, shared-memory implementations, including those for multi-core processors and hybrid architectures, are possible. The paradigm will not be made obsolete by architectures combining the shared- and distributed-memory views, or by increases in network speeds. It thus should be both possible and useful to implement this standard on a great variety of machines, including those “machines” consisting of collections of other machines, parallel or not, connected by a communication network.

The interface is suitable for use by fully general MIMD programs, as well as those written in the more restricted style of SPMD. MPI provides many features intended to improve performance on scalable parallel computers with specialized interprocessor communication hardware. Thus, we expect that native, high-performance implementations of MPI will be provided on such machines. At the same time, implementations of MPI on top of standard Unix interprocessor communication protocols will provide portability to workstation clusters and heterogenous networks of workstations.

## 1.8 What Is Included In The Standard?

The standard includes:

- Point-to-point communication
- Datatypes
- Collective operations
- Process groups
- Communication contexts
- Process topologies
- Environmental Management and inquiry
- The info object
- Process creation and management
- One-sided communication
- External interfaces
- Parallel file I/O
- Language Bindings for Fortran, C and C++
- Profiling interface

## 1.9 What Is Not Included In The Standard?

The standard does not specify:

- Operations that require more operating system support than is currently standard; for example, interrupt-driven receives, remote execution, or active messages,
- Program construction tools,
- Debugging facilities.

There are many features that have been considered and not included in this standard. This happened for a number of reasons, one of which is the time constraint that was self-imposed in finishing the standard. Features that are not included can always be offered as extensions by specific implementations. Perhaps future versions of MPI will address some of these issues.

## 1.10 Organization of this Document

The following is a list of the remaining chapters in this document, along with a brief description of each.

- Chapter 2, MPI Terms and Conventions, explains notational terms and conventions used throughout the MPI document.
- Chapter 3, Point to Point Communication, defines the basic, pairwise communication subset of MPI. *Send* and *receive* are found here, along with many associated functions designed to make basic communication powerful and efficient.
- Chapter 4, Datatypes, defines a method to describe any data layout, e.g., an array of structures in the memory, which can be used as message send or receive buffer.
- Chapter 5, Collective Communications, defines process-group collective communication operations. Well known examples of this are barrier and broadcast over a group of processes (not necessarily all the processes). With MPI-2, the semantics of collective communication was extended to include intercommunicators. It also adds two new collective operations.
- Chapter 6, Groups, Contexts, Communicators, and Caching, shows how groups of processes are formed and manipulated, how unique communication contexts are obtained, and how the two are bound together into a *communicator*.
- Chapter 7, Process Topologies, explains a set of utility functions meant to assist in the mapping of process groups (a linearly ordered set) to richer topological structures such as multi-dimensional grids.
- Chapter 8, MPI Environmental Management, explains how the programmer can manage and make inquiries of the current MPI environment. These functions are needed for the writing of correct, robust programs, and are especially important for the construction of highly-portable message-passing programs.

- Chapter 9, The Info Object, defines an opaque object, that is used as input of several MPI routines.
- Chapter 10, Process Creation and Management, defines routines that allow for creation of processes.
- Chapter 11, One-Sided Communications, defines communication routines that can be completed by a single process. These include shared-memory operations (put/get) and remote accumulate operations.
- Chapter 12, External Interfaces, defines routines designed to allow developers to layer on top of MPI. This includes generalized requests, routines that decode MPI opaque objects, and threads.
- Chapter 13, I/O, defines MPI support for parallel I/O.
- Chapter 14, Profiling Interface, explains a simple name-shifting convention that any MPI implementation must support. One motivation for this is the ability to put performance profiling calls into MPI without the need for access to the MPI source code. The name shift is merely an interface, it says nothing about how the actual profiling should be done and in fact, the name shift can be useful for other purposes.
- Chapter 15, Deprecated Functions, describes routines that are kept for reference. However usage of these functions is discouraged, as they may be deleted in future versions of the standard.
- Chapter 16, Language Bindings, describes the C++ binding, discusses Fortran issues, and describes language interoperability aspects between C, C++, and Fortran.

The Appendices are:

- Annex A, Language Bindings Summary, gives specific syntax in C, C++, and Fortran, for all MPI functions, constants, and types.
- Annex B, Change-Log, summarizes major changes since the previous version of the standard.
- Several Index pages are showing the locations of examples, constants and predefined handles, callback routines' prototypes, and all MPI functions.

MPI provides various interfaces to facilitate interoperability of distinct MPI implementations. Among these are the canonical data representation for MPI I/O and for MPI\_PACK\_EXTERNAL and MPI\_UNPACK\_EXTERNAL. The definition of an actual binding of these interfaces that will enable interoperability is outside the scope of this document.

A separate document consists of ideas that were discussed in the MPI Forum and deemed to have value, but are not included in the MPI Standard. They are part of the "Journal of Development" (JOD), lest good ideas be lost and in order to provide a starting point for further work. The chapters in the JOD are

- Chapter 2, Spawning Independent Processes, includes some elements of dynamic process management, in particular management of processes with which the spawning processes do not intend to communicate, that the Forum discussed at length but ultimately decided not to include in the MPI Standard.

- Chapter 3, *Threads and MPI*, describes some of the expected interaction between an MPI implementation and a thread library in a multi-threaded environment.
- Chapter 4, *Communicator ID*, describes an approach to providing identifiers for communicators.
- Chapter 5, *Miscellany*, discusses Miscellaneous topics in the MPI JOD, in particular single-copy routines for use in shared-memory environments and new datatype constructors.
- Chapter 6, *Toward a Full Fortran 90 Interface*, describes an approach to providing a more elaborate Fortran 90 interface.
- Chapter 7, *Split Collective Communication*, describes a specification for certain **nonblocking** collective operations.
- Chapter 8, *Real-Time MPI*, discusses MPI support for real time processing.



## Chapter 2

# MPI Terms and Conventions

This chapter explains notational terms and conventions used throughout the MPI document, some of the choices that have been made, and the rationale behind those choices. It is similar to the MPI-1 Terms and Conventions chapter but differs in some major and minor ways. Some of the major areas of difference are the naming conventions, some semantic definitions, file objects, Fortran 90 *vs* Fortran 77, C++, processes, and interaction with signals.

### 2.1 Document Notation

*Rationale.* Throughout this document, the rationale for the design choices made in the interface specification is set off in this format. Some readers may wish to skip these sections, while readers interested in interface design may want to read them carefully. (*End of rationale.*)

*Advice to users.* Throughout this document, material aimed at users and that illustrates usage is set off in this format. Some readers may wish to skip these sections, while readers interested in programming in MPI may want to read them carefully. (*End of advice to users.*)

*Advice to implementors.* Throughout this document, material that is primarily commentary to implementors is set off in this format. Some readers may wish to skip these sections, while readers interested in MPI implementations may want to read them carefully. (*End of advice to implementors.*)

### 2.2 Naming Conventions

In many cases MPI names for C functions are of the form `MPI_Class_action_subset`. This convention originated with MPI-1. Since MPI-2 an attempt has been made to standardize the names of MPI functions according to the following rules. The C++ bindings in particular follow these rules (see Section 2.6.4 on page 19).

1. In C, all routines associated with a particular type of MPI object should be of the form `MPI_Class_action_subset` or, if no subset exists, of the form `MPI_Class_action`. In Fortran, all routines associated with a particular type of MPI object should be of the form `MPI_CLASS_ACTION_SUBSET` or, if no subset exists, of the form

**MPI\_CLASS\_ACTION**. For C and Fortran we use the C++ terminology to define the **Class**. In C++, the routine is a method on **Class** and is named **MPI::Class::Action\_subset**. If the routine is associated with a certain class, but does not make sense as an object method, it is a static member function of the class.

2. If the routine is not associated with a class, the name should be of the form **MPI\_Action\_subset** in C and **MPI\_ACTION\_SUBSET** in Fortran, and in C++ should be scoped in the MPI namespace, **MPI::Action\_subset**.
3. The names of certain actions have been standardized. In particular, **Create** creates a new object, **Get** retrieves information about an object, **Set** sets this information, **Delete** deletes information, **Is** asks whether or not an object has a certain property.

C and Fortran names for some MPI functions (that were defined during the MPI-1 process) violate these rules in several cases. The most common exceptions are the omission of the **Class** name from the routine and the omission of the **Action** where one can be inferred.

MPI identifiers are limited to 30 characters (31 with the profiling interface). This is done to avoid exceeding the limit on some compilation systems.

## 2.3 Procedure Specification

MPI procedures are specified using a language-independent notation. The arguments of procedure calls are marked as IN, OUT or INOUT. The meanings of these are:

- IN: the call may use the input value but does not update the argument,
- OUT: the call may update the argument but does not use its input value,
- INOUT: the call may both use and update the argument.

There is one special case — if an argument is a handle to an opaque object (these terms are defined in Section 2.5.1), and the object is updated by the procedure call, then the argument is marked INOUT or OUT. It is marked this way even though the handle itself is not modified — we use the INOUT or OUT attribute to denote that what the handle *references* is updated. Thus, in C++, IN arguments are usually either references or pointers to **const** objects.

*Rationale.* The definition of MPI tries to avoid, to the largest possible extent, the use of INOUT arguments, because such use is error-prone, especially for scalar arguments. (*End of rationale.*)

MPI's use of IN, OUT and INOUT is intended to indicate to the user how an argument is to be used, but does not provide a rigorous classification that can be translated directly into all language bindings (e.g., **INTENT** in Fortran 90 bindings or **const** in C bindings). For instance, the “constant” **MPI\_BOTTOM** can usually be passed to OUT buffer arguments. Similarly, **MPI\_STATUS\_IGNORE** can be passed as the OUT status argument.

A common occurrence for MPI functions is an argument that is used as IN by some processes and OUT by other processes. Such an argument is, syntactically, an INOUT argument

ticket9.

ticket9.  
ticket9.

and is marked as such, although, semantically, it is not used in one call both for input and for output on a single process.

Another frequent situation arises when an argument value is needed only by a subset of the processes. When an argument is not significant at a process then an arbitrary value can be passed as an argument.

Unless specified otherwise, an argument of type OUT or type INOUT cannot be aliased with any other argument passed to an MPI procedure. An example of argument aliasing in C appears below. If we define a C procedure like this,

```
void copyIntBuffer( int *pin, int *pout, int len )
{
    int i;
    for (i=0; i<len; ++i) *pout++ = *pin++;
}
```

then a call to it in the following code fragment has aliased arguments.

```
int a[10];
copyIntBuffer( a, a+3, 7);
```

Although the C language allows this, such usage of MPI procedures is forbidden unless otherwise specified. Note that Fortran prohibits aliasing of arguments.

All MPI functions are first specified in the language-independent notation. Immediately below this, the ISO C version of the function is shown followed by a version of the same function in Fortran and then the C++ binding. Fortran in this document refers to Fortran 90; see Section 2.6.

## 2.4 Semantic Terms

When discussing MPI procedures the following semantic terms are used.

**nonblocking** A procedure is nonblocking if the procedure may return before the operation completes, and before the user is allowed to reuse resources (such as buffers) specified in the call. A nonblocking request is **started** by the call that initiates it, e.g., MPI\_ISEND. The word complete is used with respect to operations, requests, and communications. An **operation completes** when the user is allowed to reuse resources, and any output buffers have been updated; i.e. a call to MPI\_TEST will return `flag = true`. A **request is completed** by a call to wait, which returns, or a test or get status call which returns `flag = true`. This completing call has two effects: the status is extracted from the request; in the case of test and wait, if the request was nonpersistent, it is **freed**, and becomes **inactive** if it was persistent. A **communication completes** when all participating operations complete.

**blocking** A procedure is blocking if return from the procedure indicates the user is allowed to reuse resources specified in the call.

**local** A procedure is local if completion of the procedure depends only on the local executing process.

**non-local** A procedure is non-local if completion of the operation may require the execution of some MPI procedure on another process. Such an operation may require communication occurring with another user process.

**collective** A procedure is collective if all processes in a process group need to invoke the procedure. A collective call may or may not be synchronizing. Collective calls over the same communicator must be executed in the same order by all members of the process group.

**predefined** A predefined datatype is a datatype with a predefined (constant) name (such as `MPI_INT`, `MPI_FLOAT_INT`, or `MPI_UB`) or a datatype constructed with `MPI_TYPE_CREATE_F90_INTEGER`, `MPI_TYPE_CREATE_F90_REAL`, or `MPI_TYPE_CREATE_F90_COMPLEX`. The former are **named** whereas the latter are **unnamed**.

**derived** A derived datatype is any datatype that is not predefined.

**portable** A datatype is portable, if it is a predefined datatype, or it is derived from a portable datatype using only the type constructors `MPI_TYPE_CONTIGUOUS`, `MPI_TYPE_VECTOR`, `MPI_TYPE_INDEXED`, `MPI_TYPE_CREATE_INDEXED_BLOCK`, `MPI_TYPE_CREATE_SUBARRAY`, `MPI_TYPE_DUP`, and `MPI_TYPE_CREATE_DARRAY`. Such a datatype is portable because all displacements in the datatype are in terms of extents of one predefined datatype. Therefore, if such a datatype fits a data layout in one memory, it will fit the corresponding data layout in another memory, if the same declarations were used, even if the two systems have different architectures. On the other hand, if a datatype was constructed using `MPI_TYPE_CREATE_HINDEXED`, `MPI_TYPE_CREATE_HVECTOR` or `MPI_TYPE_CREATE_STRUCT`, then the datatype contains explicit byte displacements (e.g., providing padding to meet alignment restrictions). These displacements are unlikely to be chosen correctly if they fit data layout on one memory, but are used for data layouts on another process, running on a processor with a different architecture.

**equivalent** Two datatypes are equivalent if they appear to have been created with the same sequence of calls (and arguments) and thus have the same typemap. Two equivalent datatypes do not necessarily have the same cached attributes or the same names.

## 2.5 Data Types

### 2.5.1 Opaque Objects

MPI manages **system memory** that is used for buffering messages and for storing internal representations of various MPI objects such as groups, communicators, datatypes, etc. This memory is not directly accessible to the user, and objects stored there are **opaque**: their size and shape is not visible to the user. Opaque objects are accessed via **handles**, which exist in user space. MPI procedures that operate on opaque objects are passed handle arguments to access these objects. In addition to their use by MPI calls for object access, handles can participate in assignments and comparisons.

In Fortran, all handles have type `INTEGER`. In C and C++, a different handle type is defined for each category of objects. In addition, handles themselves are distinct objects in C++. The C and C++ types must support the use of the assignment and equality operators.

*Advice to implementors.* In Fortran, the handle can be an index into a table of opaque objects in a system table; in C it can be such an index or a pointer to the object. C++ handles can simply “wrap up” a table index or pointer.

*(End of advice to implementors.)*

Opaque objects are allocated and deallocated by calls that are specific to each object type. These are listed in the sections where the objects are described. The calls accept a handle argument of matching type. In an allocate call this is an OUT argument that returns a valid reference to the object. In a call to deallocate this is an INOUT argument which returns with an “invalid handle” value. MPI provides an “invalid handle” constant for each object type. Comparisons to this constant are used to test for validity of the handle.

A call to a deallocate routine invalidates the handle and marks the object for deallocation. The object is not accessible to the user after the call. However, MPI need not deallocate the object immediately. Any operation pending (at the time of the deallocate) that involves this object will complete normally; the object will be deallocated afterwards.

An opaque object and its handle are significant only at the process where the object was created and cannot be transferred to another process.

MPI provides certain predefined opaque objects and predefined, static handles to these objects. The user must not free such objects. In C++, this is enforced by declaring the handles to these predefined objects to be `static const`.

*Rationale.* This design hides the internal representation used for MPI data structures, thus allowing similar calls in C, C++, and Fortran. It also avoids conflicts with the typing rules in these languages, and easily allows future extensions of functionality. The mechanism for opaque objects used here loosely follows the POSIX Fortran binding standard.

The explicit separation of handles in user space and objects in system space allows space-reclaiming and deallocation calls to be made at appropriate points in the user program. If the opaque objects were in user space, one would have to be very careful not to go out of scope before any pending operation requiring that object completed. The specified design allows an object to be marked for deallocation, the user program can then go out of scope, and the object itself still persists until any pending operations are complete.

The requirement that handles support assignment/comparison is made since such operations are common. This restricts the domain of possible implementations. The alternative would have been to allow handles to have been an arbitrary, opaque type. This would force the introduction of routines to do assignment and comparison, adding complexity, and was therefore ruled out. *(End of rationale.)*

*Advice to users.* A user may accidentally create a dangling reference by assigning to a handle the value of another handle, and then deallocating the object associated with these handles. Conversely, if a handle variable is deallocated before the associated object is freed, then the object becomes inaccessible (this may occur, for example, if the handle is a local variable within a subroutine, and the subroutine is exited before the associated object is deallocated). It is the user’s responsibility to avoid adding or deleting references to opaque objects, except as a result of MPI calls that allocate or deallocate such objects. *(End of advice to users.)*

*Advice to implementors.* The intended semantics of opaque objects is that opaque objects are separate from one another; each call to allocate such an object copies all the information required for the object. Implementations may avoid excessive copying by substituting referencing for copying. For example, a derived datatype may contain references to its components, rather than copies of its components; a call to `MPI_COMM_GROUP` may return a reference to the group associated with the communicator, rather than a copy of this group. In such cases, the implementation must maintain reference counts, and allocate and deallocate objects in such a way that the visible effect is as if the objects were copied. (*End of advice to implementors.*)

## 2.5.2 Array Arguments

An MPI call may need an argument that is an array of opaque objects, or an array of handles. The array-of-handles is a regular array with entries that are handles to objects of the same type in consecutive locations in the array. Whenever such an array is used, an additional `len` argument is required to indicate the number of valid entries (unless this number can be derived otherwise). The valid entries are at the beginning of the array; `len` indicates how many of them there are, and need not be the size of the entire array. The same approach is followed for other array arguments. In some cases `NULL` handles are considered valid entries. When a `NULL` argument is desired for an array of statuses, one uses `MPI_STATUSES_IGNORE`.

## 2.5.3 State

MPI procedures use at various places arguments with *state* types. The values of such a data type are all identified by names, and no operation is defined on them. For example, the `MPI_TYPE_CREATE_SUBARRAY` routine has a state argument `order` with values `MPI_ORDER_C` and `MPI_ORDER_FORTRAN`.

## 2.5.4 Named Constants

MPI procedures sometimes assign a special meaning to a special value of a basic type argument; e.g., `tag` is an integer-valued argument of point-to-point communication operations, with a special wild-card value, `MPI_ANY_TAG`. Such arguments will have a range of regular values, which is a proper subrange of the range of values of the corresponding basic type; special values (such as `MPI_ANY_TAG`) will be outside the regular range. The range of regular values, such as `tag`, can be queried using environmental inquiry functions (Chapter 7 of the MPI-1 document). The range of other values, such as `source`, depends on values given by other MPI routines (in the case of `source` it is the communicator size).

MPI also provides predefined named constant handles, such as `MPI_COMM_WORLD`.

[All named constants, with the exceptions noted below for Fortran, can be used in initialization expressions or assignments.] All named constants, with the exceptions noted below for Fortran, can be used in initialization expressions or assignments, but not necessarily in array declarations or as labels in C/C++ `switch` or Fortran `select/case` statements. This implies named constants to be link-time but not necessarily compile-time constants. The named constants listed below are required to be compile-time constants in both C/C++ and Fortran. These constants do not change values during execution. Opaque objects accessed by constant handles are defined and do not change value between MPI initialization (`MPI_INIT`) and MPI completion (`MPI_FINALIZE`). The handles themselves are constants

and can be also used in initialization expressions or assignments.

The constants that are required to be compile-time constants (and can thus be used for array length declarations and labels in C/C++ `switch` and Fortran `case/select` statements) are:

```
MPI_MAX_PROCESSOR_NAME
MPI_MAX_ERROR_STRING
MPI_MAX_DATAREP_STRING
MPI_MAX_INFO_KEY
MPI_MAX_INFO_VAL
MPI_MAX_OBJECT_NAME
MPI_MAX_PORT_NAME
MPI_STATUS_SIZE (Fortran only)
MPI_ADDRESS_KIND (Fortran only)
MPI_INTEGER_KIND (Fortran only)
MPI_OFFSET_KIND (Fortran only)
```

and their C++ counterparts where appropriate.

The constants that cannot be used in initialization expressions or assignments in Fortran are:

```
MPI_BOTTOM
MPI_STATUS_IGNORE
MPI_STATUSES_IGNORE
MPI_ERRCODES_IGNORE
MPI_IN_PLACE
MPI_ARGV_NULL
MPI_ARGVS_NULL
MPI_UNWEIGHTED
```

ticket33.

*Advice to implementors.* In Fortran the implementation of these special constants may require the use of language constructs that are outside the Fortran standard. Using special values for the constants (e.g., by defining them through `PARAMETER` statements) is not possible because an implementation cannot distinguish these values from legal data. Typically, these constants are implemented as predefined static variables (e.g., a variable in an MPI-declared `COMMON` block), relying on the fact that the target compiler passes data by address. Inside the subroutine, this address can be extracted by some mechanism outside the Fortran standard (e.g., by Fortran extensions or by implementing the function in C). (*End of advice to implementors.*)

### 2.5.5 Choice

MPI functions sometimes use arguments with a *choice* (or union) data type. Distinct calls to the same routine may pass by reference actual arguments of different types. The mechanism for providing such arguments will differ from language to language. For Fortran, the document uses `<type>` to represent a choice variable; for C and C++, we use `void *`.

### 2.5.6 Addresses

Some MPI procedures use *address* arguments that represent an absolute address in the calling program. The datatype of such an argument is `MPI_Aint` in C, `MPI::Aint` in C++

and INTEGER (KIND=MPI\_ADDRESS\_KIND) in Fortran. These types must have the same width and encode address values in the same manner such that address values in one language may be passed directly to another language without conversion. There is the MPI constant MPI\_BOTTOM to indicate the start of the address range.

ticket141.

### 2.5.7 File Offsets

For I/O there is a need to give the size, displacement, and offset into a file. These quantities can easily be larger than 32 bits which can be the default size of a Fortran integer. To overcome this, these quantities are declared to be INTEGER (KIND=MPI\_OFFSET\_KIND) in Fortran. In C one uses MPI\_Offset whereas in C++ one uses MPI::Offset. These types must have the same width and encode address values in the same manner such that offset values in one language may be passed directly to another language without conversion.

## 2.6 Language Binding

This section defines the rules for MPI language binding in general and for Fortran, ISO C, and C++, in particular. (Note that ANSI C has been replaced by ISO C.) The C++ language bindings have been deprecated. Defined here are various object representations, as well as the naming conventions used for expressing this standard. The actual calling sequences are defined elsewhere.

MPI bindings are for Fortran 90, though they are designed to be usable in Fortran 77 environments.

Since the word PARAMETER is a keyword in the Fortran language, we use the word “argument” to denote the arguments to a subroutine. These are normally referred to as parameters in C and C++, however, we expect that C and C++ programmers will understand the word “argument” (which has no specific meaning in C/C++), thus allowing us to avoid unnecessary confusion for Fortran programmers.

Since Fortran is case insensitive, linkers may use either lower case or upper case when resolving Fortran names. Users of case sensitive languages should avoid the “mpi\_” and “pmpi\_” prefixes.

### 2.6.1 Deprecated Names and Functions

A number of chapters refer to deprecated or replaced MPI-1 constructs. These are constructs that continue to be part of the MPI standard, as documented in Chapter 15, but that users are recommended not to continue using, since better solutions were provided with MPI-2. For example, the Fortran binding for MPI-1 functions that have address arguments uses INTEGER. This is not consistent with the C binding, and causes problems on machines with 32 bit INTEGERS and 64 bit addresses. In MPI-2, these functions were given new names with new bindings for the address arguments. The use of the old functions is deprecated. For consistency, here and in a few other cases, new C functions are also provided, even though the new functions are equivalent to the old functions. The old names are deprecated. Another example is provided by the MPI-1 predefined datatypes MPI\_UB and MPI\_LB. They are deprecated, since their use is awkward and error-prone. The MPI-2 function MPI\_TYPE\_CREATE\_RESIZED provides a more convenient mechanism to achieve the same effect.



Table 2.1 shows a list of all of the deprecated constructs. Note that the constants `MPI_LB` and `MPI_UB` are replaced by the function `MPI_TYPE_CREATE_RESIZED`; this is because their principal use was as input datatypes to `MPI_TYPE_STRUCT` to create resized datatypes. Also note that some C typedefs and Fortran subroutine names are included in this list; they are the types of callback functions.

Deprecated	MPI-2 Replacement
<code>MPI_ADDRESS</code>	<code>MPI_GET_ADDRESS</code>
<code>MPI_TYPE_HINDEXED</code>	<code>MPI_TYPE_CREATE_HINDEXED</code>
<code>MPI_TYPE_HVECTOR</code>	<code>MPI_TYPE_CREATE_HVECTOR</code>
<code>MPI_TYPE_STRUCT</code>	<code>MPI_TYPE_CREATE_STRUCT</code>
<code>MPI_TYPE_EXTENT</code>	<code>MPI_TYPE_GET_EXTENT</code>
<code>MPI_TYPE_UB</code>	<code>MPI_TYPE_GET_EXTENT</code>
<code>MPI_TYPE_LB</code>	<code>MPI_TYPE_GET_EXTENT</code>
<code>MPI_LB</code>	<code>MPI_TYPE_CREATE_RESIZED</code>
<code>MPI_UB</code>	<code>MPI_TYPE_CREATE_RESIZED</code>
<code>MPI_ERRHANDLER_CREATE</code>	<code>MPI_COMM_CREATE_ERRHANDLER</code>
<code>MPI_ERRHANDLER_GET</code>	<code>MPI_COMM_GET_ERRHANDLER</code>
<code>MPI_ERRHANDLER_SET</code>	<code>MPI_COMM_SET_ERRHANDLER</code>
<code>MPI_Handler_function</code>	<code>MPI_Comm_errhandler_[ticket7.][fn]function</code>
<code>MPI_KEYVAL_CREATE</code>	<code>MPI_COMM_CREATE_KEYVAL</code>
<code>MPI_KEYVAL_FREE</code>	<code>MPI_COMM_FREE_KEYVAL</code>
<code>MPI_DUP_FN</code>	<code>MPI_COMM_DUP_FN</code>
<code>MPI_NULL_COPY_FN</code>	<code>MPI_COMM_NULL_COPY_FN</code>
<code>MPI_NULL_DELETE_FN</code>	<code>MPI_COMM_NULL_DELETE_FN</code>
<code>MPI_Copy_function</code>	<code>MPI_Comm_copy_attr_function</code>
<code>COPY_FUNCTION</code>	<code>COMM_COPY_ATTR_FN</code>
<code>MPI_Delete_function</code>	<code>MPI_Comm_delete_attr_function</code>
<code>DELETE_FUNCTION</code>	<code>COMM_DELETE_ATTR_FN</code>
<code>MPI_ATTR_DELETE</code>	<code>MPI_COMM_DELETE_ATTR</code>
<code>MPI_ATTR_GET</code>	<code>MPI_COMM_GET_ATTR</code>
<code>MPI_ATTR_PUT</code>	<code>MPI_COMM_SET_ATTR</code>

Table 2.1: Deprecated constructs

### 2.6.2 Fortran Binding Issues

Originally, MPI-1.1 provided bindings for Fortran 77. These bindings are retained, but they are now interpreted in the context of the Fortran 90 standard. MPI can still be used with most Fortran 77 compilers, as noted below. When the term Fortran is used it means Fortran 90.

All MPI names have an `MPI_` prefix, and all characters are capitals. Programs must not declare variables, parameters, or functions with names beginning with the prefix `MPI_`. To avoid conflicting with the profiling interface, programs should also avoid functions with the prefix `PMPI_`. This is mandated to avoid possible name collisions.

All MPI Fortran subroutines have a return code in the last argument. A few MPI operations which are functions do not have the return code argument. The return code value

for successful completion is `MPI_SUCCESS`. Other error codes are implementation dependent; see the error codes in Chapter 8 and Annex A.

Constants representing the maximum length of a string are one smaller in Fortran than in C and C++ as discussed in Section 16.3.9.

Handles are represented in Fortran as `INTEGER`s. Binary-valued variables are of type `LOGICAL`.

Array arguments are indexed from one.

The MPI Fortran binding is inconsistent with the Fortran 90 standard in several respects. These inconsistencies, such as register optimization problems, have implications for user codes that are discussed in detail in Section 16.2.2. They are also inconsistent with Fortran 77.

[ NOTE: This list should be in sync (exactly the same text) with the binding chapter, where it is repeated for completeness.

- An MPI subroutine with a choice argument may be called with different argument types.
- An MPI subroutine with an assumed-size dummy argument may be passed an actual scalar argument.
- Many MPI routines assume that actual arguments are passed by address and that arguments are not copied on entrance to or exit from the subroutine.
- An MPI implementation may read or modify user data (e.g., communication buffers used by nonblocking communications) concurrently with a user program executing outside MPI calls.
- Several named “constants,” such as `MPI_BOTTOM`, `MPI_STATUS_IGNORE`, and `MPI_ERRCODES_IGNORE`, are not ordinary Fortran constants and require a special implementation. See Section 2.5.4 on page 14 for more information.

Additionally, MPI is inconsistent with Fortran 77 in a number of ways, as noted below.

- MPI identifiers exceed 6 characters.
- MPI identifiers may contain underscores after the first character.
- MPI requires an include file, `mpif.h`. On systems that do not support include files, the implementation should specify the values of named constants.
- Many routines in MPI-2.1 Correction due to Reviews at MPI-2.1 Forum meeting April 26-28, 2008 MPI-2 MPI MPI-2.1 End of correction have `KIND`-parameterized integers (e.g., `MPI_ADDRESS_KIND` and `MPI_OFFSET_KIND`) that hold address information. On systems that do not support Fortran 90-style parameterized types, `INTEGER*8` or `INTEGER` should be used instead.
- The memory allocation routine `MPI_ALLOC_MEM` MPI-2.1 Correction due to Reviews at MPI-2.1 Forum meeting April 26-28, 2008 can’t cannot MPI-2.1 End of correction be usefully used in Fortran without a language extension that allows the allocated memory to be associated with a Fortran variable.

]

### 2.6.3 C Binding Issues

We use the ISO C declaration format. All MPI names have an `MPI_` prefix, defined constants are in all capital letters, and defined types and functions have one capital letter after the prefix. Programs must not declare variables or functions with names beginning with the prefix `MPI_`. To support the profiling interface, programs should not declare functions with names beginning with the prefix `PMPI_`.

The definition of named constants, function prototypes, and type definitions must be supplied in an include file `mpi.h`.

Almost all C functions return an error code. The successful return code will be `MPI_SUCCESS`, but failure return codes are implementation dependent.

Type declarations are provided for handles to each category of opaque objects.

Array arguments are indexed from zero.

Logical flags are integers with value 0 meaning “false” and a non-zero value meaning “true.”

Choice arguments are pointers of type `void *`.

Address arguments are of MPI defined type `MPI_Aint`. File displacements are of type `MPI_Offset`. `MPI_Aint` is defined to be an integer of the size needed to hold any valid address on the target architecture. `MPI_Offset` is defined to be an integer of the size needed to hold any valid file size on the target architecture.

### 2.6.4 C++ Binding Issues

**The C++ language bindings have been deprecated.** There are places in the standard that give rules for C and not for C++. In these cases, the C rule should be applied to the C++ case, as appropriate. In particular, the values of constants given in the text are the ones for C and Fortran. A cross index of these with the C++ names is given in Annex A.

We use the ISO C++ declaration format. All MPI names are declared within the scope of a namespace called `MPI` and therefore are referenced with an `MPI::` prefix. Defined constants are in all capital letters, and class names, defined types, and functions have only their first letter capitalized. Programs must not declare variables or functions in the `MPI` namespace. This is mandated to avoid possible name collisions.

The definition of named constants, function prototypes, and type definitions must be supplied in an include file `mpi.h`.

*Advice to implementors.* The file `mpi.h` may contain both the C and C++ definitions. Usually one can simply use the defined value (generally `__cplusplus`, but not required) to see if one is using C++ to protect the C++ definitions. It is possible that a C compiler will require that the source protected this way be legal C code. In this case, all the C++ definitions can be placed in a different include file and the “`#include`” directive can be used to include the necessary C++ definitions in the `mpi.h` file. (*End of advice to implementors.*)

C++ functions that create objects or return information usually place the object or information in the return value. Since the language neutral prototypes of MPI functions include the C++ return value as an OUT parameter, semantic descriptions of MPI functions refer to the C++ return value by that parameter name. The remaining C++ functions return `void`.

ticket150.

In some circumstances, MPI permits users to indicate that they do not want a return value. For example, the user may indicate that the status is not filled in. Unlike C and Fortran where this is achieved through a special input value, in C++ this is done by having two bindings where one has the optional argument and one does not.

C++ functions do not return error codes. If the default error handler has been set to `MPI::ERRORS_THROW_EXCEPTIONS`, the C++ exception mechanism is used to signal an error by throwing an `MPI::Exception` object.

It should be noted that the default error handler (i.e., `MPI::ERRORS_ARE_FATAL`) on a given type has not changed. User error handlers are also permitted. `MPI::ERRORS_RETURN` simply returns control to the calling function; there is no provision for the user to retrieve the error code.

User callback functions that return integer error codes should not throw exceptions; the returned error will be handled by the MPI implementation by invoking the appropriate error handler.

*Advice to users.* C++ programmers that want to handle MPI errors on their own should use the `MPI::ERRORS_THROW_EXCEPTIONS` error handler, rather than `MPI::ERRORS_RETURN`, that is used for that purpose in C. Care should be taken using exceptions in mixed language situations. (*End of advice to users.*)

Opaque object handles must be objects in themselves, and have the assignment and equality operators overridden to perform semantically like their C and Fortran counterparts.

Array arguments are indexed from zero.

Logical flags are of type `bool`.

Choice arguments are pointers of type `void *`.

Address arguments are of MPI-defined integer type `MPI::Aint`, defined to be an integer of the size needed to hold any valid address on the target architecture. Analogously, `MPI::Offset` is an integer to hold file offsets.

Most MPI functions are methods of MPI C++ classes. MPI class names are generated from the language neutral MPI types by dropping the `MPI_` prefix and scoping the type within the MPI namespace. For example, `MPI_DATATYPE` becomes `MPI::Datatype`.

The names of MPI functions generally follow the naming rules given. In some circumstances, the MPI function is related to a function defined already for MPI-1 with a name that does not follow the naming conventions. In this circumstance, the language neutral name is in analogy to the MPI name even though this gives an MPI-2 name that violates the naming conventions. The C and Fortran names are the same as the language neutral name in this case. However, the C++ names do reflect the naming rules and can differ from the C and Fortran names. Thus, the analogous name in C++ to the MPI name may be different than the language neutral name. This results in the C++ name differing from the language neutral name. An example of this is the language neutral name of `MPI_FINALIZED` and a C++ name of `MPI::Is_finalized`.

In C++, function `typedefs` are made publicly within appropriate classes. However, these declarations then become somewhat cumbersome, as with the following:

```
{typedef MPI::Grequest::Query_function(); (binding deprecated, see Section 15.2)}
```

would look like the following:

```
namespace MPI {
    class Request {
```

```

    // ...
};

class Grequest : public MPI::Request {
    // ...
    typedef Query_function(void* extra_state, MPI::Status& status);
};
};

```

Rather than including this scaffolding when declaring C++ `typedefs`, we use an abbreviated form. In particular, we explicitly indicate the class and namespace scope for the `typedef` of the function. Thus, the example above is shown in the text as follows:

```

typedef int MPI::Grequest::Query_function(void* extra_state,
                                           MPI::Status& status)

```

The C++ bindings presented in Annex A.4 and throughout this document were generated by applying a simple set of name generation rules to the MPI function specifications. While these guidelines may be sufficient in most cases, they may not be suitable for all situations. In cases of ambiguity or where a specific semantic statement is desired, these guidelines may be superseded as the situation dictates.

1. All functions, types, and constants are declared within the scope of a `namespace` called `MPI`.
2. Arrays of MPI handles are always left in the argument list (whether they are IN or OUT arguments).
3. If the argument list of an MPI function contains a scalar IN handle, and it makes sense to define the function as a method of the object corresponding to that handle, the function is made a member function of the corresponding MPI class. The member functions are named according to the corresponding MPI function name, but without the “MPI\_” prefix and without the object name prefix (if applicable). In addition:
  - (a) The scalar IN handle is dropped from the argument list, and `this` corresponds to the dropped argument.
  - (b) The function is declared `const`.
4. MPI functions are made into class functions (static) when they belong on a class but do not have a unique scalar IN or INOUT parameter of that class.
5. If the argument list contains a single OUT argument that is not of type `MPI_STATUS` (or an array), that argument is dropped from the list and the function returns that value.

**Example 2.1** The C++ binding for `MPI_COMM_SIZE` is  
`int MPI::Comm::Get_size(void) const.`

6. If there are multiple OUT arguments in the argument list, one is chosen as the return value and is removed from the list.

7. If the argument list does not contain any OUT arguments, the function returns `void`.

**Example 2.2** The C++ binding for `MPI_REQUEST_FREE` is  
`void MPI::Request::Free(void)`

8. MPI functions to which the above rules do not apply are not members of any class, but are defined in the MPI namespace.

**Example 2.3** The C++ binding for `MPI_BUFFER_ATTACH` is  
`void MPI::Attach_buffer(void* buffer, int size).`

9. All class names, defined types, and function names have only their first letter capitalized. Defined constants are in all capital letters.
10. Any IN pointer, reference, or array argument must be declared `const`.
11. Handles are passed by reference.
12. Array arguments are denoted with square brackets (`[]`), not pointers, as this is more semantically precise.

### 2.6.5 Functions and Macros

An implementation is allowed to implement `MPI_WTIME`, `MPI_WTICK`, `PMPI_WTIME`, `PMPI_WTICK`, and the handle-conversion functions (`MPI_Group_f2c`, etc.) in Section 16.3.4, and no others, as macros in C.

*Advice to implementors.* Implementors should document which routines are implemented as macros. (*End of advice to implementors.*)

*Advice to users.* If these routines are implemented as macros, they will not work with the MPI profiling interface. (*End of advice to users.*)

## 2.7 Processes

An MPI program consists of autonomous processes, executing their own code, in an MIMD style. The codes executed by each process need not be identical. The processes communicate via calls to MPI communication primitives. Typically, each process executes in its own address space, although shared-memory implementations of MPI are possible.

This document specifies the behavior of a parallel program assuming that only MPI calls are used. The interaction of an MPI program with other possible means of communication, I/O, and process management is not specified. Unless otherwise stated in the specification of the standard, MPI places no requirements on the result of its interaction with external mechanisms that provide similar or equivalent functionality. This includes, but is not limited to, interactions with external mechanisms for process control, shared and remote memory access, file system access and control, interprocess communication, process signaling, and terminal I/O. High quality implementations should strive to make the results of such interactions intuitive to users, and attempt to document restrictions where deemed necessary.

*Advice to implementors.* Implementations that support such additional mechanisms for functionality supported within MPI are expected to document how these interact with MPI. (*End of advice to implementors.*)

The interaction of MPI and threads is defined in Section 12.4.

## 2.8 Error Handling

MPI provides the user with reliable message transmission. A message sent is always received correctly, and the user does not need to check for transmission errors, time-outs, or other error conditions. In other words, MPI does not provide mechanisms for dealing with failures in the communication system. If the MPI implementation is built on an unreliable underlying mechanism, then it is the job of the implementor of the MPI subsystem to insulate the user from this unreliability, or to reflect unrecoverable errors as failures. Whenever possible, such failures will be reflected as errors in the relevant communication call. Similarly, MPI itself provides no mechanisms for handling processor failures.

Of course, MPI programs may still be erroneous. A **program error** can occur when an MPI call is made with an incorrect argument (non-existing destination in a send operation, buffer too small in a receive operation, etc.). This type of error would occur in any implementation. In addition, a **resource error** may occur when a program exceeds the amount of available system resources (number of pending messages, system buffers, etc.). The occurrence of this type of error depends on the amount of available resources in the system and the resource allocation mechanism used; this may differ from system to system. A high-quality implementation will provide generous limits on the important resources so as to alleviate the portability problem this represents.

In C and Fortran, almost all MPI calls return a code that indicates successful completion of the operation. Whenever possible, MPI calls return an error code if an error occurred during the call. By default, an error detected during the execution of the MPI library causes the parallel computation to abort, except for file operations. However, MPI provides mechanisms for users to change this default and to handle recoverable errors. The user may specify that no error is fatal, and handle error codes returned by MPI calls by himself or herself. Also, the user may provide his or her own error-handling routines, which will be invoked whenever an MPI call returns abnormally. The MPI error handling facilities are described in Section 8.3. The return values of C++ functions are not error codes. If the default error handler has been set to `MPI::ERRORS_THROW_EXCEPTIONS`, the C++ exception mechanism is used to signal an error by throwing an `MPI::Exception` object. See also Section 16.1.8 on page 494.

Several factors limit the ability of MPI calls to return with meaningful error codes when an error occurs. MPI may not be able to detect some errors; other errors may be too expensive to detect in normal execution mode; finally some errors may be “catastrophic” and may prevent MPI from returning control to the caller in a consistent state.

Another subtle issue arises because of the nature of asynchronous communications: MPI calls may initiate operations that continue asynchronously after the call returned. Thus, the operation may return with a code indicating successful completion, yet later cause an error exception to be raised. If there is a subsequent call that relates to the same operation (e.g., a call that verifies that an asynchronous operation has completed) then the error argument associated with this call will be used to indicate the nature of the error. In a few cases, the error may occur after all calls that relate to the operation have completed, so that no error



value can be used to indicate the nature of the error (e.g., an error on the receiver in a send with the ready mode). Such an error must be treated as fatal, since information cannot be returned for the user to recover from it.

This document does not specify the state of a computation after an erroneous MPI call has occurred. The desired behavior is that a relevant error code be returned, and the effect of the error be localized to the greatest possible extent. E.g., it is highly desirable that an erroneous receive call will not cause any part of the receiver's memory to be overwritten, beyond the area specified for receiving the message.

Implementations may go beyond this document in supporting in a meaningful manner MPI calls that are defined here to be erroneous. For example, MPI specifies strict type matching rules between matching send and receive operations: it is erroneous to send a floating point variable and receive an integer. Implementations may go beyond these type matching rules, and provide automatic type conversion in such situations. It will be helpful to generate warnings for such non-conforming behavior.

MPI defines a way for users to create new error codes as defined in Section 8.5.

## 2.9 Implementation Issues

There are a number of areas where an MPI implementation may interact with the operating environment and system. While MPI does not mandate that any services (such as signal handling) be provided, it does strongly suggest the behavior to be provided if those services are available. This is an important point in achieving portability across platforms that provide the same set of services.

### 2.9.1 Independence of Basic Runtime Routines

MPI programs require that library routines that are part of the basic language environment (such as `write` in Fortran and `printf` and `malloc` in ISO C) and are executed after `MPI_INIT` and before `MPI_FINALIZE` operate independently and that their *completion* is independent of the action of other processes in an MPI program.

Note that this in no way prevents the creation of library routines that provide parallel services whose operation is collective. However, the following program is expected to complete in an ISO C environment regardless of the size of `MPI_COMM_WORLD` (assuming that `printf` is available at the executing nodes).

```
int rank;
MPI_Init((void *)0, (void *)0);
MPI_Comm_rank(MPI_COMM_WORLD, &rank);
if (rank == 0) printf("Starting program\n");
MPI_Finalize();
```

The corresponding Fortran and C++ programs are also expected to complete.

An example of what is *not* required is any particular ordering of the action of these routines when called by several tasks. For example, MPI makes neither requirements nor recommendations for the output from the following program (again assuming that I/O is available at the executing nodes).

```
MPI_Comm_rank(MPI_COMM_WORLD, &rank);
printf("Output from task rank %d\n", rank);
```



In addition, calls that fail because of resource exhaustion or other error are not considered a violation of the requirements here (however, they are required to complete, just not to complete successfully).

### 2.9.2 Interaction with Signals

MPI does not specify the interaction of processes with signals and does not require that MPI be signal safe. The implementation may reserve some signals for its own use. It is required that the implementation document which signals it uses, and it is strongly recommended that it not use `SIGALRM`, `SIGFPE`, or `SIGIO`. Implementations may also prohibit the use of MPI calls from within signal handlers.

In multithreaded environments, users can avoid conflicts between signals and the MPI library by catching signals only on threads that do not execute MPI calls. High quality single-threaded implementations will be signal safe: an MPI call suspended by a signal will resume and complete normally after the signal is handled.

## 2.10 Examples

The examples in this document are for illustration purposes only. They are not intended to specify the standard. Furthermore, the examples have not been carefully checked or verified.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

## Chapter 3

# Point-to-Point Communication

### 3.1 Introduction

Sending and receiving of messages by processes is the basic MPI communication mechanism. The basic point-to-point communication operations are **send** and **receive**. Their use is illustrated in the example below.

```
#include "mpi.h"
[ticket60.]int main( [ticket60.]int argc, [ticket60.]char **argv )
[ticket60.][int argc;char **argv;]{
    char message[20];
    int myrank;
    MPI_Status status;
    MPI_Init( &argc, &argv );
    MPI_Comm_rank( MPI_COMM_WORLD, &myrank );
    if (myrank == 0) /* code for process zero */
    {
        strcpy(message,"Hello, there");
        MPI_Send(message, strlen(message)+1, MPI_CHAR, 1, 99, MPI_COMM_WORLD);
    }
    else if (myrank == 1) /* code for process one */
    {
        MPI_Recv(message, 20, MPI_CHAR, 0, 99, MPI_COMM_WORLD, &status);
        printf("received :%s:\n", message);
    }
    MPI_Finalize();
}
```

In this example, process zero (`myrank = 0`) sends a message to process one using the **send** operation `MPI_SEND`. The operation specifies a **send buffer** in the sender memory from which the message data is taken. In the example above, the send buffer consists of the storage containing the variable `message` in the memory of process zero. The location, size and type of the send buffer are specified by the first three parameters of the send operation. The message sent will contain the 13 characters of this variable. In addition, the send operation associates an **envelope** with the message. This envelope specifies the message destination and contains distinguishing information that can be used by the **receive**

operation to select a particular message. The last three parameters of the send operation, along with the rank of the sender, specify the envelope for the message sent. Process one (`myrank = 1`) receives this message with the **receive** operation `MPI_RECV`. The message to be received is selected according to the value of its envelope, and the message data is stored into the **receive buffer**. In the example above, the receive buffer consists of the storage containing the string `message` in the memory of process one. The first three parameters of the receive operation specify the location, size and type of the receive buffer. The next three parameters are used for selecting the incoming message. The last parameter is used to return information on the message just received.

The next sections describe the blocking send and receive operations. We discuss send, receive, blocking communication semantics, type matching requirements, type conversion in heterogeneous environments, and more general communication modes. Nonblocking communication is addressed next, followed by channel-like constructs and send-receive operations. Nonblocking communication is addressed next, followed by channel-like constructs and send-receive operations, ending with a description of the “dummy” process, `MPI_PROC_NULL`.

## 3.2 Blocking Send and Receive Operations

### 3.2.1 Blocking Send

The syntax of the blocking send operation is given below.

`MPI_SEND(buf, count, datatype, dest, tag, comm)`

IN	buf	initial address of send buffer (choice)
IN	count	number of elements in send buffer ( <b>non-negative</b> integer)
IN	datatype	datatype of each send buffer element (handle)
IN	dest	rank of destination (integer)
IN	tag	message tag (integer)
IN	comm	communicator (handle)

```
int MPI_Send(void* buf, int count, MPI_Datatype datatype, int dest,
             int tag, MPI_Comm comm)
```

```
MPI_SEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, IERROR)
```

```
<type> BUF(*)
```

```
INTEGER COUNT, DATATYPE, DEST, TAG, COMM, IERROR
```

```
{void MPI::Comm::Send(const void* buf, int count, const
MPI::Datatype& datatype, int dest, int tag) const (binding
deprecated, see Section 15.2) }
```

The blocking semantics of this call are described in Section 3.4.

### 3.2.2 Message Data

The send buffer specified by the `MPI_SEND` operation consists of `count` successive entries of the type indicated by `datatype`, starting with the entry at address `buf`. Note that we specify the message length in terms of number of *elements*, not number of *bytes*. The former is machine independent and closer to the application level.

The data part of the message consists of a sequence of `count` values, each of the type indicated by `datatype`. `count` may be zero, in which case the data part of the message is empty. The basic datatypes that can be specified for message data values correspond to the basic datatypes of the host language. Possible values of this argument for Fortran and the corresponding Fortran types are listed in Table 3.1.

MPI datatype	Fortran datatype
<code>MPI_INTEGER</code>	<code>INTEGER</code>
<code>MPI_REAL</code>	<code>REAL</code>
<code>MPI_DOUBLE_PRECISION</code>	<code>DOUBLE PRECISION</code>
<code>MPI_COMPLEX</code>	<code>COMPLEX</code>
<code>MPI_LOGICAL</code>	<code>LOGICAL</code>
<code>MPI_CHARACTER</code>	<code>CHARACTER(1)</code>
<code>MPI_BYTE</code>	
<code>MPI_PACKED</code>	

Table 3.1: Predefined MPI datatypes corresponding to Fortran datatypes

Possible values for this argument for C and the corresponding C types are listed in Table 3.2.

The datatypes `MPI_BYTE` and `MPI_PACKED` do not correspond to a Fortran or C datatype. A value of type `MPI_BYTE` consists of a byte (8 binary digits). A byte is uninterpreted and is different from a character. Different machines may have different representations for characters, or may use more than one byte to represent characters. On the other hand, a byte has the same binary value on all machines. The use of the type `MPI_PACKED` is explained in Section 4.2.

MPI requires support of these datatypes, which match the basic datatypes of Fortran and ISO C. Additional MPI datatypes should be provided if the host language has additional data types: `MPI_DOUBLE_COMPLEX` for double precision complex in Fortran declared to be of type `DOUBLE COMPLEX`; `MPI_REAL2`, `MPI_REAL4` and `MPI_REAL8` for Fortran reals, declared to be of type `REAL*2`, `REAL*4` and `REAL*8`, respectively; `MPI_INTEGER1`, `MPI_INTEGER2` and `MPI_INTEGER4` for Fortran integers, declared to be of type `INTEGER*1`, `INTEGER*2` and `INTEGER*4`, respectively; etc.

*Rationale.* One goal of the design is to allow for MPI to be implemented as a library, with no need for additional preprocessing or compilation. Thus, one cannot assume that a communication call has information on the datatype of variables in the communication buffer; this information must be supplied by an explicit argument. The need for such datatype information will become clear in Section 3.3.2. (*End of rationale.*)

MPI datatype	C datatype
MPI_CHAR	[ticket63.] <b>[signed ]</b> char (treated as printable character)
MPI_SHORT	signed short int
MPI_INT	signed int
MPI_LONG	signed long int
MPI_LONG_LONG_INT	signed long long int
MPI_LONG_LONG (as a synonym)	signed long long int
MPI_SIGNED_CHAR	signed char (treated as integral value)
MPI_UNSIGNED_CHAR	unsigned char (treated as integral value)
MPI_UNSIGNED_SHORT	unsigned short int
MPI_UNSIGNED	unsigned int
MPI_UNSIGNED_LONG	unsigned long int
MPI_UNSIGNED_LONG_LONG	unsigned long long int
MPI_FLOAT	float
MPI_DOUBLE	double
MPI_LONG_DOUBLE	long double
MPI_WCHAR	wchar_t (defined in <stddef.h>) (treated as printable character)
[ticket18.]MPI_C_BOOL	_Bool
[ticket18.]MPI_INT8_T	int8_t
[ticket18.]MPI_INT16_T	int16_t
[ticket18.]MPI_INT32_T	int32_t
[ticket18.]MPI_INT64_T	int64_t
[ticket18.]MPI_UINT8_T	uint8_t
[ticket18.]MPI_UINT16_T	uint16_t
[ticket18.]MPI_UINT32_T	uint32_t
[ticket18.]MPI_UINT64_T	uint64_t
[ticket18.]MPI_C_COMPLEX	float _Complex
[ticket18.]MPI_C_FLOAT_COMPLEX (as a synonym)	float _Complex
[ticket18.]MPI_C_DOUBLE_COMPLEX	double _Complex
[ticket18.]MPI_C_LONG_DOUBLE_COMPLEX	long double _Complex
MPI_BYTE	
MPI_PACKED	

Table 3.2: Predefined MPI datatypes corresponding to C datatypes

*Rationale.* The datatypes MPI\_C\_BOOL, MPI\_INT8\_T, MPI\_INT16\_T, MPI\_INT32\_T, MPI\_UINT8\_T, MPI\_UINT16\_T, MPI\_UINT32\_T, MPI\_C\_COMPLEX, MPI\_C\_FLOAT\_COMPLEX, MPI\_C\_DOUBLE\_COMPLEX, and MPI\_C\_LONG\_DOUBLE\_COMPLEX have no corresponding C++ bindings. This was intentionally done to avoid potential collisions with the C preprocessor and namespaced C++ names. C++ applications can use the C bindings with no loss of functionality. (*End of rationale.*)

MPI datatype	C datatype	Fortran datatype
MPI_AINT	MPI_Aint	INTEGER (KIND=MPI_ADDRESS_KIND)
MPI_OFFSET	MPI_Offset	INTEGER (KIND=MPI_OFFSET_KIND)

Table 3.3: Predefined MPI datatypes corresponding to both C and Fortran datatypes

The datatypes `MPI_AINT` and `MPI_OFFSET` correspond to the MPI-defined C types `MPI_Aint` and `MPI_Offset` and their Fortran equivalents `INTEGER (KIND=MPI_ADDRESS_KIND)` and `INTEGER (KIND=MPI_OFFSET_KIND)`. This is described in Table 3.3. See Section 16.3.10 for information on interlanguage communication with these types.

### 3.2.3 Message Envelope

In addition to the data part, messages carry information that can be used to distinguish messages and selectively receive them. This information consists of a fixed number of fields, which we collectively call the **message envelope**. These fields are

source  
destination  
tag  
communicator

The message source is implicitly determined by the identity of the message sender. The other fields are specified by arguments in the send operation.

The message destination is specified by the `dest` argument.

The integer-valued message tag is specified by the `tag` argument. This integer can be used by the program to distinguish different types of messages. The range of valid tag values is  $0, \dots, \text{UB}$ , where the value of `UB` is implementation dependent. It can be found by querying the value of the attribute `MPI_TAG_UB`, as described in Chapter 8. MPI requires that `UB` be no less than 32767.

The `comm` argument specifies the **communicator** that is used for the send operation. Communicators are explained in Chapter 6; below is a brief summary of their usage.

A communicator specifies the communication context for a communication operation. Each communication context provides a separate “communication universe:” messages are always received within the context they were sent, and messages sent in different contexts do not interfere.

The communicator also specifies the set of processes that share this communication context. This **process group** is ordered and processes are identified by their rank within this group. Thus, the range of valid values for `dest` is  $0, \dots, n-1$ , where  $n$  is the number of processes in the group. (If the communicator is an inter-communicator, then destinations are identified by their rank in the remote group. See Chapter 6.)

A predefined communicator `MPI_COMM_WORLD` is provided by MPI. It allows communication with all processes that are accessible after MPI initialization and processes are identified by their rank in the group of `MPI_COMM_WORLD`.

*Advice to users.* Users that are comfortable with the notion of a flat name space for processes, and a single communication context, as offered by most existing communication libraries, need only use the predefined variable `MPI_COMM_WORLD` as the

comm argument. This will allow communication with all the processes available at initialization time.

Users may define new communicators, as explained in Chapter 6. Communicators provide an important encapsulation mechanism for libraries and modules. They allow modules to have their own disjoint communication universe and their own process numbering scheme. (*End of advice to users.*)

*Advice to implementors.* The message envelope would normally be encoded by a fixed-length message header. However, the actual encoding is implementation dependent. Some of the information (e.g., source or destination) may be implicit, and need not be explicitly carried by messages. Also, processes may be identified by relative ranks, or absolute ids, etc. (*End of advice to implementors.*)

### 3.2.4 Blocking Receive

The syntax of the blocking receive operation is given below.

MPI\_RECV (buf, count, datatype, source, tag, comm, status)

OUT	buf	initial address of receive buffer (choice)
IN	count	number of elements in receive buffer (non-negative integer)
IN	datatype	datatype of each receive buffer element (handle)
IN	source	rank of source or <b>MPI_ANY_SOURCE</b> (integer)
IN	tag	message tag or <b>MPI_ANY_TAG</b> (integer)
IN	comm	communicator (handle)
OUT	status	status object (Status)

```
int MPI_Recv(void* buf, int count, MPI_Datatype datatype, int source,
             int tag, MPI_Comm comm, MPI_Status *status)
```

```
MPI_RECV(BUF, COUNT, DATATYPE, SOURCE, TAG, COMM, STATUS, IERROR)
<type> BUF(*)
INTEGER COUNT, DATATYPE, SOURCE, TAG, COMM, STATUS(MPI_STATUS_SIZE),
IERROR
```

```
{void MPI::Comm::Recv(void* buf, int count, const MPI::Datatype& datatype,
int source, int tag, MPI::Status& status) const (binding
deprecated, see Section 15.2) }
```

```
{void MPI::Comm::Recv(void* buf, int count, const MPI::Datatype& datatype,
int source, int tag) const (binding deprecated, see Section 15.2) }
```

The blocking semantics of this call are described in Section 3.4.

The receive buffer consists of the storage containing count consecutive elements of the type specified by datatype, starting at address buf. The length of the received message must be less than or equal to the length of the receive buffer. An overflow error occurs if all incoming data does not fit, without truncation, into the receive buffer.



If a message that is shorter than the receive buffer arrives, then only those locations corresponding to the (shorter) message are modified.

*Advice to users.* The `MPI_PROBE` function described in Section 3.8 can be used to receive messages of unknown length. (*End of advice to users.*)

*Advice to implementors.* Even though no specific behavior is mandated by MPI for erroneous programs, the recommended handling of overflow situations is to return in status information about the source and tag of the incoming message. The receive operation will return an error code. A quality implementation will also ensure that no memory that is outside the receive buffer will ever be overwritten.

In the case of a message shorter than the receive buffer, MPI is quite strict in that it allows no modification of the other locations. A more lenient statement would allow for some optimizations but this is not allowed. The implementation must be ready to end a copy into the receiver memory exactly at the end of the receive buffer, even if it is an odd address. (*End of advice to implementors.*)

The selection of a message by a receive operation is governed by the value of the message envelope. A message can be received by a receive operation if its envelope matches the source, tag and comm values specified by the receive operation. The receiver may specify a wildcard `MPI_ANY_SOURCE` value for source, and/or a wildcard `MPI_ANY_TAG` value for tag, indicating that any source and/or tag are acceptable. It cannot specify a wildcard value for comm. Thus, a message can be received by a receive operation only if it is addressed to the receiving process, has a matching communicator, has matching source unless source=`MPI_ANY_SOURCE` in the pattern, and has a matching tag unless tag=`MPI_ANY_TAG` in the pattern.

The message tag is specified by the tag argument of the receive operation. The argument source, if different from `MPI_ANY_SOURCE`, is specified as a rank within the process group associated with that same communicator (remote process group, for intercommunicators). Thus, the range of valid values for the source argument is  $\{0, \dots, n-1\} \cup \{\text{MPI\_ANY\_SOURCE}\}$ , where n is the number of processes in this group.

Note the asymmetry between send and receive operations: A receive operation may accept messages from an arbitrary sender, on the other hand, a send operation must specify a unique receiver. This matches a “push” communication mechanism, where data transfer is effected by the sender (rather than a “pull” mechanism, where data transfer is effected by the receiver).

Source = destination is allowed, that is, a process can send a message to itself. (However, it is unsafe to do so with the blocking send and receive operations described above, since this may lead to deadlock. See Section 3.5.)

*Advice to implementors.* Message context and other communicator information can be implemented as an additional tag field. It differs from the regular message tag in that wild card matching is not allowed on this field, and that value setting for this field is controlled by communicator manipulation functions. (*End of advice to implementors.*)

### 3.2.5 Return Status

The source or tag of a received message may not be known if wildcard values were used in the receive operation. Also, if multiple requests are completed by a single MPI function

(see Section 3.7.5), a distinct error code may need to be returned for each request. The information is returned by the `status` argument of `MPI_RECV`. The type of `status` is MPI-defined. Status variables need to be explicitly allocated by the user, that is, they are not system objects.

In C, `status` is a structure that contains three fields named `MPI_SOURCE`, `MPI_TAG`, and `MPI_ERROR`; the structure may contain additional fields. Thus, `status.MPI_SOURCE`, `status.MPI_TAG` and `status.MPI_ERROR` contain the source, tag, and error code, respectively, of the received message.

In Fortran, `status` is an array of `INTEGER`s of size `MPI_STATUS_SIZE`. The constants `MPI_SOURCE`, `MPI_TAG` and `MPI_ERROR` are the indices of the entries that store the source, tag and error fields. Thus, `status(MPI_SOURCE)`, `status(MPI_TAG)` and `status(MPI_ERROR)` contain, respectively, the source, tag and error code of the received message.

In C++, the `status` object is handled through the following methods:

```
{int MPI::Status::Get_source() const (binding deprecated, see Section 15.2) }
{void MPI::Status::Set_source(int source) (binding deprecated, see Section 15.2) }
{int MPI::Status::Get_tag() const (binding deprecated, see Section 15.2) }
{void MPI::Status::Set_tag(int tag) (binding deprecated, see Section 15.2) }
{int MPI::Status::Get_error() const (binding deprecated, see Section 15.2) }
{void MPI::Status::Set_error(int error) (binding deprecated, see Section 15.2) }
```

In general, message-passing calls do not modify the value of the error code field of `status` variables. This field may be updated only by the functions in Section 3.7.5 which return multiple statuses. The field is updated if and only if such function returns with an error code of `MPI_ERR_IN_STATUS`.

*Rationale.* The error field in `status` is not needed for calls that return only one status, such as `MPI_WAIT`, since that would only duplicate the information returned by the function itself. The current design avoids the additional overhead of setting it, in such cases. The field is needed for calls that return multiple statuses, since each request may have had a different failure. (*End of rationale.*)

The `status` argument also returns information on the length of the message received. However, this information is not directly available as a field of the `status` variable and a call to `MPI_GET_COUNT` is required to “decode” this information.

`MPI_GET_COUNT(status, datatype, count)`

IN	<code>status</code>	return status of receive operation (Status)
IN	<code>datatype</code>	datatype of each receive buffer entry (handle)
OUT	<code>count</code>	number of received entries (integer)

```
int MPI_Get_count(MPI_Status *status, MPI_Datatype datatype, int *count)
```

```
MPI_GET_COUNT(STATUS, DATATYPE, COUNT, IERROR)
```

ticket150.

```

    INTEGER STATUS(MPI_STATUS_SIZE), DATATYPE, COUNT, IERROR
    {int MPI::Status::Get_count(const MPI::Datatype& datatype) const (binding
        deprecated, see Section 15.2) }
```

Returns the number of entries received. (Again, we count *entries*, each of type *datatype*, not *bytes*.) The *datatype* argument should match the argument provided by the receive call that set the *status* variable. (We shall later see, in Section 4.1.11, that MPI\_GET\_COUNT may return, in certain situations, the value MPI\_UNDEFINED.)

*Rationale.* Some message-passing libraries use INOUT *count*, *tag* and *source* arguments, thus using them both to specify the selection criteria for incoming messages and return the actual envelope values of the received message. The use of a separate status argument prevents errors that are often attached with INOUT argument (e.g., using the MPI\_ANY\_TAG constant as the tag in a receive). Some libraries use calls that refer implicitly to the “last message received.” This is not thread safe.

The *datatype* argument is passed to MPI\_GET\_COUNT so as to improve performance. A message might be received without counting the number of elements it contains, and the count value is often not needed. Also, this allows the same function to be used after a call to MPI\_PROBE or MPI\_IPROBE. With a status from MPI\_PROBE or MPI\_IPROBE, the same datatypes are allowed as in a call to MPI\_RECV to receive this message. (*End of rationale.*)

The value returned as the *count* argument of MPI\_GET\_COUNT for a datatype of length zero where zero bytes have been transferred is zero. If the number of bytes transferred is greater than zero, MPI\_UNDEFINED is returned.

*Rationale.* Zero-length datatypes may be created in a number of cases. An important case is MPI\_TYPE\_CREATE\_DARRAY, where the definition of the particular darray results in an empty block on some MPI process. Programs written in an SPMD style will not check for this special case and may want to use MPI\_GET\_COUNT to check the status. (*End of rationale.*)

*Advice to users.* The buffer size required for the receive can be affected by data conversions and by the stride of the receive datatype. In most cases, the safest approach is to use the same datatype with MPI\_GET\_COUNT and the receive. (*End of advice to users.*)

All send and receive operations use the *buf*, *count*, *datatype*, *source*, *dest*, *tag*, *comm* and *status* arguments in the same way as the blocking MPI\_SEND and MPI\_RECV operations described in this section.

### 3.2.6 Passing MPI\_STATUS\_IGNORE for Status

Every call to MPI\_RECV includes a *status* argument, wherein the system can return details about the message received. There are also a number of other MPI calls where *status* is returned. An object of type MPI\_STATUS is not an MPI opaque object; its structure is declared in *mpi.h* and *mpif.h*, and it exists in the user’s program. In many cases, application programs are constructed so that it is unnecessary for them to examine the

**status** fields. In these cases, it is a waste for the user to allocate a status object, and it is particularly wasteful for the MPI implementation to fill in fields in this object.

To cope with this problem, there are two predefined constants, `MPI_STATUS_IGNORE` and `MPI_STATUSES_IGNORE`, which when passed to a receive, wait, or test function, inform the implementation that the status fields are not to be filled in. Note that `MPI_STATUS_IGNORE` is not a special type of `MPI_STATUS` object; rather, it is a special value for the argument. In C one would expect it to be `NULL`, not the address of a special `MPI_STATUS`.

`MPI_STATUS_IGNORE`, and the array version `MPI_STATUSES_IGNORE`, can be used everywhere a status argument is passed to a receive, wait, or test function. `MPI_STATUS_IGNORE` cannot be used when status is an IN argument. Note that in Fortran `MPI_STATUS_IGNORE` and `MPI_STATUSES_IGNORE` are objects like `MPI_BOTTOM` (not usable for initialization or assignment). See Section 2.5.4.

In general, this optimization can apply to all functions for which **status** or an array of **statuses** is an OUT argument. Note that this converts **status** into an INOUT argument. The functions that can be passed `MPI_STATUS_IGNORE` are all the various forms of `MPI_RECV`, `MPI_TEST`, and `MPI_WAIT`, as well as `MPI_REQUEST_GET_STATUS`. When an array is passed, as in the `MPI_{TEST|WAIT}_{ALL|SOME}` functions, a separate constant, `MPI_STATUSES_IGNORE`, is passed for the array argument. It is possible for an MPI function to return `MPI_ERR_IN_STATUS` even when `MPI_STATUS_IGNORE` or `MPI_STATUSES_IGNORE` has been passed to that function.

`MPI_STATUS_IGNORE` and `MPI_STATUSES_IGNORE` are not required to have the same values in C and Fortran.

It is not allowed to have some of the statuses in an array of statuses for `MPI_{TEST|WAIT}_{ALL|SOME}` functions set to `MPI_STATUS_IGNORE`; one either specifies ignoring *all* of the statuses in such a call with `MPI_STATUSES_IGNORE`, or *none* of them by passing normal statuses in all positions in the array of statuses.

There are no C++ bindings for `MPI_STATUS_IGNORE` or `MPI_STATUSES_IGNORE`. To allow an OUT or INOUT `MPI::Status` argument to be ignored, all MPI C++ bindings that have OUT or INOUT `MPI::Status` parameters are overloaded with a second version that omits the OUT or INOUT `MPI::Status` parameter.

**Example 3.1** The C++ bindings for `MPI_PROBE` are:

```
void MPI::Comm::Probe(int source, int tag, MPI::Status& status) const
void MPI::Comm::Probe(int source, int tag) const
```

### 3.3 Data Type Matching and Data Conversion

#### 3.3.1 Type Matching Rules

One can think of message transfer as consisting of the following three phases.

1. Data is pulled out of the send buffer and a message is assembled.
2. A message is transferred from sender to receiver.
3. Data is pulled from the incoming message and disassembled into the receive buffer.

Type matching has to be observed at each of these three phases: The type of each variable in the sender buffer has to match the type specified for that entry by the send

operation; the type specified by the send operation has to match the type specified by the receive operation; and the type of each variable in the receive buffer has to match the type specified for that entry by the receive operation. A program that fails to observe these three rules is erroneous.

To define type matching more precisely, we need to deal with two issues: matching of types of the host language with types specified in communication operations; and matching of types at sender and receiver.

The types of a send and receive match (phase two) if both operations use identical names. That is, `MPI_INTEGER` matches `MPI_INTEGER`, `MPI_REAL` matches `MPI_REAL`, and so on. There is one exception to this rule, discussed in Section 4.2, the type `MPI_PACKED` can match any other type.

The type of a variable in a host program matches the type specified in the communication operation if the datatype name used by that operation corresponds to the basic type of the host program variable. For example, an entry with type name `MPI_INTEGER` matches a Fortran variable of type `INTEGER`. A table giving this correspondence for Fortran and C appears in Section 3.2.2. There are two exceptions to this last rule: an entry with type name `MPI_BYTE` or `MPI_PACKED` can be used to match any byte of storage (on a byte-addressable machine), irrespective of the datatype of the variable that contains this byte. The type `MPI_PACKED` is used to send data that has been explicitly packed, or receive data that will be explicitly unpacked, see Section 4.2. The type `MPI_BYTE` allows one to transfer the binary value of a byte in memory unchanged.

To summarize, the type matching rules fall into the three categories below.

- Communication of typed values (e.g., with datatype different from `MPI_BYTE`), where the datatypes of the corresponding entries in the sender program, in the send call, in the receive call and in the receiver program must all match.
- Communication of untyped values (e.g., of datatype `MPI_BYTE`), where both sender and receiver use the datatype `MPI_BYTE`. In this case, there are no requirements on the types of the corresponding entries in the sender and the receiver programs, nor is it required that they be the same.
- Communication involving packed data, where `MPI_PACKED` is used.

The following examples illustrate the first two cases.

**Example 3.2** Sender and receiver specify matching types.

```
CALL MPI_COMM_RANK(comm, rank, ierr)
IF (rank.EQ.0) THEN
  CALL MPI_SEND(a(1), 10, MPI_REAL, 1, tag, comm, ierr)
ELSE IF (rank.EQ.1) THEN
  CALL MPI_RECV(b(1), 15, MPI_REAL, 0, tag, comm, status, ierr)
END IF
```

This code is correct if both `a` and `b` are real arrays of size  $\geq 10$ . (In Fortran, it might be correct to use this code even if `a` or `b` have size  $< 10$ : e.g., when `a(1)` can be equivalenced to an array with ten reals.)

**Example 3.3** Sender and receiver do not specify matching types.

```

1  CALL MPI_COMM_RANK(comm, rank, ierr)
2  IF (rank.EQ.0) THEN
3      CALL MPI_SEND(a(1), 10, MPI_REAL, 1, tag, comm, ierr)
4  ELSE IF (rank.EQ.1) THEN
5      CALL MPI_RECV(b(1), 40, MPI_BYTE, 0, tag, comm, status, ierr)
6  END IF

```

This code is erroneous, since sender and receiver do not provide matching datatype arguments.

**Example 3.4** Sender and receiver specify communication of untyped values.

```

12 CALL MPI_COMM_RANK(comm, rank, ierr)
13 IF (rank.EQ.0) THEN
14     CALL MPI_SEND(a(1), 40, MPI_BYTE, 1, tag, comm, ierr)
15 ELSE IF (rank.EQ.1) THEN
16     CALL MPI_RECV(b(1), 60, MPI_BYTE, 0, tag, comm, status, ierr)
17 END IF

```

This code is correct, irrespective of the type and size of *a* and *b* (unless this results in an out of bound memory access).

*Advice to users.* If a buffer of type `MPI_BYTE` is passed as an argument to `MPI_SEND`, then MPI will send the data stored at contiguous locations, starting from the address indicated by the *buf* argument. This may have unexpected results when the data layout is not as a casual user would expect it to be. For example, some Fortran compilers implement variables of type `CHARACTER` as a structure that contains the character length and a pointer to the actual string. In such an environment, sending and receiving a Fortran `CHARACTER` variable using the `MPI_BYTE` type will not have the anticipated result of transferring the character string. For this reason, the user is advised to use typed communications whenever possible. (*End of advice to users.*)

### Type `MPI_CHARACTER`

The type `MPI_CHARACTER` matches one character of a Fortran variable of type `CHARACTER`, rather than the entire character string stored in the variable. Fortran variables of type `CHARACTER` or substrings are transferred as if they were arrays of characters. This is illustrated in the example below.

**Example 3.5** Transfer of Fortran `CHARACTER`s.

```

40 CHARACTER*10 a
41 CHARACTER*10 b
42
43 CALL MPI_COMM_RANK(comm, rank, ierr)
44 IF (rank.EQ.0) THEN
45     CALL MPI_SEND(a, 5, MPI_CHARACTER, 1, tag, comm, ierr)
46 ELSE IF (rank.EQ.1) THEN
47     CALL MPI_RECV(b(6:10), 5, MPI_CHARACTER, 0, tag, comm, status, ierr)
48 END IF

```

The last five characters of string `b` at process 1 are replaced by the first five characters of string `a` at process 0.

*Rationale.* The alternative choice would be for `MPI_CHARACTER` to match a character of arbitrary length. This runs into problems.

A Fortran character variable is a constant length string, with no special termination symbol. There is no fixed convention on how to represent characters, and how to store their length. Some compilers pass a character argument to a routine as a pair of arguments, one holding the address of the string and the other holding the length of string. Consider the case of an MPI communication call that is passed a communication buffer with type defined by a derived datatype (Section 4.1). If this communicator buffer contains variables of type `CHARACTER` then the information on their length will not be passed to the MPI routine.

This problem forces us to provide explicit information on character length with the MPI call. One could add a length parameter to the type `MPI_CHARACTER`, but this does not add much convenience and the same functionality can be achieved by defining a suitable derived datatype. (*End of rationale.*)

*Advice to implementors.* Some compilers pass Fortran `CHARACTER` arguments as a structure with a length and a pointer to the actual string. In such an environment, the MPI call needs to dereference the pointer in order to reach the string. (*End of advice to implementors.*)

### 3.3.2 Data Conversion

One of the goals of MPI is to support parallel computations across heterogeneous environments. Communication in a heterogeneous environment may require data conversions. We use the following terminology.

**type conversion** changes the datatype of a value, e.g., by rounding a `REAL` to an `INTEGER`.

**representation conversion** changes the binary representation of a value, e.g., from Hex floating point to IEEE floating point.

The type matching rules imply that MPI communication never entails type conversion. On the other hand, MPI requires that a representation conversion be performed when a typed value is transferred across environments that use different representations for the datatype of this value. MPI does not specify rules for representation conversion. Such conversion is expected to preserve integer, logical or character values, and to convert a floating point value to the nearest value that can be represented on the target system.

Overflow and underflow exceptions may occur during floating point conversions. Conversion of integers or characters may also lead to exceptions when a value that can be represented in one system cannot be represented in the other system. An exception occurring during representation conversion results in a failure of the communication. An error occurs either in the send operation, or the receive operation, or both.

If a value sent in a message is untyped (i.e., of type `MPI_BYTE`), then the binary representation of the byte stored at the receiver is identical to the binary representation of the byte loaded at the sender. This holds true, whether sender and receiver run in the same or in distinct environments. No representation conversion is required. (Note that



representation conversion may occur when values of type `MPI_CHARACTER` or `MPI_CHAR` are transferred, for example, from an EBCDIC encoding to an ASCII encoding.)

No conversion need occur when an MPI program executes in a homogeneous system, where all processes run in the same environment.

Consider the three examples, 3.2–3.4. The first program is correct, assuming that `a` and `b` are `REAL` arrays of size  $\geq 10$ . If the sender and receiver execute in different environments, then the ten real values that are fetched from the send buffer will be converted to the representation for reals on the receiver site before they are stored in the receive buffer. While the number of real elements fetched from the send buffer equal the number of real elements stored in the receive buffer, the number of bytes stored need not equal the number of bytes loaded. For example, the sender may use a four byte representation and the receiver an eight byte representation for reals.

The second program is erroneous, and its behavior is undefined.

The third program is correct. The exact same sequence of forty bytes that were loaded from the send buffer will be stored in the receive buffer, even if sender and receiver run in a different environment. The message sent has exactly the same length (in bytes) and the same binary representation as the message received. If `a` and `b` are of different types, or if they are of the same type but different data representations are used, then the bits stored in the receive buffer may encode values that are different from the values they encoded in the send buffer.

Data representation conversion also applies to the envelope of a message: source, destination and tag are all integers that may need to be converted.

*Advice to implementors.* The current definition does not require messages to carry data type information. Both sender and receiver provide complete data type information. In a heterogeneous environment, one can either use a machine independent encoding such as XDR, or have the receiver convert from the sender representation to its own, or even have the sender do the conversion.

Additional type information might be added to messages in order to allow the system to detect mismatches between datatype at sender and receiver. This might be particularly useful in a slower but safer debug mode. (*End of advice to implementors.*)

MPI requires support for inter-language communication, i.e., if messages are sent by a C or C++ process and received by a Fortran process, or vice-versa. The behavior is defined in Section 16.3 on page 515.

### 3.4 Communication Modes

The send call described in Section 3.2.1 is **blocking**: it does not return until the message data and envelope have been safely stored away so that the sender is free to [access and overwrite]modify the send buffer. The message might be copied directly into the matching receive buffer, or it might be copied into a temporary system buffer.

Message buffering decouples the send and receive operations. A blocking send can complete as soon as the message was buffered, even if no matching receive has been executed by the receiver. On the other hand, message buffering can be expensive, as it entails additional memory-to-memory copying, and it requires the allocation of memory for buffering. MPI offers the choice of several communication modes that allow one to control the choice of the communication protocol.

ticket45.



The send call described in Section 3.2.1 uses the **standard** communication mode. In this mode, it is up to MPI to decide whether outgoing messages will be buffered. MPI may buffer outgoing messages. In such a case, the send call may complete before a matching receive is invoked. On the other hand, buffer space may be unavailable, or MPI may choose not to buffer outgoing messages, for performance reasons. In this case, the send call will not complete until a matching receive has been posted, and the data has been moved to the receiver.

Thus, a send in standard mode can be started whether or not a matching receive has been posted. It may complete before a matching receive is posted. The standard mode send is **non-local**: successful completion of the send operation may depend on the occurrence of a matching receive.

*Rationale.* The reluctance of MPI to mandate whether standard sends are buffering or not stems from the desire to achieve portable programs. Since any system will run out of buffer resources as message sizes are increased, and some implementations may want to provide little buffering, MPI takes the position that correct (and therefore, portable) programs do not rely on system buffering in standard mode. Buffering may improve the performance of a correct program, but it doesn't affect the result of the program. If the user wishes to guarantee a certain amount of buffering, the user-provided buffer system of Section 3.6 should be used, along with the buffered-mode send. (*End of rationale.*)

There are three additional communication modes.

A **buffered** mode send operation can be started whether or not a matching receive has been posted. It may complete before a matching receive is posted. However, unlike the standard send, this operation is **local**, and its completion does not depend on the occurrence of a matching receive. Thus, if a send is executed and no matching receive is posted, then MPI must buffer the outgoing message, so as to allow the send call to complete. An error will occur if there is insufficient buffer space. The amount of available buffer space is controlled by the user — see Section 3.6. Buffer allocation by the user may be required for the buffered mode to be effective.

A send that uses the **synchronous** mode can be started whether or not a matching receive was posted. However, the send will complete successfully only if a matching receive is posted, and the receive operation has started to receive the message sent by the synchronous send. Thus, the completion of a synchronous send not only indicates that the send buffer can be reused, but it also indicates that the receiver has reached a certain point in its execution, namely that it has started executing the matching receive. If both sends and receives are blocking operations then the use of the synchronous mode provides synchronous communication semantics: a communication does not complete at either end before both processes rendezvous at the communication. A send executed in this mode is **non-local**.

A send that uses the **ready** communication mode may be started *only* if the matching receive is already posted. Otherwise, the operation is erroneous and its outcome is undefined. On some systems, this allows the removal of a hand-shake operation that is otherwise required and results in improved performance. The completion of the send operation does not depend on the status of a matching receive, and merely indicates that the send buffer can be reused. A send operation that uses the ready mode has the same semantics as a standard send operation, or a synchronous send operation; it is merely that the sender provides additional information to the system (namely that a matching receive is already

posted), that can save some overhead. In a correct program, therefore, a ready send could be replaced by a standard send with no effect on the behavior of the program other than performance.

Three additional send functions are provided for the three additional communication modes. The communication mode is indicated by a one letter prefix: B for buffered, S for synchronous, and R for ready.

**MPI\_BSEND** (buf, count, datatype, dest, tag, comm)

IN	buf	initial address of send buffer (choice)
IN	count	number of elements in send buffer (non-negative integer)
IN	datatype	datatype of each send buffer element (handle)
IN	dest	rank of destination (integer)
IN	tag	message tag (integer)
IN	comm	communicator (handle)

```
int MPI_Bsend(void* buf, int count, MPI_Datatype datatype, int dest,
              int tag, MPI_Comm comm)
```

```
MPI_BSEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, IERROR)
```

```
<type> BUF(*)
```

```
INTEGER COUNT, DATATYPE, DEST, TAG, COMM, IERROR
```

```
{void MPI::Comm::Bsend(const void* buf, int count, const
MPI::Datatype& datatype, int dest, int tag) const (binding
deprecated, see Section 15.2) }
```

Send in buffered mode.

**MPI\_SSEND** (buf, count, datatype, dest, tag, comm)

IN	buf	initial address of send buffer (choice)
IN	count	number of elements in send buffer (non-negative integer)
IN	datatype	datatype of each send buffer element (handle)
IN	dest	rank of destination (integer)
IN	tag	message tag (integer)
IN	comm	communicator (handle)

```
int MPI_Ssend(void* buf, int count, MPI_Datatype datatype, int dest,
              int tag, MPI_Comm comm)
```

```
MPI_SSEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, IERROR)
```

```
<type> BUF(*)
```

```
INTEGER COUNT, DATATYPE, DEST, TAG, COMM, IERROR
```

ticket150.

```
{void MPI::Comm::Ssend(const void* buf, int count, const
    MPI::Datatype& datatype, int dest, int tag) const (binding
    deprecated, see Section 15.2) }
```

Send in synchronous mode.

MPI\_RSEND (buf, count, datatype, dest, tag, comm)

IN	buf	initial address of send buffer (choice)
IN	count	number of elements in send buffer (non-negative integer)
IN	datatype	datatype of each send buffer element (handle)
IN	dest	rank of destination (integer)
IN	tag	message tag (integer)
IN	comm	communicator (handle)

```
int MPI_Rsend(void* buf, int count, MPI_Datatype datatype, int dest,
    int tag, MPI_Comm comm)
```

```
MPI_RSEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, IERROR)
    <type> BUF(*)
    INTEGER COUNT, DATATYPE, DEST, TAG, COMM, IERROR
```

```
{void MPI::Comm::Rsend(const void* buf, int count, const
    MPI::Datatype& datatype, int dest, int tag) const (binding
    deprecated, see Section 15.2) }
```

Send in ready mode.

There is only one receive operation, but it matches any of the send modes. The receive operation described in the last section is **blocking**: it returns only after the receive buffer contains the newly received message. A receive can complete before the matching send has completed (of course, it can complete only after the matching send has started).

In a multi-threaded implementation of MPI, the system may de-schedule a thread that is blocked on a send or receive operation, and schedule another thread for execution in the same address space. In such a case it is the user's responsibility not to [access or ] modify a communication buffer until the communication completes. Otherwise, the outcome of the computation is undefined.

[

*Rationale.* We prohibit read accesses to a send buffer while it is being used, even though the send operation is not supposed to alter the content of this buffer. This may seem more stringent than necessary, but the additional restriction causes little loss of functionality and allows better performance on some systems — consider the case where data transfer is done by a DMA engine that is not cache-coherent with the main processor. (*End of rationale.*)

]

*Advice to implementors.* Since a synchronous send cannot complete before a matching receive is posted, one will not normally buffer messages sent by such an operation.

It is recommended to choose buffering over blocking the sender, whenever possible, for standard sends. The programmer can signal his or her preference for blocking the sender until a matching receive occurs by using the synchronous send mode.

A possible communication protocol for the various communication modes is outlined below.

**ready send:** The message is sent as soon as possible.

**synchronous send:** The sender sends a request-to-send message. The receiver stores this request. When a matching receive is posted, the receiver sends back a permission-to-send message, and the sender now sends the message.

**standard send:** First protocol may be used for short messages, and second protocol for long messages.

**buffered send:** The sender copies the message into a buffer and then sends it with a nonblocking send (using the same protocol as for standard send).

Additional control messages might be needed for flow control and error recovery. Of course, there are many other possible protocols.

Ready send can be implemented as a standard send. In this case there will be no performance advantage (or disadvantage) for the use of ready send.

A standard send can be implemented as a synchronous send. In such a case, no data buffering is needed. However, users may expect some buffering.

In a multi-threaded environment, the execution of a blocking communication should block only the executing thread, allowing the thread scheduler to de-schedule this thread and schedule another thread for execution. (*End of advice to implementors.*)

### 3.5 Semantics of Point-to-Point Communication

A valid MPI implementation guarantees certain general properties of point-to-point communication, which are described in this section.

**Order** Messages are *non-overtaking*: If a sender sends two messages in succession to the same destination, and both match the same receive, then this operation cannot receive the second message if the first one is still pending. If a receiver posts two receives in succession, and both match the same message, then the second receive operation cannot be satisfied by this message, if the first one is still pending. This requirement facilitates matching of sends to receives. It guarantees that message-passing code is deterministic, if processes are single-threaded and the wildcard `MPI_ANY_SOURCE` is not used in receives. (Some of the calls described later, such as `MPI_CANCEL` or `MPI_WAITANY`, are additional sources of nondeterminism.)

If a process has a single thread of execution, then any two communications executed by this process are ordered. On the other hand, if the process is multi-threaded, then the semantics of thread execution may not define a relative order between two send operations executed by two distinct threads. The operations are logically concurrent, even if one physically precedes the other. In such a case, the two messages sent can be received in

any order. Similarly, if two receive operations that are logically concurrent receive two successively sent messages, then the two messages can match the two receives in either order.

**Example 3.6** An example of non-overtaking messages.

```
CALL MPI_COMM_RANK(comm, rank, ierr)
IF (rank.EQ.0) THEN
    CALL MPI_BSEND(buf1, count, MPI_REAL, 1, tag, comm, ierr)
    CALL MPI_BSEND(buf2, count, MPI_REAL, 1, tag, comm, ierr)
ELSE IF (rank.EQ.1) THEN
    CALL MPI_RECV(buf1, count, MPI_REAL, 0, MPI_ANY_TAG, comm, status, ierr)
    CALL MPI_RECV(buf2, count, MPI_REAL, 0, tag, comm, status, ierr)
END IF
```

The message sent by the first send must be received by the first receive, and the message sent by the second send must be received by the second receive.

**Progress** If a pair of matching send and receives have been initiated on two processes, then at least one of these two operations will complete, independently of other actions in the system: the send operation will complete, unless the receive is satisfied by another message, and completes; the receive operation will complete, unless the message sent is consumed by another matching receive that was posted at the same destination process.

**Example 3.7** An example of two, intertwined matching pairs.

```
CALL MPI_COMM_RANK(comm, rank, ierr)
IF (rank.EQ.0) THEN
    CALL MPI_BSEND(buf1, count, MPI_REAL, 1, tag1, comm, ierr)
    CALL MPI_SSEND(buf2, count, MPI_REAL, 1, tag2, comm, ierr)
ELSE IF (rank.EQ.1) THEN
    CALL MPI_RECV(buf1, count, MPI_REAL, 0, tag2, comm, status, ierr)
    CALL MPI_RECV(buf2, count, MPI_REAL, 0, tag1, comm, status, ierr)
END IF
```

Both processes invoke their first communication call. Since the first send of process zero uses the buffered mode, it must complete, irrespective of the state of process one. Since no matching receive is posted, the message will be copied into buffer space. (If insufficient buffer space is available, then the program will fail.) The second send is then invoked. At that point, a matching pair of send and receive operation is enabled, and both operations must complete. Process one next invokes its second receive call, which will be satisfied by the buffered message. Note that process one received the messages in the reverse order they were sent.

**Fairness** MPI makes no guarantee of *fairness* in the handling of communication. Suppose that a send is posted. Then it is possible that the destination process repeatedly posts a receive that matches this send, yet the message is never received, because it is each time overtaken by another message, sent from another source. Similarly, suppose that a receive was posted by a multi-threaded process. Then it is possible that messages that match this

receive are repeatedly received, yet the receive is never satisfied, because it is overtaken by other receives posted at this node (by other executing threads). It is the programmer's responsibility to prevent starvation in such situations.

**Resource limitations** Any pending communication operation consumes system resources that are limited. Errors may occur when lack of resources prevent the execution of an MPI call. A quality implementation will use a (small) fixed amount of resources for each pending send in the ready or synchronous mode and for each pending receive. However, buffer space may be consumed to store messages sent in standard mode, and must be consumed to store messages sent in buffered mode, when no matching receive is available. The amount of space available for buffering will be much smaller than program data memory on many systems. Then, it will be easy to write programs that overrun available buffer space.

MPI allows the user to provide buffer memory for messages sent in the buffered mode. Furthermore, MPI specifies a detailed operational model for the use of this buffer. An MPI implementation is required to do no worse than implied by this model. This allows users to avoid buffer overflows when they use buffered sends. Buffer allocation and use is described in Section 3.6.

A buffered send operation that cannot complete because of a lack of buffer space is erroneous. When such a situation is detected, an error is signalled that may cause the program to terminate abnormally. On the other hand, a standard send operation that cannot complete because of lack of buffer space will merely block, waiting for buffer space to become available or for a matching receive to be posted. This behavior is preferable in many situations. Consider a situation where a producer repeatedly produces new values and sends them to a consumer. Assume that the producer produces new values faster than the consumer can consume them. If buffered sends are used, then a buffer overflow will result. Additional synchronization has to be added to the program so as to prevent this from occurring. If standard sends are used, then the producer will be automatically throttled, as its send operations will block when buffer space is unavailable.

In some situations, a lack of buffer space leads to deadlock situations. This is illustrated by the examples below.

**Example 3.8** An exchange of messages.

```
CALL MPI_COMM_RANK(comm, rank, ierr)
IF (rank.EQ.0) THEN
    CALL MPI_SEND(sendbuf, count, MPI_REAL, 1, tag, comm, ierr)
    CALL MPI_RECV(recvbuf, count, MPI_REAL, 1, tag, comm, status, ierr)
ELSE IF (rank.EQ.1) THEN
    CALL MPI_RECV(recvbuf, count, MPI_REAL, 0, tag, comm, status, ierr)
    CALL MPI_SEND(sendbuf, count, MPI_REAL, 0, tag, comm, ierr)
END IF
```

This program will succeed even if no buffer space for data is available. The standard send operation can be replaced, in this example, with a synchronous send.

**Example 3.9** An errant attempt to exchange messages.

```
CALL MPI_COMM_RANK(comm, rank, ierr)
IF (rank.EQ.0) THEN
```

```

CALL MPI_RECV(recvbuf, count, MPI_REAL, 1, tag, comm, status, ierr)
CALL MPI_SEND(sendbuf, count, MPI_REAL, 1, tag, comm, ierr)
ELSE IF (rank.EQ.1) THEN
CALL MPI_RECV(recvbuf, count, MPI_REAL, 0, tag, comm, status, ierr)
CALL MPI_SEND(sendbuf, count, MPI_REAL, 0, tag, comm, ierr)
END IF

```

The receive operation of the first process must complete before its send, and can complete only if the matching send of the second processor is executed. The receive operation of the second process must complete before its send and can complete only if the matching send of the first process is executed. This program will always deadlock. The same holds for any other send mode.

**Example 3.10** An exchange that relies on buffering.

```

CALL MPI_COMM_RANK(comm, rank, ierr)
IF (rank.EQ.0) THEN
CALL MPI_SEND(sendbuf, count, MPI_REAL, 1, tag, comm, ierr)
CALL MPI_RECV(recvbuf, count, MPI_REAL, 1, tag, comm, status, ierr)
ELSE IF (rank.EQ.1) THEN
CALL MPI_SEND(sendbuf, count, MPI_REAL, 0, tag, comm, ierr)
CALL MPI_RECV(recvbuf, count, MPI_REAL, 0, tag, comm, status, ierr)
END IF

```

The message sent by each process has to be copied out before the send operation returns and the receive operation starts. For the program to complete, it is necessary that at least one of the two messages sent be buffered. Thus, this program can succeed only if the communication system can buffer at least `count` words of data.

*Advice to users.* When standard send operations are used, then a deadlock situation may occur where both processes are blocked because buffer space is not available. The same will certainly happen, if the synchronous mode is used. If the buffered mode is used, and not enough buffer space is available, then the program will not complete either. However, rather than a deadlock situation, we shall have a buffer overflow error.

A program is “safe” if no message buffering is required for the program to complete. One can replace all sends in such program with synchronous sends, and the program will still run correctly. This conservative programming style provides the best portability, since program completion does not depend on the amount of buffer space available or on the communication protocol used.

Many programmers prefer to have more leeway and opt to use the “unsafe” programming style shown in Example 3.10. In such cases, the use of standard sends is likely to provide the best compromise between performance and robustness: quality implementations will provide sufficient buffering so that “common practice” programs will not deadlock. The buffered send mode can be used for programs that require more buffering, or in situations where the programmer wants more control. This mode might also be used for debugging purposes, as buffer overflow conditions are easier to diagnose than deadlock conditions.

Nonblocking message-passing operations, as described in Section 3.7, can be used to avoid the need for buffering outgoing messages. This prevents deadlocks due to lack of buffer space, and improves performance, by allowing overlap of computation and communication, and avoiding the overheads of allocating buffers and copying messages into buffers. (*End of advice to users.*)

### 3.6 Buffer Allocation and Usage

A user may specify a buffer to be used for buffering messages sent in buffered mode. Buffering is done by the sender.

`MPI_BUFFER_ATTACH(buffer, size)`

IN	buffer	initial buffer address (choice)
IN	size	buffer size, in bytes (non-negative integer)

`int MPI_Buffer_attach(void* buffer, int size)`

`MPI_BUFFER_ATTACH(BUFFER, SIZE, IERROR)`

`<type> BUFFER(*)`

`INTEGER SIZE, IERROR`

`{void MPI::Attach_buffer(void* buffer, int size) (binding deprecated, see Section 15.2) }`

Provides to MPI a buffer in the user's memory to be used for buffering outgoing messages. The buffer is used only by messages sent in buffered mode. Only one buffer can be attached to a process at a time.

`MPI_BUFFER_DETACH(buffer_addr, size)`

OUT	buffer_addr	initial buffer address (choice)
OUT	size	buffer size, in bytes (non-negative integer)

`int MPI_Buffer_detach(void* buffer_addr, int* size)`

`MPI_BUFFER_DETACH(BUFFER_ADDR, SIZE, IERROR)`

`<type> BUFFER_ADDR(*)`

`INTEGER SIZE, IERROR`

`{int MPI::Detach_buffer(void*& buffer) (binding deprecated, see Section 15.2) }`

Detach the buffer currently associated with MPI. The call returns the address and the size of the detached buffer. This operation will block until all messages currently in the buffer have been transmitted. Upon return of this function, the user may reuse or deallocate the space taken by the buffer.

**Example 3.11** Calls to attach and detach buffers.



```

#define BUFFSIZE 10000
int size[ticket115.];
char *buff;
MPI_Buffer_attach( malloc(BUFFSIZE), BUFFSIZE);
/* a buffer of 10000 bytes can now be used by MPI_Bsend */
MPI_Buffer_detach( &buff, &size);
/* Buffer size reduced to zero */
MPI_Buffer_attach( buff, size);
/* Buffer of 10000 bytes available again */

```

*Advice to users.* Even though the C functions `MPI_Buffer_attach` and `MPI_Buffer_detach` both have a first argument of type `void*`, these arguments are used differently: A pointer to the buffer is passed to `MPI_Buffer_attach`; the address of the pointer is passed to `MPI_Buffer_detach`, so that this call can return the pointer value. (*End of advice to users.*)

*Rationale.* Both arguments are defined to be of type `void*` (rather than `void*` and `void**`, respectively), so as to avoid complex type casts. E.g., in the last example, `&buff`, which is of type `char**`, can be passed as argument to `MPI_Buffer_detach` without type casting. If the formal parameter had type `void**` then we would need a type cast before and after the call. (*End of rationale.*)

The statements made in this section describe the behavior of MPI for buffered-mode sends. When no buffer is currently associated, MPI behaves as if a zero-sized buffer is associated with the process.

MPI must provide as much buffering for outgoing messages *as if* outgoing message data were buffered by the sending process, in the specified buffer space, using a circular, contiguous-space allocation policy. We outline below a model implementation that defines this policy. MPI may provide more buffering, and may use a better buffer allocation algorithm than described below. On the other hand, MPI may signal an error whenever the simple buffering allocator described below would run out of space. In particular, if no buffer is explicitly associated with the process, then any buffered send may cause an error.

MPI does not provide mechanisms for querying or controlling buffering done by standard mode sends. It is expected that vendors will provide such information for their implementations.

*Rationale.* There is a wide spectrum of possible implementations of buffered communication: buffering can be done at sender, at receiver, or both; buffers can be dedicated to one sender-receiver pair, or be shared by all communications; buffering can be done in real or in virtual memory; it can use dedicated memory, or memory shared by other processes; buffer space may be allocated statically or be changed dynamically; etc. It does not seem feasible to provide a portable mechanism for querying or controlling buffering that would be compatible with all these choices, yet provide meaningful information. (*End of rationale.*)

### 3.6.1 Model Implementation of Buffered Mode

The model implementation uses the packing and unpacking functions described in Section 4.2 and the nonblocking communication functions described in Section 3.7.

We assume that a circular queue of pending message entries (PME) is maintained. Each entry contains a communication request handle that identifies a pending nonblocking send, a pointer to the next entry and the packed message data. The entries are stored in successive locations in the buffer. Free space is available between the queue tail and the queue head.

A buffered send call results in the execution of the following code.

- Traverse sequentially the PME queue from head towards the tail, deleting all entries for communications that have completed, up to the first entry with an uncompleted request; update queue head to point to that entry.
- Compute the number,  $n$ , of bytes needed to store an entry for the new message. An upper bound on  $n$  can be computed as follows: A call to the function `MPI_PACK_SIZE(count, datatype, comm, size)`, with the `count`, `datatype` and `comm` arguments used in the `MPI_BSEND` call, returns an upper bound on the amount of space needed to buffer the message data (see Section 4.2). The MPI constant `MPI_BSEND_OVERHEAD` provides an upper bound on the additional space consumed by the entry (e.g., for pointers or envelope information).
- Find the next contiguous empty space of  $n$  bytes in buffer (space following queue tail, or space at start of buffer if queue tail is too close to end of buffer). If space is not found then raise buffer overflow error.
- Append to end of PME queue in contiguous space the new entry that contains request handle, next pointer and packed message data; `MPI_PACK` is used to pack data.
- Post nonblocking send (standard mode) for packed data.
- Return

### 3.7 Nonblocking Communication

One can improve performance on many systems by overlapping communication and computation. This is especially true on systems where communication can be executed autonomously by an intelligent communication controller. Light-weight threads are one mechanism for achieving such overlap. An alternative mechanism that often leads to better performance is to use **nonblocking communication**. A nonblocking **send start** call initiates the send operation, but does not complete it. The send start call can return before the message was copied out of the send buffer. A separate **send complete** call is needed to complete the communication, i.e., to verify that the data has been copied out of the send buffer. With suitable hardware, the transfer of data out of the sender memory may proceed concurrently with computations done at the sender after the send was initiated and before it completed. Similarly, a nonblocking **receive start call** initiates the receive operation, but does not complete it. The call can return before a message is stored into the receive buffer. A separate **receive complete** call is needed to complete the receive operation and verify that the data has been received into the receive buffer. With suitable hardware, the transfer of data into the receiver memory may proceed concurrently with computations done after the receive was initiated and before it completed. The use of nonblocking receives may also avoid system buffering and memory-to-memory copying, as information is provided early on the location of the receive buffer.

Nonblocking send start calls can use the same four modes as blocking sends: **standard**, **buffered**, **synchronous** and **ready**. These carry the same meaning. Sends of all modes, **ready** excepted, can be started whether a matching receive has been posted or not; a nonblocking **ready** send can be started only if a matching receive is posted. In all cases, the send start call is local: it returns immediately, irrespective of the status of other processes. If the call causes some system resource to be exhausted, then it will fail and return an error code. Quality implementations of MPI should ensure that this happens only in “pathological” cases. That is, an MPI implementation should be able to support a large number of pending nonblocking operations.

The send-complete call returns when data has been copied out of the send buffer. It may carry additional meaning, depending on the send mode.

If the send mode is **synchronous**, then the send can complete only if a matching receive has started. That is, a receive has been posted, and has been matched with the send. In this case, the send-complete call is non-local. Note that a synchronous, nonblocking send may complete, if matched by a nonblocking receive, before the receive complete call occurs. (It can complete as soon as the sender “knows” the transfer will complete, but before the receiver “knows” the transfer will complete.)

If the send mode is **buffered** then the message must be buffered if there is no pending receive. In this case, the send-complete call is local, and must succeed irrespective of the status of a matching receive.

If the send mode is **standard** then the send-complete call may return before a matching receive is posted, if the message is buffered. On the other hand, the send-complete may not complete until a matching receive is posted, and the message was copied into the receive buffer.

Nonblocking sends can be matched with blocking receives, and vice-versa.

*Advice to users.* The completion of a send operation may be delayed, for standard mode, and must be delayed, for synchronous mode, until a matching receive is posted. The use of nonblocking sends in these two cases allows the sender to proceed ahead of the receiver, so that the computation is more tolerant of fluctuations in the speeds of the two processes.

[ Nonblocking sends in the buffered and ready modes have a more limited impact. A nonblocking send will return as soon as possible, whereas a blocking send will return after the data has been copied out of the sender memory. The use of nonblocking sends is advantageous in these cases only if data copying can be concurrent with computation. ] Nonblocking sends in the buffered and ready modes have a more limited impact, e.g., the blocking version of buffered send is capable of completing regardless of when a matching receive call is made. However, separating the start from the completion of these sends still gives some opportunity for optimization within the MPI library. For example, starting a buffered send gives an implementation more flexibility in determining if and how the message is buffered. There are also advantages for both nonblocking buffered and ready modes when data copying can be done concurrently with computation.

The message-passing model implies that communication is initiated by the sender. The communication will generally have lower overhead if a receive is already posted when the sender initiates the communication (data can be moved directly to the receive buffer, and there is no need to queue a pending send request). However, a

ticket50.

ticket50.

receive operation can complete only after the matching send has occurred. The use of nonblocking receives allows one to achieve lower communication overheads without blocking the receiver while it waits for the send. (*End of advice to users.*)

### 3.7.1 Communication Request Objects

Nonblocking communications use opaque **request** objects to identify communication operations and match the operation that initiates the communication with the operation that terminates it. These are system objects that are accessed via a handle. A request object identifies various properties of a communication operation, such as the send mode, the communication buffer that is associated with it, its context, the tag and destination arguments to be used for a send, or the tag and source arguments to be used for a receive. In addition, this object stores information about the status of the pending communication operation.

### 3.7.2 Communication Initiation

We use the same naming conventions as for blocking communication: a prefix of B, S, or R is used for buffered, synchronous or ready mode. In addition a prefix of I (for immediate) indicates that the call is nonblocking.

**MPI\_ISEND**(buf, count, datatype, dest, tag, comm, request)

IN	buf	initial address of send buffer (choice)
IN	count	number of elements in send buffer (non-negative integer)
IN	datatype	datatype of each send buffer element (handle)
IN	dest	rank of destination (integer)
IN	tag	message tag (integer)
IN	comm	communicator (handle)
OUT	request	communication request (handle)

```
int MPI_Isend(void* buf, int count, MPI_Datatype datatype, int dest,
             int tag, MPI_Comm comm, MPI_Request *request)
```

```
MPI_ISEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)
```

```
<type> BUF(*)
```

```
INTEGER COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR
```

```
{MPI::Request MPI::Comm::Isend(const void* buf, int count, const
MPI::Datatype& datatype, int dest, int tag) const (binding
deprecated, see Section 15.2) }
```

Start a standard mode, nonblocking send.

```

MPI_IBSEND(buf, count, datatype, dest, tag, comm, request)
    IN      buf          initial address of send buffer (choice)
    IN      count        number of elements in send buffer (non-negative integer)
    IN      datatype     datatype of each send buffer element (handle)
    IN      dest         rank of destination (integer)
    IN      tag          message tag (integer)
    IN      comm         communicator (handle)
    OUT     request      communication request (handle)

int MPI_IbSEND(void* buf, int count, MPI_Datatype datatype, int dest,
               int tag, MPI_Comm comm, MPI_Request *request)

MPI_IBSEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)
    <type> BUF(*)
    INTEGER COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR

{MPI::Request MPI::Comm::IbSEND(const void* buf, int count, const
    MPI::Datatype& datatype, int dest, int tag) const (binding
    deprecated, see Section 15.2) }

    Start a buffered mode, nonblocking send.

MPI_ISSEND(buf, count, datatype, dest, tag, comm, request)
    IN      buf          initial address of send buffer (choice)
    IN      count        number of elements in send buffer (non-negative integer)
    IN      datatype     datatype of each send buffer element (handle)
    IN      dest         rank of destination (integer)
    IN      tag          message tag (integer)
    IN      comm         communicator (handle)
    OUT     request      communication request (handle)

int MPI_Issend(void* buf, int count, MPI_Datatype datatype, int dest,
               int tag, MPI_Comm comm, MPI_Request *request)

MPI_ISSEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)
    <type> BUF(*)
    INTEGER COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR

{MPI::Request MPI::Comm::Issend(const void* buf, int count, const
    MPI::Datatype& datatype, int dest, int tag) const (binding
    deprecated, see Section 15.2) }

    Start a synchronous mode, nonblocking send.

```

```

1 MPI_IRSEND(buf, count, datatype, dest, tag, comm, request)
2     IN      buf                initial address of send buffer (choice)
3
4     IN      count              number of elements in send buffer (non-negative inte-
5                                ger)
6
7     IN      datatype           datatype of each send buffer element (handle)
8
9     IN      dest               rank of destination (integer)
10
11    IN      tag                 message tag (integer)
12
13    IN      comm                communicator (handle)
14
15    OUT     request             communication request (handle)

```

```

16 int MPI_Irsend(void* buf, int count, MPI_Datatype datatype, int dest,
17               int tag, MPI_Comm comm, MPI_Request *request)

```

```

18 MPI_IRSEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)
19     <type> BUF(*)
20     INTEGER COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR

```

```

21 {MPI::Request MPI::Comm::Irsend(const void* buf, int count, const
22                                MPI::Datatype& datatype, int dest, int tag) const (binding
23                                deprecated, see Section 15.2) }

```

Start a ready mode nonblocking send.

```

24
25
26 MPI_IRECV (buf, count, datatype, source, tag, comm, request)
27     OUT     buf                initial address of receive buffer (choice)
28
29     IN      count              number of elements in receive buffer (non-negative in-
30                                teger)
31
32     IN      datatype           datatype of each receive buffer element (handle)
33
34     IN      source              rank of source or MPI_ANY_SOURCE (integer)
35
36     IN      tag                 message tag or MPI_ANY_TAG (integer)
37
38     IN      comm                communicator (handle)
39
40     OUT     request             communication request (handle)

```

```

41 int MPI_Irecv(void* buf, int count, MPI_Datatype datatype, int source,
42               int tag, MPI_Comm comm, MPI_Request *request)

```

```

43 MPI_IRECV(BUF, COUNT, DATATYPE, SOURCE, TAG, COMM, REQUEST, IERROR)
44     <type> BUF(*)
45     INTEGER COUNT, DATATYPE, SOURCE, TAG, COMM, REQUEST, IERROR

```

```

46 {MPI::Request MPI::Comm::Irecv(void* buf, int count, const
47                                MPI::Datatype& datatype, int source, int tag) const (binding
48                                deprecated, see Section 15.2) }

```

Start a nonblocking receive.

These calls allocate a communication request object and associate it with the request handle (the argument `request`). The request can be used later to query the status of the communication or wait for its completion.

A nonblocking send call indicates that the system may start copying data out of the send buffer. The sender should not `[access]modify` any part of the send buffer after a nonblocking send operation is called, until the send completes.

A nonblocking receive call indicates that the system may start writing data into the receive buffer. The receiver should not access any part of the receive buffer after a nonblocking receive operation is called, until the receive completes.

*Advice to users.* To prevent problems with the argument copying and register optimization done by Fortran compilers, please note the hints in subsections “Problems Due to Data Copying and Sequence Association,” and “A Problem with Register Optimization” in Section 16.2.2 on pages 501 and 503. (*End of advice to users.*)

### 3.7.3 Communication Completion

The functions `MPI_WAIT` and `MPI_TEST` are used to complete a nonblocking communication. The completion of a send operation indicates that the sender is now free to update the locations in the send buffer (the send operation itself leaves the content of the send buffer unchanged). It does not indicate that the message has been received, rather, it may have been buffered by the communication subsystem. However, if a **synchronous** mode send was used, the completion of the send operation indicates that a matching receive was initiated, and that the message will eventually be received by this matching receive.

The completion of a receive operation indicates that the receive buffer contains the received message, the receiver is now free to access it, and that the status object is set. It does not indicate that the matching send operation has completed (but indicates, of course, that the send was initiated).

We shall use the following terminology: A **null** handle is a handle with value `MPI_REQUEST_NULL`. A persistent request and the handle to it are **inactive** if the request is not associated with any ongoing communication (see Section 3.9). A handle is **active** if it is neither null nor inactive. An **empty** status is a status which is set to return `tag = MPI_ANY_TAG`, `source = MPI_ANY_SOURCE`, `error = MPI_SUCCESS`, and is also internally configured so that calls to `MPI_GET_COUNT` and `MPI_GET_ELEMENTS` return `count = 0` and `MPI_TEST_CANCELLED` returns false. We set a status variable to empty when the value returned by it is not significant. Status is set in this way so as to prevent errors due to accesses of stale information.

The fields in a **status** object returned by a call to `MPI_WAIT`, `MPI_TEST`, or any of the other derived functions (`MPI_{TEST|WAIT}{ALL|SOME|ANY}`), where the **request** corresponds to a send call, are undefined, with two exceptions: The error status field will contain valid information if the wait or test call returned with `MPI_ERR_IN_STATUS`; and the returned status can be queried by the call `MPI_TEST_CANCELLED`.

Error codes belonging to the error class `MPI_ERR_IN_STATUS` should be returned only by the MPI completion functions that take arrays of `MPI_STATUS`. For the functions `MPI_TEST`, `MPI_TESTANY`, `MPI_WAIT`, and `MPI_WAITANY`, which return a single `MPI_STATUS` value, the normal MPI error return process should be used (not the `MPI_ERROR` field in the `MPI_STATUS` argument).

ticket98.



```
1 MPI_WAIT(request, status)
```

```
2     INOUT    request          request (handle)
3
4     OUT      status          status object (Status)
```

```
5
6 int MPI_Wait(MPI_Request *request, MPI_Status *status)
```

```
7 MPI_WAIT(REQUEST, STATUS, IERROR)
8     INTEGER REQUEST, STATUS(MPI_STATUS_SIZE), IERROR
```

```
9 {void MPI::Request::Wait(MPI::Status& status) (binding deprecated, see
10 Section 15.2) }
```

```
11 {void MPI::Request::Wait() (binding deprecated, see Section 15.2) }
```

14 A call to MPI\_WAIT returns when the operation identified by `request` is complete. If  
 15 the communication object associated with this request was created by a nonblocking send  
 16 or receive call, then the object is deallocated by the call to MPI\_WAIT and the request  
 17 handle is set to MPI\_REQUEST\_NULL. MPI\_WAIT is a non-local operation.

18 The call returns, in `status`, information on the completed operation. The content of  
 19 the status object for a receive operation can be accessed as described in Section 3.2.5. The  
 20 status object for a send operation may be queried by a call to MPI\_TEST\_CANCELLED  
 21 (see Section 3.8).

22 One is allowed to call MPI\_WAIT with a null or inactive `request` argument. In this case  
 23 the operation returns immediately with empty `status`.

24  
 25 *Advice to users.* Successful return of MPI\_WAIT after a MPI\_IBSEND implies that  
 26 the user send buffer can be reused — i.e., data has been sent out or copied into  
 27 a buffer attached with MPI\_BUFFER\_ATTACH. Note that, at this point, we can no  
 28 longer cancel the send (see Section 3.8). If a matching receive is never posted, then the  
 29 buffer cannot be freed. This runs somewhat counter to the stated goal of MPI\_CANCEL  
 30 (always being able to free program space that was committed to the communication  
 31 subsystem). (*End of advice to users.*)

32  
 33 *Advice to implementors.* In a multi-threaded environment, a call to MPI\_WAIT should  
 34 block only the calling thread, allowing the thread scheduler to schedule another thread  
 35 for execution. (*End of advice to implementors.*)

```
36
37
38 MPI_TEST(request, flag, status)
```

```
39     INOUT    request          communication request (handle)
40
41     OUT      flag            true if operation completed (logical)
42
43     OUT      status          status object (Status)
```

```
44
45 int MPI_Test(MPI_Request *request, int *flag, MPI_Status *status)
```

```
46 MPI_TEST(REQUEST, FLAG, STATUS, IERROR)
47     LOGICAL FLAG
48     INTEGER REQUEST, STATUS(MPI_STATUS_SIZE), IERROR
```



ticket150.

```
{bool MPI::Request::Test(MPI::Status& status) (binding deprecated, see
```

```
Section 15.2) }
```

```
{bool MPI::Request::Test() (binding deprecated, see Section 15.2) }
```

A call to `MPI_TEST` returns `flag = true` if the operation identified by `request` is complete. In such a case, the status object is set to contain information on the completed operation; if the communication object was created by a nonblocking send or receive, then it is deallocated and the request handle is set to `MPI_REQUEST_NULL`. The call returns `flag = false`, otherwise. In this case, the value of the status object is undefined. `MPI_TEST` is a local operation.

The return status object for a receive operation carries information that can be accessed as described in Section 3.2.5. The status object for a send operation carries information that can be accessed by a call to `MPI_TEST_CANCELLED` (see Section 3.8).

One is allowed to call `MPI_TEST` with a null or inactive `request` argument. In such a case the operation returns with `flag = true` and empty `status`.

The functions `MPI_WAIT` and `MPI_TEST` can be used to complete both sends and receives.

*Advice to users.* The use of the nonblocking `MPI_TEST` call allows the user to schedule alternative activities within a single thread of execution. An event-driven thread scheduler can be emulated with periodic calls to `MPI_TEST`. (*End of advice to users.*)

*Rationale.* The function `MPI_TEST` returns with `flag = true` exactly in those situations where the function `MPI_WAIT` returns; both functions return in such case the same value in `status`. Thus, a blocking `Wait` can be easily replaced by a nonblocking `Test`. (*End of rationale.*)

**Example 3.12** Simple usage of nonblocking operations and `MPI_WAIT`.

```
CALL MPI_COMM_RANK(comm, rank, ierr)
IF (rank.EQ.0) THEN
  CALL MPI_ISEND(a(1), 10, MPI_REAL, 1, tag, comm, request, ierr)
  **** do some computation to mask latency ****
  CALL MPI_WAIT(request, status, ierr)
ELSE IF (rank.EQ.1) THEN
  CALL MPI_IRECV(a(1), 15, MPI_REAL, 0, tag, comm, request, ierr)
  **** do some computation to mask latency ****
  CALL MPI_WAIT(request, status, ierr)
END IF
```

A request object can be deallocated without waiting for the associated communication to complete, by using the following operation.

```

1  MPI_REQUEST_FREE(request)
2      INOUT      request                communication request (handle)
3
4
5  int MPI_Request_free(MPI_Request *request)
6
7  MPI_REQUEST_FREE(REQUEST, IERROR)
8      INTEGER REQUEST, IERROR
9  {void MPI::Request::Free() (binding deprecated, see Section 15.2) }
```

Mark the request object for deallocation and set `request` to `MPI_REQUEST_NULL`. An ongoing communication that is associated with the request will be allowed to complete. The request will be deallocated only after its completion.

*Rationale.* The `MPI_REQUEST_FREE` mechanism is provided for reasons of performance and convenience on the sending side. (*End of rationale.*)

*Advice to users.* Once a request is freed by a call to `MPI_REQUEST_FREE`, it is not possible to check for the successful completion of the associated communication with calls to `MPI_WAIT` or `MPI_TEST`. Also, if an error occurs subsequently during the communication, an error code cannot be returned to the user — such an error must be treated as fatal. Questions arise as to how one knows when the operations have completed when using `MPI_REQUEST_FREE`. Depending on the program logic, there may be other ways in which the program knows that certain operations have completed and this makes usage of `MPI_REQUEST_FREE` practical. For example, an active send request could be freed when the logic of the program is such that the receiver sends a reply to the message sent — the arrival of the reply informs the sender that the send has completed and the send buffer can be reused. An active receive request should never be freed as the receiver will have no way to verify that the receive has completed and the receive buffer can be reused. (*End of advice to users.*)

*Advice to users.* Once a request is freed by a call to `MPI_REQUEST_FREE`, it is not possible to check for the successful completion of the associated communication with calls to `MPI_WAIT` or `MPI_TEST`. Also, if an error occurs subsequently during the communication, an error code cannot be returned to the user — such an error must be treated as fatal. An active receive request should never be freed as the receiver will have no way to verify that the receive has completed and the receive buffer can be reused. (*End of advice to users.*)

**Example 3.13** An example using `MPI_REQUEST_FREE`.

```

CALL MPI_COMM_RANK(MPI_COMM_WORLD, rank, ierr)
IF (rank.EQ.0) THEN
  DO i=1, n
```

```

        CALL MPI_ISEND(outval, 1, MPI_REAL, 1, 0, MPI_COMM_WORLD, req, ierr)
        CALL MPI_REQUEST_FREE(req, ierr)
        CALL MPI_Irecv(inval, 1, MPI_REAL, 1, 0, MPI_COMM_WORLD, req, ierr)
        CALL MPI_WAIT(req, status, ierr)
    END DO
ELSE IF (rank.EQ.1) THEN
    CALL MPI_Irecv(inval, 1, MPI_REAL, 0, 0, MPI_COMM_WORLD, req, ierr)
    CALL MPI_WAIT(req, status, ierr)
    DO I=1, n-1
        CALL MPI_ISEND(outval, 1, MPI_REAL, 0, 0, MPI_COMM_WORLD, req, ierr)
        CALL MPI_REQUEST_FREE(req, ierr)
        CALL MPI_Irecv(inval, 1, MPI_REAL, 0, 0, MPI_COMM_WORLD, req, ierr)
        CALL MPI_WAIT(req, status, ierr)
    END DO
    CALL MPI_ISEND(outval, 1, MPI_REAL, 0, 0, MPI_COMM_WORLD, req, ierr)
    CALL MPI_WAIT(req, status, ierr)
END IF

```

### 3.7.4 Semantics of Nonblocking Communications

The semantics of nonblocking communication is defined by suitably extending the definitions in Section 3.5.

**Order** Nonblocking communication operations are ordered according to the execution order of the calls that initiate the communication. The non-overtaking requirement of Section 3.5 is extended to nonblocking communication, with this definition of order being used.

**Example 3.14** Message ordering for nonblocking operations.

```

CALL MPI_COMM_RANK(comm, rank, ierr)
IF (RANK.EQ.0) THEN
    CALL MPI_ISEND(a, 1, MPI_REAL, 1, 0, comm, r1, ierr)
    CALL MPI_ISEND(b, 1, MPI_REAL, 1, 0, comm, r2, ierr)
ELSE IF (rank.EQ.1) THEN
    CALL MPI_Irecv(a, 1, MPI_REAL, 0, MPI_ANY_TAG, comm, r1, ierr)
    CALL MPI_Irecv(b, 1, MPI_REAL, 0, 0, comm, r2, ierr)
END IF
CALL MPI_WAIT(r1, status, ierr)
CALL MPI_WAIT(r2, status, ierr)

```

The first send of process zero will match the first receive of process one, even if both messages are sent before process one executes either receive.

**Progress** A call to `MPI_WAIT` that completes a receive will eventually terminate and return if a matching send has been started, unless the send is satisfied by another receive. In particular, if the matching send is nonblocking, then the receive should complete even if no call is executed by the sender to complete the send. Similarly, a call to `MPI_WAIT` that completes a send will eventually return if a matching receive has been started, unless the receive is satisfied by another send, and even if no call is executed to complete the receive.

**Example 3.15** An illustration of progress semantics.

```

1  CALL MPI_COMM_RANK(comm, rank, ierr)
2
3  IF (RANK.EQ.0) THEN
4      CALL MPI_SSEND(a, 1, MPI_REAL, 1, 0, comm, ierr)
5      CALL MPI_SEND(b, 1, MPI_REAL, 1, 1, comm, ierr)
6
7  ELSE IF (rank.EQ.1) THEN
8      CALL MPI_IRECV(a, 1, MPI_REAL, 0, 0, comm, r, ierr)
9      CALL MPI_RECV(b, 1, MPI_REAL, 0, 1, comm, status, ierr)
10     CALL MPI_WAIT(r, status, ierr)
11 END IF

```

This code should not deadlock in a correct MPI implementation. The first synchronous send of process zero must complete after process one posts the matching (nonblocking) receive even if process one has not yet reached the completing wait call. Thus, process zero will continue and execute the second send, allowing process one to complete execution.

If an `MPI_TEST` that completes a receive is repeatedly called with the same arguments, and a matching send has been started, then the call will eventually return `flag = true`, unless the send is satisfied by another receive. If an `MPI_TEST` that completes a send is repeatedly called with the same arguments, and a matching receive has been started, then the call will eventually return `flag = true`, unless the receive is satisfied by another send.

### 3.7.5 Multiple Completions

It is convenient to be able to wait for the completion of any, some, or all the operations in a list, rather than having to wait for a specific message. A call to `MPI_WAITANY` or `MPI_TESTANY` can be used to wait for the completion of one out of several operations. A call to `MPI_WAITALL` or `MPI_TESTALL` can be used to wait for all pending operations in a list. A call to `MPI_WAIT SOME` or `MPI_TEST SOME` can be used to complete all enabled operations in a list.

`MPI_WAITANY` (count, array\_of\_requests, index, status)

IN	count	list length (non-negative integer)
INOUT	array_of_requests	array of requests (array of handles)
OUT	index	index of handle for operation that completed (integer)
OUT	status	status object (Status)

```

int MPI_Waitany(int count, MPI_Request *array_of_requests, int *index,
                MPI_Status *status)

```

```

MPI_WAITANY(COUNT, ARRAY_OF_REQUESTS, INDEX, STATUS, IERROR)
    INTEGER COUNT, ARRAY_OF_REQUESTS(*), INDEX, STATUS(MPI_STATUS_SIZE),
    IERROR

```

```

{static int MPI::Request::Waitany(int count,
    MPI::Request array_of_requests[], MPI::Status& status) (binding
    deprecated, see Section 15.2) }

```

ticket150.

ticket150.

ticket150.

```
{static int MPI::Request::Waitany(int count,
    MPI::Request array_of_requests[]) (binding deprecated, see
    Section 15.2) }
```

Blocks until one of the operations associated with the active requests in the array has completed. If more than one operation is enabled and can terminate, one is arbitrarily chosen. Returns in `index` the index of that request in the array and returns in `status` the status of the completing communication. (The array is indexed from zero in C, and from one in Fortran.) If the request was allocated by a nonblocking communication operation, then it is deallocated and the request handle is set to `MPI_REQUEST_NULL`.

The `array_of_requests` list may contain null or inactive handles. If the list contains no active handles (list has length zero or all entries are null or inactive), then the call returns immediately with `index = MPI_UNDEFINED`, and a empty status.

The execution of `MPI_WAITANY(count, array_of_requests, index, status)` has the same effect as the execution of `MPI_WAIT(&array_of_requests[i], status)`, where `i` is the value returned by `index` (unless the value of `index` is `MPI_UNDEFINED`). `MPI_WAITANY` with an array containing one active entry is equivalent to `MPI_WAIT`.

`MPI_TESTANY(count, array_of_requests, index, flag, status)`

IN	count	list length (non-negative integer)
INOUT	array_of_requests	array of requests (array of handles)
OUT	index	index of operation that completed, or <code>MPI_UNDEFINED</code> if none completed (integer)
OUT	flag	true if one of the operations is complete (logical)
OUT	status	status object (Status)

```
int MPI_Testany(int count, MPI_Request *array_of_requests, int *index,
    int *flag, MPI_Status *status)
```

```
MPI_TESTANY(COUNT, ARRAY_OF_REQUESTS, INDEX, FLAG, STATUS, IERROR)
    LOGICAL FLAG
    INTEGER COUNT, ARRAY_OF_REQUESTS(*), INDEX, STATUS(MPI_STATUS_SIZE),
    IERROR
```

```
{static bool MPI::Request::Testany(int count,
    MPI::Request array_of_requests[], int& index,
    MPI::Status& status) (binding deprecated, see Section 15.2) }
```

```
{static bool MPI::Request::Testany(int count,
    MPI::Request array_of_requests[], int& index) (binding
    deprecated, see Section 15.2) }
```

Tests for completion of either one or none of the operations associated with active handles. In the former case, it returns `flag = true`, returns in `index` the index of this request in the array, and returns in `status` the status of that operation; if the request was allocated by a nonblocking communication call then the request is deallocated and the handle is set to `MPI_REQUEST_NULL`. (The array is indexed from zero in C, and from one in Fortran.)

In the latter case (no operation completed), it returns `flag = false`, returns a value of `MPI_UNDEFINED` in `index` and `status` is undefined.

The array may contain null or inactive handles. If the array contains no active handles then the call returns immediately with `flag = true`, `index = MPI_UNDEFINED`, and an empty `status`.

If the array of requests contains active handles then the execution of `MPI_TESTANY(count, array_of_requests, index, status)` has the same effect as the execution of `MPI_TEST( &array_of_requests[i], flag, status)`, for  $i=0, 1, \dots, \text{count}-1$ , in some arbitrary order, until one call returns `flag = true`, or all fail. In the former case, `index` is set to the last value of  $i$ , and in the latter case, it is set to `MPI_UNDEFINED`. `MPI_TESTANY` with an array containing one active entry is equivalent to `MPI_TEST`.

*Rationale.* The function `MPI_TESTANY` returns with `flag = true` exactly in those situations where the function `MPI_WAITANY` returns; both functions return in that case the same values in the remaining parameters. Thus, a blocking `MPI_WAITANY` can be easily replaced by a nonblocking `MPI_TESTANY`. The same relation holds for the other pairs of Wait and Test functions defined in this section. (*End of rationale.*)

`MPI_WAITALL( count, array_of_requests, array_of_statuses)`

IN	count	lists length (non-negative integer)
INOUT	array_of_requests	array of requests (array of handles)
OUT	array_of_statuses	array of status objects (array of Status)

```
int MPI_Waitall(int count, MPI_Request *array_of_requests,
               MPI_Status *array_of_statuses)
```

```
MPI_WAITALL(COUNT, ARRAY_OF_REQUESTS, ARRAY_OF_STATUSES, IERROR)
            INTEGER COUNT, ARRAY_OF_REQUESTS(*)
            INTEGER ARRAY_OF_STATUSES(MPI_STATUS_SIZE,*), IERROR
```

```
{static void MPI::Request::Waitall(int count,
    MPI::Request array_of_requests[],
    MPI::Status array_of_statuses[]) (binding deprecated, see
    Section 15.2) }

{static void MPI::Request::Waitall(int count,
    MPI::Request array_of_requests[]) (binding deprecated, see
    Section 15.2) }
```

Blocks until all communication operations associated with active handles in the list complete, and return the status of all these operations (this includes the case where no handle in the list is active). Both arrays have the same number of valid entries. The  $i$ -th entry in `array_of_statuses` is set to the return status of the  $i$ -th operation. Requests that were created by nonblocking communication operations are deallocated and the corresponding handles in the array are set to `MPI_REQUEST_NULL`. The list may contain null or inactive handles. The call sets to empty the status of each such entry.

The error-free execution of `MPI_WAITALL(count, array_of_requests, array_of_statuses)` has the same effect as the execution of `MPI_WAIT(&array_of_request[i], &array_of_statuses[i])`, for  $i=0, \dots, \text{count}-1$ , in some arbitrary order. `MPI_WAITALL` with an array of length one is equivalent to `MPI_WAIT`.

When one or more of the communications completed by a call to `MPI_WAITALL` fail, it is desirable to return specific information on each communication. The function `MPI_WAITALL` will return in such case the error code `MPI_ERR_IN_STATUS` and will set the error field of each status to a specific error code. This code will be `MPI_SUCCESS`, if the specific communication completed; it will be another specific error code, if it failed; or it can be `MPI_ERR_PENDING` if it has neither failed nor completed. The function `MPI_WAITALL` will return `MPI_SUCCESS` if no request had an error, or will return another error code if it failed for other reasons (such as invalid arguments). In such cases, it will not update the error fields of the statuses.

*Rationale.* This design streamlines error handling in the application. The application code need only test the (single) function result to determine if an error has occurred. It needs to check each individual status only when an error occurred. (*End of rationale.*)

`MPI_TESTALL(count, array_of_requests, flag, array_of_statuses)`

IN	count	lists length (non-negative integer)
INOUT	array_of_requests	array of requests (array of handles)
OUT	flag	(logical)
OUT	array_of_statuses	array of status objects (array of Status)

```
int MPI_Testall(int count, MPI_Request *array_of_requests, int *flag,
                MPI_Status *array_of_statuses)
```

```
MPI_TESTALL(COUNT, ARRAY_OF_REQUESTS, FLAG, ARRAY_OF_STATUSES, IERROR)
LOGICAL FLAG
INTEGER COUNT, ARRAY_OF_REQUESTS(*),
ARRAY_OF_STATUSES(MPI_STATUS_SIZE,*), IERROR
```

```
{static bool MPI::Request::Testall(int count,
    MPI::Request array_of_requests[],
    MPI::Status array_of_statuses[]) (binding deprecated, see
    Section 15.2) }
```

```
{static bool MPI::Request::Testall(int count,
    MPI::Request array_of_requests[]) (binding deprecated, see
    Section 15.2) }
```

Returns `flag = true` if all communications associated with active handles in the array have completed (this includes the case where no handle in the list is active). In this case, each status entry that corresponds to an active handle request is set to the status of the corresponding communication; if the request was allocated by a nonblocking communication call then it is deallocated, and the handle is set to `MPI_REQUEST_NULL`. Each status entry that corresponds to a null or inactive handle is set to empty.



Otherwise, `flag = false` is returned, no request is modified and the values of the status entries are undefined. This is a local operation.

Errors that occurred during the execution of `MPI_TESTALL` are handled as errors in `MPI_WAITALL`.

`MPI_WAITSOME(incount, array_of_requests, outcount, array_of_indices, array_of_statuses)`

IN	<code>incount</code>	length of <code>array_of_requests</code> (non-negative integer)
INOUT	<code>array_of_requests</code>	array of requests (array of handles)
OUT	<code>outcount</code>	number of completed requests (integer)
OUT	<code>array_of_indices</code>	array of indices of operations that completed (array of integers)
OUT	<code>array_of_statuses</code>	array of status objects for operations that completed (array of <code>Status</code> )

```
int MPI_Waitsome(int incount, MPI_Request *array_of_requests,
                 int *outcount, int *array_of_indices,
                 MPI_Status *array_of_statuses)
```

```
MPI_WAITSOME(INCOUNT, ARRAY_OF_REQUESTS, OUTCOUNT, ARRAY_OF_INDICES,
              ARRAY_OF_STATUSES, IERROR)
INTEGER INCOUNT, ARRAY_OF_REQUESTS(*), OUTCOUNT, ARRAY_OF_INDICES(*),
ARRAY_OF_STATUSES(MPI_STATUS_SIZE,*), IERROR
```

```
{static int MPI::Request::Waitsome(int incount,
MPI::Request array_of_requests[], int array_of_indices[],
MPI::Status array_of_statuses[]) (binding deprecated, see
Section 15.2) }
```

```
{static int MPI::Request::Waitsome(int incount,
MPI::Request array_of_requests[], int array_of_indices[])
(binding deprecated, see Section 15.2) }
```

Waits until at least one of the operations associated with active handles in the list have completed. Returns in `outcount` the number of requests from the list `array_of_requests` that have completed. Returns in the first `outcount` locations of the array `array_of_indices` the indices of these operations (index within the array `array_of_requests`; the array is indexed from zero in C and from one in Fortran). Returns in the first `outcount` locations of the array `array_of_status` the status for these completed operations. If a request that completed was allocated by a nonblocking communication call, then it is deallocated, and the associated handle is set to `MPI_REQUEST_NULL`.

If the list contains no active handles, then the call returns immediately with `outcount = MPI_UNDEFINED`.

When one or more of the communications completed by `MPI_WAITSOME` fails, then it is desirable to return specific information on each communication. The arguments `outcount`, `array_of_indices` and `array_of_statuses` will be adjusted to indicate completion of all communications that have succeeded or failed. The call will return the error code



MPI\_ERR\_IN\_STATUS and the error field of each status returned will be set to indicate success or to indicate the specific error that occurred. The call will return MPI\_SUCCESS if no request resulted in an error, and will return another error code if it failed for other reasons (such as invalid arguments). In such cases, it will not update the error fields of the statuses.

MPI\_TESTSOME(incount, array\_of\_requests, outcount, array\_of\_indices, array\_of\_statuses)

IN	incount	length of array_of_requests (non-negative integer)
INOUT	array_of_requests	array of requests (array of handles)
OUT	outcount	number of completed requests (integer)
OUT	array_of_indices	array of indices of operations that completed (array of integers)
OUT	array_of_statuses	array of status objects for operations that completed (array of Status)

```
int MPI_Testsome(int incount, MPI_Request *array_of_requests,
                 int *outcount, int *array_of_indices,
                 MPI_Status *array_of_statuses)
```

```
MPI_TESTSOME(INCOUNT, ARRAY_OF_REQUESTS, OUTCOUNT, ARRAY_OF_INDICES,
             ARRAY_OF_STATUSES, IERROR)
INTEGER INCOUNT, ARRAY_OF_REQUESTS(*), OUTCOUNT, ARRAY_OF_INDICES(*),
ARRAY_OF_STATUSES(MPI_STATUS_SIZE,*), IERROR
```

```
{static int MPI::Request::Testsome(int incount,
    MPI::Request array_of_requests[], int array_of_indices[],
    MPI::Status array_of_statuses[]) (binding deprecated, see
    Section 15.2) }
```

```
{static int MPI::Request::Testsome(int incount,
    MPI::Request array_of_requests[], int array_of_indices[])
    (binding deprecated, see Section 15.2) }
```

Behaves like MPI\_WAITSSOME, except that it returns immediately. If no operation has completed it returns outcount = 0. If there is no active handle in the list it returns outcount = MPI\_UNDEFINED.

MPI\_TESTSOME is a local operation, which returns immediately, whereas MPI\_WAITSSOME will block until a communication completes, if it was passed a list that contains at least one active handle. Both calls fulfill a fairness requirement: If a request for a receive repeatedly appears in a list of requests passed to MPI\_WAITSSOME or MPI\_TESTSOME, and a matching send has been posted, then the receive will eventually succeed, unless the send is satisfied by another receive; and similarly for send requests.

Errors that occur during the execution of MPI\_TESTSOME are handled as for MPI\_WAITSSOME.

*Advice to users.* The use of MPI\_TESTSOME is likely to be more efficient than the use of MPI\_TESTANY. The former returns information on all completed communications,

with the latter, a new call is required for each communication that completes.

A server with multiple clients can use `MPI_WAIT SOME` so as not to starve any client. Clients send messages to the server with service requests. The server calls `MPI_WAIT SOME` with one receive request for each client, and then handles all receives that completed. If a call to `MPI_WAIT ANY` is used instead, then one client could starve while requests from another client always sneak in first. (*End of advice to users.*)

*Advice to implementors.* `MPI_TESTSOME` should complete as many pending communications as possible. (*End of advice to implementors.*)

**Example 3.16** Client-server code (starvation can occur).

```

CALL MPI_COMM_SIZE(comm, size, ierr)
CALL MPI_COMM_RANK(comm, rank, ierr)
IF(rank .GT. 0) THEN          ! client code
  DO WHILE(.TRUE.)
    CALL MPI_ISEND(a, n, MPI_REAL, 0, tag, comm, request, ierr)
    CALL MPI_WAIT(request, status, ierr)
  END DO
ELSE                          ! rank=0 -- server code
  DO i=1, size-1
    CALL MPI_Irecv(a(1,i), n, MPI_REAL, i[ticket115.], tag,
                  comm, request_list(i), ierr)
  END DO
  DO WHILE(.TRUE.)
    CALL MPI_WAITANY(size-1, request_list, index, status, ierr)
    CALL DO_SERVICE(a(1,index)) ! handle one message
    CALL MPI_Irecv(a(1, index), n, MPI_REAL, index, tag,
                  comm, request_list(index), ierr)
  END DO
END IF

```

**Example 3.17** Same code, using `MPI_WAIT SOME`.

```

CALL MPI_COMM_SIZE(comm, size, ierr)
CALL MPI_COMM_RANK(comm, rank, ierr)
IF(rank .GT. 0) THEN          ! client code
  DO WHILE(.TRUE.)
    CALL MPI_ISEND(a, n, MPI_REAL, 0, tag, comm, request, ierr)
    CALL MPI_WAIT(request, status, ierr)
  END DO
ELSE                          ! rank=0 -- server code
  DO i=1, size-1
    CALL MPI_Irecv(a(1,i), n, MPI_REAL, i, tag,
                  comm, request_list(i), ierr)
  END DO

```

```

DO WHILE(.TRUE.)
  CALL MPI_WAIT_SOME(size, request_list, numdone,
                    indices, statuses, ierr)
  DO i=1, numdone
    CALL DO_SERVICE(a(1, indices(i)))
    CALL MPI_Irecv(a(1, indices(i)), n, MPI_REAL, 0, tag,
                  comm, request_list(indices(i)), ierr)
  END DO
END DO
END IF

```

### 3.7.6 Non-destructive Test of status

This call is useful for accessing the information associated with a request, without freeing the request (in case the user is expected to access it later). It allows one to layer libraries more conveniently, since multiple layers of software may access the same completed request and extract from it the status information.

`MPI_REQUEST_GET_STATUS( request, flag, status )`

IN	request	request (handle)
OUT	flag	boolean flag, same as from <code>MPI_TEST</code> (logical)
OUT	status	<code>MPI_STATUS</code> object if flag is true (Status)

```

int MPI_Request_get_status(MPI_Request request, int *flag,
                          MPI_Status *status)

```

```

MPI_REQUEST_GET_STATUS( REQUEST, FLAG, STATUS, IERROR)
  INTEGER REQUEST, STATUS(MPI_STATUS_SIZE), IERROR
  LOGICAL FLAG

```

```

{bool MPI::Request::Get_status(MPI::Status& status) const (binding deprecated,
  see Section 15.2) }

```

```

{bool MPI::Request::Get_status() const (binding deprecated, see Section 15.2) }

```

Sets `flag=true` if the operation is complete, and, if so, returns in status the request status. However, unlike `test` or `wait`, it does not deallocate or inactivate the request; a subsequent call to `test`, `wait` or `free` should be executed with that request. It sets `flag=false` if the operation is not complete.

One is allowed to call `MPI_REQUEST_GET_STATUS` with a null or inactive request argument. In such a case the operation returns with `flag=true` and empty status.

## 3.8 Probe and Cancel

The `MPI_PROBE` and `MPI_Iprobe` operations allow incoming messages to be checked for, without actually receiving them. The user can then decide how to receive them, based on the information returned by the probe (basically, the information returned by `status`). In

particular, the user may allocate memory for the receive buffer, according to the length of the probed message.

The `MPI_CANCEL` operation allows pending communications to be canceled. This is required for cleanup. Posting a send or a receive ties up user resources (send or receive buffers), and a cancel may be needed to free these resources gracefully.

`MPI_Iprobe(source, tag, comm, flag, status)`

IN	source	[source rank,]rank of source or MPI_ANY_SOURCE (integer)
IN	tag	[tag value]message tag or MPI_ANY_TAG (integer)
IN	comm	communicator (handle)
OUT	flag	(logical)
OUT	status	status object (Status)

```
int MPI_Iprobe(int source, int tag, MPI_Comm comm, int *flag,
               MPI_Status *status)
```

```
MPI_Iprobe(SOURCE, TAG, COMM, FLAG, STATUS, IERROR)
LOGICAL FLAG
```

```
INTEGER SOURCE, TAG, COMM, STATUS(MPI_STATUS_SIZE), IERROR
```

```
{bool MPI::Comm::Iprobe(int source, int tag, MPI::Status& status) const
    (binding deprecated, see Section 15.2) }
```

```
{bool MPI::Comm::Iprobe(int source, int tag) const (binding deprecated, see
    Section 15.2) }
```

`MPI_Iprobe(source, tag, comm, flag, status)` returns `flag = true` if there is a message that can be received and that matches the pattern specified by the arguments `source`, `tag`, and `comm`. The call matches the same message that would have been received by a call to `MPI_RECV(..., source, tag, comm, status)` executed at the same point in the program, and returns in `status` the same value that would have been returned by `MPI_RECV()`. Otherwise, the call returns `flag = false`, and leaves `status` undefined.

If `MPI_Iprobe` returns `flag = true`, then the content of the status object can be subsequently accessed as described in Section 3.2.5 to find the source, tag and length of the probed message.

A subsequent receive executed with the same communicator, and the source and tag returned in `status` by `MPI_Iprobe` will receive the message that was matched by the probe, if no other intervening receive occurs after the probe, and the send is not successfully cancelled before the receive. If the receiving process is multi-threaded, it is the user's responsibility to ensure that the last condition holds.

The `source` argument of `MPI_PROBE` can be `MPI_ANY_SOURCE`, and the `tag` argument can be `MPI_ANY_TAG`, so that one can probe for messages from an arbitrary source and/or with an arbitrary tag. However, a specific communication context must be provided with the `comm` argument.

It is not necessary to receive a message immediately after it has been probed for, and the same message may be probed for several times before it is received.

MPI\_PROBE(source, tag, comm, status)

IN	source	[source rank,]rank of source or MPI_ANY_SOURCE (integer)
IN	tag	[tag value]message tag or MPI_ANY_TAG (integer)
IN	comm	communicator (handle)
OUT	status	status object (Status)

```
int MPI_Probe(int source, int tag, MPI_Comm comm, MPI_Status *status)
```

```
MPI_PROBE(SOURCE, TAG, COMM, STATUS, IERROR)
```

```
INTEGER SOURCE, TAG, COMM, STATUS(MPI_STATUS_SIZE), IERROR
```

```
{void MPI::Comm::Probe(int source, int tag, MPI::Status& status) const  
    (binding deprecated, see Section 15.2) }
```

```
{void MPI::Comm::Probe(int source, int tag) const (binding deprecated, see  
    Section 15.2) }
```

MPI\_PROBE behaves like MPI\_IPROBE except that it is a blocking call that returns only after a matching message has been found.

The MPI implementation of MPI\_PROBE and MPI\_IPROBE needs to guarantee progress: if a call to MPI\_PROBE has been issued by a process, and a send that matches the probe has been initiated by some process, then the call to MPI\_PROBE will return, unless the message is received by another concurrent receive operation (that is executed by another thread at the probing process). Similarly, if a process busy waits with MPI\_IPROBE and a matching message has been issued, then the call to MPI\_IPROBE will eventually return flag = true unless the message is received by another concurrent receive operation.

**Example 3.18** Use blocking probe to wait for an incoming message.

```
CALL MPI_COMM_RANK(comm, rank, ierr)
IF (rank.EQ.0) THEN
    CALL MPI_SEND(i, 1, MPI_INTEGER, 2, 0, comm, ierr)
ELSE IF (rank.EQ.1) THEN
    CALL MPI_SEND(x, 1, MPI_REAL, 2, 0, comm, ierr)
ELSE IF (rank.EQ.2) THEN
    DO i=1, 2
        CALL MPI_PROBE(MPI_ANY_SOURCE, 0,
                        comm, status, ierr)
        IF (status(MPI_SOURCE) .EQ. 0) THEN
100      CALL MPI_RECV(i, 1, MPI_INTEGER, 0, 0, comm, status, ierr)
        ELSE
200      CALL MPI_RECV(x, 1, MPI_REAL, 1, 0, comm, status, ierr)
        END IF
    END DO
END IF
```

Each message is received with the right type.

**Example 3.19** A similar program to the previous example, but now it has a problem.

```

1  CALL MPI_COMM_RANK(comm, rank, ierr)
2
3  IF (rank.EQ.0) THEN
4      CALL MPI_SEND(i, 1, MPI_INTEGER, 2, 0, comm, ierr)
5  ELSE IF (rank.EQ.1) THEN
6      CALL MPI_SEND(x, 1, MPI_REAL, 2, 0, comm, ierr)
7  ELSE IF (rank.EQ.2) THEN
8      DO i=1, 2
9          CALL MPI_PROBE(MPI_ANY_SOURCE, 0,
10             comm, status, ierr)
11             IF (status(MPI_SOURCE) .EQ. 0) THEN
12
13 100         CALL MPI_RECV(i, 1, MPI_INTEGER, MPI_ANY_SOURCE,
14             0, comm, status, ierr)
15
16 200         CALL MPI_RECV(x, 1, MPI_REAL, MPI_ANY_SOURCE,
17             0, comm, status, ierr)
18
19         END IF
20     END DO
21 END IF

```

We slightly modified Example 3.18, using `MPI_ANY_SOURCE` as the source argument in the two receive calls in statements labeled 100 and 200. The program is now incorrect: the receive operation may receive a message that is distinct from the message probed by the preceding call to `MPI_PROBE`.

*Advice to implementors.* A call to `MPI_PROBE(source, tag, comm, status)` will match the message that would have been received by a call to `MPI_RECV(..., source, tag, comm, status)` executed at the same point. Suppose that this message has source `s`, tag `t` and communicator `c`. If the tag argument in the probe call has value `MPI_ANY_TAG` then the message probed will be the earliest pending message from source `s` with communicator `c` and any tag; in any case, the message probed will be the earliest pending message from source `s` with tag `t` and communicator `c` (this is the message that would have been received, so as to preserve message order). This message continues as the earliest pending message from source `s` with tag `t` and communicator `c`, until it is received. A receive operation subsequent to the probe that uses the same communicator as the probe and uses the tag and source values returned by the probe, must receive this message, unless it has already been received by another receive operation. (*End of advice to implementors.*)

`MPI_CANCEL(request)`

IN request communication request (handle)

`int MPI_Cancel(MPI_Request *request)`

`MPI_CANCEL(REQUEST, IERROR)`

INTEGER REQUEST, IERROR

ticket150.

```
{void MPI::Request::Cancel() const (binding deprecated, see Section 15.2) }
```

A call to `MPI_CANCEL` marks for cancellation a pending, nonblocking communication operation (send or receive). The cancel call is local. It returns immediately, possibly before the communication is actually canceled. It is still necessary to complete a communication that has been marked for cancellation, using a call to `MPI_REQUEST_FREE`, `MPI_WAIT` or `MPI_TEST` (or any of the derived operations).

If a communication is marked for cancellation, then a `MPI_WAIT` call for that communication is guaranteed to return, irrespective of the activities of other processes (i.e., `MPI_WAIT` behaves as a local function); similarly if `MPI_TEST` is repeatedly called in a busy wait loop for a canceled communication, then `MPI_TEST` will eventually be successful.

`MPI_CANCEL` can be used to cancel a communication that uses a persistent request (see Section 3.9), in the same way it is used for nonpersistent requests. A successful cancellation cancels the active communication, but not the request itself. After the call to `MPI_CANCEL` and the subsequent call to `MPI_WAIT` or `MPI_TEST`, the request becomes inactive and can be activated for a new communication.

The successful cancellation of a buffered send frees the buffer space occupied by the pending message.

Either the cancellation succeeds, or the communication succeeds, but not both. If a send is marked for cancellation, then it must be the case that either the send completes normally, in which case the message sent was received at the destination process, or that the send is successfully canceled, in which case no part of the message was received at the destination. Then, any matching receive has to be satisfied by another send. If a receive is marked for cancellation, then it must be the case that either the receive completes normally, or that the receive is successfully canceled, in which case no part of the receive buffer is altered. Then, any matching send has to be satisfied by another receive.

If the operation has been canceled, then information to that effect will be returned in the status argument of the operation that completes the communication.

*Rationale.* Although the IN request handle parameter should not need to be passed by reference, the C binding has listed the argument type as `MPI_Request*` since MPI-1.0. This function signature therefore cannot be changed without breaking existing MPI applications. (*End of rationale.*)

```
MPI_TEST_CANCELLED(status, flag)
```

IN	status	status object (Status)
OUT	flag	(logical)

```
int MPI_Test_cancelled(MPI_Status *status, int *flag)
```

```
MPI_TEST_CANCELLED(STATUS, FLAG, IERROR)
```

```
LOGICAL FLAG
```

```
INTEGER STATUS(MPI_STATUS_SIZE), IERROR
```

```
{bool MPI::Status::Is_cancelled() const (binding deprecated, see Section 15.2) }
```

1  
2 ticket150.  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30 ticket10.  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47 ticket150.  
48 ticket150.

Returns `flag = true` if the communication associated with the status object was canceled successfully. In such a case, all other fields of `status` (such as `count` or `tag`) are undefined. Returns `flag = false`, otherwise. If a receive operation might be canceled then one should call `MPI_TEST_CANCELLED` first, to check whether the operation was canceled, before checking on the other fields of the return status.

*Advice to users.* Cancel can be an expensive operation that should be used only exceptionally. (*End of advice to users.*)

*Advice to implementors.* If a send operation uses an “eager” protocol (data is transferred to the receiver before a matching receive is posted), then the cancellation of this send may require communication with the intended receiver in order to free allocated buffers. On some systems this may require an interrupt to the intended receiver. Note that, while communication may be needed to implement `MPI_CANCEL`, this is still a local operation, since its completion does not depend on the code executed by other processes. If processing is required on another process, this should be transparent to the application (hence the need for an interrupt and an interrupt handler). (*End of advice to implementors.*)

### 3.9 Persistent Communication Requests

Often a communication with the same argument list is repeatedly executed within the inner loop of a parallel computation. In such a situation, it may be possible to optimize the communication by binding the list of communication arguments to a **persistent** communication request once and, then, repeatedly using the request to initiate and complete messages. The persistent request thus created can be thought of as a communication port or a “half-channel.” It does not provide the full functionality of a conventional channel, since there is no binding of the send port to the receive port. This construct allows reduction of the overhead for communication between the process and communication controller, but not of the overhead for communication between one communication controller and another. It is not necessary that messages sent with a persistent request be received by a receive operation using a persistent request, or vice versa.

A persistent communication request is created using one of the five following calls. These calls involve no communication.

`MPI_SEND_INIT(buf, count, datatype, dest, tag, comm, request)`

IN	buf	initial address of send buffer (choice)
IN	count	number of elements sent (non-negative integer)
IN	datatype	type of each element (handle)
IN	dest	rank of destination (integer)
IN	tag	message tag (integer)
IN	comm	communicator (handle)
OUT	request	communication request (handle)



```
int MPI_Send_init(void* buf, int count, MPI_Datatype datatype, int dest,
                 int tag, MPI_Comm comm, MPI_Request *request)
```

```
MPI_SEND_INIT(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)
    <type> BUF(*)
    INTEGER REQUEST, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR
```

```
{MPI::Prequest MPI::Comm::Send_init(const void* buf, int count, const
    MPI::Datatype& datatype, int dest, int tag) const (binding
    deprecated, see Section 15.2) }
```

Creates a persistent communication request for a standard mode send operation, and binds to it all the arguments of a send operation.

```
MPI_BSEND_INIT(buf, count, datatype, dest, tag, comm, request)
```

IN	buf	initial address of send buffer (choice)
IN	count	number of elements sent (non-negative integer)
IN	datatype	type of each element (handle)
IN	dest	rank of destination (integer)
IN	tag	message tag (integer)
IN	comm	communicator (handle)
OUT	request	communication request (handle)

```
int MPI_Bsend_init(void* buf, int count, MPI_Datatype datatype, int dest,
                  int tag, MPI_Comm comm, MPI_Request *request)
```

```
MPI_BSEND_INIT(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)
    <type> BUF(*)
    INTEGER REQUEST, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR
```

```
{MPI::Prequest MPI::Comm::Bsend_init(const void* buf, int count, const
    MPI::Datatype& datatype, int dest, int tag) const (binding
    deprecated, see Section 15.2) }
```

Creates a persistent communication request for a buffered mode send.

```
MPI_SSEND_INIT(buf, count, datatype, dest, tag, comm, request)
```

IN	buf	initial address of send buffer (choice)
IN	count	number of elements sent (non-negative integer)
IN	datatype	type of each element (handle)
IN	dest	rank of destination (integer)
IN	tag	message tag (integer)
IN	comm	communicator (handle)
OUT	request	communication request (handle)

```

1  int MPI_Ssend_init(void* buf, int count, MPI_Datatype datatype, int dest,
2      int tag, MPI_Comm comm, MPI_Request *request)

```

```

3  MPI_SSEND_INIT(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)

```

```

4      <type> BUF(*)

```

```

5      INTEGER COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR

```

```

6  {MPI::Prequest MPI::Comm::Ssend_init(const void* buf, int count, const
7      MPI::Datatype& datatype, int dest, int tag) const (binding
8      deprecated, see Section 15.2) }

```

Creates a persistent communication object for a synchronous mode send operation.

```

13 MPI_RSEND_INIT(buf, count, datatype, dest, tag, comm, request)

```

```

14     IN      buf                initial address of send buffer (choice)

```

```

15     IN      count              number of elements sent (non-negative integer)

```

```

16     IN      datatype           type of each element (handle)

```

```

17     IN      dest               rank of destination (integer)

```

```

18     IN      tag                message tag (integer)

```

```

19     IN      comm               communicator (handle)

```

```

20     OUT     request            communication request (handle)

```

```

21  int MPI_Rsend_init(void* buf, int count, MPI_Datatype datatype, int dest,
22      int tag, MPI_Comm comm, MPI_Request *request)

```

```

23  MPI_RSEND_INIT(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)

```

```

24      <type> BUF(*)

```

```

25      INTEGER COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR

```

```

26  {MPI::Prequest MPI::Comm::Rsend_init(const void* buf, int count, const
27      MPI::Datatype& datatype, int dest, int tag) const (binding
28      deprecated, see Section 15.2) }

```

Creates a persistent communication object for a ready mode send operation.

```

37 MPI_RECV_INIT(buf, count, datatype, source, tag, comm, request)

```

```

38     OUT     buf                initial address of receive buffer (choice)

```

```

39     IN      count              number of elements received (non-negative integer)

```

```

40     IN      datatype           type of each element (handle)

```

```

41     IN      source             rank of source or MPI_ANY_SOURCE (integer)

```

```

42     IN      tag                message tag or MPI_ANY_TAG (integer)

```

```

43     IN      comm               communicator (handle)

```

```

44     OUT     request            communication request (handle)

```

```

int MPI_Recv_init(void* buf, int count, MPI_Datatype datatype, int source,
                  int tag, MPI_Comm comm, MPI_Request *request)
MPI_RECV_INIT(BUF, COUNT, DATATYPE, SOURCE, TAG, COMM, REQUEST, IERROR)
    <type> BUF(*)
    INTEGER COUNT, DATATYPE, SOURCE, TAG, COMM, REQUEST, IERROR
{MPI::Prequest MPI::Comm::Recv_init(void* buf, int count, const
    MPI::Datatype& datatype, int source, int tag) const (binding
    deprecated, see Section 15.2) }
```

Creates a persistent communication request for a receive operation. The argument `buf` is marked as OUT because the user gives permission to write on the receive buffer by passing the argument to `MPI_RECV_INIT`.

A persistent communication request is inactive after it was created — no active communication is attached to the request.

A communication (send or receive) that uses a persistent request is initiated by the function `MPI_START`.

```

MPI_START(request)
    INOUT    request                communication request (handle)

int MPI_Start(MPI_Request *request)
MPI_START(REQUEST, IERROR)
    INTEGER REQUEST, IERROR
{void MPI::Prequest::Start() (binding deprecated, see Section 15.2) }
```

The argument, `request`, is a handle returned by one of the previous five calls. The associated request should be inactive. The request becomes active once the call is made.

If the request is for a send with ready mode, then a matching receive should be posted before the call is made. The communication buffer should not be `[accessed]`modified after the call, and until the operation completes.

The call is local, with similar semantics to the nonblocking communication operations described in Section 3.7. That is, a call to `MPI_START` with a request created by `MPI_SEND_INIT` starts a communication in the same manner as a call to `MPI_ISEND`; a call to `MPI_START` with a request created by `MPI_BSEND_INIT` starts a communication in the same manner as a call to `MPI_IBSEND`; and so on.

```

MPI_STARTALL(count, array_of_requests)
    IN        count                list length (non-negative integer)
    INOUT     array_of_requests     array of requests (array of handle)

int MPI_Startall(int count, MPI_Request *array_of_requests)
MPI_STARTALL(COUNT, ARRAY_OF_REQUESTS, IERROR)
    INTEGER COUNT, ARRAY_OF_REQUESTS(*), IERROR
```

```

1
ticket150. 2 {static void MPI::Prequest::Startall(int count,
ticket150. 3 MPI::Prequest array_of_requests[]) (binding deprecated, see
4 Section 15.2) }
5

```

Start all communications associated with requests in `array_of_requests`. A call to `MPI_STARTALL(count, array_of_requests)` has the same effect as calls to `MPI_START (&array_of_requests[i])`, executed for  $i=0, \dots, \text{count}-1$ , in some arbitrary order.

A communication started with a call to `MPI_START` or `MPI_STARTALL` is completed by a call to `MPI_WAIT`, `MPI_TEST`, or one of the derived functions described in Section 3.7.5. The request becomes inactive after successful completion of such call. The request is not deallocated and it can be activated anew by an `MPI_START` or `MPI_STARTALL` call.

A persistent request is deallocated by a call to `MPI_REQUEST_FREE` (Section 3.7.3).

The call to `MPI_REQUEST_FREE` can occur at any point in the program after the persistent request was created. However, the request will be deallocated only after it becomes inactive. Active receive requests should not be freed. Otherwise, it will not be possible to check that the receive has completed. It is preferable, in general, to free requests when they are inactive. If this rule is followed, then the functions described in this section will be invoked in a sequence of the form,

**Create (Start Complete)\* Free**

where  $*$  indicates zero or more repetitions. If the same communication object is used in several concurrent threads, it is the user's responsibility to coordinate calls so that the correct sequence is obeyed.

A send operation initiated with `MPI_START` can be matched with any receive operation and, likewise, a receive operation initiated with `MPI_START` can receive messages generated by any send operation.

*Advice to users.* To prevent problems with the argument copying and register optimization done by Fortran compilers, please note the hints in subsections “Problems Due to Data Copying and Sequence Association,” and “A Problem with Register Optimization” in Section 16.2.2 on pages 501 and 503. (*End of advice to users.*)

### 3.10 Send-Receive

The **send-receive** operations combine in one call the sending of a message to one destination and the receiving of another message, from another process. The two (source and destination) are possibly the same. A send-receive operation is very useful for executing a shift operation across a chain of processes. If blocking sends and receives are used for such a shift, then one needs to order the sends and receives correctly (for example, even processes send, then receive, odd processes receive first, then send) so as to prevent cyclic dependencies that may lead to deadlock. When a send-receive operation is used, the communication subsystem takes care of these issues. The send-receive operation can be used in conjunction with the functions described in Chapter 7 in order to perform shifts on various logical topologies. Also, a send-receive operation is useful for implementing remote procedure calls.

A message sent by a send-receive operation can be received by a regular receive operation or probed by a probe operation; a send-receive operation can receive a message sent by a regular send operation.

`MPI_SENDRECV(sendbuf, sendcount, sendtype, dest, sendtag, recvbuf, recvcount, recvtype, source, recvtag, comm, status)`

IN	sendbuf	initial address of send buffer (choice)	
IN	sendcount	number of elements in send buffer (non-negative integer)	
IN	sendtype	type of elements in send buffer (handle)	
IN	dest	rank of destination (integer)	
IN	sendtag	send tag (integer)	
OUT	recvbuf	initial address of receive buffer (choice)	
IN	recvcount	number of elements in receive buffer (non-negative integer)	
IN	recvtype	type of elements in receive buffer (handle)	
IN	source	rank of source or <code>MPI_ANY_SOURCE</code> (integer)	ticket51.
IN	recvtag	receive tag or <code>MPI_ANY_TAG</code> (integer)	ticket51.
IN	comm	communicator (handle)	
OUT	status	status object (Status)	

```
int MPI_Sendrecv(void *sendbuf, int sendcount, MPI_Datatype sendtype,
                 int dest, int sendtag, void *recvbuf, int recvcount,
                 MPI_Datatype recvtype, int source, int recvtag, MPI_Comm comm,
                 MPI_Status *status)
```

```
MPI_SENDRECV(SENDBUF, SENDCOUNT, SENDTYPE, DEST, SENDTAG, RECVBUF,
              RECVCOUNT, RECVTYPE, SOURCE, RECVTAG, COMM, STATUS, IERROR)
<type> SENDBUF(*), RECVBUF(*)
INTEGER SENDCOUNT, SENDTYPE, DEST, SENDTAG, REVCOUNT, RECVTYPE,
SOURCE, RECVTAG, COMM, STATUS(MPI_STATUS_SIZE), IERROR
```

```
{void MPI::Comm::Sendrecv(const void *sendbuf, int sendcount, const
                          MPI::Datatype& sendtype, int dest, int sendtag, void *recvbuf,
                          int recvcount, const MPI::Datatype& recvtype, int source,
                          int recvtag, MPI::Status& status) const (binding deprecated, see
                          Section 15.2) }
```

```
{void MPI::Comm::Sendrecv(const void *sendbuf, int sendcount, const
                          MPI::Datatype& sendtype, int dest, int sendtag, void *recvbuf,
                          int recvcount, const MPI::Datatype& recvtype, int source,
                          int recvtag) const (binding deprecated, see Section 15.2) }
```

Execute a blocking send and receive operation. Both send and receive use the same communicator, but possibly different tags. The send buffer and receive buffers must be

disjoint, and may have different lengths and datatypes.

The semantics of a send-receive operation is what would be obtained if the caller forked two concurrent threads, one to execute the send, and one to execute the receive, followed by a join of these two threads.

`MPI_SENDRECV_REPLACE(buf, count, datatype, dest, sendtag, source, recvtag, comm, status)`

INOUT	buf	initial address of send and receive buffer (choice)
IN	count	number of elements in send and receive buffer (non-negative integer)
IN	datatype	type of elements in send and receive buffer (handle)
IN	dest	rank of destination (integer)
IN	sendtag	send message tag (integer)
IN	source	rank of source or <code>MPI_ANY_SOURCE</code> (integer)
IN	recvtag	receive message tag or <code>MPI_ANY_TAG</code> (integer)
IN	comm	communicator (handle)
OUT	status	status object (Status)

```
int MPI_Sendrecv_replace(void* buf, int count, MPI_Datatype datatype,
                        int dest, int sendtag, int source, int recvtag, MPI_Comm comm,
                        MPI_Status *status)
```

```
MPI_SENDRECV_REPLACE(BUF, COUNT, DATATYPE, DEST, SENDTAG, SOURCE, RECVTAG,
                    COMM, STATUS, IERROR)
<type> BUF(*)
INTEGER COUNT, DATATYPE, DEST, SENDTAG, SOURCE, RECVTAG, COMM,
STATUS(MPI_STATUS_SIZE), IERROR
```

```
{void MPI::Comm::Sendrecv_replace(void* buf, int count, const
    MPI::Datatype& datatype, int dest, int sendtag, int source,
    int recvtag, MPI::Status& status) const (binding deprecated, see
    Section 15.2) }
```

```
{void MPI::Comm::Sendrecv_replace(void* buf, int count, const
    MPI::Datatype& datatype, int dest, int sendtag, int source,
    int recvtag) const (binding deprecated, see Section 15.2) }
```

Execute a blocking send and receive. The same buffer is used both for the send and for the receive, so that the message sent is replaced by the message received.

*Advice to implementors.* Additional intermediate buffering is needed for the “replace” variant. (*End of advice to implementors.*)

## 3.11 Null Processes

In many instances, it is convenient to specify a “dummy” source or destination for communication. This simplifies the code that is needed for dealing with boundaries, for example, in the case of a non-circular shift done with calls to send-receive.

The special value `MPI_PROC_NULL` can be used instead of a rank wherever a source or a destination argument is required in a call. A communication with process `MPI_PROC_NULL` has no effect. A send to `MPI_PROC_NULL` succeeds and returns as soon as possible. A receive from `MPI_PROC_NULL` succeeds and returns as soon as possible with no modifications to the receive buffer. When a receive with `source = MPI_PROC_NULL` is executed then the status object returns `source = MPI_PROC_NULL`, `tag = MPI_ANY_TAG` and `count = 0`.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48



# Chapter 4

## Datatypes

Basic datatypes were introduced in Section 3.2.2 Message Data on page 29 and in Section 3.3 Data Type Matching and Data Conversion on page 36. In this chapter, this model is extended to describe any data layout. We consider general datatypes that allow one to transfer efficiently heterogeneous and noncontiguous data. We conclude with the description of calls for explicit packing and unpacking of messages.

### 4.1 Derived Datatypes

Up to here, all point to point communication have involved only buffers containing a sequence of identical basic datatypes. This is too constraining on two accounts. One often wants to pass messages that contain values with different datatypes (e.g., an integer count, followed by a sequence of real numbers); and one often wants to send noncontiguous data (e.g., a sub-block of a matrix). One solution is to pack noncontiguous data into a contiguous buffer at the sender site and unpack it at the receiver site. This has the disadvantage of requiring additional memory-to-memory copy operations at both sites, even when the communication subsystem has scatter-gather capabilities. Instead, MPI provides mechanisms to specify more general, mixed, and noncontiguous communication buffers. It is up to the implementation to decide whether data should be first packed in a contiguous buffer before being transmitted, or whether it can be collected directly from where it resides.

The general mechanisms provided here allow one to transfer directly, without copying, objects of various shape and size. It is not assumed that the MPI library is cognizant of the objects declared in the host language. Thus, if one wants to transfer a structure, or an array section, it will be necessary to provide in MPI a definition of a communication buffer that mimics the definition of the structure or array section in question. These facilities can be used by library designers to define communication functions that can transfer objects defined in the host language — by decoding their definitions as available in a symbol table or a dope vector. Such higher-level communication functions are not part of MPI.

More general communication buffers are specified by replacing the basic datatypes that have been used so far with derived datatypes that are constructed from basic datatypes using the constructors described in this section. These methods of constructing derived datatypes can be applied recursively.

A **general datatype** is an opaque object that specifies two things:

- A sequence of basic datatypes

- A sequence of integer (byte) displacements

The displacements are not required to be positive, distinct, or in increasing order. Therefore, the order of items need not coincide with their order in store, and an item may appear more than once. We call such a pair of sequences (or sequence of pairs) a **type map**. The sequence of basic datatypes (displacements ignored) is the **type signature** of the datatype.

Let

$$Typemap = \{(type_0, disp_0), \dots, (type_{n-1}, disp_{n-1})\},$$

be such a type map, where  $type_i$  are basic types, and  $disp_i$  are displacements. Let

$$Typesig = \{type_0, \dots, type_{n-1}\}$$

be the associated type signature. This type map, together with a base address  $buf$ , specifies a communication buffer: the communication buffer that consists of  $n$  entries, where the  $i$ -th entry is at address  $buf + disp_i$  and has type  $type_i$ . A message assembled from such a communication buffer will consist of  $n$  values, of the types defined by  $Typesig$ .

Most datatype constructors have replication count or block length arguments. Allowed values are **[nonnegative]non-negative** integers. If the value is zero, no elements are generated in the type map and there is no effect on datatype bounds or extent.

We can use a handle to a general datatype as an argument in a send or receive operation, instead of a basic datatype argument. The operation `MPI_SEND(buf, 1, datatype,...)` will use the send buffer defined by the base address `buf` and the general datatype associated with `datatype`; it will generate a message with the type signature determined by the `datatype` argument. `MPI_RECV(buf, 1, datatype,...)` will use the receive buffer defined by the base address `buf` and the general datatype associated with `datatype`.

General datatypes can be used in all send and receive operations. We discuss, in Section 4.1.11, the case where the second argument `count` has value  $> 1$ .

The basic datatypes presented in Section 3.2.2 are particular cases of a general datatype, and are predefined. Thus, `MPI_INT` is a predefined handle to a datatype with type map  $\{(int, 0)\}$ , with one entry of type `int` and displacement zero. The other basic datatypes are similar.

The **extent** of a datatype is defined to be the span from the first byte to the last byte occupied by entries in this datatype, rounded up to satisfy alignment requirements. That is, if

$$Typemap = \{(type_0, disp_0), \dots, (type_{n-1}, disp_{n-1})\},$$

then

$$\begin{aligned} lb(Typemap) &= \min_j disp_j, \\ ub(Typemap) &= \max_j (disp_j + sizeof(type_j)) + \epsilon, \text{ and} \\ extent(Typemap) &= ub(Typemap) - lb(Typemap). \end{aligned} \tag{4.1}$$

If  $type_i$  requires alignment to a byte address that is a multiple of  $k_i$ , then  $\epsilon$  is the least **[nonnegative]non-negative** increment needed to round  $extent(Typemap)$  to the next multiple of  $\max_i k_i$ . The complete definition of **extent** is given on page 100.

**Example 4.1** Assume that  $Type = \{(double, 0), (char, 8)\}$  (a double at displacement zero, followed by a char at displacement eight). Assume, furthermore, that doubles have to be strictly aligned at addresses that are multiples of eight. Then, the extent of this datatype is 16 (9 rounded to the next multiple of 8). A datatype that consists of a character immediately followed by a double will also have an extent of 16.

*Rationale.* The definition of extent is motivated by the assumption that the amount of padding added at the end of each structure in an array of structures is the least needed to fulfill alignment constraints. More explicit control of the extent is provided in Section 4.1.6. Such explicit control is needed in cases where the assumption does not hold, for example, where union types are used. (*End of rationale.*)

#### 4.1.1 Type Constructors with Explicit Addresses

In Fortran, the functions `MPI_TYPE_CREATE_HVECTOR`, `MPI_TYPE_CREATE_HINDEXED`, `MPI_TYPE_CREATE_STRUCT`, and `MPI_GET_ADDRESS` accept arguments of type `INTEGER(KIND=MPI_ADDRESS_KIND)`, wherever arguments of type `MPI_Aint` and `MPI::Aint` are used in C and C++. On Fortran 77 systems that do not support the Fortran 90 `KIND` notation, and where addresses are 64 bits whereas default `INTEGER`s are 32 bits, these arguments will be of type `INTEGER*8`.

#### 4.1.2 Datatype Constructors

**Contiguous** The simplest datatype constructor is `MPI_TYPE_CONTIGUOUS` which allows replication of a datatype into contiguous locations.

`MPI_TYPE_CONTIGUOUS(count, oldtype, newtype)`

IN	count	replication count ([nonnegative]non-negative integer)
IN	oldtype	old datatype (handle)
OUT	newtype	new datatype (handle)

```
int MPI_Type_contiguous(int count, MPI_Datatype oldtype,
                        MPI_Datatype *newtype)
```

```
MPI_TYPE_CONTIGUOUS(COUNT, OLDTYPE, NEWTYPE, IERROR)
INTEGER COUNT, OLDTYPE, NEWTYPE, IERROR
```

```
{MPI::Datatype MPI::Datatype::Create_contiguous(int count) const (binding
depreciated, see Section 15.2) }
```

`newtype` is the datatype obtained by concatenating `count` copies of `oldtype`. Concatenation is defined using *extent* as the size of the concatenated copies.

**Example 4.2** Let `oldtype` have type map  $\{(double, 0), (char, 8)\}$ , with extent 16, and let `count = 3`. The type map of the datatype returned by `newtype` is

$\{(double, 0), (char, 8), (double, 16), (char, 24), (double, 32), (char, 40)\}$ ;

i.e., alternating double and char elements, with displacements 0, 8, 16, 24, 32, 40.

ticket74.

ticket150.

ticket150.

In general, assume that the type map of `oldtype` is

$$\{(type_0, disp_0), \dots, (type_{n-1}, disp_{n-1})\},$$

with extent  $ex$ . Then `newtype` has a type map with `count · n` entries defined by:

$$\{(type_0, disp_0), \dots, (type_{n-1}, disp_{n-1}), (type_0, disp_0 + ex), \dots, (type_{n-1}, disp_{n-1} + ex), \\ \dots, (type_0, disp_0 + ex \cdot (\text{count} - 1)), \dots, (type_{n-1}, disp_{n-1} + ex \cdot (\text{count} - 1))\}.$$

**Vector** The function `MPI_TYPE_VECTOR` is a more general constructor that allows replication of a datatype into locations that consist of equally spaced blocks. Each block is obtained by concatenating the same number of copies of the old datatype. The spacing between blocks is a multiple of the extent of the old datatype.

`MPI_TYPE_VECTOR( count, blocklength, stride, oldtype, newtype)`

ticket74.	IN	count	number of blocks ([nonnegative]non-negative integer)
ticket74.	IN	blocklength	number of elements in each block ([nonnegative]non-negative integer)
	IN	stride	number of elements between start of each block (integer)
	IN	oldtype	old datatype (handle)
	OUT	newtype	new datatype (handle)

```
int MPI_Type_vector(int count, int blocklength, int stride,
    MPI_Datatype oldtype, MPI_Datatype *newtype)
```

```
MPI_TYPE_VECTOR(COUNT, BLOCKLENGTH, STRIDE, OLDTYPE, NEWTYPE, IERROR)
```

```
INTEGER COUNT, BLOCKLENGTH, STRIDE, OLDTYPE, NEWTYPE, IERROR
```

```
{MPI::Datatype MPI::Datatype::Create_vector(int count, int blocklength,
    int stride) const (binding deprecated, see Section 15.2) }
```

**Example 4.3** Assume, again, that `oldtype` has type map  $\{(double, 0), (char, 8)\}$ , with extent 16. A call to `MPI_TYPE_VECTOR( 2, 3, 4, oldtype, newtype)` will create the datatype with type map,

$$\{(double, 0), (char, 8), (double, 16), (char, 24), (double, 32), (char, 40), \\ (double, 64), (char, 72), (double, 80), (char, 88), (double, 96), (char, 104)\}.$$

That is, two blocks with three copies each of the old type, with a stride of 4 elements ( $4 \cdot 16$  bytes) between the blocks.

**Example 4.4** A call to `MPI_TYPE_VECTOR(3, 1, -2, oldtype, newtype)` will create the datatype,

$$\{(\text{double}, 0), (\text{char}, 8), (\text{double}, -32), (\text{char}, -24), (\text{double}, -64), (\text{char}, -56)\}.$$

In general, assume that `oldtype` has type map,

$$\{(type_0, disp_0), \dots, (type_{n-1}, disp_{n-1})\},$$

with extent  $ex$ . Let `bl` be the `blocklength`. The newly created datatype has a type map with `count · bl · n` entries:

$$\begin{aligned} &\{(type_0, disp_0), \dots, (type_{n-1}, disp_{n-1}), \\ &(type_0, disp_0 + ex), \dots, (type_{n-1}, disp_{n-1} + ex), \dots, \\ &(type_0, disp_0 + (bl - 1) \cdot ex), \dots, (type_{n-1}, disp_{n-1} + (bl - 1) \cdot ex), \\ &(type_0, disp_0 + stride \cdot ex), \dots, (type_{n-1}, disp_{n-1} + stride \cdot ex), \dots, \\ &(type_0, disp_0 + (stride + bl - 1) \cdot ex), \dots, (type_{n-1}, disp_{n-1} + (stride + bl - 1) \cdot ex), \dots, \\ &(type_0, disp_0 + stride \cdot (count - 1) \cdot ex), \dots, \\ &(type_{n-1}, disp_{n-1} + stride \cdot (count - 1) \cdot ex), \dots, \\ &(type_0, disp_0 + (stride \cdot (count - 1) + bl - 1) \cdot ex), \dots, \\ &(type_{n-1}, disp_{n-1} + (stride \cdot (count - 1) + bl - 1) \cdot ex)\}. \end{aligned}$$

A call to `MPI_TYPE_CONTIGUOUS(count, oldtype, newtype)` is equivalent to a call to `MPI_TYPE_VECTOR(count, 1, 1, oldtype, newtype)`, or to a call to `MPI_TYPE_VECTOR(1, count, n, oldtype, newtype)`,  $n$  arbitrary.

**Hvector** The function `MPI_TYPE_CREATE_HVECTOR` is identical to `MPI_TYPE_VECTOR`, except that `stride` is given in bytes, rather than in elements. The use for both types of vector constructors is illustrated in Section 4.1.14. (H stands for “heterogeneous”).

`MPI_TYPE_CREATE_HVECTOR( count, blocklength, stride, oldtype, newtype)`

IN	count	number of blocks ([nonnegative]non-negative integer)
IN	blocklength	number of elements in each block ([nonnegative]non-negative integer)
IN	stride	number of bytes between start of each block (integer)
IN	oldtype	old datatype (handle)
OUT	newtype	new datatype (handle)

ticket74.

ticket74.

```

1  int MPI_Type_create_hvector(int count, int blocklength, MPI_Aint stride,
2      MPI_Datatype oldtype, MPI_Datatype *newtype)
3
4  MPI_TYPE_CREATE_HVECTOR(COUNT, BLOCKLENGTH, STRIDE, OLDTYPE, NEWTYPE,
5      IERROR)
6      INTEGER COUNT, BLOCKLENGTH, OLDTYPE, NEWTYPE, IERROR
7      INTEGER(KIND=MPI_ADDRESS_KIND) STRIDE

```

```

8  {MPI::Datatype MPI::Datatype::Create_hvector(int count, int blocklength,
9      MPI::Aint stride) const (binding deprecated, see Section 15.2) }

```

This function replaces MPI\_TYPE\_HVECTOR, whose use is deprecated. See also Chapter 15.

Assume that `oldtype` has type map,

$$\{(type_0, disp_0), \dots, (type_{n-1}, disp_{n-1})\},$$

with extent  $ex$ . Let  $bl$  be the `blocklength`. The newly created datatype has a type map with  $count \cdot bl \cdot n$  entries:

$$\begin{aligned}
&\{(type_0, disp_0), \dots, (type_{n-1}, disp_{n-1}), \\
&(type_0, disp_0 + ex), \dots, (type_{n-1}, disp_{n-1} + ex), \dots, \\
&(type_0, disp_0 + (bl - 1) \cdot ex), \dots, (type_{n-1}, disp_{n-1} + (bl - 1) \cdot ex), \\
&(type_0, disp_0 + stride), \dots, (type_{n-1}, disp_{n-1} + stride), \dots, \\
&(type_0, disp_0 + stride + (bl - 1) \cdot ex), \dots, \\
&(type_{n-1}, disp_{n-1} + stride + (bl - 1) \cdot ex), \dots, \\
&(type_0, disp_0 + stride \cdot (count - 1)), \dots, (type_{n-1}, disp_{n-1} + stride \cdot (count - 1)), \dots, \\
&(type_0, disp_0 + stride \cdot (count - 1) + (bl - 1) \cdot ex), \dots, \\
&(type_{n-1}, disp_{n-1} + stride \cdot (count - 1) + (bl - 1) \cdot ex)\}.
\end{aligned}$$

**Indexed** The function MPI\_TYPE\_INDEXED allows replication of an old datatype into a sequence of blocks (each block is a concatenation of the old datatype), where each block can contain a different number of copies and have a different displacement. All block displacements are multiples of the old type extent.

MPI\_TYPE\_INDEXED( count, array\_of\_blocklengths, array\_of\_displacements, oldtype, newtype)

	IN	count	number of blocks – also number of entries in array_of_displacements and array_of_blocklengths ([nonnegative]non-negative integer)	1 2 3 4 5 6
ticket74.	IN	array_of_blocklengths	number of elements per block (array of [nonnegative]non-negative integers)	7 8
ticket74.	IN	array_of_displacements	displacement for each block, in multiples of oldtype extent (array of integer)	9 10
	IN	oldtype	old datatype (handle)	11 12
	OUT	newtype	new datatype (handle)	13 14

```

int MPI_Type_indexed(int count, int *array_of_blocklengths,
                    int *array_of_displacements, MPI_Datatype oldtype,
                    MPI_Datatype *newtype)
MPI_TYPE_INDEXED(COUNT, ARRAY_OF_BLOCKLENGTHS, ARRAY_OF_DISPLACEMENTS,
                OLDTYPE, NEWTYPE, IERROR)
INTEGER COUNT, ARRAY_OF_BLOCKLENGTHS(*), ARRAY_OF_DISPLACEMENTS(*),
OLDTYPE, NEWTYPE, IERROR
{MPI::Datatype MPI::Datatype::Create_indexed(int count,
const int array_of_blocklengths[],
const int array_of_displacements[]) const (binding deprecated, see
Section 15.2) }

```

**Example 4.5** Let oldtype have type map  $\{(\text{double}, 0), (\text{char}, 8)\}$ , with extent 16. Let  $B = (3, 1)$  and let  $D = (4, 0)$ . A call to MPI\_TYPE\_INDEXED(2, B, D, oldtype, newtype) returns a datatype with type map,

$$\{(\text{double}, 64), (\text{char}, 72), (\text{double}, 80), (\text{char}, 88), (\text{double}, 96), (\text{char}, 104),$$

$$(\text{double}, 0), (\text{char}, 8)\}.$$

That is, three copies of the old type starting at displacement 64, and one copy starting at displacement 0.

In general, assume that oldtype has type map,

$$\{(type_0, disp_0), \dots, (type_{n-1}, disp_{n-1})\},$$

with extent  $ex$ . Let B be the array\_of\_blocklength argument and D be the array\_of\_displacements argument. The newly created datatype has  $n \cdot \sum_{i=0}^{\text{count}-1} B[i]$  entries:

$$\{(type_0, disp_0 + D[0] \cdot ex), \dots, (type_{n-1}, disp_{n-1} + D[0] \cdot ex), \dots,$$

$$(type_0, disp_0 + (D[0] + B[0] - 1) \cdot ex), \dots, (type_{n-1}, disp_{n-1} + (D[0] + B[0] - 1) \cdot ex), \dots,$$

$(type_0, disp_0 + D[count-1] \cdot ex), \dots, (type_{n-1}, disp_{n-1} + D[count-1] \cdot ex), \dots,$

$(type_0, disp_0 + (D[count-1] + B[count-1] - 1) \cdot ex), \dots,$

$(type_{n-1}, disp_{n-1} + (D[count-1] + B[count-1] - 1) \cdot ex)\}.$

A call to `MPI_TYPE_VECTOR(count, blocklength, stride, oldtype, newtype)` is equivalent to a call to `MPI_TYPE_INDEXED(count, B, D, oldtype, newtype)` where

$D[j] = j \cdot \text{stride}, j = 0, \dots, \text{count} - 1,$

and

$B[j] = \text{blocklength}, j = 0, \dots, \text{count} - 1.$

**Hindexed** The function `MPI_TYPE_CREATE_HINDEXED` is identical to `MPI_TYPE_INDEXED`, except that block displacements in `array_of_displacements` are specified in bytes, rather than in multiples of the `oldtype` extent.

`MPI_TYPE_CREATE_HINDEXED( count, array_of_blocklengths, array_of_displacements, oldtype, newtype)`

ticket74.	IN	count	number of blocks — also number of entries in <code>array_of_displacements</code> and <code>array_of_blocklengths</code> ([nonnegative]non-negative integer)
ticket74.	IN	array_of_blocklengths	number of elements in each block (array of [nonnegative]non-negative integers)
	IN	array_of_displacements	byte displacement of each block (array of integer)
	IN	oldtype	old datatype (handle)
	OUT	newtype	new datatype (handle)

```
int MPI_Type_create_hindexed(int count, int array_of_blocklengths[],
                             MPI_Aint array_of_displacements[], MPI_Datatype oldtype,
                             MPI_Datatype *newtype)
```

```
MPI_TYPE_CREATE_HINDEXED(COUNT, ARRAY_OF_BLOCKLENGTHS,
                           ARRAY_OF_DISPLACEMENTS, OLDTYPE, NEWTYPE, IERROR)
INTEGER COUNT, ARRAY_OF_BLOCKLENGTHS(*), OLDTYPE, NEWTYPE, IERROR
INTEGER(KIND=MPI_ADDRESS_KIND) ARRAY_OF_DISPLACEMENTS(*)
```

```
{MPI::Datatype MPI::Datatype::Create_hindexed(int count,
const int array_of_blocklengths[],
const MPI::Aint array_of_displacements[]) const (binding
depreciated, see Section 15.2) }
```

This function replaces `MPI_TYPE_HINDEXED`, whose use is deprecated. See also Chapter 15.



Assume that `oldtype` has type map,

$$\{(type_0, disp_0), \dots, (type_{n-1}, disp_{n-1})\},$$

with extent  $ex$ . Let  $B$  be the `array_of_blocklength` argument and  $D$  be the `array_of_displacements` argument. The newly created datatype has a type map with  $n \cdot \sum_{i=0}^{count-1} B[i]$  entries:

$$\begin{aligned} &\{(type_0, disp_0 + D[0]), \dots, (type_{n-1}, disp_{n-1} + D[0]), \dots, \\ &(type_0, disp_0 + D[0] + (B[0] - 1) \cdot ex), \dots, \\ &(type_{n-1}, disp_{n-1} + D[0] + (B[0] - 1) \cdot ex), \dots, \\ &(type_0, disp_0 + D[count-1]), \dots, (type_{n-1}, disp_{n-1} + D[count-1]), \dots, \\ &(type_0, disp_0 + D[count-1] + (B[count-1] - 1) \cdot ex), \dots, \\ &(type_{n-1}, disp_{n-1} + D[count-1] + (B[count-1] - 1) \cdot ex)\}. \end{aligned}$$

**Indexed\_block** This function is the same as `MPI_TYPE_INDEXED` except that the blocklength is the same for all blocks. There are many codes using indirect addressing arising from unstructured grids where the blocksize is always 1 (gather/scatter). The following convenience function allows for constant blocksize and arbitrary displacements.

`MPI_TYPE_CREATE_INDEXED_BLOCK(count, blocklength, array_of_displacements, oldtype, newtype)`

IN	count	length of array of displacements (non-negative integer)
IN	blocklength	size of block (non-negative integer)
IN	array_of_displacements	array of displacements (array of integer)
IN	oldtype	old datatype (handle)
OUT	newtype	new datatype (handle)

```
int MPI_Type_create_indexed_block(int count, int blocklength,
    int array_of_displacements[], MPI_Datatype oldtype,
    MPI_Datatype *newtype)
```

```
MPI_TYPE_CREATE_INDEXED_BLOCK(COUNT, BLOCKLENGTH, ARRAY_OF_DISPLACEMENTS,
    OLDTYPE, NEWTYPE, IERROR)
INTEGER COUNT, BLOCKLENGTH, ARRAY_OF_DISPLACEMENTS(*), OLDTYPE,
NEWTYPE, IERROR
```

```
{MPI::Datatype MPI::Datatype::Create_indexed_block(int count,
    int blocklength, const int array_of_displacements[]) const
    (binding deprecated, see Section 15.2) }
```

ticket150.

ticket150.

Struct `MPI_TYPE_STRUCT` is the most general type constructor. It further generalizes `MPI_TYPE_CREATE_HINDEXED` in that it allows each block to consist of replications of different datatypes.

`MPI_TYPE_CREATE_STRUCT(count, array_of_blocklengths, array_of_displacements, array_of_types, newtype)`

ticket74. IN count number of blocks ([nonnegative]non-negative integer)  
— also number of entries in arrays `array_of_types`,  
`array_of_displacements` and `array_of_blocklengths`

ticket74. IN array\_of\_blocklength number of elements in each block (array of [nonnegative]non-negative integer)

IN array\_of\_displacements byte displacement of each block (array of integer)

IN array\_of\_types type of elements in each block (array of handles to datatype objects)

OUT newtype new datatype (handle)

```
int MPI_Type_create_struct(int count, int array_of_blocklengths[],
                          MPI_Aint array_of_displacements[],
                          MPI_Datatype array_of_types[], MPI_Datatype *newtype)
```

```
MPI_TYPE_CREATE_STRUCT(COUNT, ARRAY_OF_BLOCKLENGTHS,
                       ARRAY_OF_DISPLACEMENTS, ARRAY_OF_TYPES, NEWTYPE, IERROR)
INTEGER COUNT, ARRAY_OF_BLOCKLENGTHS(*), ARRAY_OF_TYPES(*), NEWTYPE,
IERROR
INTEGER(KIND=MPI_ADDRESS_KIND) ARRAY_OF_DISPLACEMENTS(*)
```

ticket150. {static MPI::Datatype MPI::Datatype::Create\_struct(int count,  
const int array\_of\_blocklengths[], const MPI::Aint  
array\_of\_displacements[],  
ticket150. const MPI::Datatype array\_of\_types[]) (binding deprecated, see  
Section 15.2) }

This function replaces `MPI_TYPE_STRUCT`, whose use is deprecated. See also Chapter 15.

**Example 4.6** Let `type1` have type map,

{(double, 0), (char, 8)},

with extent 16. Let `B = (2, 1, 3)`, `D = (0, 16, 26)`, and `T = (MPI_FLOAT, type1, MPI_CHAR)`. Then a call to `MPI_TYPE_STRUCT(3, B, D, T, newtype)` returns a datatype with type map,

{(float, 0), (float, 4), (double, 16), (char, 24), (char, 26), (char, 27), (char, 28)}.

That is, two copies of `MPI_FLOAT` starting at 0, followed by one copy of `type1` starting at 16, followed by three copies of `MPI_CHAR`, starting at 26. (We assume that a float occupies four bytes.)

In general, let  $T$  be the `array_of_types` argument, where  $T[i]$  is a handle to,

$$typemap_i = \{(type_0^i, disp_0^i), \dots, (type_{n_i-1}^i, disp_{n_i-1}^i)\},$$

with extent  $ex_i$ . Let  $B$  be the `array_of_blocklength` argument and  $D$  be the `array_of_displacements` argument. Let  $c$  be the `count` argument. Then the newly created datatype has a type map with  $\sum_{i=0}^{c-1} B[i] \cdot n_i$  entries:

$$\begin{aligned} & \{(type_0^0, disp_0^0 + D[0]), \dots, (type_{n_0}^0, disp_{n_0}^0 + D[0]), \dots, \\ & (type_0^0, disp_0^0 + D[0] + (B[0] - 1) \cdot ex_0), \dots, (type_{n_0}^0, disp_{n_0}^0 + D[0] + (B[0]-1) \cdot ex_0), \dots, \\ & (type_0^{c-1}, disp_0^{c-1} + D[c-1]), \dots, (type_{n_{c-1}-1}^{c-1}, disp_{n_{c-1}-1}^{c-1} + D[c-1]), \dots, \\ & (type_0^{c-1}, disp_0^{c-1} + D[c-1] + (B[c-1] - 1) \cdot ex_{c-1}), \dots, \\ & (type_{n_{c-1}-1}^{c-1}, disp_{n_{c-1}-1}^{c-1} + D[c-1] + (B[c-1]-1) \cdot ex_{c-1})\}. \end{aligned}$$

A call to `MPI_TYPE_CREATE_HINDEXED(count, B, D, oldtype, newtype)` is equivalent to a call to `MPI_TYPE_CREATE_STRUCT(count, B, D, T, newtype)`, where each entry of  $T$  is equal to `oldtype`.

#### 4.1.3 Subarray Datatype Constructor

`MPI_TYPE_CREATE_SUBARRAY(ndims, array_of_sizes, array_of_subsizes, array_of_starts, order, oldtype, newtype)`

IN	ndims	number of array dimensions (positive integer)
IN	array_of_sizes	number of elements of type <code>oldtype</code> in each dimension of the full array (array of positive integers)
IN	array_of_subsizes	number of elements of type <code>oldtype</code> in each dimension of the subarray (array of positive integers)
IN	array_of_starts	starting coordinates of the subarray in each dimension (array of <span style="color:blue">nonnegative</span> <span style="color:red">non-negative</span> integers)
IN	order	array storage order flag (state)
IN	oldtype	array element datatype (handle)
OUT	newtype	new datatype (handle)

```
int MPI_Type_create_subarray(int ndims, int array_of_sizes[],
                           int array_of_subsizes[], int array_of_starts[], int order,
                           MPI_Datatype oldtype, MPI_Datatype *newtype)
```

```
MPI_TYPE_CREATE_SUBARRAY(NDIMS, ARRAY_OF_SIZES, ARRAY_OF_SUBSIZES,
                          ARRAY_OF_STARTS, ORDER, OLDTYPE, NEWTYPE, IERROR)
INTEGER NDIMS, ARRAY_OF_SIZES(*), ARRAY_OF_SUBSIZES(*),
ARRAY_OF_STARTS(*), ORDER, OLDTYPE, NEWTYPE, IERROR
```

ticket74.

ticket150.

```

1 {MPI::Datatype MPI::Datatype::Create_subarray(int ndims,
2         const int array_of_sizes[], const int array_of_subsizes[],
3         const int array_of_starts[], int order) const (binding
4         deprecated, see Section 15.2) }
```

The subarray type constructor creates an MPI datatype describing an  $n$ -dimensional subarray of an  $n$ -dimensional array. The subarray may be situated anywhere within the full array, and may be of any nonzero size up to the size of the larger array as long as it is confined within this array. This type constructor facilitates creating filetypes to access arrays distributed in blocks among processes to a single file that contains the global array, see MPI I/O, especially Section 13.1.1 on page 407.

This type constructor can handle arrays with an arbitrary number of dimensions and works for both C and Fortran ordered matrices (i.e., row-major or column-major). Note that a C program may use Fortran order and a Fortran program may use C order.

The `ndims` parameter specifies the number of dimensions in the full data array and gives the number of elements in `array_of_sizes`, `array_of_subsizes`, and `array_of_starts`.

The number of elements of type `oldtype` in each dimension of the  $n$ -dimensional array and the requested subarray are specified by `array_of_sizes` and `array_of_subsizes`, respectively. For any dimension  $i$ , it is erroneous to specify `array_of_subsizes[i] < 1` or `array_of_subsizes[i] > array_of_sizes[i]`.

The `array_of_starts` contains the starting coordinates of each dimension of the subarray. Arrays are assumed to be indexed starting from zero. For any dimension  $i$ , it is erroneous to specify `array_of_starts[i] < 0` or `array_of_starts[i] > (array_of_sizes[i] - array_of_subsizes[i])`.

*Advice to users.* In a Fortran program with arrays indexed starting from 1, if the starting coordinate of a particular dimension of the subarray is  $n$ , then the entry in `array_of_starts` for that dimension is  $n-1$ . (*End of advice to users.*)

The `order` argument specifies the storage order for the subarray as well as the full array. It must be set to one of the following:

**MPI\_ORDER\_C** The ordering used by C arrays, (i.e., row-major order)

**MPI\_ORDER\_FORTRAN** The ordering used by Fortran arrays, (i.e., column-major order)

A  $ndims$ -dimensional subarray (`newtype`) with no extra padding can be defined by the function `Subarray()` as follows:

```

newtype = Subarray(ndims, {size0, size1, ..., sizendims-1},
                    {subsize0, subsize1, ..., subsizendims-1},
                    {start0, start1, ..., startndims-1}, oldtype)
```

Let the typemap of `oldtype` have the form:

$$\{(type_0, disp_0), (type_1, disp_1), \dots, (type_{n-1}, disp_{n-1})\}$$

where  $type_i$  is a predefined MPI datatype, and let  $ex$  be the extent of `oldtype`. Then we define the `Subarray()` function recursively using the following three equations. Equation 4.2 defines the base step. Equation 4.3 defines the recursion step when `order = MPI_ORDER_FORTRAN`, and Equation 4.4 defines the recursion step when `order = MPI_ORDER_C`.

$$\begin{aligned}
& \text{Subarray}(1, \{size_0\}, \{subsize_0\}, \{start_0\}, \\
& \quad \{(type_0, disp_0), (type_1, disp_1), \dots, (type_{n-1}, disp_{n-1})\}) \\
& = \{(\text{MPI\_LB}, 0), \\
& \quad (type_0, disp_0 + start_0 \times ex), \dots, (type_{n-1}, disp_{n-1} + start_0 \times ex), \\
& \quad (type_0, disp_0 + (start_0 + 1) \times ex), \dots, (type_{n-1}, \\
& \quad \quad disp_{n-1} + (start_0 + 1) \times ex), \dots \\
& \quad (type_0, disp_0 + (start_0 + subsize_0 - 1) \times ex), \dots, \\
& \quad \quad (type_{n-1}, disp_{n-1} + (start_0 + subsize_0 - 1) \times ex), \\
& \quad (\text{MPI\_UB}, size_0 \times ex)\}
\end{aligned} \tag{4.2}$$

$$\begin{aligned}
& \text{Subarray}(ndims, \{size_0, size_1, \dots, size_{ndims-1}\}, \\
& \quad \{subsize_0, subsize_1, \dots, subsize_{ndims-1}\}, \\
& \quad \{start_0, start_1, \dots, start_{ndims-1}\}, \text{oldtype}) \\
& = \text{Subarray}(ndims - 1, \{size_1, size_2, \dots, size_{ndims-1}\}, \\
& \quad \{subsize_1, subsize_2, \dots, subsize_{ndims-1}\}, \\
& \quad \{start_1, start_2, \dots, start_{ndims-1}\}, \\
& \quad \text{Subarray}(1, \{size_0\}, \{subsize_0\}, \{start_0\}, \text{oldtype}))
\end{aligned} \tag{4.3}$$

$$\begin{aligned}
& \text{Subarray}(ndims, \{size_0, size_1, \dots, size_{ndims-1}\}, \\
& \quad \{subsize_0, subsize_1, \dots, subsize_{ndims-1}\}, \\
& \quad \{start_0, start_1, \dots, start_{ndims-1}\}, \text{oldtype}) \\
& = \text{Subarray}(ndims - 1, \{size_0, size_1, \dots, size_{ndims-2}\}, \\
& \quad \{subsize_0, subsize_1, \dots, subsize_{ndims-2}\}, \\
& \quad \{start_0, start_1, \dots, start_{ndims-2}\}, \\
& \quad \text{Subarray}(1, \{size_{ndims-1}\}, \{subsize_{ndims-1}\}, \{start_{ndims-1}\}, \text{oldtype}))
\end{aligned} \tag{4.4}$$

For an example use of `MPI_TYPE_CREATE_SUBARRAY` in the context of I/O see Section 13.9.2.

#### 4.1.4 Distributed Array Datatype Constructor

The distributed array type constructor supports HPF-like [30] data distributions. However, unlike in HPF, the storage order may be specified for C arrays as well as for Fortran arrays.

*Advice to users.* One can create an HPF-like file view using this type constructor as follows. Complementary filetypes are created by having every process of a group call this constructor with identical arguments (with the exception of `rank` which should be set appropriately). These filetypes (along with identical `disp` and `etype`) are then used to define the view (via `MPI_FILE_SET_VIEW`), see MPI I/O, especially Section 13.1.1 on page 407 and Section 13.3 on page 419. Using this view, a collective data access operation (with identical offsets) will yield an HPF-like distribution pattern. (*End of advice to users.*)

```

1  MPI_TYPE_CREATE_DARRAY(size, rank, ndims, array_of_gsizes, array_of_distrib,
2  array_of_dargs, array_of_psize, order, oldtype, newtype)
3
4      IN      size      size of process group (positive integer)
5
6      IN      rank      rank in process group ([nonnegative]non-negative in-
7
8      IN      ndims     number of array dimensions as well as process grid
9
10     IN      array_of_gsizes number of elements of type oldtype in each dimension
11
12     IN      array_of_distrib distribution of array in each dimension (array of state)
13
14     IN      array_of_dargs distribution argument in each dimension (array of pos-
15
16     IN      array_of_psize size of process grid in each dimension (array of positive
17
18     IN      order      array storage order flag (state)
19
20     IN      oldtype     old datatype (handle)
21
22     OUT     newtype     new datatype (handle)

```

```

23  int MPI_Type_create_darray(int size, int rank, int ndims,
24      int array_of_gsizes[], int array_of_distrib[], int
25      array_of_dargs[], int array_of_psize[], int order,
26      MPI_Datatype oldtype, MPI_Datatype *newtype)
27
28  MPI_TYPE_CREATE_DARRAY(SIZE, RANK, NDIMS, ARRAY_OF_GSIZES,
29      ARRAY_OF_DISTRIBS, ARRAY_OF_DARGS, ARRAY_OF_PSIZE, ORDER,
30      OLDTYPE, NEWTYPE, IERROR)
31
32  INTEGER SIZE, RANK, NDIMS, ARRAY_OF_GSIZES(*), ARRAY_OF_DISTRIBS(*),
33  ARRAY_OF_DARGS(*), ARRAY_OF_PSIZE(*), ORDER, OLDTYPE, NEWTYPE, IERROR
34
35  {MPI::Datatype MPI::Datatype::Create_darray(int size, int rank, int ndims,
36      const int array_of_gsizes[], const int array_of_distrib[],
37      const int array_of_dargs[], const int array_of_psize[],
38      int order) const (binding deprecated, see Section 15.2) }

```

MPI\_TYPE\_CREATE\_DARRAY can be used to generate the datatypes corresponding to the distribution of an `ndims`-dimensional array of `oldtype` elements onto an `ndims`-dimensional grid of logical processes. Unused dimensions of `array_of_psize` should be set to 1. (See Example 4.7, page 97.) For a call to MPI\_TYPE\_CREATE\_DARRAY to be correct, the equation  $\prod_{i=0}^{ndims-1} array\_of\_psize[i] = size$  must be satisfied. The ordering of processes in the process grid is assumed to be row-major, as in the case of virtual Cartesian process topologies.

*Advice to users.* For both Fortran and C arrays, the ordering of processes in the process grid is assumed to be row-major. This is consistent with the ordering used in virtual Cartesian process topologies in MPI. To create such virtual process topologies, or to find the coordinates of a process in the process grid, etc., users may use the

corresponding process topology functions, see Chapter 7 on page 261. (*End of advice to users.*)

Each dimension of the array can be distributed in one of three ways:

- MPI\_DISTRIBUTE\_BLOCK - Block distribution
- MPI\_DISTRIBUTE\_CYCLIC - Cyclic distribution
- MPI\_DISTRIBUTE\_NONE - Dimension not distributed.

The constant MPI\_DISTRIBUTE\_DFLT\_DARG specifies a default distribution argument. The distribution argument for a dimension that is not distributed is ignored. For any dimension  $i$  in which the distribution is MPI\_DISTRIBUTE\_BLOCK, it is erroneous to specify  $\text{array\_of\_dargs}[i] * \text{array\_of\_psizes}[i] < \text{array\_of\_gsizes}[i]$ .

For example, the HPF layout `ARRAY(CYCLIC(15))` corresponds to MPI\_DISTRIBUTE\_CYCLIC with a distribution argument of 15, and the HPF layout `ARRAY(BLOCK)` corresponds to MPI\_DISTRIBUTE\_BLOCK with a distribution argument of MPI\_DISTRIBUTE\_DFLT\_DARG.

The `order` argument is used as in MPI\_TYPE\_CREATE\_SUBARRAY to specify the storage order. Therefore, arrays described by this type constructor may be stored in Fortran (column-major) or C (row-major) order. Valid values for `order` are MPI\_ORDER\_FORTRAN and MPI\_ORDER\_C.

This routine creates a new MPI datatype with a typemap defined in terms of a function called “cyclic()” (see below).

Without loss of generality, it suffices to define the typemap for the MPI\_DISTRIBUTE\_CYCLIC case where MPI\_DISTRIBUTE\_DFLT\_DARG is not used.

MPI\_DISTRIBUTE\_BLOCK and MPI\_DISTRIBUTE\_NONE can be reduced to the MPI\_DISTRIBUTE\_CYCLIC case for dimension  $i$  as follows.

MPI\_DISTRIBUTE\_BLOCK with  $\text{array\_of\_dargs}[i]$  equal to MPI\_DISTRIBUTE\_DFLT\_DARG is equivalent to MPI\_DISTRIBUTE\_CYCLIC with  $\text{array\_of\_dargs}[i]$  set to

$$(\text{array\_of\_gsizes}[i] + \text{array\_of\_psizes}[i] - 1) / \text{array\_of\_psizes}[i].$$

If  $\text{array\_of\_dargs}[i]$  is not MPI\_DISTRIBUTE\_DFLT\_DARG, then MPI\_DISTRIBUTE\_BLOCK and MPI\_DISTRIBUTE\_CYCLIC are equivalent.

MPI\_DISTRIBUTE\_NONE is equivalent to MPI\_DISTRIBUTE\_CYCLIC with  $\text{array\_of\_dargs}[i]$  set to  $\text{array\_of\_gsizes}[i]$ .

Finally, MPI\_DISTRIBUTE\_CYCLIC with  $\text{array\_of\_dargs}[i]$  equal to MPI\_DISTRIBUTE\_DFLT\_DARG is equivalent to MPI\_DISTRIBUTE\_CYCLIC with  $\text{array\_of\_dargs}[i]$  set to 1.

For MPI\_ORDER\_FORTRAN, an  $\text{ndims}$ -dimensional distributed array (`newtype`) is defined by the following code fragment:

```
oldtype[0] = oldtype;
for ( i = 0; i < ndims; i++ ) {
    oldtype[i+1] = cyclic(array_of_dargs[i],
                        array_of_gsizes[i],
                        r[i],
                        array_of_psize[i],
```

```

1         oldtype[i]);
2     }
3     newtype = oldtype[ndims];
4
5     For MPI_ORDER_C, the code is:
6
7     oldtype[0] = oldtype;
8     for ( i = 0; i < ndims; i++ ) {
9         oldtype[i + 1] = cyclic(array_of_dargs[ndims - i - 1],
10                                array_of_gsizes[ndims - i - 1],
11                                r[ndims - i - 1],
12                                array_of_psize[ndims - i - 1],
13                                oldtype[i]);
14     }
15     newtype = oldtype[ndims];
16

```

where  $r[i]$  is the position of the process (with rank rank) in the process grid at dimension  $i$ . The values of  $r[i]$  are given by the following code fragment:

```

20     t_rank = rank;
21     t_size = 1;
22     for (i = 0; i < ndims; i++)
23         t_size *= array_of_psize[i];
24     for (i = 0; i < ndims; i++) {
25         t_size = t_size / array_of_psize[i];
26         r[i] = t_rank / t_size;
27         t_rank = t_rank % t_size;
28     }
29

```

Let the typemap of oldtype have the form:

```

31     {(type0, disp0), (type1, disp1), ..., (typen-1, dispn-1)}
```

where  $type_i$  is a predefined MPI datatype, and let  $ex$  be the extent of oldtype.

Given the above, the function `cyclic()` is defined as follows:

```

36     cyclic(darg, gsize, r, psize, oldtype)
37     =  {(MPI_LB, 0),
38         (type0, disp0 + r × darg × ex), ...,
39         (typen-1, dispn-1 + r × darg × ex),
40         (type0, disp0 + (r × darg + 1) × ex), ...,
41         (typen-1, dispn-1 + (r × darg + 1) × ex),
42         ...
43         (type0, disp0 + ((r + 1) × darg - 1) × ex), ...,
44         (typen-1, dispn-1 + ((r + 1) × darg - 1) × ex),
45         (type0, disp0 + r × darg × ex + psize × darg × ex), ...,
46

```



$$\begin{aligned}
& (type_{n-1}, disp_{n-1} + r \times darg \times ex + psize \times darg \times ex), \\
& (type_0, disp_0 + (r \times darg + 1) \times ex + psize \times darg \times ex), \dots, \\
& (type_{n-1}, disp_{n-1} + (r \times darg + 1) \times ex + psize \times darg \times ex), \\
& \dots \\
& (type_0, disp_0 + ((r + 1) \times darg - 1) \times ex + psize \times darg \times ex), \dots, \\
& (type_{n-1}, disp_{n-1} + ((r + 1) \times darg - 1) \times ex + psize \times darg \times ex), \\
& \vdots \\
& (type_0, disp_0 + r \times darg \times ex + psize \times darg \times ex \times (count - 1)), \dots, \\
& (type_{n-1}, disp_{n-1} + r \times darg \times ex + psize \times darg \times ex \times (count - 1)), \\
& (type_0, disp_0 + (r \times darg + 1) \times ex + psize \times darg \times ex \times (count - 1)), \dots, \\
& (type_{n-1}, disp_{n-1} + (r \times darg + 1) \times ex \\
& \quad + psize \times darg \times ex \times (count - 1)), \\
& \dots \\
& (type_0, disp_0 + (r \times darg + darg_{last} - 1) \times ex \\
& \quad + psize \times darg \times ex \times (count - 1)), \dots, \\
& (type_{n-1}, disp_{n-1} + (r \times darg + darg_{last} - 1) \times ex \\
& \quad + psize \times darg \times ex \times (count - 1)), \\
& (MPI\_UB, gsize \times ex) \}
\end{aligned}$$

where *count* is defined by this code fragment:

```

nblocks = (gsiz + (darg - 1)) / darg;
count = nblocks / psize;
left_over = nblocks - count * psize;
if (r < left_over)
    count = count + 1;

```

Here, *nblocks* is the number of blocks that must be distributed among the processors.

Finally, *darg<sub>last</sub>* is defined by this code fragment:

```

if ((num_in_last_cyclic = gsize % (psiz * darg)) == 0)
    darg_last = darg;
else
    darg_last = num_in_last_cyclic - darg * r;
    if (darg_last > darg)
        darg_last = darg;
    if (darg_last <= 0)
        darg_last = darg;

```

**Example 4.7** Consider generating the filetypes corresponding to the HPF distribution:

```

<oldtype> FILEARRAY(100, 200, 300)
!HPF$ PROCESSORS PROCESSES(2, 3)
!HPF$ DISTRIBUTE FILEARRAY(CYCLIC(10), *, BLOCK) ONTO PROCESSES

```

This can be achieved by the following Fortran code, assuming there will be six processes attached to the run:

```

1      ndims = 3
2      array_of_gsizes(1) = 100
3      array_of_distribs(1) = MPI_DISTRIBUTE_CYCLIC
4      array_of_dargs(1) = 10
5      array_of_gsizes(2) = 200
6      array_of_distribs(2) = MPI_DISTRIBUTE_NONE
7      array_of_dargs(2) = 0
8      array_of_gsizes(3) = 300
9      array_of_distribs(3) = MPI_DISTRIBUTE_BLOCK
10     array_of_dargs(3) = [ticket116.] [MPI_DISTRIBUTE_DFLT_ARG]MPI_DISTRIBUTE_DFLT_DARG
11     array_of_psizes(1) = 2
12     array_of_psizes(2) = 1
13     array_of_psizes(3) = 3
14     call MPI_COMM_SIZE(MPI_COMM_WORLD, size, ierr)
15     call MPI_COMM_RANK(MPI_COMM_WORLD, rank, ierr)
16     call MPI_TYPE_CREATE_DARRAY(size, rank, ndims, array_of_gsizes, &
17                                array_of_distribs, array_of_dargs, array_of_psizes, &
18                                MPI_ORDER_FORTRAN, oldtype, newtype, ierr)
19

```

#### 4.1.5 Address and Size Functions

The displacements in a general datatype are relative to some initial buffer address. **Absolute addresses** can be substituted for these displacements: we treat them as displacements relative to “address zero,” the start of the address space. This initial address zero is indicated by the constant `MPI_BOTTOM`. Thus, a datatype can specify the absolute address of the entries in the communication buffer, in which case the `buf` argument is passed the value `MPI_BOTTOM`.

The address of a location in memory can be found by invoking the function `MPI_GET_ADDRESS`.

```

31 MPI_GET_ADDRESS(location, address)
32

```

IN	location	location in caller memory (choice)
OUT	address	address of location (integer)

```

36 int MPI_Get_address(void *location, MPI_Aint *address)
37

```

```

38 MPI_GET_ADDRESS(LOCATION, ADDRESS, IERROR)
39     <type> LOCATION(*)
40     INTEGER IERROR
41     INTEGER(KIND=MPI_ADDRESS_KIND) ADDRESS

```

```

42 {MPI::Aint MPI::Get_address(void* location) (binding deprecated, see Section 15.2)
43     }
44

```

This function replaces `MPI_ADDRESS`, whose use is deprecated. See also Chapter 15. Returns the (byte) address of `location`.

*Advice to users.* Current Fortran MPI codes will run unmodified, and will port

ticket150.  
ticket150.

to any system. However, they may fail if addresses larger than  $2^{32} - 1$  are used in the program. New codes should be written so that they use the new functions. This provides compatibility with C/C++ and avoids errors on 64 bit architectures. However, such newly written codes may need to be (slightly) rewritten to port to old Fortran 77 environments that do not support KIND declarations. (*End of advice to users.*)

**Example 4.8** Using MPI\_GET\_ADDRESS for an array.

```
REAL A(100,100)
INTEGER(KIND=MPI_ADDRESS_KIND) I1, I2, DIFF
CALL MPI_GET_ADDRESS(A(1,1), I1, IERROR)
CALL MPI_GET_ADDRESS(A(10,10), I2, IERROR)
DIFF = I2 - I1
! The value of DIFF is 909*sizeofreal; the values of I1 and I2 are
! implementation dependent.
```

*Advice to users.* C users may be tempted to avoid the usage of MPI\_GET\_ADDRESS and rely on the availability of the address operator &. Note, however, that *& cast-expression* is a pointer, not an address. ISO C does not require that the value of a pointer (or the pointer cast to int) be the absolute address of the object pointed at — although this is commonly the case. Furthermore, referencing may not have a unique definition on machines with a segmented address space. The use of MPI\_GET\_ADDRESS to “reference” C variables guarantees portability to such machines as well. (*End of advice to users.*)

*Advice to users.* To prevent problems with the argument copying and register optimization done by Fortran compilers, please note the hints in subsections “Problems Due to Data Copying and Sequence Association,” and “A Problem with Register Optimization” in Section 16.2.2 on pages 501 and 503. (*End of advice to users.*)

The following auxiliary function provides useful information on derived datatypes.

MPI\_TYPE\_SIZE(datatype, size)

IN	datatype	datatype (handle)
OUT	size	datatype size (integer)

```
int MPI_Type_size(MPI_Datatype datatype, int *size)
```

```
MPI_TYPE_SIZE(DATATYPE, SIZE, IERROR)
```

```
INTEGER DATATYPE, SIZE, IERROR
```

```
{int MPI::Datatype::Get_size() const (binding deprecated, see Section 15.2) }
```

MPI\_TYPE\_SIZE returns the total size, in bytes, of the entries in the type signature associated with datatype; i.e., the total size of the data in a message that would be created with this datatype. Entries that occur multiple times in the datatype are counted with their multiplicity.

#### 4.1.6 Lower-Bound and Upper-Bound Markers

It is often convenient to define explicitly the lower bound and upper bound of a type map, and override the definition given on page 100. This allows one to define a datatype that has “holes” at its beginning or its end, or a datatype with entries that extend above the upper bound or below the lower bound. Examples of such usage are provided in Section 4.1.14. Also, the user may want to override the alignment rules that are used to compute upper bounds and extents. E.g., a C compiler may allow the user to override default alignment rules for some of the structures within a program. The user has to specify explicitly the bounds of the datatypes that match these structures.

To achieve this, we add two additional “pseudo-datatypes,” `MPI_LB` and `MPI_UB`, that can be used, respectively, to mark the lower bound or the upper bound of a datatype. These pseudo-datatypes occupy no space ( $\text{extent}(\text{MPI\_LB}) = \text{extent}(\text{MPI\_UB}) = 0$ ). They do not affect the size or count of a datatype, and do not affect the content of a message created with this datatype. However, they do affect the definition of the extent of a datatype and, therefore, affect the outcome of a replication of this datatype by a datatype constructor.

**Example 4.9** Let  $D = (-3, 0, 6)$ ;  $T = (\text{MPI\_LB}, \text{MPI\_INT}, \text{MPI\_UB})$ , and  $B = (1, 1, 1)$ . Then a call to `MPI_TYPE_STRUCT(3, B, D, T, type1)` creates a new datatype that has an extent of 9 (from -3 to 5, 5 included), and contains an integer at displacement 0. This is the datatype defined by the sequence  $\{(\text{lb}, -3), (\text{int}, 0), (\text{ub}, 6)\}$ . If this type is replicated twice by a call to `MPI_TYPE_CONTIGUOUS(2, type1, type2)` then the newly created type can be described by the sequence  $\{(\text{lb}, -3), (\text{int}, 0), (\text{int}, 9), (\text{ub}, 15)\}$ . (An entry of type `ub` can be deleted if there is another entry of type `ub` with a higher displacement; an entry of type `lb` can be deleted if there is another entry of type `lb` with a lower displacement.)

In general, if

$$\text{Typemap} = \{(\text{type}_0, \text{disp}_0), \dots, (\text{type}_{n-1}, \text{disp}_{n-1})\},$$

then the **lower bound** of *Typemap* is defined to be

$$\text{lb}(\text{Typemap}) = \begin{cases} \min_j \text{disp}_j & \text{if no entry has basic type lb} \\ \min_j \{\text{disp}_j \text{ such that } \text{type}_j = \text{lb}\} & \text{otherwise} \end{cases}$$

Similarly, the **upper bound** of *Typemap* is defined to be

$$\text{ub}(\text{Typemap}) = \begin{cases} \max_j \text{disp}_j + \text{sizeof}(\text{type}_j) + \epsilon & \text{if no entry has basic type ub} \\ \max_j \{\text{disp}_j \text{ such that } \text{type}_j = \text{ub}\} & \text{otherwise} \end{cases}$$

Then

$$\text{extent}(\text{Typemap}) = \text{ub}(\text{Typemap}) - \text{lb}(\text{Typemap})$$

If  $\text{type}_i$  requires alignment to a byte address that is a multiple of  $k_i$ , then  $\epsilon$  is the least [nonnegative]non-negative increment needed to round  $\text{extent}(\text{Typemap})$  to the next multiple of  $\max_i k_i$ .

The formal definitions given for the various datatype constructors apply now, with the amended definition of **extent**.

## 4.1.7 Extent and Bounds of Datatypes

The following function replaces the three functions `MPI_TYPE_UB`, `MPI_TYPE_LB` and `MPI_TYPE_EXTENT`. It also returns address sized integers, in the Fortran binding. The use of `MPI_TYPE_UB`, `MPI_TYPE_LB` and `MPI_TYPE_EXTENT` is deprecated.

`MPI_TYPE_GET_EXTENT(datatype, lb, extent)`

IN	datatype	datatype to get information on (handle)
OUT	lb	lower bound of datatype (integer)
OUT	extent	extent of datatype (integer)

```
int MPI_Type_get_extent(MPI_Datatype datatype, MPI_Aint *lb,
                        MPI_Aint *extent)
```

```
MPI_TYPE_GET_EXTENT(DATATYPE, LB, EXTENT, IERROR)
    INTEGER DATATYPE, IERROR
    INTEGER(KIND = MPI_ADDRESS_KIND) LB, EXTENT
```

```
{void MPI::Datatype::Get_extent(MPI::Aint& lb, MPI::Aint& extent) const
    (binding deprecated, see Section 15.2) }
```

Returns the lower bound and the extent of `datatype` (as defined in Section 4.1.6 on page 100).

MPI allows one to change the extent of a datatype, using lower bound and upper bound markers (`MPI_LB` and `MPI_UB`). This is useful, as it allows to control the stride of successive datatypes that are replicated by datatype constructors, or are replicated by the `count` argument in a send or receive call. However, the current mechanism for achieving it is painful; also it is restrictive. `MPI_LB` and `MPI_UB` are “sticky”: once present in a datatype, they cannot be overridden (e.g., the upper bound can be moved up, by adding a new `MPI_UB` marker, but cannot be moved down below an existing `MPI_UB` marker). A new type constructor is provided to facilitate these changes. The use of `MPI_LB` and `MPI_UB` is deprecated.

`MPI_TYPE_CREATE_RESIZED(oldtype, lb, extent, newtype)`

IN	oldtype	input datatype (handle)
IN	lb	new lower bound of datatype (integer)
IN	extent	new extent of datatype (integer)
OUT	newtype	output datatype (handle)

```
int MPI_Type_create_resized(MPI_Datatype oldtype, MPI_Aint lb, MPI_Aint
                            extent, MPI_Datatype *newtype)
```

```
MPI_TYPE_CREATE_RESIZED(OLDTYPE, LB, EXTENT, NEWTYPE, IERROR)
    INTEGER OLDTYPE, NEWTYPE, IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) LB, EXTENT
```

```

1  {MPI::Datatype MPI::Datatype::Create_resized(const MPI::Aint lb,
ticket150. 2      const MPI::Aint extent) const (binding deprecated, see Section 15.2)
3      }
4

```

Returns in `newtype` a handle to a new datatype that is identical to `oldtype`, except that the lower bound of this new datatype is set to be `lb`, and its upper bound is set to be `lb + extent`. Any previous `lb` and `ub` markers are erased, and a new pair of lower bound and upper bound markers are put in the positions indicated by the `lb` and `extent` arguments. This affects the behavior of the datatype when used in communication operations, with `count > 1`, and when used in the construction of new derived datatypes.

*Advice to users.* It is strongly recommended that users use these two new functions, rather than the old MPI-1 functions to set and access lower bound, upper bound and extent of datatypes. (*End of advice to users.*)

#### 4.1.8 True Extent of Datatypes

Suppose we implement gather (see also Section 5.5 on page 143) as a spanning tree implemented on top of point-to-point routines. Since the receive buffer is only valid on the root process, one will need to allocate some temporary space for receiving data on intermediate nodes. However, the datatype extent cannot be used as an estimate of the amount of space that needs to be allocated, if the user has modified the extent using the `MPI_UB` and `MPI_LB` values. A function is provided which returns the true extent of the datatype.

`MPI_TYPE_GET_TRUE_EXTENT(datatype, true_lb, true_extent)`

IN	<code>datatype</code>	datatype to get information on (handle)
OUT	<code>true_lb</code>	true lower bound of datatype (integer)
OUT	<code>true_extent</code>	true size of datatype (integer)

```

31 int MPI_Type_get_true_extent(MPI_Datatype datatype, MPI_Aint *true_lb,
32     MPI_Aint *true_extent)
33

```

```

34 MPI_TYPE_GET_TRUE_EXTENT(DATATYPE, TRUE_LB, TRUE_EXTENT, IERROR)
35     INTEGER DATATYPE, IERROR
36     INTEGER(KIND = MPI_ADDRESS_KIND) TRUE_LB, TRUE_EXTENT

```

```

37 {void MPI::Datatype::Get_true_extent(MPI::Aint& true_lb,
ticket150. 38     MPI::Aint& true_extent) const (binding deprecated, see Section 15.2)
39     }
40

```

`true_lb` returns the offset of the lowest unit of store which is addressed by the datatype, i.e., the lower bound of the corresponding typemap, ignoring `MPI_LB` markers. `true_extent` returns the true size of the datatype, i.e., the extent of the corresponding typemap, ignoring `MPI_LB` and `MPI_UB` markers, and performing no rounding for alignment. If the typemap associated with `datatype` is

$$Typemap = \{(type_0, disp_0), \dots, (type_{n-1}, disp_{n-1})\}$$

Then

$$\text{true\_lb}(\text{Typemap}) = \min_j \{ \text{disp}_j : \text{type}_j \neq \text{lb}, \text{ub} \},$$

$$\text{true\_ub}(\text{Typemap}) = \max_j \{ \text{disp}_j + \text{sizeof}(\text{type}_j) : \text{type}_j \neq \text{lb}, \text{ub} \},$$

and

$$\text{true\_extent}(\text{Typemap}) = \text{true\_ub}(\text{Typemap}) - \text{true\_lb}(\text{typemap}).$$

(Readers should compare this with the definitions in Section 4.1.6 on page 100 and Section 4.1.7 on page 101, which describe the function `MPI_TYPE_GET_EXTENT`.)

The `true_extent` is the minimum number of bytes of memory necessary to hold a datatype, uncompressed.

#### 4.1.9 Commit and Free

A datatype object has to be **committed** before it can be used in a communication. As an argument in datatype constructors, uncommitted and also committed datatypes can be used. There is no need to commit basic datatypes. They are “pre-committed.”

`MPI_TYPE_COMMIT(datatype)`

INOUT     datatype                             datatype that is committed (handle)

`int MPI_Type_commit(MPI_Datatype *datatype)`

`MPI_TYPE_COMMIT(DATATYPE, IERROR)`

INTEGER DATATYPE, IERROR

`{void MPI::Datatype::Commit() (binding deprecated, see Section 15.2) }`

The commit operation commits the datatype, that is, the formal description of a communication buffer, not the content of that buffer. Thus, after a datatype has been committed, it can be repeatedly reused to communicate the changing content of a buffer or, indeed, the content of different buffers, with different starting addresses.

*Advice to implementors.* The system may “compile” at commit time an internal representation for the datatype that facilitates communication, e.g. change from a compacted representation to a flat representation of the datatype, and select the most convenient transfer mechanism. (*End of advice to implementors.*)

`MPI_TYPE_COMMIT` will accept a committed datatype; in this case, it is equivalent to a no-op.

**Example 4.10** The following code fragment gives examples of using `MPI_TYPE_COMMIT`.

```
INTEGER type1, type2
```

```
CALL MPI_TYPE_CONTIGUOUS(5, MPI_REAL, type1, ierr)
```

```
! new type object created
```

```
CALL MPI_TYPE_COMMIT(type1, ierr)
```

```
! now type1 can be used for communication
```

ticket150.  
ticket150.

```

1  type2 = type1
2      ! type2 can be used for communication
3      ! (it is a handle to same object as type1)
4  CALL MPI_TYPE_VECTOR(3, 5, 4, MPI_REAL, type1, ierr)
5      ! new uncommitted type object created
6  CALL MPI_TYPE_COMMIT(type1, ierr)
7      ! now type1 can be used anew for communication

```

```

10 MPI_TYPE_FREE(datatype)

```

```

12     INOUT    datatype                datatype that is freed (handle)

```

```

14 int MPI_Type_free(MPI_Datatype *datatype)

```

```

16 MPI_TYPE_FREE(DATATYPE, IERROR)

```

```

17     INTEGER DATATYPE, IERROR

```

```

18 {void MPI::Datatype::Free() (binding deprecated, see Section 15.2) }

```

Marks the datatype object associated with `datatype` for deallocation and sets `datatype` to `MPI_DATATYPE_NULL`. Any communication that is currently using this datatype will complete normally. Freeing a datatype does not affect any other datatype that was built from the freed datatype. The system behaves as if input datatype arguments to derived datatype constructors are passed by value.

*Advice to implementors.* The implementation may keep a reference count of active communications that use the datatype, in order to decide when to free it. Also, one may implement constructors of derived datatypes so that they keep pointers to their datatype arguments, rather than copying them. In this case, one needs to keep track of active datatype definition references in order to know when a datatype object can be freed. *(End of advice to implementors.)*

#### 4.1.10 Duplicating a Datatype

```

36 MPI_TYPE_DUP(type, newtype)

```

```

37     IN        type                datatype (handle)

```

```

39     OUT       newtype            copy of type (handle)

```

```

41 int MPI_Type_dup(MPI_Datatype type, MPI_Datatype *newtype)

```

```

42 MPI_TYPE_DUP(TYPE, NEWTYPE, IERROR)

```

```

43     INTEGER TYPE, NEWTYPE, IERROR

```

```

44 {MPI::Datatype MPI::Datatype::Dup() const (binding deprecated, see Section 15.2) }

```

`MPI_TYPE_DUP` is a type constructor which duplicates the existing type with associated key values. For each key value, the respective copy callback function



determines the attribute value associated with this key in the new communicator; one particular action that a copy callback may take is to delete the attribute from the new datatype. Returns in `newtype` a new datatype with exactly the same properties as `type` and any copied cached information, see Section 6.7.4 on page 249. The new datatype has identical upper bound and lower bound and yields the same net result when fully decoded with the functions in Section 4.1.13. The `newtype` has the same committed state as the old `type`.

#### 4.1.11 Use of General Datatypes in Communication

Handles to derived datatypes can be passed to a communication call wherever a datatype argument is required. A call of the form `MPI_SEND(buf, count, datatype, ...)`, where `count > 1`, is interpreted as if the call was passed a new datatype which is the concatenation of `count` copies of `datatype`. Thus, `MPI_SEND(buf, count, datatype, dest, tag, comm)` is equivalent to,

```
MPI_TYPE_CONTIGUOUS(count, datatype, newtype)
MPI_TYPE_COMMIT(newtype)
MPI_SEND(buf, 1, newtype, dest, tag, comm).
```

Similar statements apply to all other communication functions that have a `count` and `datatype` argument.

Suppose that a send operation `MPI_SEND(buf, count, datatype, dest, tag, comm)` is executed, where `datatype` has type map,

$$\{(type_0, disp_0), \dots, (type_{n-1}, disp_{n-1})\},$$

and extent *extent*. (Empty entries of “pseudo-type” `MPI_UB` and `MPI_LB` are not listed in the type map, but they affect the value of *extent*.) The send operation sends  $n \cdot \text{count}$  entries, where entry  $i \cdot n + j$  is at location  $addr_{i,j} = \text{buf} + \text{extent} \cdot i + disp_j$  and has type  $type_j$ , for  $i = 0, \dots, \text{count} - 1$  and  $j = 0, \dots, n - 1$ . These entries need not be contiguous, nor distinct; their order can be arbitrary.

The variable stored at address  $addr_{i,j}$  in the calling program should be of a type that matches  $type_j$ , where type matching is defined as in Section 3.3.1. The message sent contains  $n \cdot \text{count}$  entries, where entry  $i \cdot n + j$  has type  $type_j$ .

Similarly, suppose that a receive operation `MPI_RECV(buf, count, datatype, source, tag, comm, status)` is executed, where `datatype` has type map,

$$\{(type_0, disp_0), \dots, (type_{n-1}, disp_{n-1})\},$$

with extent *extent*. (Again, empty entries of “pseudo-type” `MPI_UB` and `MPI_LB` are not listed in the type map, but they affect the value of *extent*.) This receive operation receives  $n \cdot \text{count}$  entries, where entry  $i \cdot n + j$  is at location  $\text{buf} + \text{extent} \cdot i + disp_j$  and has type  $type_j$ . If the incoming message consists of  $k$  elements, then we must have  $k \leq n \cdot \text{count}$ ; the  $i \cdot n + j$ -th element of the message should have a type that matches  $type_j$ .

Type matching is defined according to the type signature of the corresponding datatypes, that is, the sequence of basic type components. Type matching does not depend on some aspects of the datatype definition, such as the displacements (layout in memory) or the intermediate types used.

**Example 4.11** This example shows that type matching is defined in terms of the basic types that a derived type consists of.

```

...
CALL MPI_TYPE_CONTIGUOUS( 2, MPI_REAL, type2, ...)
CALL MPI_TYPE_CONTIGUOUS( 4, MPI_REAL, type4, ...)
CALL MPI_TYPE_CONTIGUOUS( 2, type2, type22, ...)
...
CALL MPI_SEND( a, 4, MPI_REAL, ...)
CALL MPI_SEND( a, 2, type2, ...)
CALL MPI_SEND( a, 1, type22, ...)
CALL MPI_SEND( a, 1, type4, ...)
...
CALL MPI_RECV( a, 4, MPI_REAL, ...)
CALL MPI_RECV( a, 2, type2, ...)
CALL MPI_RECV( a, 1, type22, ...)
CALL MPI_RECV( a, 1, type4, ...)

```

Each of the sends matches any of the receives.

A datatype may specify overlapping entries. The use of such a datatype in a receive operation is erroneous. (This is erroneous even if the actual message received is short enough not to write any entry more than once.)

Suppose that `MPI_RECV(buf, count, datatype, dest, tag, comm, status)` is executed, where `datatype` has type map,

$$\{(type_0, disp_0), \dots, (type_{n-1}, disp_{n-1})\}.$$

The received message need not fill all the receive buffer, nor does it need to fill a number of locations which is a multiple of  $n$ . Any number,  $k$ , of basic elements can be received, where  $0 \leq k \leq \text{count} \cdot n$ . The number of basic elements received can be retrieved from `status` using the query function `MPI_GET_ELEMENTS`.

`MPI_GET_ELEMENTS( status, datatype, count)`

IN	status	return status of receive operation (Status)
IN	datatype	datatype used by receive operation (handle)
OUT	count	number of received basic elements (integer)

```
int MPI_Get_elements(MPI_Status *status, MPI_Datatype datatype, int *count)
```

```
MPI_GET_ELEMENTS(STATUS, DATATYPE, COUNT, IERROR)
```

```
INTEGER STATUS(MPI_STATUS_SIZE), DATATYPE, COUNT, IERROR
```

```
{int MPI::Status::Get_elements(const MPI::Datatype& datatype) const (binding
deprecated, see Section 15.2)}
```

The previously defined function, `MPI_GET_COUNT` (Section 3.2.5), has a different behavior. It returns the number of “top-level entries” received, i.e. the number of “copies” of type `datatype`. In the previous example, `MPI_GET_COUNT` may return any integer

ticket150.

ticket150.

value  $k$ , where  $0 \leq k \leq \text{count}$ . If `MPI_GET_COUNT` returns  $k$ , then the number of basic elements received (and the value returned by `MPI_GET_ELEMENTS`) is  $n \cdot k$ . If the number of basic elements received is not a multiple of  $n$ , that is, if the receive operation has not received an integral number of `datatype` “copies,” then `MPI_GET_COUNT` returns the value `MPI_UNDEFINED`. The `datatype` argument should match the argument provided by the receive call that set the `status` variable.

**Example 4.12** Usage of `MPI_GET_COUNT` and `MPI_GET_ELEMENTS`.

```
...
CALL MPI_TYPE_CONTIGUOUS(2, MPI_REAL, Type2, ierr)
CALL MPI_TYPE_COMMIT(Type2, ierr)
...
CALL MPI_COMM_RANK(comm, rank, ierr)
IF (rank.EQ.0) THEN
    CALL MPI_SEND(a, 2, MPI_REAL, 1, 0, comm, ierr)
    CALL MPI_SEND(a, 3, MPI_REAL, 1, 0, comm, ierr)
ELSE IF (rank.EQ.1) THEN
    CALL MPI_RECV(a, 2, Type2, 0, 0, comm, stat, ierr)
    CALL MPI_GET_COUNT(stat, Type2, i, ierr)      ! returns i=1
    CALL MPI_GET_ELEMENTS(stat, Type2, i, ierr)   ! returns i=2
    CALL MPI_RECV(a, 2, Type2, 0, 0, comm, stat, ierr)
    CALL MPI_GET_COUNT(stat, Type2, i, ierr)      ! returns i=MPI_UNDEFINED
    CALL MPI_GET_ELEMENTS(stat, Type2, i, ierr)   ! returns i=3
END IF
```

The function `MPI_GET_ELEMENTS` can also be used after a probe to find the number of elements in the probed message. Note that the two functions `MPI_GET_COUNT` and `MPI_GET_ELEMENTS` return the same values when they are used with basic datatypes.

*Rationale.* The extension given to the definition of `MPI_GET_COUNT` seems natural: one would expect this function to return the value of the `count` argument, when the receive buffer is filled. Sometimes `datatype` represents a basic unit of data one wants to transfer, for example, a record in an array of records (structures). One should be able to find out how many components were received without bothering to divide by the number of elements in each component. However, on other occasions, `datatype` is used to define a complex layout of data in the receiver memory, and does not represent a basic unit of data for transfers. In such cases, one needs to use the function `MPI_GET_ELEMENTS`. (*End of rationale.*)

*Advice to implementors.* The definition implies that a receive cannot change the value of storage outside the entries defined to compose the communication buffer. In particular, the definition implies that padding space in a structure should not be modified when such a structure is copied from one process to another. This would prevent the obvious optimization of copying the structure, together with the padding, as one contiguous block. The implementation is free to do this optimization when it does not impact the outcome of the computation. The user can “force” this optimization by explicitly including padding as part of the message. (*End of advice to implementors.*)

#### 4.1.12 Correct Use of Addresses

Successively declared variables in C or Fortran are not necessarily stored at contiguous locations. Thus, care must be exercised that displacements do not cross from one variable to another. Also, in machines with a segmented address space, addresses are not unique and address arithmetic has some peculiar properties. Thus, the use of **addresses**, that is, displacements relative to the start address `MPI_BOTTOM`, has to be restricted.

Variables belong to the same **sequential storage** if they belong to the same array, to the same **COMMON** block in Fortran, or to the same structure in C. Valid addresses are defined recursively as follows:

1. The function `MPI_GET_ADDRESS` returns a valid address, when passed as argument a variable of the calling program.
2. The `buf` argument of a communication function evaluates to a valid address, when passed as argument a variable of the calling program.
3. If `v` is a valid address, and `i` is an integer, then `v+i` is a valid address, provided `v` and `v+i` are in the same sequential storage.
4. If `v` is a valid address then `MPI_BOTTOM + v` is a valid address.

A correct program uses only valid addresses to identify the locations of entries in communication buffers. Furthermore, if `u` and `v` are two valid addresses, then the (integer) difference `u - v` can be computed only if both `u` and `v` are in the same sequential storage. No other arithmetic operations can be meaningfully executed on addresses.

The rules above impose no constraints on the use of derived datatypes, as long as they are used to define a communication buffer that is wholly contained within the same sequential storage. However, the construction of a communication buffer that contains variables that are not within the same sequential storage must obey certain restrictions. Basically, a communication buffer with variables that are not within the same sequential storage can be used only by specifying in the communication call `buf = MPI_BOTTOM`, `count = 1`, and using a **datatype** argument where all displacements are valid (absolute) addresses.

*Advice to users.* It is not expected that MPI implementations will be able to detect erroneous, “out of bound” displacements — unless those overflow the user address space — since the MPI call may not know the extent of the arrays and records in the host program. (*End of advice to users.*)

*Advice to implementors.* There is no need to distinguish (absolute) addresses and (relative) displacements on a machine with contiguous address space: `MPI_BOTTOM` is zero, and both addresses and displacements are integers. On machines where the distinction is required, addresses are recognized as expressions that involve `MPI_BOTTOM`. (*End of advice to implementors.*)

#### 4.1.13 Decoding a Datatype

MPI datatype objects allow users to specify an arbitrary layout of data in memory. There are several cases where accessing the layout information in opaque datatype objects would

be useful. The opaque datatype object has found a number of uses outside MPI. Furthermore, a number of tools wish to display internal information about a datatype. To achieve this, datatype decoding functions are provided. The two functions in this section are used together to decode datatypes to recreate the calling sequence used in their initial definition. These can be used to allow a user to determine the type map and type signature of a datatype.

`MPI_TYPE_GET_ENVELOPE(datatype, num_integers, num_addresses, num_datatypes, combiner)`

IN	datatype	datatype to access (handle)	
OUT	num_integers	number of input integers used in the call constructing combiner ([nonnegative]non-negative integer)	ticket74.
OUT	num_addresses	number of input addresses used in the call constructing combiner ([nonnegative]non-negative integer)	ticket74.
OUT	num_datatypes	number of input datatypes used in the call constructing combiner ([nonnegative]non-negative integer)	ticket74.
OUT	combiner	combiner (state)	

```
int MPI_Type_get_envelope(MPI_Datatype datatype, int *num_integers,
                          int *num_addresses, int *num_datatypes, int *combiner)
```

```
MPI_TYPE_GET_ENVELOPE(DATATYPE, NUM_INTEGERS, NUM_ADDRESSES, NUM_DATATYPES,
                       COMBINER, IERROR)
    INTEGER DATATYPE, NUM_INTEGERS, NUM_ADDRESSES, NUM_DATATYPES, COMBINER,
    IERROR
```

```
{void MPI::Datatype::Get_envelope(int& num_integers, int& num_addresses,
                                  int& num_datatypes, int& combiner) const (binding deprecated, see
                                  Section 15.2) }
```

For the given datatype, `MPI_TYPE_GET_ENVELOPE` returns information on the number and type of input arguments used in the call that created the datatype. The number-of-arguments values returned can be used to provide sufficiently large arrays in the decoding routine `MPI_TYPE_GET_CONTENTS`. This call and the meaning of the returned values is described below. The combiner reflects the MPI datatype constructor call that was used in creating datatype.

*Rationale.* By requiring that the combiner reflect the constructor used in the creation of the datatype, the decoded information can be used to effectively recreate the calling sequence used in the original creation. One call is effectively the same as another when the information obtained from `MPI_TYPE_GET_CONTENTS` may be used with either to produce the same outcome. C calls `MPI_Type_hindexed` and `MPI_Type_create_hindexed` are always effectively the same while the Fortran call `MPI_TYPE_HINDEXED` will be different than either of these in some MPI implementations. This is the most useful information and was felt to be reasonable even though it constrains implementations to remember the original constructor sequence even if the internal representation is different.

The decoded information keeps track of datatype duplications. This is important as one needs to distinguish between a predefined datatype and a dup of a predefined datatype. The former is a constant object that cannot be freed, while the latter is a derived datatype that can be freed. (*End of rationale.*)

The list below has the values that can be returned in `combiner` on the left and the call associated with them on the right.

<code>MPI_COMBINER_NAMED</code>	a named predefined datatype
<code>MPI_COMBINER_DUP</code>	<code>MPI_TYPE_DUP</code>
<code>MPI_COMBINER_CONTIGUOUS</code>	<code>MPI_TYPE_CONTIGUOUS</code>
<code>MPI_COMBINER_VECTOR</code>	<code>MPI_TYPE_VECTOR</code>
<code>MPI_COMBINER_HVECTOR_INTEGER</code>	<code>MPI_TYPE_HVECTOR</code> from Fortran
<code>MPI_COMBINER_HVECTOR</code>	<code>MPI_TYPE_HVECTOR</code> from C or C++ and in some case Fortran or <code>MPI_TYPE_CREATE_HVECTOR</code>
<code>MPI_COMBINER_INDEXED</code>	<code>MPI_TYPE_INDEXED</code>
<code>MPI_COMBINER_HINDEXED_INTEGER</code>	<code>MPI_TYPE_HINDEXED</code> from Fortran
<code>MPI_COMBINER_HINDEXED</code>	<code>MPI_TYPE_HINDEXED</code> from C or C++ and in some case Fortran or <code>MPI_TYPE_CREATE_HINDEXED</code>
<code>MPI_COMBINER_INDEXED_BLOCK</code>	<code>MPI_TYPE_CREATE_INDEXED_BLOCK</code>
<code>MPI_COMBINER_STRUCT_INTEGER</code>	<code>MPI_TYPE_STRUCT</code> from Fortran
<code>MPI_COMBINER_STRUCT</code>	<code>MPI_TYPE_STRUCT</code> from C or C++ and in some case Fortran or <code>MPI_TYPE_CREATE_STRUCT</code>
<code>MPI_COMBINER_SUBARRAY</code>	<code>MPI_TYPE_CREATE_SUBARRAY</code>
<code>MPI_COMBINER_DARRAY</code>	<code>MPI_TYPE_CREATE_DARRAY</code>
<code>MPI_COMBINER_F90_REAL</code>	<code>MPI_TYPE_CREATE_F90_REAL</code>
<code>MPI_COMBINER_F90_COMPLEX</code>	<code>MPI_TYPE_CREATE_F90_COMPLEX</code>
<code>MPI_COMBINER_F90_INTEGER</code>	<code>MPI_TYPE_CREATE_F90_INTEGER</code>
<code>MPI_COMBINER_RESIZED</code>	<code>MPI_TYPE_CREATE_RESIZED</code>

Table 4.1: `combiner` values returned from `MPI_TYPE_GET_ENVELOPE`

If `combiner` is `MPI_COMBINER_NAMED` then `datatype` is a named predefined datatype.

For deprecated calls with address arguments, we sometimes need to differentiate whether the call used an integer or an address size argument. For example, there are two combin-ers for hvector: `MPI_COMBINER_HVECTOR_INTEGER` and `MPI_COMBINER_HVECTOR`. The former is used if it was the MPI-1 call from Fortran, and the latter is used if it was the MPI-1 call from C or C++. However, on systems where `MPI_ADDRESS_KIND = MPI_INTEGER_KIND` (i.e., where integer arguments and address size arguments are the same), the combiner `MPI_COMBINER_HVECTOR` may be returned for a datatype constructed by a call to `MPI_TYPE_HVECTOR` from Fortran. Similarly, `MPI_COMBINER_HINDEXED` may be returned for a datatype constructed by a call to `MPI_TYPE_HINDEXED` from Fortran, and `MPI_COMBINER_STRUCT` may be returned for a datatype constructed by a call to `MPI_TYPE_STRUCT` from Fortran. On such systems, one need not differentiate construc-

tors that take address size arguments from constructors that take integer arguments, since these are the same. The preferred calls all use address sized arguments so two combinators are not required for them.

*Rationale.* For recreating the original call, it is important to know if address information may have been truncated. The deprecated calls from Fortran for a few routines could be subject to truncation in the case where the default `INTEGER` size is smaller than the size of an address. (*End of rationale.*)

The actual arguments used in the creation call for a datatype can be obtained from the call:

`MPI_TYPE_GET_CONTENTS(datatype, max_integers, max_addresses, max_datatypes, array_of_integers, array_of_addresses, array_of_datatypes)`

IN	datatype	datatype to access (handle)	
IN	max_integers	number of elements in array_of_integers ([nonnegative]non-negative integer)	ticket74.
IN	max_addresses	number of elements in array_of_addresses ([nonnegative]non-negative integer)	ticket74.
IN	max_datatypes	number of elements in array_of_datatypes ([nonnegative]non-negative integer)	ticket74.
OUT	array_of_integers	contains integer arguments used in constructing datatype (array of integers)	
OUT	array_of_addresses	contains address arguments used in constructing datatype (array of integers)	
OUT	array_of_datatypes	contains datatype arguments used in constructing datatype (array of handles)	

```
int MPI_Type_get_contents(MPI_Datatype datatype, int max_integers,
    int max_addresses, int max_datatypes, int array_of_integers[],
    MPI_Aint array_of_addresses[],
    MPI_Datatype array_of_datatypes[])
```

```
MPI_TYPE_GET_CONTENTS(DATATYPE, MAX_INTEGERS, MAX_ADDRESSES, MAX_DATATYPES,
    ARRAY_OF_INTEGERS, ARRAY_OF_ADDRESSES, ARRAY_OF_DATATYPES,
    IERROR)
```

```
INTEGER DATATYPE, MAX_INTEGERS, MAX_ADDRESSES, MAX_DATATYPES,
    ARRAY_OF_INTEGERS(*), ARRAY_OF_DATATYPES(*), IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) ARRAY_OF_ADDRESSES(*)
```

```
{void MPI::Datatype::Get_contents(int max_integers, int max_addresses,
    int max_datatypes, int array_of_integers[],
    MPI::Aint array_of_addresses[],
    MPI::Datatype array_of_datatypes[]) const (binding deprecated, see
    Section 15.2) }
```

`datatype` must be a predefined unnamed or a derived datatype; the call is erroneous if `datatype` is a predefined named datatype.

The values given for `max_integers`, `max_addresses`, and `max_datatypes` must be at least as large as the value returned in `num_integers`, `num_addresses`, and `num_datatypes`, respectively, in the call `MPI_TYPE_GET_ENVELOPE` for the same `datatype` argument.

*Rationale.* The arguments `max_integers`, `max_addresses`, and `max_datatypes` allow for error checking in the call. (*End of rationale.*)

The datatypes returned in `array_of_datatypes` are handles to datatype objects that are equivalent to the datatypes used in the original construction call. If these were derived datatypes, then the returned datatypes are new datatype objects, and the user is responsible for freeing these datatypes with `MPI_TYPE_FREE`. If these were predefined datatypes, then the returned datatype is equal to that (constant) predefined datatype and cannot be freed.

The committed state of returned derived datatypes is undefined, i.e., the datatypes may or may not be committed. Furthermore, the content of attributes of returned datatypes is undefined.

Note that `MPI_TYPE_GET_CONTENTS` can be invoked with a `datatype` argument that was constructed using `MPI_TYPE_CREATE_F90_REAL`, `MPI_TYPE_CREATE_F90_INTEGER`, or `MPI_TYPE_CREATE_F90_COMPLEX` (an unnamed predefined datatype). In such a case, an empty `array_of_datatypes` is returned.

*Rationale.* The definition of datatype equivalence implies that equivalent predefined datatypes are equal. By requiring the same handle for named predefined datatypes, it is possible to use the `==` or `.EQ.` comparison operator to determine the datatype involved. (*End of rationale.*)

*Advice to implementors.* The datatypes returned in `array_of_datatypes` must appear to the user as if each is an equivalent copy of the datatype used in the type constructor call. Whether this is done by creating a new datatype or via another mechanism such as a reference count mechanism is up to the implementation as long as the semantics are preserved. (*End of advice to implementors.*)

*Rationale.* The committed state and attributes of the returned datatype is deliberately left vague. The datatype used in the original construction may have been modified since its use in the constructor call. Attributes can be added, removed, or modified as well as having the datatype committed. The semantics given allow for a reference count implementation without having to track these changes. (*End of rationale.*)

In the deprecated datatype constructor calls, the address arguments in Fortran are of type `INTEGER`. In the preferred calls, the address arguments are of type `INTEGER(KIND=MPI_ADDRESS_KIND)`. The call `MPI_TYPE_GET_CONTENTS` returns all addresses in an argument of type `INTEGER(KIND=MPI_ADDRESS_KIND)`. This is true even if the deprecated calls were used. Thus, the location of values returned can be thought of as being returned by the C bindings. It can also be determined by examining the preferred calls for datatype constructors for the deprecated calls that involve addresses.



*Rationale.* By having all address arguments returned in the `array_of_addresses` argument, the result from a C and Fortran decoding of a `datatype` gives the result in the same argument. It is assumed that an integer of type `INTEGER(KIND=MPI_ADDRESS_KIND)` will be at least as large as the `INTEGER` argument used in datatype construction with the old MPI-1 calls so no loss of information will occur. (*End of rationale.*)

The following defines what values are placed in each entry of the returned arrays depending on the datatype constructor used for `datatype`. It also specifies the size of the arrays needed which is the values returned by `MPI_TYPE_GET_ENVELOPE`. In Fortran, the following calls were made:

```

PARAMETER (LARGE = 1000)
INTEGER TYPE, NI, NA, ND, COMBINER, I(LARGE), D(LARGE), IERROR
INTEGER(KIND=MPI_ADDRESS_KIND) A(LARGE)
! CONSTRUCT DATATYPE TYPE (NOT SHOWN)
CALL MPI_TYPE_GET_ENVELOPE(TYPE, NI, NA, ND, COMBINER, IERROR)
IF ((NI .GT. LARGE) .OR. (NA .GT. LARGE) .OR. (ND .GT. LARGE)) THEN
    WRITE (*, *) "NI, NA, OR ND = ", NI, NA, ND, &
    " RETURNED BY MPI_TYPE_GET_ENVELOPE IS LARGER THAN LARGE = ", LARGE
    CALL MPI_ABORT(MPI_COMM_WORLD, 99[ticket116.], IERROR)
ENDIF
CALL MPI_TYPE_GET_CONTENTS(TYPE, NI, NA, ND, I, A, D, IERROR)

```

or in C the analogous calls of:

```

#define LARGE 1000
int ni, na, nd, combiner, i[LARGE];
MPI_Aint a[LARGE];
MPI_Datatype type, d[LARGE];
/* construct datatype type (not shown) */
MPI_Type_get_envelope(type, &ni, &na, &nd, &combiner);
if ((ni > LARGE) || (na > LARGE) || (nd > LARGE)) {
    fprintf(stderr, "ni, na, or nd = %d %d %d returned by ", ni, na, nd);
    fprintf(stderr, "MPI_Type_get_envelope is larger than LARGE = %d\n",
            LARGE);
    MPI_Abort(MPI_COMM_WORLD, 99);
};
MPI_Type_get_contents(type, ni, na, nd, i, a, d);

```

The C++ code is in analogy to the C code above with the same values returned.

In the descriptions that follow, the lower case name of arguments is used.

If combiner is `MPI_COMBINER_NAMED` then it is erroneous to call `MPI_TYPE_GET_CONTENTS`.

If combiner is `MPI_COMBINER_DUP` then

Constructor argument	C & C++ location	Fortran location
oldtype	d[0]	D(1)

and `ni = 0`, `na = 0`, `nd = 1`.

If combiner is MPI\_COMBINER\_CONTIGUOUS then

Constructor argument	C & C++ location	Fortran location
count	i[0]	I(1)
oldtype	d[0]	D(1)

and ni = 1, na = 0, nd = 1.

If combiner is MPI\_COMBINER\_VECTOR then

Constructor argument	C & C++ location	Fortran location
count	i[0]	I(1)
blocklength	i[1]	I(2)
stride	i[2]	I(3)
oldtype	d[0]	D(1)

and ni = 3, na = 0, nd = 1.

If combiner is MPI\_COMBINER\_HVECTOR\_INTEGER or MPI\_COMBINER\_HVECTOR then

Constructor argument	C & C++ location	Fortran location
count	i[0]	I(1)
blocklength	i[1]	I(2)
stride	a[0]	A(1)
oldtype	d[0]	D(1)

and ni = 2, na = 1, nd = 1.

If combiner is MPI\_COMBINER\_INDEXED then

Constructor argument	C & C++ location	Fortran location
count	i[0]	I(1)
array_of_blocklengths	i[1] to i[i[0]]	I(2) to I(I(1)+1)
array_of_displacements	i[i[0]+1] to i[2*i[0]]	I(I(1)+2) to I(2*I(1)+1)
oldtype	d[0]	D(1)

and ni = 2\*count+1, na = 0, nd = 1.

If combiner is MPI\_COMBINER\_HINDEXED\_INTEGER or MPI\_COMBINER\_HINDEXED then

Constructor argument	C & C++ location	Fortran location
count	i[0]	I(1)
array_of_blocklengths	i[1] to i[i[0]]	I(2) to I(I(1)+1)
array_of_displacements	a[0] to a[i[0]-1]	A(1) to A(I(1))
oldtype	d[0]	D(1)

and ni = count+1, na = count, nd = 1.

If combiner is MPI\_COMBINER\_INDEXED\_BLOCK then

Constructor argument	C & C++ location	Fortran location
count	i[0]	I(1)
blocklength	i[1]	I(2)
array_of_displacements	i[2] to i[i[0]+1]	I(3) to I(I(1)+2)
oldtype	d[0]	D(1)

and ni = count+2, na = 0, nd = 1.

If combiner is MPI\_COMBINER\_STRUCT\_INTEGER or MPI\_COMBINER\_STRUCT then

Constructor argument	C & C++ location	Fortran location
count	i[0]	I(1)
array_of_blocklengths	i[1] to i[i[0]]	I(2) to I(I(1)+1)
array_of_displacements	a[0] to a[i[0]-1]	A(1) to A(I(1))
array_of_types	d[0] to d[i[0]-1]	D(1) to D(I(1))

and ni = count+1, na = count, nd = count.

If combiner is MPI\_COMBINER\_SUBARRAY then

Constructor argument	C & C++ location	Fortran location
ndims	i[0]	I(1)
array_of_sizes	i[1] to i[i[0]]	I(2) to I(I(1)+1)
array_of_subsizes	i[i[0]+1] to i[2*i[0]]	I(I(1)+2) to I(2*I(1)+1)
array_of_starts	i[2*i[0]+1] to i[3*i[0]]	I(2*I(1)+2) to I(3*I(1)+1)
order	i[3*i[0]+1]	I(3*I(1)+2]
oldtype	d[0]	D(1)

and ni = 3\*ndims+2, na = 0, nd = 1.

If combiner is MPI\_COMBINER\_DARRAY then

Constructor argument	C & C++ location	Fortran location
size	i[0]	I(1)
rank	i[1]	I(2)
ndims	i[2]	I(3)
array_of_gsizes	i[3] to i[i[2]+2]	I(4) to I(I(3)+3)
array_of_distribs	i[i[2]+3] to i[2*i[2]+2]	I(I(3)+4) to I(2*I(3)+3)
array_of_dargs	i[2*i[2]+3] to i[3*i[2]+2]	I(2*I(3)+4) to I(3*I(3)+3)
array_of_psizes	i[3*i[2]+3] to i[4*i[2]+2]	I(3*I(3)+4) to I(4*I(3)+3)
order	i[4*i[2]+3]	I(4*I(3)+4)
oldtype	d[0]	D(1)

and ni = 4\*ndims+4, na = 0, nd = 1.

If combiner is MPI\_COMBINER\_F90\_REAL then

Constructor argument	C & C++ location	Fortran location
p	i[0]	I(1)
r	i[1]	I(2)

and ni = 2, na = 0, nd = 0.

If combiner is MPI\_COMBINER\_F90\_COMPLEX then

Constructor argument	C & C++ location	Fortran location
p	i[0]	I(1)
r	i[1]	I(2)

and ni = 2, na = 0, nd = 0.

If combiner is MPI\_COMBINER\_F90\_INTEGER then

Constructor argument	C & C++ location	Fortran location
r	i[0]	I(1)

and ni = 1, na = 0, nd = 0.

If combiner is MPI\_COMBINER\_RESIZED then

Constructor argument	C & C++ location	Fortran location
lb	a[0]	A(1)
extent	a[1]	A(2)
oldtype	d[0]	D(1)

and ni = 0, na = 2, nd = 1.

#### 4.1.14 Examples

The following examples illustrate the use of derived datatypes.

**Example 4.13** Send and receive a section of a 3D array.

```

REAL a(100,100,100), e(9,9,9)
INTEGER oneslice, twoslice, threeslice, sizeofreal, myrank, ierr
INTEGER status(MPI_STATUS_SIZE)

C      extract the section a(1:17:2, 3:11, 2:10)
C      and store it in e(:, :, :).

CALL MPI_COMM_RANK(MPI_COMM_WORLD, myrank, ierr)

CALL MPI_TYPE_EXTENT( MPI_REAL, sizeofreal, ierr)

C      create datatype for a 1D section
CALL MPI_TYPE_VECTOR( 9, 1, 2, MPI_REAL, oneslice, ierr)

C      create datatype for a 2D section
CALL MPI_TYPE_HVECTOR(9, 1, 100*sizeofreal, oneslice, twoslice, ierr)

C      create datatype for the entire section
CALL MPI_TYPE_HVECTOR( 9, 1, 100*100*sizeofreal, twoslice,
                      threeslice, ierr)

CALL MPI_TYPE_COMMIT( threeslice, ierr)
CALL MPI_SENDRECV(a(1,3,2), 1, threeslice, myrank, 0, e, 9*9*9,
                  MPI_REAL, myrank, 0, MPI_COMM_WORLD, status, ierr)

```

**Example 4.14** Copy the (strictly) lower triangular part of a matrix.

```

REAL a(100,100), b(100,100)
INTEGER disp(100), blocklen(100), ltype, myrank, ierr
INTEGER status(MPI_STATUS_SIZE)

C      copy lower triangular part of array a
C      onto lower triangular part of array b

CALL MPI_COMM_RANK(MPI_COMM_WORLD, myrank, ierr)

C      compute start and size of each column

```

```

DO i=1, 100
    disp(i) = 100*(i-1) + i
    block[ticket116.]len(i) = 100-i
END DO

C    create datatype for lower triangular part
CALL MPI_TYPE_INDEXED( 100, block[ticket116.]len, disp, MPI_REAL, ltype, ierr)

CALL MPI_TYPE_COMMIT(ltype, ierr)
CALL MPI_SENDRECV( a, 1, ltype, myrank, 0, b, 1,
                  ltype, myrank, 0, MPI_COMM_WORLD, status, ierr)

```

**Example 4.15** Transpose a matrix.

```

REAL a(100,100), b(100,100)
INTEGER row, xpose, sizeofreal, myrank, ierr
INTEGER status(MPI_STATUS_SIZE)

C    transpose matrix a onto b

CALL MPI_COMM_RANK(MPI_COMM_WORLD, myrank, ierr)

CALL MPI_TYPE_EXTENT( MPI_REAL, sizeofreal, ierr)

C    create datatype for one row
CALL MPI_TYPE_VECTOR( 100, 1, 100, MPI_REAL, row, ierr)

C    create datatype for matrix in row-major order
CALL MPI_TYPE_HVECTOR( 100, 1, sizeofreal, row, xpose, ierr)

CALL MPI_TYPE_COMMIT( xpose, ierr)

C    send matrix in row-major order and receive in column major order
CALL MPI_SENDRECV( a, 1, xpose, myrank, 0, b, 100*100,
                  MPI_REAL, myrank, 0, MPI_COMM_WORLD, status, ierr)

```

**Example 4.16** Another approach to the transpose problem:

```

REAL a(100,100), b(100,100)
INTEGER disp(2), blocklen(2), type(2), row, row1, sizeofreal
INTEGER myrank, ierr
INTEGER status(MPI_STATUS_SIZE)

CALL MPI_COMM_RANK(MPI_COMM_WORLD, myrank, ierr)

C    transpose matrix a onto b

CALL MPI_TYPE_EXTENT( MPI_REAL, sizeofreal, ierr)

```

```

1  C      create datatype for one row
2      CALL MPI_TYPE_VECTOR( 100, 1, 100, MPI_REAL, row, ierr)
3
4  C      create datatype for one row, with the extent of one real number
5      disp(1) = 0
6      disp(2) = sizeofreal
7      type(1)  = row
8      type(2)  = MPI_UB
9      blocklen(1) = 1
10     blocklen(2) = 1
11     CALL MPI_TYPE_STRUCT( 2, blocklen, disp, type, row1, ierr)
12
13     CALL MPI_TYPE_COMMIT( row1, ierr)
14
15  C      send 100 rows and receive in column major order
16     CALL MPI_SENDRECV( a, 100, row1, myrank, 0, b, 100*100,
17                       MPI_REAL, myrank, 0, MPI_COMM_WORLD, status, ierr)
18

```

**Example 4.17** We manipulate an array of structures.

```

21  struct Partstruct
22  {
23      int    class; /* particle class */
24      double d[6]; /* particle coordinates */
25      char   b[7]; /* some additional information */
26  };
27
28  struct Partstruct    particle[1000];
29
30  int                i, dest, rank[ticket116.], tag;
31  MPI_Comm           comm;
32
33
34  /* build datatype describing structure */
35
36  MPI_Datatype Particletype;
37  MPI_Datatype type[3] = {MPI_INT, MPI_DOUBLE, MPI_CHAR};
38  int          blocklen[3] = {1, 6, 7};
39  MPI_Aint      disp[3];
40  MPI_Aint      base;
41
42
43  /* compute displacements of structure components */
44
45  MPI_Address( particle, disp);
46  MPI_Address( particle[0].d, disp+1);
47  MPI_Address( particle[0].b, disp+2);
48  base = disp[0];

```

```

for (i=0; i < 3; i++) disp[i] -= base;
1
2
MPI_Type_struct( 3, blocklen, disp, type, &Particletype);
3
4
    /* If compiler does padding in mysterious ways,
5
6
    the following may be safer */
7
MPI_Datatype type1[4] = {MPI_INT, MPI_DOUBLE, MPI_CHAR, MPI_UB};
8
int          blocklen1[4] = {1, 6, 7, 1};
9
MPI_Aint     disp1[4];
10
11
/* compute displacements of structure components */
12
13
MPI_Address( particle, disp1);
14
MPI_Address( particle[0].d, disp1+1);
15
MPI_Address( particle[0].b, disp1+2);
16
MPI_Address( particle+1, disp1+3);
17
base = disp1[0];
18
for (i=0; i < 4; i++) disp1[i] -= base;
19
20
/* build datatype describing structure */
21
22
MPI_Type_struct( 4, blocklen1, disp1, type1, &Particletype);
23
24
25
        /* 4.1:
26
        send the entire array */
27
28
MPI_Type_commit( &Particletype);
29
MPI_Send( particle, 1000, Particletype, dest, tag, comm);
30
31
32
        /* 4.2:
33
        send only the entries of class zero particles,
34
        preceded by the number of such entries */
35
36
MPI_Datatype Zparticles; /* datatype describing all particles
37
                        with class zero (needs to be recomputed
38
                        if classes change) */
39
MPI_Datatype Ztype;
40
41
MPI_Aint     zdisp[1000];
42
int          zblock[1000], j, k;
43
[ticket116.]int          zzblock[2] = {1,1};
44
MPI_Aint     zzdisp[2];
45
MPI_Datatype zztype[2];
46
47
/* compute displacements of class zero particles */
48

```

```

1  j = 0;
2  for(i=0; i < 1000; i++)
3      if (particle[i].class == 0)
4          {
5              zdisp[j] = i;
6              zblock[j] = 1;
7              j++;
8          }
9
10 /* create datatype for class zero particles */
11 MPI_Type_indexed( j, zblock, zdisp, Particletype, &Zparticles);
12
13 /* prepend particle count */
14 MPI_Address(&j, zzdisp);
15 MPI_Address(particle, zzdisp+1);
16 zztype[0] = MPI_INT;
17 zztype[1] = Zparticles;
18 MPI_Type_struct(2, zblock, zzdisp, zztype, &Ztype);
19
20 MPI_Type_commit( &Ztype);
21 MPI_Send( MPI_BOTTOM, 1, Ztype, dest, tag, comm);
22
23
24 /* A probably more efficient way of defining Zparticles */
25
26 /* consecutive particles with index zero are handled as one block */
27 j=0;
28 for (i=0; i < 1000; i++)
29     if (particle[i].index == 0)
30     {
31         for (k=i+1; (k < 1000)&&(particle[k].index == 0) ; k++);
32         zdisp[j] = i;
33         zblock[j] = k-i;
34         j++;
35         i = k;
36     }
37 MPI_Type_indexed( j, zblock, zdisp, Particletype, &Zparticles);
38
39
40 /* 4.3:
41    send the first two coordinates of all entries */
42
43 MPI_Datatype Allpairs; /* datatype for all pairs of coordinates */
44
45 MPI_Aint sizeofentry;
46
47 MPI_Type_extent( Particletype, &sizeofentry);
48

```



```

/* sizeofentry can also be computed by subtracting the address
   of particle[0] from the address of particle[1] */

MPI_Type_hvector( 1000, 2, sizeofentry, MPI_DOUBLE, &Allpairs);
MPI_Type_commit( &Allpairs);
MPI_Send( particle[0].d, 1, Allpairs, dest, tag, comm);

/* an alternative solution to 4.3 */

MPI_Datatype Onepair; /* datatype for one pair of coordinates, with
                       the extent of one particle entry */
MPI_Aint disp2[3];
MPI_Datatype type2[3] = {MPI_LB, MPI_DOUBLE, MPI_UB};
int blocklen2[3] = {1, 2, 1};

MPI_Address( particle, disp2);
MPI_Address( particle[0].d, disp2+1);
MPI_Address( particle+1, disp2+2);
base = disp2[0];
for (i=0; i<2; i++) disp2[i] -= base;

MPI_Type_struct( 3, blocklen2, disp2, type2, &Onepair);
MPI_Type_commit( &Onepair);
MPI_Send( particle[0].d, 1000, Onepair, dest, tag, comm);

```

**Example 4.18** The same manipulations as in the previous example, but use absolute addresses in datatypes.

```

struct Partstruct
{
    int class;
    double d[6];
    char b[7];
};

struct Partstruct particle[1000];

/* build datatype describing first array entry */

MPI_Datatype Particletype;
MPI_Datatype type[3] = {MPI_INT, MPI_DOUBLE, MPI_CHAR};
int          block[3] = {1, 6, 7};
MPI_Aint     disp[3];

MPI_Address( particle, disp);
MPI_Address( particle[0].d, disp+1);
MPI_Address( particle[0].b, disp+2);

```

```

1  MPI_Type_struct( 3, block, disp, type, &Particletype);
2
3  /* Particletype describes first array entry -- using absolute
4     addresses */
5
6         /* 5.1:
7            send the entire array */
8
9  MPI_Type_commit( &Particletype);
10 MPI_Send( MPI_BOTTOM, 1000, Particletype, dest, tag, comm);
11
12
13         /* 5.2:
14            send the entries of class zero,
15            preceded by the number of such entries */
16
17 MPI_Datatype Zparticles, Ztype;
18
19 MPI_Aint      zdisp[1000];
20 int           zblock[1000], i, j, k;
21 int           zzblock[2] = {1,1};
22 MPI_Datatype  zztype[2];
23 MPI_Aint      zzdisp[2];
24
25 j=0;
26 for (i=0; i < 1000; i++)
27     if (particle[i].index == 0)
28     {
29         for (k=i+1; (k < 1000)&&(particle[k].index [ticket16.] == 0) ; k++);
30         zdisp[j] = i;
31         zblock[j] = k-i;
32         j++;
33         i = k;
34     }
35 MPI_Type_indexed( j, zblock, zdisp, Particletype, &Zparticles);
36 /* Zparticles describe particles with class zero, using
37    their absolute addresses*/
38
39 /* prepend particle count */
40 MPI_Address(&j, zzdisp);
41 zzdisp[1] = MPI_BOTTOM;
42 zztype[0] = MPI_INT;
43 zztype[1] = Zparticles;
44 MPI_Type_struct(2, zzblock, zzdisp, zztype, &Ztype);
45
46 MPI_Type_commit( &Ztype);
47 MPI_Send( MPI_BOTTOM, 1, Ztype, dest, tag, comm);
48

```

**Example 4.19** Handling of unions.

```

union {
    int    ival;
    float  fval;
    } u[1000][ticket116.];

int    utype;

/* All entries of u have identical type; variable
   utype keeps track of their current type */

MPI_Datatype  type[2];
int           blocklen[2] = {1,1};
MPI_Aint      disp[2];
MPI_Datatype  mpi_utype[2];
MPI_Aint      i,j;

/* compute an MPI datatype for each possible union type;
   assume values are left-aligned in union storage. */

MPI_Address( u, &i);
MPI_Address( u+1, &j);
disp[0] = 0; disp[1] = j-i;
type[1] = MPI_UB;

type[0] = MPI_INT;
MPI_Type_struct(2, blocklen, disp, type, &mpi_utype[0]);

type[0] = MPI_FLOAT;
MPI_Type_struct(2, blocklen, disp, type, &mpi_utype[1]);

for(i=0; i<2; i++) MPI_Type_commit(&mpi_utype[i]);

/* actual communication */

MPI_Send(u, 1000, mpi_utype[utype], dest, tag, comm);

```

**Example 4.20** This example shows how a datatype can be decoded. The routine `printdatatype` prints out the elements of the datatype. Note the use of `MPI_Type_free` for datatypes that are not predefined.

```

/*
   Example of decoding a datatype.

   Returns 0 if the datatype is predefined, 1 otherwise
*/
#include <stdio.h>
#include <stdlib.h>

```

```

1  #include "mpi.h"
2  int printdatatype( MPI_Datatype datatype )
3  {
4      int *array_of_ints;
5      MPI_Aint *array_of_adds;
6      MPI_Datatype *array_of_dtypes;
7      int num_ints, num_adds, num_dtypes, combiner;
8      int i;
9
10     MPI_Type_get_envelope( datatype,
11                           &num_ints, &num_adds, &num_dtypes, &combiner );
12     switch (combiner) {
13     case MPI_COMBINER_NAMED:
14         printf( "Datatype is named:" );
15         /* To print the specific type, we can match against the
16            predefined forms. We can NOT use a switch statement here
17            We could also use MPI_TYPE_GET_NAME if we preferred to use
18            names that the user may have changed.
19            */
20         if (datatype == MPI_INT)    printf( "MPI_INT\n" );
21         else if (datatype == MPI_DOUBLE) printf( "MPI_DOUBLE\n" );
22         ... else test for other types ...
23         return 0;
24         break;
25     case MPI_COMBINER_STRUCT:
26     case MPI_COMBINER_STRUCT_INTEGER:
27         printf( "Datatype is struct containing" );
28         array_of_ints = (int *)malloc( num_ints * sizeof(int) );
29         array_of_adds =
30             (MPI_Aint *) malloc( num_adds * sizeof(MPI_Aint) );
31         array_of_dtypes = (MPI_Datatype *)
32             malloc( num_dtypes * sizeof(MPI_Datatype) );
33         MPI_Type_get_contents( datatype, num_ints, num_adds, num_dtypes,
34                               array_of_ints, array_of_adds, array_of_dtypes );
35         printf( " %d datatypes:\n", array_of_ints[0] );
36         for (i=0; i<array_of_ints[0]; i++) {
37             printf( "blocklength %d, displacement %ld, type:\n",
38                   array_of_ints[i+1], array_of_adds[i] );
39             if (printdatatype( array_of_dtypes[i] )) {
40                 /* Note that we free the type ONLY if it
41                    is not predefined */
42                 MPI_Type_free( &array_of_dtypes[i] );
43             }
44         }
45         free( array_of_ints );
46         free( array_of_adds );
47         free( array_of_dtypes );
48         break;

```

```

        ... other combiner values ...
    default:
        printf( "Unrecognized combiner type\n" );
    }
    return 1;
}

```

## 4.2 Pack and Unpack

Some existing communication libraries provide pack/unpack functions for sending noncontiguous data. In these, the user explicitly packs data into a contiguous buffer before sending it, and unpacks it from a contiguous buffer after receiving it. Derived datatypes, which are described in Section 4.1, allow one, in most cases, to avoid explicit packing and unpacking. The user specifies the layout of the data to be sent or received, and the communication library directly accesses a noncontiguous buffer. The pack/unpack routines are provided for compatibility with previous libraries. Also, they provide some functionality that is not otherwise available in MPI. For instance, a message can be received in several parts, where the receive operation done on a later part may depend on the content of a former part. Another use is that outgoing messages may be explicitly buffered in user supplied space, thus overriding the system buffering policy. Finally, the availability of pack and unpack operations facilitates the development of additional communication libraries layered on top of MPI.

MPI\_PACK(inbuf, incount, datatype, outbuf, outsize, position, comm)

IN	inbuf	input buffer start (choice)
IN	incount	number of input data items (non-negative integer)
IN	datatype	datatype of each input data item (handle)
OUT	outbuf	output buffer start (choice)
IN	outsize	output buffer size, in bytes (non-negative integer)
INOUT	position	current position in buffer, in bytes (integer)
IN	comm	communicator for packed message (handle)

```

int MPI_Pack(void* inbuf, int incount, MPI_Datatype datatype, void *outbuf,
             int outsize, int *position, MPI_Comm comm)

```

```

MPI_PACK(INBUF, INCOUNT, DATATYPE, OUTBUF, OUTSIZE, POSITION, COMM, IERROR)
<type> INBUF(*), OUTBUF(*)
INTEGER INCOUNT, DATATYPE, OUTSIZE, POSITION, COMM, IERROR

```

```

{void MPI::Datatype::Pack(const void* inbuf, int incount, void *outbuf,
                          int outsize, int& position, const MPI::Comm &comm) const
  (binding deprecated, see Section 15.2) }

```

Packs the message in the send buffer specified by inbuf, incount, datatype into the buffer space specified by outbuf and outsize. The input buffer can be any communication buffer allowed in MPI\_SEND. The output buffer is a contiguous storage area containing outsize

ticket150.

ticket150.

bytes, starting at the address `outbuf` (length is counted in bytes, not elements, as if it were a communication buffer for a message of type `MPI_PACKED`).

The input value of `position` is the first location in the output buffer to be used for packing. `position` is incremented by the size of the packed message, and the output value of `position` is the first location in the output buffer following the locations occupied by the packed message. The `comm` argument is the communicator that will be subsequently used for sending the packed message.

`MPI_UNPACK(inbuf, insize, position, outbuf, outcount, datatype, comm)`

IN	<code>inbuf</code>	input buffer start (choice)
IN	<code>insize</code>	size of input buffer, in bytes (non-negative integer)
INOUT	<code>position</code>	current position in bytes (integer)
OUT	<code>outbuf</code>	output buffer start (choice)
IN	<code>outcount</code>	number of items to be unpacked (integer)
IN	<code>datatype</code>	datatype of each output data item (handle)
IN	<code>comm</code>	communicator for packed message (handle)

```
int MPI_Unpack(void* inbuf, int insize, int *position, void *outbuf,
               int outcount, MPI_Datatype datatype, MPI_Comm comm)
```

```
MPI_UNPACK(INBUF, INSIZE, POSITION, OUTBUF, OUTCOUNT, DATATYPE, COMM,
           IERROR)
```

```
<type> INBUF(*), OUTBUF(*)
```

```
INTEGER INSIZE, POSITION, OUTCOUNT, DATATYPE, COMM, IERROR
```

```
{void MPI::Datatype::Unpack(const void* inbuf, int insize, void *outbuf,
                             int outcount, int& position, const MPI::Comm& comm) const
  (binding deprecated, see Section 15.2) }
```

Unpacks a message into the receive buffer specified by `outbuf`, `outcount`, `datatype` from the buffer space specified by `inbuf` and `insize`. The output buffer can be any communication buffer allowed in `MPI_RECV`. The input buffer is a contiguous storage area containing `insize` bytes, starting at address `inbuf`. The input value of `position` is the first location in the input buffer occupied by the packed message. `position` is incremented by the size of the packed message, so that the output value of `position` is the first location in the input buffer after the locations occupied by the message that was unpacked. `comm` is the communicator used to receive the packed message.

*Advice to users.* Note the difference between `MPI_RECV` and `MPI_UNPACK`: in `MPI_RECV`, the count argument specifies the maximum number of items that can be received. The actual number of items received is determined by the length of the incoming message. In `MPI_UNPACK`, the count argument specifies the actual number of items that are unpacked; the “size” of the corresponding message is the increment in `position`. The reason for this change is that the “incoming message size” is not predetermined since the user decides how much to unpack; nor is it easy to determine the “message size” from the number of items to be unpacked. In fact, in a

heterogeneous system, this number may not be determined *a priori*. (*End of advice to users.*)

To understand the behavior of pack and unpack, it is convenient to think of the data part of a message as being the sequence obtained by concatenating the successive values sent in that message. The pack operation stores this sequence in the buffer space, as if sending the message to that buffer. The unpack operation retrieves this sequence from buffer space, as if receiving a message from that buffer. (It is helpful to think of internal Fortran files or `sscanf` in C, for a similar function.)

Several messages can be successively packed into one **packing unit**. This is effected by several successive **related** calls to `MPI_PACK`, where the first call provides `position = 0`, and each successive call inputs the value of `position` that was output by the previous call, and the same values for `outbuf`, `outcount` and `comm`. This packing unit now contains the equivalent information that would have been stored in a message by one send call with a send buffer that is the “concatenation” of the individual send buffers.

A packing unit can be sent using type `MPI_PACKED`. Any point to point or collective communication function can be used to move the sequence of bytes that forms the packing unit from one process to another. This packing unit can now be received using any receive operation, with any datatype: the type matching rules are relaxed for messages sent with type `MPI_PACKED`.

A message sent with any type (including `MPI_PACKED`) can be received using the type `MPI_PACKED`. Such a message can then be unpacked by calls to `MPI_UNPACK`.

A packing unit (or a message created by a regular, “typed” send) can be unpacked into several successive messages. This is effected by several successive related calls to `MPI_UNPACK`, where the first call provides `position = 0`, and each successive call inputs the value of `position` that was output by the previous call, and the same values for `inbuf`, `insize` and `comm`.

The concatenation of two packing units is not necessarily a packing unit; nor is a substring of a packing unit necessarily a packing unit. Thus, one cannot concatenate two packing units and then unpack the result as one packing unit; nor can one unpack a substring of a packing unit as a separate packing unit. Each packing unit, that was created by a related sequence of pack calls, or by a regular send, must be unpacked as a unit, by a sequence of related unpack calls.

*Rationale.* The restriction on “atomic” packing and unpacking of packing units allows the implementation to add at the head of packing units additional information, such as a description of the sender architecture (to be used for type conversion, in a heterogeneous environment) (*End of rationale.*)

The following call allows the user to find out how much space is needed to pack a message and, thus, manage space allocation for buffers.

```

1 MPI_PACK_SIZE(incount, datatype, comm, size)
2     IN          incount          count argument to packing call (non-negative integer)
3     IN          datatype         datatype argument to packing call (handle)
4     IN          comm            communicator argument to packing call (handle)
5     OUT         size            upper bound on size of packed message, in bytes (non-
6                                negative integer)

```

```

9 int MPI_Pack_size(int incount, MPI_Datatype datatype, MPI_Comm comm,
10                  int *size)

```

```

12 MPI_PACK_SIZE(INCOUNT, DATATYPE, COMM, SIZE, IERROR)
13     INTEGER INCOUNT, DATATYPE, COMM, SIZE, IERROR

```

```

15 {int MPI::Datatype::Pack_size(int incount, const MPI::Comm& comm) const
16     (binding deprecated, see Section 15.2) }

```

A call to `MPI_PACK_SIZE(incount, datatype, comm, size)` returns in `size` an upper bound on the increment in position that is effected by a call to `MPI_PACK(inbuf, incount, datatype, outbuf, outcount, position, comm)`.

*Rationale.* The call returns an upper bound, rather than an exact bound, since the exact amount of space needed to pack the message may depend on the context (e.g., first message packed in a packing unit may take more space). (*End of rationale.*)

**Example 4.21** An example using `MPI_PACK`.

```

26 int          position, i, j, a[2];
27 char          buff[1000];
28 [ticket116.] [...]
29 MPI_Comm_rank(MPI_COMM_WORLD, &myrank);
30 if (myrank == 0)
31 {
32     /[ticket116.] [ ]* SENDER CODE */
33
34     position = 0;
35     MPI_Pack(&i, 1, MPI_INT, buff, 1000, &position, MPI_COMM_WORLD);
36     MPI_Pack(&j, 1, MPI_INT, buff, 1000, &position, MPI_COMM_WORLD);
37     MPI_Send( buff, position, MPI_PACKED, 1, 0, MPI_COMM_WORLD);
38 }
39 else /* RECEIVER CODE */
40     MPI_Recv( a, 2, MPI_INT, 0, 0, MPI_COMM_WORLD);

```

**Example 4.22** An elaborate example.

```

44 int  position, i;
45 float a[1000];
46 char buff[1000][ticket116.];
47 [ticket116.] [...]
48 MPI_Comm_rank(MPI_Comm_world, &myrank);

```



```

if (myrank == 0)
{
    /*[ticket116.][ ]* SENDER CODE */

    int len[2];
    MPI_Aint disp[2];
    MPI_Datatype type[2], newtype;

    /* build datatype for i followed by a[0]...a[i-1] */

    len[0] = 1;
    len[1] = i;
    MPI_Address( &i, disp);
    MPI_Address( a, disp+1);
    type[0] = MPI_INT;
    type[1] = MPI_FLOAT;
    MPI_Type_struct( 2, len, disp, type, &newtype);
    MPI_Type_commit( &newtype);

    /* Pack i followed by a[0]...a[i-1]*/

    position = 0;
    MPI_Pack( MPI_BOTTOM, 1, newtype, buff, 1000, &position, MPI_COMM_WORLD);

    /* Send */

    MPI_Send( buff, position, MPI_PACKED, 1, 0,
              MPI_COMM_WORLD)[ticket116.];

    /* *****
       One can replace the last three lines with
       MPI_Send( MPI_BOTTOM, 1, newtype, 1, 0, MPI_COMM_WORLD);
       ***** */
}
else if (myrank == 1)
{
    /* RECEIVER CODE */

    MPI_Status status;

    /* Receive */

    MPI_Recv( buff, 1000, MPI_PACKED, 0, 0, [ticket116.]MPI_COMM_WORLD, &status);

    /* Unpack i */

    position = 0;
    MPI_Unpack(buff, 1000, &position, &i, 1, MPI_INT, MPI_COMM_WORLD);

```

```

1
2  /* Unpack a[0]...a[i-1] */
3  MPI_Unpack(buff, 1000, &position, a, i, MPI_FLOAT, MPI_COMM_WORLD);
4  }

```

**Example 4.23** Each process sends a count, followed by count characters to the root; the root concatenates all characters into one string.

```

8  int  count, gsize, counts[64], totalcount, k1, k2, k,
9      displs[64], position, concat_pos;
10 char chr[100], *lbuf, *rbuf, *cbuf;
11 [ticket116.] [...]
12 MPI_Comm_size(comm, &gsize);
13 MPI_Comm_rank(comm, &myrank);
14
15     /* allocate local pack buffer */
16 MPI_Pack_size(1, MPI_INT, comm, &k1);
17 MPI_Pack_size(count, MPI_CHAR, comm, &k2);
18 k = k1+k2;
19 lbuf = (char *)malloc(k);
20
21     /* pack count, followed by count characters */
22 position = 0;
23 MPI_Pack(&count, 1, MPI_INT, lbuf, k, &position, comm);
24 MPI_Pack(chr, count, MPI_CHAR, lbuf, k, &position, comm);
25
26 if (myrank != root) {
27     /* gather at root sizes of all packed messages */
28     MPI_Gather( &position, 1, MPI_INT, NULL, [ticket116.] [NULL] 0,
29               [ticket116.] [NULL] MPI_DATATYPE_NULL, root, comm);
30
31     /* gather at root packed messages */
32     MPI_Gatherv( [ticket116.] [&lbuf] lbuf, position, MPI_PACKED, NULL,
33                 NULL, NULL, NULL, root, comm);
34
35 } else { /* root code */
36     /* gather sizes of all packed messages */
37     MPI_Gather( &position, 1, MPI_INT, counts, 1,
38               MPI_INT, root, comm);
39
40     /* gather all packed messages */
41     displs[0] = 0;
42     for (i=1; i < gsize; i++)
43         displs[i] = displs[i-1] + counts[i-1];
44     totalcount = di[ticket116.] spls[gsize-1] + counts[gsize-1];
45     rbuf = (char *)malloc(totalcount);
46     cbuf = (char *)malloc(totalcount);
47     MPI_Gatherv( lbuf, position, MPI_PACKED, rbuf,
48                 counts, displs, MPI_PACKED, root, comm);

```

```

/* unpack all messages and concatenate strings */
concat_pos = 0;
for (i=0; i < gsize; i++) {
    position = 0;
    MPI_Unpack( rbuf+displs[i], totalcount-displs[i],
               &position, &count, 1, MPI_INT, comm);
    MPI_Unpack( rbuf+displs[i], totalcount-displs[i],
               &position, cbuf+concat_pos, count, MPI_CHAR, comm);
    concat_pos += count;
}
cbuf[concat_pos] = [ticket116.]['']\0';
}

```

### 4.3 Canonical MPI\_PACK and MPI\_UNPACK

These functions read/write data to/from the buffer in the “external32” data format specified in Section 13.5.2, and calculate the size needed for packing. Their first arguments specify the data format, for future extensibility, but currently the only valid value of the `datarep` argument is “external32.”

*Advice to users.* These functions could be used, for example, to send typed data in a portable format from one MPI implementation to another. (*End of advice to users.*)

The buffer will contain exactly the packed data, without headers. `MPI_BYTE` should be used to send and receive data that is packed using `MPI_PACK_EXTERNAL`.

*Rationale.* `MPI_PACK_EXTERNAL` specifies that there is no header on the message and further specifies the exact format of the data. Since `MPI_PACK` may (and is allowed to) use a header, the datatype `MPI_PACKED` cannot be used for data packed with `MPI_PACK_EXTERNAL`. (*End of rationale.*)

`MPI_PACK_EXTERNAL(datarep, inbuf, incount, datatype, outbuf, outsize, position )`

IN	<code>datarep</code>	data representation (string)
IN	<code>inbuf</code>	input buffer start (choice)
IN	<code>incount</code>	number of input data items (integer)
IN	<code>datatype</code>	datatype of each input data item (handle)
OUT	<code>outbuf</code>	output buffer start (choice)
IN	<code>outsize</code>	output buffer size, in bytes (integer)
INOUT	<code>position</code>	current position in buffer, in bytes (integer)

```

int MPI_Pack_external(char *datarep, void *inbuf, int incount,
                     MPI_Datatype datatype, void *outbuf, MPI_Aint outsize,
                     MPI_Aint *position)

```

```

1 MPI_PACK_EXTERNAL(DATAREP, INBUF, INCOUNT, DATATYPE, OUTBUF, OUTSIZE,
2     POSITION, IERROR)
3     INTEGER INCOUNT, DATATYPE, IERROR
4     INTEGER(KIND=MPI_ADDRESS_KIND) OUTSIZE, POSITION
5     CHARACTER*(*) DATAREP
6     <type> INBUF(*), OUTBUF(*)

```

```

7 {void MPI::Datatype::Pack_external(const char* datarep, const void* inbuf,
8     int incount, void* outbuf, MPI::Aint outsize,
9     MPI::Aint& position) const (binding deprecated, see Section 15.2) }

```

```

13 MPI_UNPACK_EXTERNAL(datarep, inbuf, insize, position, outbuf, outsize, position )

```

14	IN	datarep	data representation (string)
15	IN	inbuf	input buffer start (choice)
16			
17	IN	insize	input buffer size, in bytes (integer)
18	INOUT	position	current position in buffer, in bytes (integer)
19			
20	OUT	outbuf	output buffer start (choice)
21	IN	outcount	number of output data items (integer)
22	IN	datatype	datatype of output data item (handle)

```

24 int MPI_Unpack_external(char *datarep, void *inbuf, MPI_Aint insize,
25     MPI_Aint *position, void *outbuf, int outcount,
26     MPI_Datatype datatype)

```

```

28 MPI_UNPACK_EXTERNAL(DATAREP, INBUF, INSIZE, POSITION, OUTBUF, OUTCOUNT,
29     DATATYPE, IERROR)
30     INTEGER OUTCOUNT, DATATYPE, IERROR
31     INTEGER(KIND=MPI_ADDRESS_KIND) INSIZE, POSITION
32     CHARACTER*(*) DATAREP
33     <type> INBUF(*), OUTBUF(*)

```

```

34 {void MPI::Datatype::Unpack_external(const char* datarep,
35     const void* inbuf, MPI::Aint insize, MPI::Aint& position,
36     void* outbuf, int outcount) const (binding deprecated, see
37     Section 15.2) }

```

```

40 MPI_PACK_EXTERNAL_SIZE( datarep, incount, datatype, size )

```

42	IN	datarep	data representation (string)
43	IN	incount	number of input data items (integer)
44			
45	IN	datatype	datatype of each input data item (handle)
46	OUT	size	output buffer size, in bytes (integer)

```

int MPI_Pack_external_size(char *datarep, int incount,
                           MPI_Datatype datatype, MPI_Aint *size)
MPI_PACK_EXTERNAL_SIZE(DATAREP, INCOUNT, DATATYPE, SIZE, IERROR)
    INTEGER INCOUNT, DATATYPE, IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) SIZE
    CHARACTER*(*) DATAREP
{MPI::Aint MPI::Datatype::Pack_external_size(const char* datarep,
        int incount) const (binding deprecated, see Section 15.2) }

```

1  
2  
3  
4  
5  
6  
7 ticket150.  
8  
9 ticket150.  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

# Chapter 5

## Collective Communication

### 5.1 Introduction and Overview

Collective communication is defined as communication that involves a group or groups of processes. The functions of this type provided by MPI are the following:

- `MPI_BARRIER`: Barrier synchronization across all members of a group (Section 5.3).
- `MPI_BCAST`: Broadcast from one member to all members of a group (Section 5.4). This is shown as “broadcast” in Figure 5.1.
- `MPI_GATHER`, `MPI_GATHERV`: Gather data from all members of a group to one member (Section 5.5). This is shown as “gather” in Figure 5.1.
- `MPI_SCATTER`, `MPI_SCATTERV`: Scatter data from one member to all members of a group (Section 5.6). This is shown as “scatter” in Figure 5.1.
- `MPI_ALLGATHER`, `MPI_ALLGATHERV`: A variation on Gather where all members of a group receive the result (Section 5.7). This is shown as “allgather” in Figure 5.1.
- `MPI_ALLTOALL`, `MPI_ALLTOALLV`, `MPI_ALLTOALLW`: Scatter/Gather data from all members to all members of a group (also called complete exchange[ or all-to-all]) (Section 5.8). This is shown as [“alltoall”] “complete exchange” in Figure 5.1.
- `MPI_ALLREDUCE`, `MPI_REDUCE`: Global reduction operations such as sum, max, min, or user-defined functions, where the result is returned to all members of a group and a variation where the result is returned to only one member (Section 5.9).
- `MPI_REDUCE_SCATTER`: A combined reduction and scatter operation (Section 5.10).
- `MPI_SCAN`, `MPI_EXSCAN`: Scan across all members of a group (also called prefix) (Section 5.11).

One of the key arguments in a call to a collective routine is a communicator that defines the group or groups of participating processes and provides a context for the operation. This is discussed further in Section 5.2. The syntax and semantics of the collective operations are defined to be consistent with the syntax and semantics of the point-to-point operations. Thus, general datatypes are allowed and must match between sending and receiving processes as specified in Chapter 4. Several collective routines such as broadcast

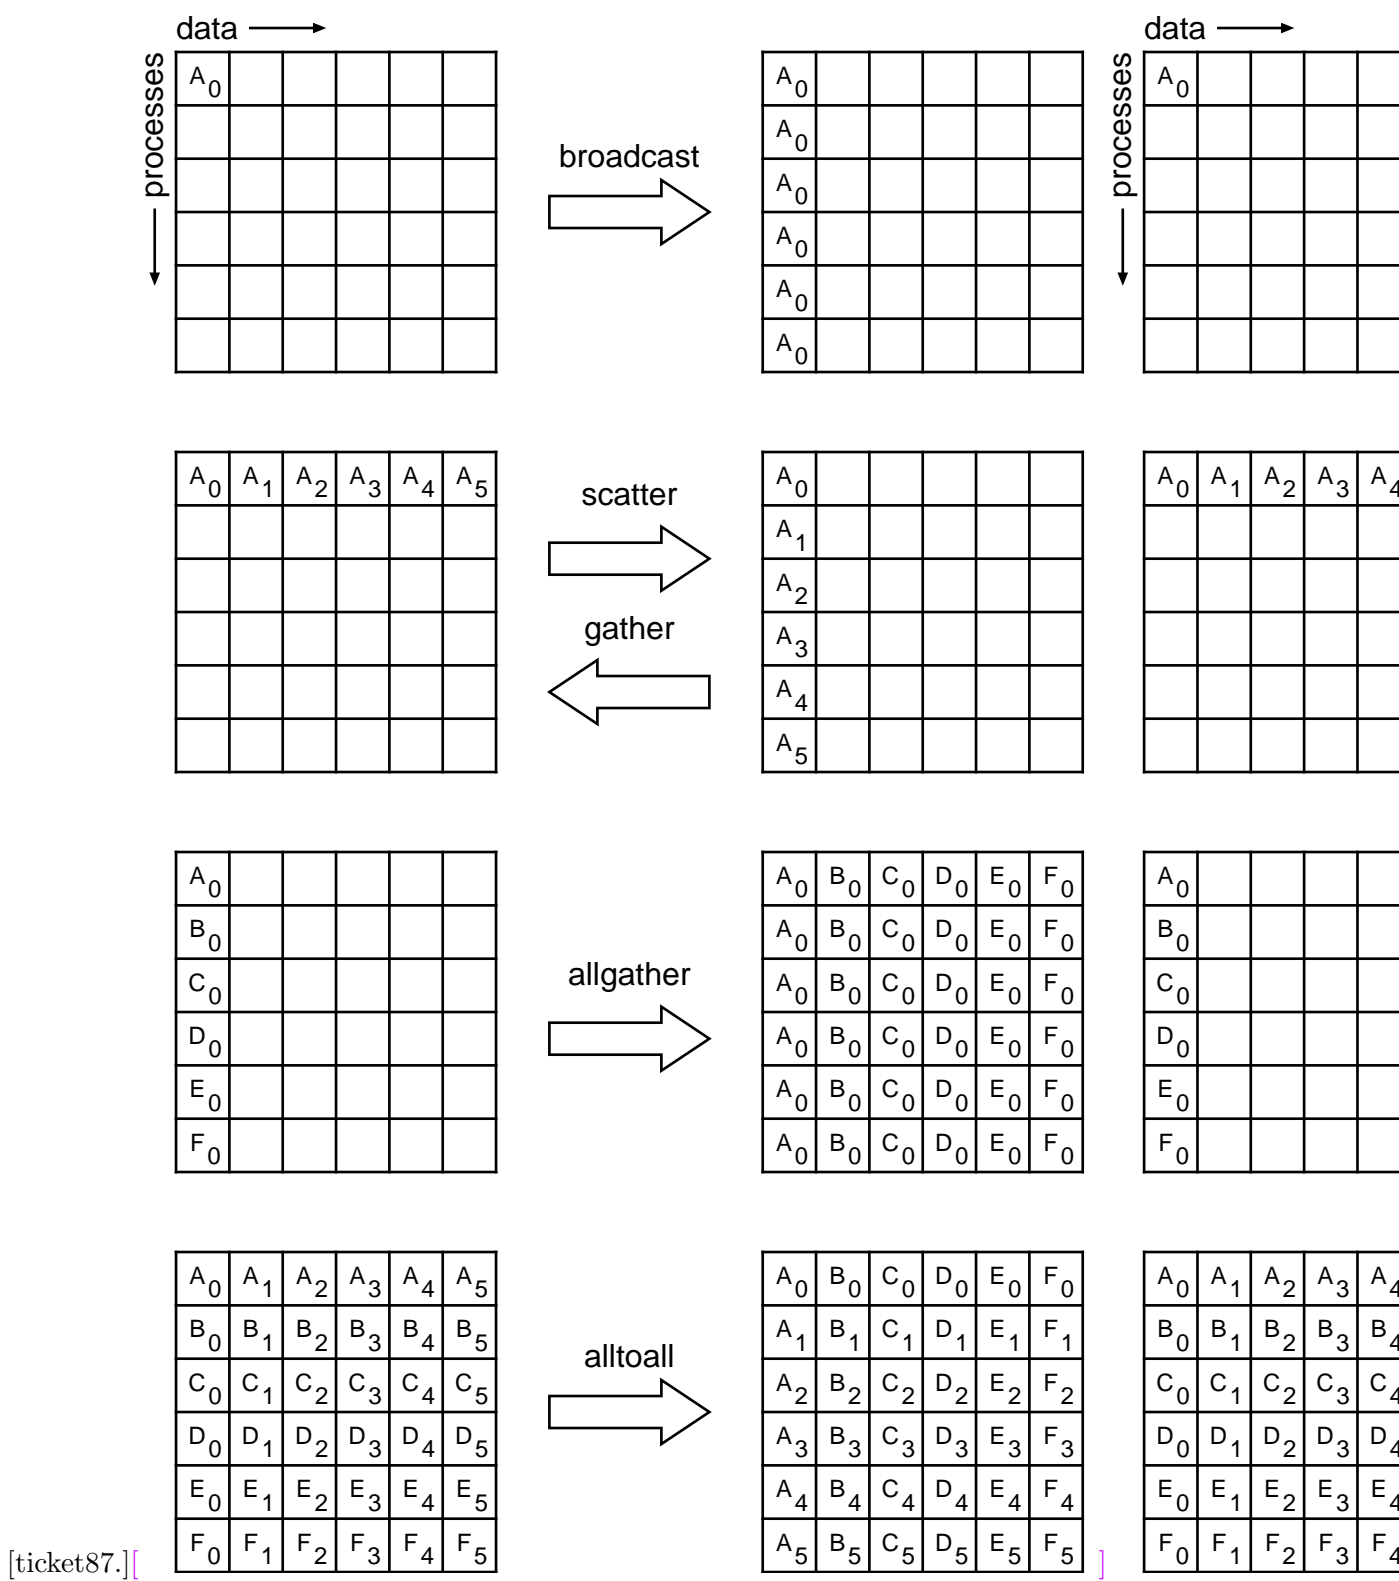


Figure 5.1: Collective move functions illustrated for a group of six processes. In each case, each row of boxes represents data locations in one process. Thus, in the broadcast, initially just the first process contains the data  $A_0$ , but after the broadcast all processes contain it.



and gather have a single originating or receiving process. Such a process is called the *root*. Some arguments in the collective functions are specified as “significant only at root,” and are ignored for all participants except the root. The reader is referred to Chapter 4 for information concerning communication buffers, general datatypes and type matching rules, and to Chapter 6 for information on how to define groups and create communicators.

The type-matching conditions for the collective operations are more strict than the corresponding conditions between sender and receiver in point-to-point. Namely, for collective operations, the amount of data sent must exactly match the amount of data specified by the receiver. Different type maps (the layout in memory, see Section 4.1) between sender and receiver are still allowed.

Collective routine calls can (but are not required to) return as soon as their participation in the collective communication is complete. The completion of a call indicates that the caller is now free to `[access]modify` locations in the communication buffer. It does not indicate that other processes in the group have completed or even started the operation (unless otherwise implied by `[in]` the description of the operation). Thus, a collective communication call may, or may not, have the effect of synchronizing all calling processes. This statement excludes, of course, the barrier function.

Collective communication calls may use the same communicators as point-to-point communication; MPI guarantees that messages generated on behalf of collective communication calls will not be confused with messages generated by point-to-point communication. A more detailed discussion of correct use of collective routines is found in Section 5.12.

*Rationale.* The equal-data restriction (on type matching) was made so as to avoid the complexity of providing a facility analogous to the status argument of `MPI_RECV` for discovering the amount of data sent. Some of the collective routines would require an array of status values.

The statements about synchronization are made so as to allow a variety of implementations of the collective functions.

The collective operations do not accept a message tag argument. If future revisions of MPI define `[non-blocking]nonblocking` collective functions, then tags (or a similar mechanism) might need to be added so as to allow the dis-ambiguation of multiple, pending, collective operations. (*End of rationale.*)

*Advice to users.* It is dangerous to rely on synchronization side-effects of the collective operations for program correctness. For example, even though a particular implementation may provide a broadcast routine with a side-effect of synchronization, the standard does not require this, and a program that relies on this will not be portable.

On the other hand, a correct, portable program must allow for the fact that a collective call *may* be synchronizing. Though one cannot rely on any synchronization side-effect, one must program so as to allow it. These issues are discussed further in Section 5.12. (*End of advice to users.*)

*Advice to implementors.* While vendors may write optimized collective routines matched to their architectures, a complete library of the collective communication routines can be written entirely using the MPI point-to-point communication functions and a few auxiliary functions. If implementing on top of point-to-point, a hidden,

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13 ticket45.  
14  
15 ticket120.  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31 ticket44.  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

special communicator might be created for the collective operation so as to avoid interference with any on-going point-to-point communication at the time of the collective call. This is discussed further in Section 5.12. (*End of advice to implementors.*)

Many of the descriptions of the collective routines provide illustrations in terms of blocking MPI point-to-point routines. These are intended solely to indicate what data is sent or received by what process. Many of these examples are *not* correct MPI programs; for purposes of simplicity, they often assume infinite buffering.

## 5.2 Communicator Argument

The key concept of the collective functions is to have a group or groups of participating processes. The routines do not have group identifiers as explicit arguments. Instead, there is a communicator argument. Groups and communicators are discussed in full detail in Chapter 6. For the purposes of this chapter, it is sufficient to know that there are two types of communicators: *intra-communicators* and *inter-communicators*. An intracommunicator can be thought of as an identifier for a single group of processes linked with a context. An intercommunicator identifies two distinct groups of processes linked with a context.

### 5.2.1 Specifics for Intracommunicator Collective Operations

All processes in the group identified by the intracommunicator must call the collective routine [\[with matching arguments\]](#).

In many cases, collective communication can occur “in place” for intracommunicators, with the output buffer being identical to the input buffer. This is specified by providing a special argument value, `MPI_IN_PLACE`, instead of the send buffer or the receive buffer argument, depending on the operation performed.

*Rationale.* The “in place” operations are provided to reduce unnecessary memory motion by both the MPI implementation and by the user. Note that while the simple check of testing whether the send and receive buffers have the same address will work for some cases (e.g., `MPI_ALLREDUCE`), they are inadequate in others (e.g., `MPI_GATHER`, with root not equal to zero). Further, Fortran explicitly prohibits aliasing of arguments; the approach of using a special value to denote “in place” operation eliminates that difficulty. (*End of rationale.*)

*Advice to users.* By allowing the “in place” option, the receive buffer in many of the collective calls becomes a send-and-receive buffer. For this reason, a Fortran binding that includes `INTENT` must mark these as `INOUT`, not `OUT`.

Note that `MPI_IN_PLACE` is a special kind of value; it has the same restrictions on its use that `MPI_BOTTOM` has.

Some intracommunicator collective operations do not support the “in place” option (e.g., `MPI_ALLTOALLV`). (*End of advice to users.*)

### 5.2.2 Applying Collective Operations to Intercommunicators

To understand how collective operations apply to intercommunicators, we can view most MPI intracommunicator collective operations as fitting one of the following categories (see, for instance, [\[43\]](#)):

**All-To-All** All processes contribute to the result. All processes receive the result.

- MPI\_ALLGATHER, MPI\_ALLGATHERV
- MPI\_ALLTOALL, MPI\_ALLTOALLV, MPI\_ALLTOALLW
- MPI\_ALLREDUCE, MPI\_REDUCE\_SCATTER
- MPI\_BARRIER

**All-To-One** All processes contribute to the result. One process receives the result.

- MPI\_GATHER, MPI\_GATHERV
- MPI\_REDUCE

**One-To-All** One process contributes to the result. All processes receive the result.

- MPI\_BCAST
- MPI\_SCATTER, MPI\_SCATTERV

**Other** Collective operations that do not fit into one of the above categories.

- MPI\_SCAN, MPI\_EXSCAN [
- MPI\_BARRIER ]

[ The MPI\_BARRIER operation does not fit into this classification since no data is being moved (other than the implicit fact that a barrier has been called). ]The data movement patterns of MPI\_SCAN and MPI\_EXSCAN do not fit this taxonomy.

The application of collective communication to intercommunicators is best described in terms of two groups. For example, an all-to-all MPI\_ALLGATHER operation can be described as collecting data from all members of one group with the result appearing in all members of the other group (see Figure 5.2). As another example, a one-to-all MPI\_BCAST operation sends data from one member of one group to all members of the other group. Collective computation operations such as MPI\_REDUCE\_SCATTER have a similar interpretation (see Figure 5.3). For intracommunicators, these two groups are the same. For intercommunicators, these two groups are distinct. For the all-to-all operations, each such operation is described in two phases, so that it has a symmetric, full-duplex behavior.

The following collective operations also apply to intercommunicators:

- MPI\_BARRIER,
- MPI\_BCAST,
- MPI\_GATHER, MPI\_GATHERV,
- MPI\_SCATTER, MPI\_SCATTERV,
- MPI\_ALLGATHER, MPI\_ALLGATHERV,
- MPI\_ALLTOALL, MPI\_ALLTOALLV, MPI\_ALLTOALLW,
- MPI\_ALLREDUCE, MPI\_REDUCE,

### • MPI\_REDUCE\_SCATTER.

In C++, the bindings for these functions are in the `MPI::Comm` class. However, since the collective operations do not make sense on a C++ `MPI::Comm` (as it is neither an intercommunicator nor an intracommunicator), the functions are all pure virtual.

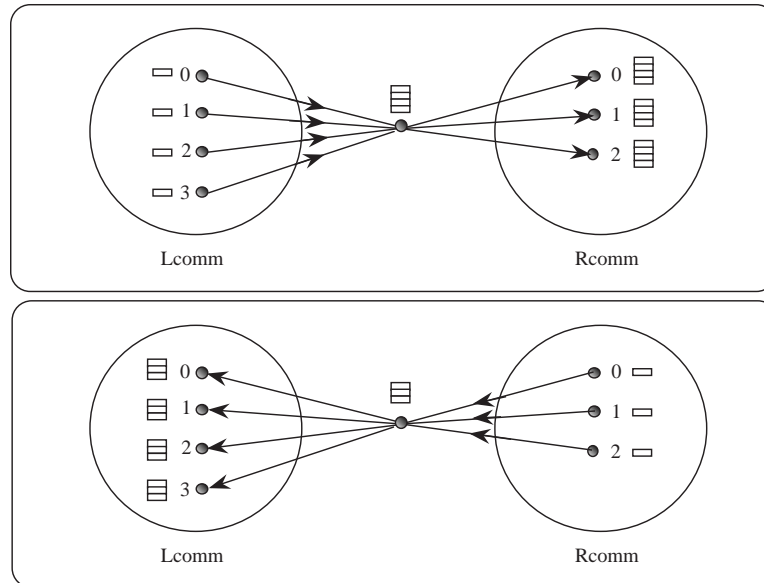


Figure 5.2: Intercommunicator allgather. The focus of data to one process is represented, not mandated by the semantics. The two phases do allgathers in both directions.

### 5.2.3 Specifics for Intercommunicator Collective Operations

All processes in both groups identified by the intercommunicator must call the collective routine. [In addition, processes in the same group must call the routine with matching arguments.]

Note that the “in place” option for intracommunicators does not apply to intercommunicators since in the intercommunicator case there is no communication from a process to itself.

For intercommunicator collective communication, if the operation is [rooted (e.g., broadcast, gather, scatter)] in the All-To-One or One-To-All categories, then the transfer is unidirectional. The direction of the transfer is indicated by a special value of the root argument. In this case, for the group containing the root process, all processes in the group must call the routine using a special argument for the root. For this, the root process uses the special root value `MPI_ROOT`; all other processes in the same group as the root use `MPI_PROC_NULL`. All processes in the other group (the group that is the remote group relative to the root process) must call the collective routine and provide the rank of the root. If the operation is [unrooted (e.g., alltoall)] in the All-To-All category, then the transfer is bidirectional.

*Rationale.* [Rooted operations] Operations in the All-To-One and One-To-All categories are unidirectional by nature, and there is a clear way of specifying direction. [Non-rooted operations, such as all-to-all.] Operations in the All-To-All category will often occur as part of an exchange, where it makes sense to communicate in both directions at once. (End of rationale.)

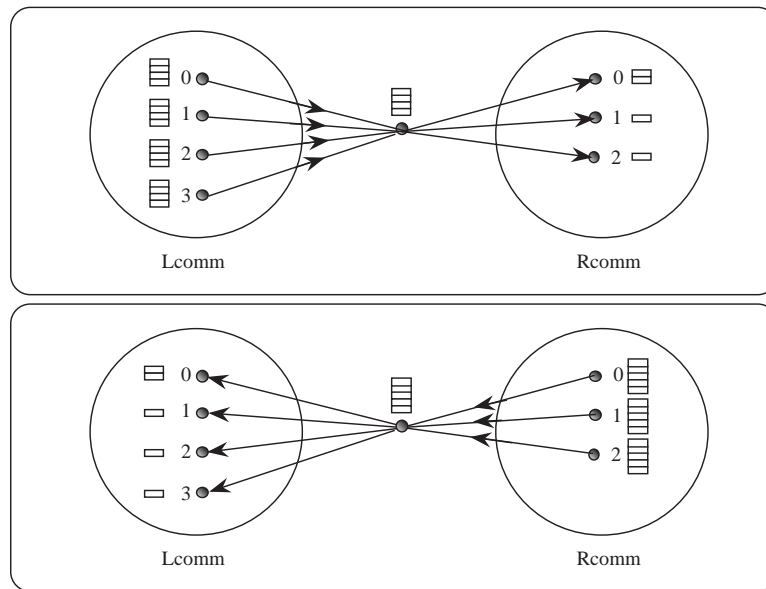


Figure 5.3: Intercommunicator reduce-scatter. The focus of data to one process is represented, not mandated by the semantics. The two phases do reduce-scatters in both directions.

### 5.3 Barrier Synchronization

MPI\_BARRIER( comm )

IN	comm	communicator (handle)
----	------	-----------------------

```
int MPI_Barrier(MPI_Comm comm)
```

```
MPI_BARRIER(COMM, IERROR)
    INTEGER COMM, IERROR
```

```
{void MPI::Comm::Barrier() const = 0 (binding deprecated, see Section 15.2) }
```

If `comm` is an intracommunicator, `MPI_BARRIER` blocks the caller until all group members have called it. The call returns at any process only after all group members have entered the call.

```
[int MPI_Barrier(MPI_Comm comm)
```

MPI-2.1 Correction due to Reviews to MPI-2.1 draft Feb.23, 2008 For MPI-2, `comm` may be an intercommunicator or an intracommunicator. MPI-2.1 End of review based correction If `comm` is an intercommunicator, the barrier is performed across all processes in the intercommunicator. In this case, all processes in MPI-2.1 round-two - begin of modification the local group one group (group A) MPI-2.1 round-two - end of modification of the intercommunicator may exit the barrier when all of the processes in the MPI-2.1 round-two - begin of modification remote group other group (group B) MPI-2.1 round-two - end of modification have entered the barrier. ] If `comm` is an intercommunicator, `MPI_BARRIER` involves two groups. The call returns at processes in one group (group A)

of the intercommunicator only after all members of the other group (group B) have entered the call (and vice versa). A process may return from the call before all processes in its own group have entered the call.

## 5.4 Broadcast

`MPI_BCAST( buffer, count, datatype, root, comm )`

INOUT	buffer	starting address of buffer (choice)
IN	count	number of entries in buffer (non-negative integer)
IN	datatype	data type of buffer (handle)
IN	root	rank of broadcast root (integer)
IN	comm	communicator (handle)

```
int MPI_Bcast(void* buffer, int count, MPI_Datatype datatype, int root,
              MPI_Comm comm )
```

```
MPI_BCAST(BUFFER, COUNT, DATATYPE, ROOT, COMM, IERROR)
```

```
<type> BUFFER(*)
```

```
INTEGER COUNT, DATATYPE, ROOT, COMM, IERROR
```

```
{void MPI::Comm::Bcast(void* buffer, int count,
                        const MPI::Datatype& datatype, int root) const = 0 (binding
                        deprecated, see Section 15.2) }
```

If `comm` is an intracommunicator, `MPI_BCAST` broadcasts a message from the process with rank `root` to all processes of the group, itself included. It is called by all members of the group using the same arguments for `comm` and `root`. On return, the content of `root`'s buffer is copied to all other processes.

General, derived datatypes are allowed for `datatype`. The type signature of `count`, `datatype` on any process must be equal to the type signature of `count`, `datatype` at the root. This implies that the amount of data sent must be equal to the amount received, pairwise between each process and the root. `MPI_BCAST` and all other data-movement collective routines make this restriction. Distinct type maps between sender and receiver are still allowed.

The “in place” option is not meaningful here.

If `comm` is an intercommunicator, then the call involves all processes in the intercommunicator, but with one group (group A) defining the root process. All processes in the other group (group B) pass the same value in argument `root`, which is the rank of the root in group A. The root passes the value `MPI_ROOT` in `root`. All other processes in group A pass the value `MPI_PROC_NULL` in `root`. Data is broadcast from the root to all processes in group B. The buffer arguments of the processes in group B must be consistent with the buffer argument of the root.

### 5.4.1 Example using `MPI_BCAST`

The examples in this section use intracommunicators.

**Example 5.1** Broadcast 100 ints from process 0 to every process in the group.

```
MPI_Comm comm;
int array[100];
int root=0;
...
MPI_Bcast( array, 100, MPI_INT, root, comm);
```

As in many of our example code fragments, we assume that some of the variables (such as `comm` in the above) have been assigned appropriate values.

## 5.5 Gather

`MPI_GATHER( sendbuf, sendcount, sendtype, recvbuf, recvcount, recvtype, root, comm)`

IN	sendbuf	starting address of send buffer (choice)
IN	sendcount	number of elements in send buffer (non-negative integer)
IN	sendtype	data type of send buffer elements (handle)
OUT	recvbuf	address of receive buffer (choice, significant only at root)
IN	recvcount	number of elements for any single receive (non-negative integer, significant only at root)
IN	recvtype	data type of recv buffer elements (significant only at root) (handle)
IN	root	rank of receiving process (integer)
IN	comm	communicator (handle)

```
int MPI_Gather(void* sendbuf, int sendcount, MPI_Datatype sendtype,
              void* recvbuf, int recvcount, MPI_Datatype recvtype, int root,
              MPI_Comm comm)
```

```
MPI_GATHER(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, RECVCOUNT, RECVTYPE,
           ROOT, COMM, IERROR)
<type> SENDBUF(*), RECVBUF(*)
INTEGER SENDCOUNT, SENDTYPE, RECVCOUNT, RECVTYPE, ROOT, COMM, IERROR
```

```
{void MPI::Comm::Gather(const void* sendbuf, int sendcount, const
                        MPI::Datatype& sendtype, void* recvbuf, int recvcount,
                        const MPI::Datatype& recvtype, int root) const = 0 (binding
                        deprecated, see Section 15.2) }
```

If `comm` is an intracommunicator, each process (root process included) sends the contents of its send buffer to the root process. The root process receives the messages and stores

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40 ticket150.  
41  
42  
43 ticket150.  
44  
45  
46  
47  
48

them in rank order. The outcome is *as if* each of the `n` processes in the group (including the root process) had executed a call to

```
MPI_Send(sendbuf, sendcount, sendtype, root, ...),
```

and the root had executed `n` calls to

```
MPI_Recv(recvbuf + i · recvcount · extent(recvtype), recvcount, recvtype, i, ...),
```

where `extent(recvtype)` is the type extent obtained from a call to `MPI_Type_get_extent()`.

An alternative description is that the `n` messages sent by the processes in the group are concatenated in rank order, and the resulting message is received by the root as if by a call to `MPI_RECV(recvbuf, recvcount·n, recvtype, ...)`.

The receive buffer is ignored for all non-root processes.

General, derived datatypes are allowed for both `sendtype` and `recvtype`. The type signature of `sendcount`, `sendtype` on each process must be equal to the type signature of `recvcount`, `recvtype` at the root. This implies that the amount of data sent must be equal to the amount of data received, pairwise between each process and the root. Distinct type maps between sender and receiver are still allowed.

All arguments to the function are significant on process `root`, while on other processes, only arguments `sendbuf`, `sendcount`, `sendtype`, `root`, and `comm` are significant. The arguments `root` and `comm` must have identical values on all processes.

The specification of counts and types should not cause any location on the root to be written more than once. Such a call is erroneous.

Note that the `recvcount` argument at the root indicates the number of items it receives from *each* process, not the total number of items it receives.

The “in place” option for intracommunicators is specified by passing `MPI_IN_PLACE` as the value of `sendbuf` at the root. In such a case, `sendcount` and `sendtype` are ignored, and the contribution of the root to the gathered vector is assumed to be already in the correct place in the receive buffer.

If `comm` is an intercommunicator, then the call involves all processes in the intercommunicator, but with one group (group A) defining the root process. All processes in the other group (group B) pass the same value in argument `root`, which is the rank of the root in group A. The root passes the value `MPI_ROOT` in `root`. All other processes in group A pass the value `MPI_PROC_NULL` in `root`. Data is gathered from all processes in group B to the root. The send buffer arguments of the processes in group B must be consistent with the receive buffer argument of the root.



MPI\_GATHERV( sendbuf, sendcount, sendtype, recvbuf, recvcunts, displs, recvtype, root, comm)

IN	sendbuf	starting address of send buffer (choice)
IN	sendcount	number of elements in send buffer (non-negative integer)
IN	sendtype	data type of send buffer elements (handle)
OUT	recvbuf	address of receive buffer (choice, significant only at root)
IN	recvcunts	non-negative integer array (of length group size) containing the number of elements that are received from each process (significant only at root)
IN	displs	integer array (of length group size). Entry <i>i</i> specifies the displacement relative to <i>recvbuf</i> at which to place the incoming data from process <i>i</i> (significant only at root)
IN	recvtype	data type of recv buffer elements (significant only at root) (handle)
IN	root	rank of receiving process (integer)
IN	comm	communicator (handle)

```
int MPI_Gatherv(void* sendbuf, int sendcount, MPI_Datatype sendtype,
               void* recvbuf, int *recvcunts, int *displs,
               MPI_Datatype recvtype, int root, MPI_Comm comm)
MPI_GATHERV(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, RECVCOUNTS, DISPLS,
            RECVTYPE, ROOT, COMM, IERROR)
<type> SENDBUF(*), RECVBUF(*)
INTEGER SENDCOUNT, SENDTYPE, RECVCOUNTS(*), DISPLS(*), RECVTYPE, ROOT,
COMM, IERROR
```

```
{void MPI::Comm::Gatherv(const void* sendbuf, int sendcount, const
                        MPI::Datatype& sendtype, void* recvbuf,
                        const int recvcunts[], const int displs[],
                        const MPI::Datatype& recvtype, int root) const = 0 (binding
                        deprecated, see Section 15.2) }
```

ticket150.

ticket150.

MPI\_GATHERV extends the functionality of MPI\_GATHER by allowing a varying count of data from each process, since *recvcunts* is now an array. It also allows more flexibility as to where the data is placed on the root, by providing the new argument, *displs*.

If *comm* is an intracommunicator, the outcome is *as if* each process, including the root process, sends a message to the root,

```
MPI_Send(sendbuf, sendcount, sendtype, root, ...),
```

and the root executes *n* receives,

```
MPI_Recv(recvbuf + displs[j] · extent(recvtype), recvcunts[j], recvtype, i, ...).
```

The data received from process *j* is placed into *recvbuf* of the root process beginning at offset *displs[j]* elements (in terms of the *recvtype*).

The receive buffer is ignored for all non-root processes.

The type signature implied by *sendcount*, *sendtype* on process *i* must be equal to the type signature implied by *recvcounts[i]*, *recvtype* at the root. This implies that the amount of data sent must be equal to the amount of data received, pairwise between each process and the root. Distinct type maps between sender and receiver are still allowed, as illustrated in Example 5.6.

All arguments to the function are significant on process *root*, while on other processes, only arguments *sendbuf*, *sendcount*, *sendtype*, *root*, and *comm* are significant. The arguments *root* and *comm* must have identical values on all processes.

The specification of counts, types, and displacements should not cause any location on the root to be written more than once. Such a call is erroneous.

The “in place” option for intracommunicators is specified by passing *MPI\_IN\_PLACE* as the value of *sendbuf* at the root. In such a case, *sendcount* and *sendtype* are ignored, and the contribution of the root to the gathered vector is assumed to be already in the correct place in the receive buffer

If *comm* is an intercommunicator, then the call involves all processes in the intercommunicator, but with one group (group A) defining the root process. All processes in the other group (group B) pass the same value in argument *root*, which is the rank of the root in group A. The root passes the value *MPI\_ROOT* in *root*. All other processes in group A pass the value *MPI\_PROC\_NULL* in *root*. Data is gathered from all processes in group B to the root. The send buffer arguments of the processes in group B must be consistent with the receive buffer argument of the root.

### 5.5.1 Examples using *MPI\_GATHER*, *MPI\_GATHERV*

The examples in this section use intracommunicators.

**Example 5.2** Gather 100 ints from every process in group to root. See figure 5.4.

```
MPI_Comm comm;
int gsize, sendarray[100];
int root, *rbuf;
...
MPI_Comm_size( comm, &gsize);
rbuf = (int *)malloc(gsize*100*sizeof(int));
MPI_Gather( sendarray, 100, MPI_INT, rbuf, 100, MPI_INT, root, comm);
```

**Example 5.3** Previous example modified – only the root allocates memory for the receive buffer.

```
MPI_Comm comm;
int gsize, sendarray[100];
int root, myrank, *rbuf;
...
MPI_Comm_rank( comm, &myrank);
if ( myrank == root) {
    MPI_Comm_size( comm, &gsize);
```

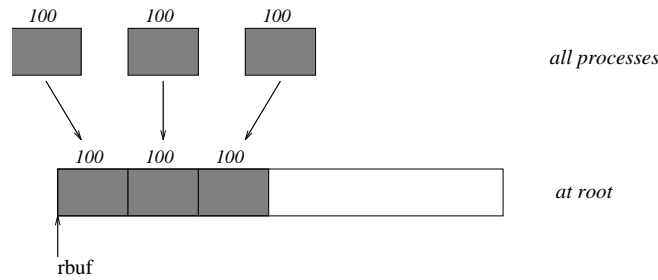


Figure 5.4: The root process gathers 100 ints from each process in the group.

```

    rbuf = (int *)malloc(gsize*100*sizeof(int));
}
MPI_Gather( sendarray, 100, MPI_INT, rbuf, 100, MPI_INT, root, comm);

```

**Example 5.4** Do the same as the previous example, but use a derived datatype. Note that the type cannot be the entire set of `gsize*100` ints since type matching is defined pairwise between the root and each process in the gather.

```

MPI_Comm comm;
int gsize, sendarray[100];
int root, *rbuf;
MPI_Datatype rtype;
...
MPI_Comm_size( comm, &gsize);
MPI_Type_contiguous( 100, MPI_INT, &rtype );
MPI_Type_commit( &rtype );
rbuf = (int *)malloc(gsize*100*sizeof(int));
MPI_Gather( sendarray, 100, MPI_INT, rbuf, 1, rtype, root, comm);

```

**Example 5.5** Now have each process send 100 ints to root, but place each set (of 100) `stride` ints apart at receiving end. Use `MPI_GATHERV` and the `displs` argument to achieve this effect. Assume `stride`  $\geq$  100. See Figure 5.5.

```

MPI_Comm comm;
int gsize, sendarray[100];
int root, *rbuf, stride;
int *displs, i, rcounts;
...

MPI_Comm_size( comm, &gsize);
rbuf = (int *)malloc(gsize*stride*sizeof(int));
displs = (int *)malloc(gsize*sizeof(int));
rcounts = (int *)malloc(gsize*sizeof(int));
for (i=0; i<gsize; ++i) {
    displs[i] = i*stride;
    rcounts[i] = 100;
}

```

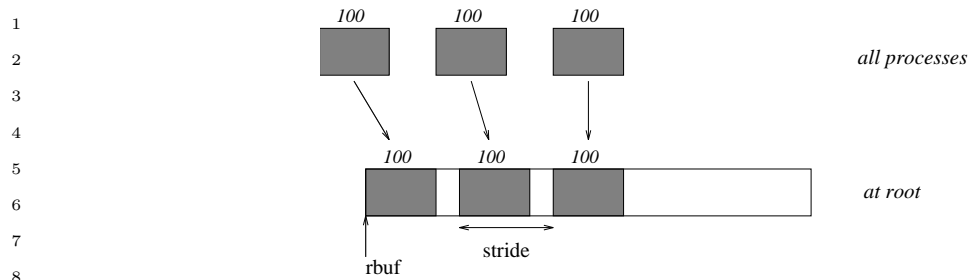


Figure 5.5: The root process gathers 100 ints from each process in the group, each set is placed `stride` ints apart.

```

13     }
14     MPI_Gatherv( sendarray, 100, MPI_INT, rbuf, rcounts, displs, MPI_INT,
15                  root, comm);

```

Note that the program is erroneous if  $stride < 100$ .

**Example 5.6** Same as Example 5.5 on the receiving side, but send the 100 ints from the 0th column of a  $100 \times 150$  int array, in C. See Figure 5.6.

```

22     MPI_Comm comm;
23     int gsize, sendarray[100][150];
24     int root, *rbuf, stride;
25     MPI_Datatype stype;
26     int *displs, i, *rcounts;
27
28     ...
29
30     MPI_Comm_size( comm, &gsize);
31     rbuf = (int *)malloc(gsize*stride*sizeof(int));
32     displs = (int *)malloc(gsize*sizeof(int));
33     rcounts = (int *)malloc(gsize*sizeof(int));
34     for (i=0; i<gsize; ++i) {
35         displs[i] = i*stride;
36         rcounts[i] = 100;
37     }
38     /* Create datatype for 1 column of array
39     */
40     MPI_Type_vector( 100, 1, 150, MPI_INT, &stype);
41     MPI_Type_commit( &stype );
42     MPI_Gatherv( sendarray, 1, stype, rbuf, rcounts, displs, MPI_INT,
43                  root, comm);

```

**Example 5.7** Process  $i$  sends  $(100-i)$  ints from the  $i$ -th column of a  $100 \times 150$  int array, in C. It is received into a buffer with stride, as in the previous two examples. See Figure 5.7.

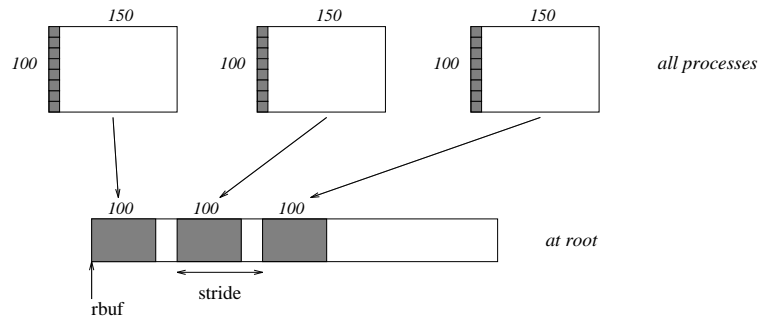


Figure 5.6: The root process gathers column 0 of a 100×150 C array, and each set is placed `stride` ints apart.

```

MPI_Comm comm;
int gsize, sendarray[100][150], *sptr;
int root, *rbuf, stride, myrank;
MPI_Datatype stype;
int *displs, i, *rcounts;

...

MPI_Comm_size( comm, &gsize);
MPI_Comm_rank( comm, &myrank );
rbuf = (int *)malloc(gsize*stride*sizeof(int));
displs = (int *)malloc(gsize*sizeof(int));
rcounts = (int *)malloc(gsize*sizeof(int));
for (i=0; i<gsize; ++i) {
    displs[i] = i*stride;
    rcounts[i] = 100-i;    /* note change from previous example */
}
/* Create datatype for the column we are sending
 */
MPI_Type_vector( 100-myrank, 1, 150, MPI_INT, &stype);
MPI_Type_commit( &stype );
/* sptr is the address of start of "myrank" column
 */
sptr = &sendarray[0][myrank];
MPI_Gatherv( sptr, 1, stype, rbuf, rcounts, displs, MPI_INT,
              root, comm);

```

Note that a different amount of data is received from each process.

**Example 5.8** Same as Example 5.7, but done in a different way at the sending end. We create a datatype that causes the correct striding at the sending end so that we read a column of a C array. A similar thing was done in Example 4.16, Section 4.1.14.

```

MPI_Comm comm;
int gsize, sendarray[100][150], *sptr;

```

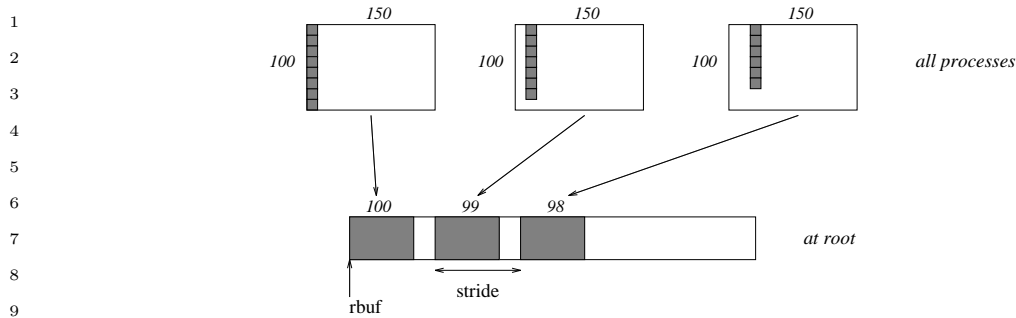


Figure 5.7: The root process gathers  $100-i$  ints from column  $i$  of a  $100 \times 150$  C array, and each set is placed `stride` ints apart.

```

14     int root, *rbuf, stride, myrank, disp[2], blocklen[2];
15     MPI_Datatype stype, type[2];
16     int *displs, i, *rcounts;
17
18     ...
19
20     MPI_Comm_size( comm, &gsize);
21     MPI_Comm_rank( comm, &myrank );
22     rbuf = (int *)malloc(gsize*stride*sizeof(int));
23     displs = (int *)malloc(gsize*sizeof(int));
24     rcounts = (int *)malloc(gsize*sizeof(int));
25     for (i=0; i<gsize; ++i) {
26         displs[i] = i*stride;
27         rcounts[i] = 100-i;
28     }
29     /* Create datatype for one int, with extent of entire row
30      */
31     disp[0] = 0;      disp[1] = 150*sizeof(int);
32     type[0] = MPI_INT; type[1] = MPI_UB;
33     blocklen[0] = 1;  blocklen[1] = 1;
34     MPI_Type_[ticket118.]create_struct( 2, blocklen, disp, type, &stype );
35     MPI_Type_commit( &stype );
36     sptr = &sendarray[0][myrank];
37     MPI_Gatherv( sptr, 100-myrank, stype, rbuf, rcounts, displs, MPI_INT,
38                  root, comm);

```

**Example 5.9** Same as Example 5.7 at sending side, but at receiving side we make the stride between received blocks vary from block to block. See Figure 5.8.

```

42     MPI_Comm comm;
43     int gsize, sendarray[100][150], *sptr;
44     int root, *rbuf, *stride, myrank, bufsize;
45     MPI_Datatype stype;
46     int *displs, i, *rcounts, offset;

```

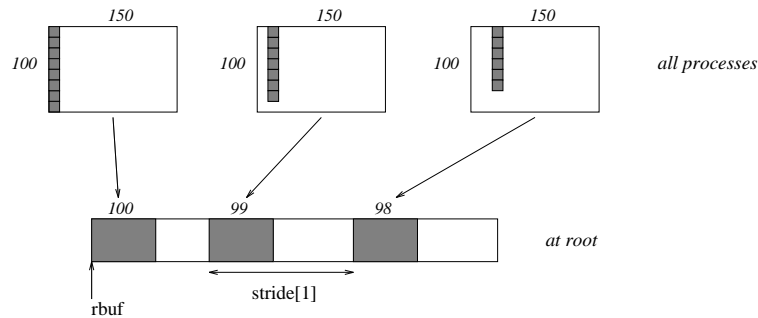


Figure 5.8: The root process gathers  $100-i$  ints from column  $i$  of a  $100 \times 150$  C array, and each set is placed  $\text{stride}[i]$  ints apart (a varying stride).

```

...
MPI_Comm_size( comm, &gsize);
MPI_Comm_rank( comm, &myrank );

stride = (int *)malloc(gsize*sizeof(int));
...
/* stride[i] for i = 0 to gsize-1 is set somehow
 */

/* set up displs and rcounts vectors first
 */
displs = (int *)malloc(gsize*sizeof(int));
rcounts = (int *)malloc(gsize*sizeof(int));
offset = 0;
for (i=0; i<gsize; ++i) {
    displs[i] = offset;
    offset += stride[i];
    rcounts[i] = 100-i;
}
/* the required buffer size for rbuf is now easily obtained
 */
bufsize = displs[gsize-1]+rcounts[gsize-1];
rbuf = (int *)malloc(bufsize*sizeof(int));
/* Create datatype for the column we are sending
 */
MPI_Type_vector( 100-myrank, 1, 150, MPI_INT, &stype);
MPI_Type_commit( &stype );
sptr = &sendarray[0][myrank];
MPI_Gatherv( sptr, 1, stype, rbuf, rcounts, displs, MPI_INT,
             root, comm);

```

**Example 5.10** Process  $i$  sends  $\text{num}$  ints from the  $i$ -th column of a  $100 \times 150$  int array, in C. The complicating factor is that the various values of  $\text{num}$  are not known to  $\text{root}$ , so a

separate gather must first be run to find these out. The data is placed contiguously at the receiving end.

```

1
2
3
4     MPI_Comm comm;
5     int gsize, sendarray[100][150], *sptr;
6     int root, *rbuf, [ticket118.] [stride,] myrank, disp[2], blocklen[2];
7     MPI_Datatype stype, type[ticket118.] [s] [2];
8     int *displs, i, *rcounts, num;
9
10    ...
11
12    MPI_Comm_size( comm, &gsize);
13    MPI_Comm_rank( comm, &myrank );
14
15    /* First, gather nums to root
16     */
17    rcounts = (int *)malloc(gsize*sizeof(int));
18    MPI_Gather( &num, 1, MPI_INT, rcounts, 1, MPI_INT, root, comm);
19    /* root now has correct rcounts, using these we set displs[] so
20     * that data is placed contiguously (or concatenated) at receive end
21     */
22    displs = (int *)malloc(gsize*sizeof(int));
23    displs[0] = 0;
24    for (i=1; i<gsize; ++i) {
25        displs[i] = displs[i-1]+rcounts[i-1];
26    }
27    /* And, create receive buffer
28     */
29    rbuf = (int *)malloc(gsize*(displs[gsize-1]+rcounts[gsize-1])
30                                *sizeof(int));
31    /* Create datatype for one int, with extent of entire row
32     */
33    disp[0] = 0;      disp[1] = 150*sizeof(int);
34    type[0] = MPI_INT; type[1] = MPI_UB;
35    blocklen[0] = 1;  blocklen[1] = 1;
36    MPI_Type_[ticket118.] create_struct( 2, blocklen, disp, type, &stype );
37    MPI_Type_commit( &stype );
38    sptr = &sendarray[0][myrank];
39    MPI_Gatherv( sptr, num, stype, rbuf, rcounts, displs, MPI_INT,
40                root, comm);
41
42
43
44
45
46
47
48

```



## 5.6 Scatter

MPI_SCATTER( sendbuf, sendcount, sendtype, recvbuf, recvcount, recvtype, root, comm)		
IN	sendbuf	address of send buffer (choice, significant only at root)
IN	sendcount	number of elements sent to each process (non-negative integer, significant only at root)
IN	sendtype	data type of send buffer elements (significant only at root) (handle)
OUT	recvbuf	address of receive buffer (choice)
IN	recvcount	number of elements in receive buffer (non-negative integer)
IN	recvtype	data type of receive buffer elements (handle)
IN	root	rank of sending process (integer)
IN	comm	communicator (handle)

```
int MPI_Scatter(void* sendbuf, int sendcount, MPI_Datatype sendtype,
               void* recvbuf, int recvcount, MPI_Datatype recvtype, int root,
               MPI_Comm comm)
```

```
MPI_SCATTER(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, REVCOUNT, RECVTYPE,
            ROOT, COMM, IERROR)
<type> SENDBUF(*), RECVBUF(*)
INTEGER SENDCOUNT, SENDTYPE, REVCOUNT, RECVTYPE, ROOT, COMM, IERROR
```

```
{void MPI::Comm::Scatter(const void* sendbuf, int sendcount, const
                        MPI::Datatype& sendtype, void* recvbuf, int recvcount,
                        const MPI::Datatype& recvtype, int root) const = 0 (binding
                        deprecated, see Section 15.2) }
```

MPI\_SCATTER is the inverse operation to MPI\_GATHER.

If comm is an intracommunicator, the outcome is *as if* the root executed n send operations,

```
MPI_Send(sendbuf + i · sendcount · extent(sendtype), sendcount, sendtype, i, ...),
```

and each process executed a receive,

```
MPI_Recv(recvbuf, recvcount, recvtype, i, ...).
```

An alternative description is that the root sends a message with MPI\_Send(sendbuf, sendcount·n, sendtype, ...). This message is split into n equal segments, the *i*-th segment is sent to the *i*-th process in the group, and each process receives this message as above.

The send buffer is ignored for all non-root processes.

The type signature associated with sendcount, sendtype at the root must be equal to the type signature associated with recvcount, recvtype at all processes (however, the type maps may be different). This implies that the amount of data sent must be equal to the

ticket150.

ticket150.

amount of data received, pairwise between each process and the root. Distinct type maps between sender and receiver are still allowed.

All arguments to the function are significant on process `root`, while on other processes, only arguments `recvbuf`, `recvcount`, `recvtype`, `root`, and `comm` are significant. The arguments `root` and `comm` must have identical values on all processes.

The specification of counts and types should not cause any location on the root to be read more than once.

*Rationale.* Though not needed, the last restriction is imposed so as to achieve symmetry with `MPI_GATHER`, where the corresponding restriction (a multiple-write restriction) is necessary. (*End of rationale.*)

The “in place” option for intracommunicators is specified by passing `MPI_IN_PLACE` as the value of `recvbuf` at the root. In such a case, `recvcount` and `recvtype` are ignored, and root “sends” no data to itself. The scattered vector is still assumed to contain  $n$  segments, where  $n$  is the group size; the  $root$ -th segment, which root should “send to itself,” is not moved.

If `comm` is an intercommunicator, then the call involves all processes in the intercommunicator, but with one group (group A) defining the root process. All processes in the other group (group B) pass the same value in argument `root`, which is the rank of the root in group A. The root passes the value `MPI_ROOT` in `root`. All other processes in group A pass the value `MPI_PROC_NULL` in `root`. Data is scattered from the root to all processes in group B. The receive buffer arguments of the processes in group B must be consistent with the send buffer argument of the root.

`MPI_SCATTERV( sendbuf, sendcounts, displs, sendtype, recvbuf, recvcount, recvtype, root, comm)`

IN	<code>sendbuf</code>	address of send buffer (choice, significant only at root)
IN	<code>sendcounts</code>	non-negative integer array (of length group size) specifying the number of elements to send to each processor
IN	<code>displs</code>	integer array (of length group size). Entry $i$ specifies the displacement (relative to <code>sendbuf</code> from which to take the outgoing data to process $i$
IN	<code>sendtype</code>	data type of send buffer elements (handle)
OUT	<code>recvbuf</code>	address of receive buffer (choice)
IN	<code>recvcount</code>	number of elements in receive buffer (non-negative integer)
IN	<code>recvtype</code>	data type of receive buffer elements (handle)
IN	<code>root</code>	rank of sending process (integer)
IN	<code>comm</code>	communicator (handle)

```
int MPI_Scatterv(void* sendbuf, int *sendcounts, int *displs,
                MPI_Datatype sendtype, void* recvbuf, int recvcount,
                MPI_Datatype recvtype, int root, MPI_Comm comm)
```

```

MPI_SCATTERV(SENDBUF, SENDCOUNTS, DISPLS, SENDTYPE, RECVBUF, REVCOUNT,
             RECVTYPE, ROOT, COMM, IERROR)
<type> SENDBUF(*), RECVBUF(*)
INTEGER SENDCOUNTS(*), DISPLS(*), SENDTYPE, REVCOUNT, RECVTYPE, ROOT,
COMM, IERROR

```

```

{void MPI::Comm::Scatterv(const void* sendbuf, const int sendcounts[],
    const int displs[], const MPI::Datatype& sendtype,
    void* recvbuf, int recvcount, const MPI::Datatype& recvtype,
    int root) const = 0 (binding deprecated, see Section 15.2) }

```

MPI\_SCATTERV is the inverse operation to MPI\_GATHERV.

MPI\_SCATTERV extends the functionality of MPI\_SCATTER by allowing a varying count of data to be sent to each process, since `sendcounts` is now an array. It also allows more flexibility as to where the data is taken from on the root, by providing an additional argument, `displs`.

If `comm` is an intracommunicator, the outcome is as if the root executed `n` send operations,

```
MPI_Send(sendbuf + displs[i] · extent(sendtype), sendcounts[i], sendtype, i, ...),
```

and each process executed a receive,

```
MPI_Recv(recvbuf, recvcount, recvtype, i, ...).
```

The send buffer is ignored for all non-root processes.

The type signature implied by `sendcount[i]`, `sendtype` at the root must be equal to the type signature implied by `recvcount`, `recvtype` at process `i` (however, the type maps may be different). This implies that the amount of data sent must be equal to the amount of data received, pairwise between each process and the root. Distinct type maps between sender and receiver are still allowed.

All arguments to the function are significant on process `root`, while on other processes, only arguments `recvbuf`, `recvcount`, `recvtype`, `root`, and `comm` are significant. The arguments `root` and `comm` must have identical values on all processes.

The specification of counts, types, and displacements should not cause any location on the root to be read more than once.

The “in place” option for intracommunicators is specified by passing `MPI_IN_PLACE` as the value of `recvbuf` at the root. In such a case, `recvcount` and `recvtype` are ignored, and root “sends” no data to itself. The scattered vector is still assumed to contain  $n$  segments, where  $n$  is the group size; the *root*-th segment, which root should “send to itself,” is not moved.

If `comm` is an intercommunicator, then the call involves all processes in the intercommunicator, but with one group (group A) defining the root process. All processes in the other group (group B) pass the same value in argument `root`, which is the rank of the root in group A. The root passes the value `MPI_ROOT` in `root`. All other processes in group A pass the value `MPI_PROC_NULL` in `root`. Data is scattered from the root to all processes in group B. The receive buffer arguments of the processes in group B must be consistent with the send buffer argument of the root.

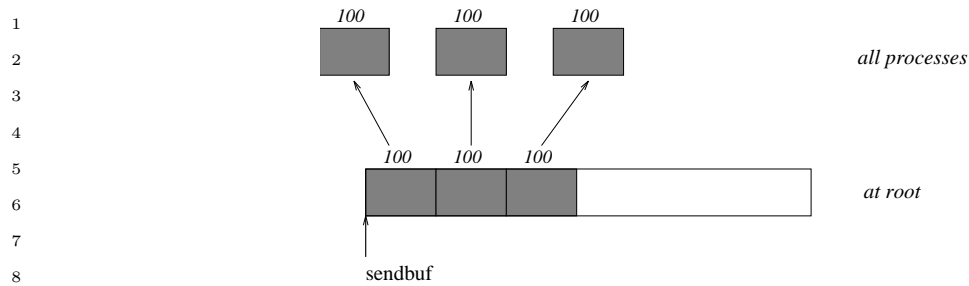


Figure 5.9: The root process scatters sets of 100 ints to each process in the group.

### 5.6.1 Examples using MPI\_SCATTER, MPI\_SCATTERV

The examples in this section use intracommunicators.

**Example 5.11** The reverse of Example 5.2. Scatter sets of 100 ints from the root to each process in the group. See Figure 5.9.

```

18     MPI_Comm comm;
19     int gsize,*sendbuf;
20     int root, rbuf[100];
21     ...
22     MPI_Comm_size( comm, &gsize);
23     sendbuf = (int *)malloc(gsize*100*sizeof(int));
24     ...
25     MPI_Scatter( sendbuf, 100, MPI_INT, rbuf, 100, MPI_INT, root, comm);

```

**Example 5.12** The reverse of Example 5.5. The root process scatters sets of 100 ints to the other processes, but the sets of 100 are *stride ints* apart in the sending buffer. Requires use of MPI\_SCATTERV. Assume  $stride \geq 100$ . See Figure 5.10.

```

32     MPI_Comm comm;
33     int gsize,*sendbuf;
34     int root, rbuf[100], i, *displs, *scounts;
35     ...
36     ...
37
38     MPI_Comm_size( comm, &gsize);
39     sendbuf = (int *)malloc(gsize*stride*sizeof(int));
40     ...
41     displs = (int *)malloc(gsize*sizeof(int));
42     scounts = (int *)malloc(gsize*sizeof(int));
43     for (i=0; i<gsize; ++i) {
44         displs[i] = i*stride;
45         scounts[i] = 100;
46     }
47     MPI_Scatterv( sendbuf, scounts, displs, MPI_INT, rbuf, 100, MPI_INT,
48                  root, comm);

```

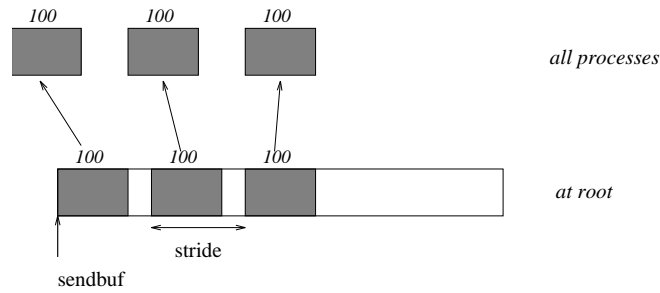


Figure 5.10: The root process scatters sets of 100 ints, moving by `stride` ints from send to send in the scatter.

**Example 5.13** The reverse of Example 5.9. We have a varying stride between blocks at sending (root) side, at the receiving side we receive into the *i*-th column of a 100×150 C array. See Figure 5.11.

```

MPI_Comm comm;
int gsize, recvarray[100][150], *rptr;
int root, *sendbuf, myrank, [ticket118.][bufsize, ]*stride;
MPI_Datatype rtype;
int i, *displs, *counts, offset;
...
MPI_Comm_size( comm, &gsize);
MPI_Comm_rank( comm, &myrank );

stride = (int *)malloc(gsize*sizeof(int));
...
/* stride[i] for i = 0 to gsize-1 is set somehow
 * sendbuf comes from elsewhere
 */
...
displs = (int *)malloc(gsize*sizeof(int));
counts = (int *)malloc(gsize*sizeof(int));
offset = 0;
for (i=0; i<gsize; ++i) {
    displs[i] = offset;
    offset += stride[i];
    counts[i] = 100 - i;
}
/* Create datatype for the column we are receiving
 */
MPI_Type_vector( 100-myrank, 1, 150, MPI_INT, &rtype);
MPI_Type_commit( &rtype );
rptr = &recvarray[0][myrank];
MPI_Scatterv( sendbuf, counts, displs, MPI_INT, rptr, 1, rtype,
              root, comm);

```

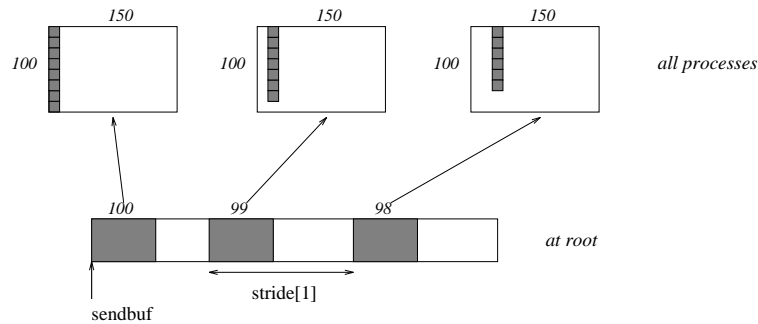


Figure 5.11: The root scatters blocks of  $100-i$  ints into column  $i$  of a  $100 \times 150$  C array. At the sending side, the blocks are `stride[i]` ints apart.

## 5.7 Gather-to-all

<code>MPI_ALLGATHER( sendbuf, sendcount, sendtype, recvbuf, recvcount, recvtype, comm)</code>			
IN	<code>sendbuf</code>	starting address of send buffer (choice)	
IN	<code>sendcount</code>	number of elements in send buffer (non-negative integer)	
IN	<code>sendtype</code>	data type of send buffer elements (handle)	
OUT	<code>recvbuf</code>	address of receive buffer (choice)	
IN	<code>recvcount</code>	number of elements received from any process (non-negative integer)	
IN	<code>recvtype</code>	data type of receive buffer elements (handle)	
IN	<code>comm</code>	communicator (handle)	

```

int MPI_Allgather(void* sendbuf, int sendcount, MPI_Datatype sendtype,
                  void* recvbuf, int recvcount, MPI_Datatype recvtype,
                  MPI_Comm comm)
MPI_ALLGATHER(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, REVCOUNT, RECVTYPE,
              COMM, IERROR)
<type> SENDBUF(*), RECVBUF(*)
INTEGER SENDCOUNT, SENDTYPE, REVCOUNT, RECVTYPE, COMM, IERROR
{void MPI::Comm::Allgather(const void* sendbuf, int sendcount, const
    MPI::Datatype& sendtype, void* recvbuf, int recvcount,
    const MPI::Datatype& recvtype) const = 0 (binding deprecated, see
    Section 15.2) }
```

`MPI_ALLGATHER` can be thought of as `MPI_GATHER`, but where all processes receive the result, instead of just the root. The block of data sent from the  $j$ -th process is received by every process and placed in the  $j$ -th block of the buffer `recvbuf`.

The type signature associated with `sendcount`, `sendtype`, at a process must be equal to the type signature associated with `recvcount`, `recvtype` at any other process.

If `comm` is an intracommunicator, the outcome of a call to `MPI_ALLGATHER(...)` is as if all processes executed `n` calls to

```
MPI_G[ticket118.] [ATHER]ather(sendbuf,sendcount,sendtype,recvbuf,recvcount,
                                recvtype,root,comm) [ticket120.],[,]
```

for `root = 0 , . . . , n-1`. The rules for correct usage of `MPI_ALLGATHER` are easily found from the corresponding rules for `MPI_GATHER`.

The “in place” option for intracommunicators is specified by passing the value `MPI_IN_PLACE` to the argument `sendbuf` at all processes. `sendcount` and `sendtype` are ignored. Then the input data of each process is assumed to be in the area where that process would receive its own contribution to the receive buffer.

If `comm` is an intercommunicator, then each process [in group A contributes a data item; these items]of one group (group A) contributes `sendcount` data items; these data are concatenated and the result is stored at each process in [group B]the other group (group B). Conversely the concatenation of the contributions of the processes in group B is stored at each process in group A. The send buffer arguments in group A must be consistent with the receive buffer arguments in group B, and vice versa.

*Advice to users.* The communication pattern of `MPI_ALLGATHER` executed on an intercommunication domain need not be symmetric. The number of items sent by processes in group A (as specified by the arguments `sendcount`, `sendtype` in group A and the arguments `recvcount`, `recvtype` in group B), need not equal the number of items sent by processes in group B (as specified by the arguments `sendcount`, `sendtype` in group B and the arguments `recvcount`, `recvtype` in group A). In particular, one can move data in only one direction by specifying `sendcount = 0` for the communication in the reverse direction.

(End of advice to users.)

1 MPI\_ALLGATHERV( sendbuf, sendcount, sendtype, recvbuf, recvcunts, displs, recvtype, comm)

2			
3	IN	sendbuf	starting address of send buffer (choice)
4	IN	sendcount	number of elements in send buffer (non-negative integer)
5			
6			
7	IN	sendtype	data type of send buffer elements (handle)
8	OUT	recvbuf	address of receive buffer (choice)
9			
10	IN	recvcunts	non-negative integer array (of length group size) containing the number of elements that are received from each process
11			
12			
13	IN	displs	integer array (of length group size). Entry i specifies the displacement (relative to <code>recvbuf</code> ) at which to place the incoming data from process i
14			
15			
16	IN	recvtype	data type of receive buffer elements (handle)
17			
18	IN	comm	communicator (handle)
19			

20 int MPI\_Allgatherv(void\* sendbuf, int sendcount, MPI\_Datatype sendtype,  
21 void\* recvbuf, int \*recvcunts, int \*displs,  
22 MPI\_Datatype recvtype, MPI\_Comm comm)

23 MPI\_ALLGATHERV(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, RECVCOUNTS, DISPLS,  
24 RECVTYPE, COMM, IERROR)  
25 <type> SENDBUF(\*), RECVBUF(\*)  
26 INTEGER SENDCOUNT, SENDTYPE, RECVCOUNTS(\*), DISPLS(\*), RECVTYPE, COMM,  
27 IERROR

ticket150. 28  
29 {void MPI::Comm::Allgatherv(const void\* sendbuf, int sendcount, const  
30 MPI::Datatype& sendtype, void\* recvbuf,  
31 const int recvcunts[], const int displs[],  
ticket150. 32 const MPI::Datatype& recvtype) const = 0 (*binding deprecated, see*  
33 *Section 15.2*) }

34  
35 MPI\_ALLGATHERV can be thought of as MPI\_GATHERV, but where all processes re-  
36 ceive the result, instead of just the root. The block of data sent from the j-th process is  
37 received by every process and placed in the j-th block of the buffer `recvbuf`. These blocks  
38 need not all be the same size.

39 The type signature associated with `sendcount`, `sendtype`, at process j must be equal to  
40 the type signature associated with `recvcunts[j]`, `recvtype` at any other process.

41 If `comm` is an intracommunicator, the outcome is as if all processes executed calls to

42 MPI\_GATHERV(sendbuf, sendcount, sendtype, recvbuf, recvcunts, displs,  
43 recvtype, root, comm),  
44

45 for `root = 0, ..., n-1`. The rules for correct usage of MPI\_ALLGATHERV are easily  
46 found from the corresponding rules for MPI\_GATHERV.

47 The “in place” option for intracommunicators is specified by passing the value

ticket120. 48 MPI\_IN\_PLACE to the argument `sendbuf` at all processes. In such a case, `sendcount` and



sendtype are ignored, and the input data of each process is assumed to be in the area where that process would receive its own contribution to the receive buffer.

If comm is an intercommunicator, then each process [in group A contributes a data item; these items]of one group (group A) contributes sendcount data items; these data are concatenated and the result is stored at each process in [group B]the other group (group B). Conversely the concatenation of the contributions of the processes in group B is stored at each process in group A. The send buffer arguments in group A must be consistent with the receive buffer arguments in group B, and vice versa.

### 5.7.1 Example[s] using MPI\_ALLGATHER[, MPI\_ALLGATHERV]

The example[s] in this section uses intracommunicators.

**Example 5.14** The all-gather version of Example 5.2. Using MPI\_ALLGATHER, we will gather 100 ints from every process in the group to every process.

```
MPI_Comm comm;
int gsize, sendarray[100];
int *rbuf;
...
MPI_Comm_size( comm, &gsize);
rbuf = (int *)malloc(gsize*100*sizeof(int));
MPI_Allgather( sendarray, 100, MPI_INT, rbuf, 100, MPI_INT, comm);
```

After the call, every process has the group-wide concatenation of the sets of data.

## 5.8 All-to-All Scatter/Gather

MPI\_ALLTOALL(sendbuf, sendcount, sendtype, recvbuf, recvcount, recvtype, comm)

IN	sendbuf	starting address of send buffer (choice)
IN	sendcount	number of elements sent to each process (non-negative integer)
IN	sendtype	data type of send buffer elements (handle)
OUT	recvbuf	address of receive buffer (choice)
IN	recvcount	number of elements received from any process (non-negative integer)
IN	recvtype	data type of receive buffer elements (handle)
IN	comm	communicator (handle)

```
int MPI_Alltoall(void* sendbuf, int sendcount, MPI_Datatype sendtype,
                void* recvbuf, int recvcount, MPI_Datatype recvtype,
                MPI_Comm comm)
```

```
MPI_ALLTOALL(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, RECVCOUNT, RECVTYPE,
              COMM, IERROR)
```

```

1      <type> SENDBUF(*), RECVBUF(*)
2      INTEGER SENDCOUNT, SENDTYPE, RECVCOUNT, RECVMODE, COMM, IERROR
ticket150. 3
4      {void MPI::Comm::Alltoall(const void* sendbuf, int sendcount, const
5          MPI::Datatype& sendtype, void* recvbuf, int recvcount,
ticket150. 6          const MPI::Datatype& recvmode) const = 0 (binding deprecated, see
7              Section 15.2) }
```

MPI\_ALLTOALL is an extension of MPI\_ALLGATHER to the case where each process sends distinct data to each of the receivers. The  $j$ -th block sent from process  $i$  is received by process  $j$  and is placed in the  $i$ -th block of `recvbuf`.

The type signature associated with `sendcount`, `sendtype`, at a process must be equal to the type signature associated with `recvcount`, `recvtype` at any other process. This implies that the amount of data sent must be equal to the amount of data received, pairwise between every pair of processes. As usual, however, the type maps may be different.

If `comm` is an intracommunicator, the outcome is as if each process executed a send to each process (itself included) with a call to,

```
MPI_Send(sendbuf + i · sendcount · extent(sendtype), sendcount, sendtype, i, ...),
```

and a receive from every other process with a call to,

```
MPI_Recv(recvbuf + i · recvcount · extent(recvtype), recvcount, recvtype, i, ...).
```

All arguments on all processes are significant. The argument `comm` must have identical values on all processes.

[ No “in place” option is supported.

] The “in place” option for intracommunicators is specified by passing `MPI_IN_PLACE` to the argument `sendbuf` at *all* processes. In such a case, `sendcount` and `sendtype` are ignored. The data to be sent is taken from the `recvbuf` and replaced by the received data. Data sent and received must have the same type map as specified by `recvcount` and `recvtype`.

*Rationale.* For large MPI\_ALLTOALL instances, allocating both send and receive buffers may consume too much memory. The “in place” option effectively halves the application memory consumption and is useful in situations where the data to be sent will not be used by the sending process after the MPI\_ALLTOALL exchange (e.g., in parallel Fast Fourier Transforms). (*End of rationale.*)

*Advice to implementors.* Users may opt to use the “in place” option in order to conserve memory. Quality MPI implementations should thus strive to minimize system buffering. (*End of advice to implementors.*)

If `comm` is an intercommunicator, then the outcome is as if each process in group A sends a message to each process in group B, and vice versa. The  $j$ -th send buffer of process  $i$  in group A should be consistent with the  $i$ -th receive buffer of process  $j$  in group B, and vice versa.

*Advice to users.* When [all-to-all] a complete exchange is executed on an intercommunication domain, then the number of data items sent from processes in group A to processes in group B need not equal the number of items sent in the reverse direction. In particular, one can have unidirectional communication by specifying `sendcount = 0` in the reverse direction.

(*End of advice to users.*)

MPI\_ALLTOALLV(sendbuf, sendcounts, sdispls, sendtype, recvbuf, recvcoun-  
ts, rdispls, recv-  
type, comm)

IN	sendbuf	starting address of send buffer (choice)	
IN	sendcounts	non-negative integer array [equal to the group size](of length group size) specifying the number of elements to send to each processor	ticket93.
IN	sdispls	integer array (of length group size). Entry j specifies the displacement (relative to sendbuf from which to take the outgoing data destined for process j	
IN	sendtype	data type of send buffer elements (handle)	
OUT	recvbuf	address of receive buffer (choice)	
IN	recvcoun- ts	non-negative integer array [equal to the group size](of length group size) specifying the number of elements that can be received from each processor	ticket93.
IN	rdispls	integer array (of length group size). Entry i specifies the displacement (relative to recvbuf at which to place the incoming data from process i	
IN	recvtype	data type of receive buffer elements (handle)	
IN	comm	communicator (handle)	

```
int MPI_Alltoallv(void* sendbuf, int *sendcounts, int *sdispls,
                  MPI_Datatype sendtype, void* recvbuf, int *recvcoun-
                  ts, int *rdispls, MPI_Datatype recvtype, MPI_Comm comm)
MPI_ALLTOALLV(SENDBUF, SENDCOUNTS, SDISPLS, SENDTYPE, RECVBUF, RECVCOUNTS,
               RDISPLS, RECVTYPE, COMM, IERROR)
<type> SENDBUF(*), RECVBUF(*)
INTEGER SENDCOUNTS(*), SDISPLS(*), SENDTYPE, REVCOUNTS(*), RDISPLS(*),
RECVTYPE, COMM, IERROR
```

```
{void MPI::Comm::Alltoallv(const void* sendbuf, const int sendcounts[],
                           const int sdispls[], const MPI::Datatype& sendtype,
                           void* recvbuf, const int recvcoun-
                           ts[], const int rdispls[],
                           const MPI::Datatype& recvtype) const = 0 (binding deprecated, see
                           Section 15.2) }
```

MPI\_ALLTOALLV adds flexibility to MPI\_ALLTOALL in that the location of data for the send is specified by sdispls and the location of the placement of the data on the receive side is specified by rdispls.

If comm is an intracommunicator, then the j-th block sent from process i is received by process j and is placed in the i-th block of recvbuf. These blocks need not all have the same size.

The type signature associated with sendcounts[j], sendtype at process i must be equal to the type signature associated with recvcoun-  
ts[i], recvtype at process j. This implies that the amount of data sent must be equal to the amount of data received, pairwise between every pair of processes. Distinct type maps between sender and receiver are still allowed.

The outcome is as if each process sent a message to every other process with,

```
MPI_Send(sendbuf + [ticket113.]sdispls[i] · extent(sendtype), sendcounts[i], sendtype, i, ...),
```

and received a message from every other process with a call to

```
MPI_Recv(recvbuf + [ticket113.]rdispls[i] · extent(recvtype), recvcounts[i], recvtype, i, ...).
```

All arguments on all processes are significant. The argument `comm` must have identical values on all processes.

[ No “in place” option is supported. ] The “in place” option for intracommunicators is specified by passing `MPI_IN_PLACE` to the argument `sendbuf` at *all* processes. In such a case, `sendcounts`, `sdispls` and `sendtype` are ignored. The data to be sent is taken from the `recvbuf` and replaced by the received data. Data sent and received must have the same type map as specified by the `recvcounts` array and the `recvtype`, and is taken from the locations of the receive buffer specified by `rdispls`.

*Advice to users.* Specifying the “in place” option (which must be given on all processes) implies that the same amount and type of data is sent and received between any two processes in the group of the communicator. Different pairs of processes can exchange different amounts of data. Users must ensure that `recvcounts[j]` and `recvtype` on process `i` match `recvcounts[i]` and `recvtype` on process `j`. This symmetric exchange can be useful in applications where the data to be sent will not be used by the sending process after the `MPI_ALLTOALLV` exchange. (*End of advice to users.*)

If `comm` is an intercommunicator, then the outcome is as if each process in group A sends a message to each process in group B, and vice versa. The `j`-th send buffer of process `i` in group A should be consistent with the `i`-th receive buffer of process `j` in group B, and vice versa.

*Rationale.* The definitions of `MPI_ALLTOALL` and `MPI_ALLTOALLV` give as much flexibility as one would achieve by specifying `n` independent, point-to-point communications, with two exceptions: all messages use the same datatype, and messages are scattered from (or gathered to) sequential storage. (*End of rationale.*)

*Advice to implementors.* Although the discussion of collective communication in terms of point-to-point operation implies that each message is transferred directly from sender to receiver, implementations may use a tree communication pattern. Messages can be forwarded by intermediate nodes where they are split (for scatter) or concatenated (for gather), if this is more efficient. (*End of advice to implementors.*)

```
MPI_ALLTOALLW(sendbuf, sendcounts, sdispls, sendtypes, recvbuf, recvcounts, rdispls, recv-
```

```
types, comm)
IN          sendbuf          starting address of send buffer (choice)
```

ticket93.	IN	sendcounts	non-negative integer array [equal to the group size](of length group size) specifying the number of elements to send to each processor[( array of non-negative integers)]	1 2 3 4
ticket93.	IN	sdispls	integer array (of length group size). Entry j specifies the displacement in bytes (relative to sendbuf) from which to take the outgoing data destined for process j (array of integers)	5 6 7 8 9
	IN	sendtypes	array of datatypes (of length group size). Entry j specifies the type of data to send to process j (array of handles)	10 11 12
	OUT	recvbuf	address of receive buffer (choice)	13 ticket93.
	IN	recvcounts	non-negative integer array [equal to the group size](of length group size) specifying the number of elements that can be received from each processor[ (array of non-negative integers)]	14 ticket93. 15 16 ticket93. 17
	IN	rdispls	integer array (of length group size). Entry i specifies the displacement in bytes (relative to recvbuf) at which to place the incoming data from process i (array of integers)	18 19 20 21 22
	IN	recvtypes	array of datatypes (of length group size). Entry i specifies the type of data received from process i (array of handles)	23 24 25
	IN	comm	communicator (handle)	26 27
<pre>int MPI_Alltoallw(void *sendbuf, int sendcounts[], int sdispls[],                   MPI_Datatype sendtypes[], void *recvbuf, int recvcounts[],                   int rdispls[], MPI_Datatype recvtypes[], MPI_Comm comm)</pre>				28 29 30 31
<pre>MPI_ALLTOALLW(SENDBUF, SENDCOUNTS, SDISPLS, SENDTYPES, RECVBUF, RECVCOUNTS,                RDISPLS, RECVTYPES, COMM, IERROR)</pre>				32 33
<pre>&lt;type&gt; SENDBUF(*), RECVBUF(*) INTEGER SENDCOUNTS(*), SDISPLS(*), SENDTYPES(*), RECVCOUNTS(*), RDISPLS(*), RECVTYPES(*), COMM, IERROR</pre>				34 35 36
<pre>{void MPI::Comm::Alltoallw(const void* sendbuf, const int sendcounts[],                            const int sdispls[], const MPI::Datatype sendtypes[], void*                            recvbuf, const int recvcounts[], const int rdispls[], const                            MPI::Datatype recvtypes[]) const = 0 (binding deprecated, see                            Section 15.2) }</pre>				37 ticket150. 38 39 40 41 ticket150. 42

MPI\_ALLTOALLW is the most general form of [All-to-all]complete exchange. Like MPI\_TYPE\_CREATE\_STRUCT, the most general type constructor, MPI\_ALLTOALLW allows separate specification of count, displacement and datatype. In addition, to allow maximum flexibility, the displacement of blocks within the send and receive buffers is specified in bytes.

ticket87.

If `comm` is an intracommunicator, then the  $j$ -th block sent from process  $i$  is received by process  $j$  and is placed in the  $i$ -th block of `recvbuf`. These blocks need not all have the same size.

The type signature associated with `sendcounts[j]`, `sendtypes[j]` at process  $i$  must be equal to the type signature associated with `recvcounts[i]`, `recvtypes[i]` at process  $j$ . This implies that the amount of data sent must be equal to the amount of data received, pairwise between every pair of processes. Distinct type maps between sender and receiver are still allowed.

The outcome is as if each process sent a message to every other process with

```
MPI_Send(sendbuf + sdispls[i], sendcounts[i], sendtypes[i], i, ...),
```

and received a message from every other process with a call to

```
MPI_Recv(recvbuf + rdispls[i], recvcounts[i], recvtypes[i], i, ...).
```

All arguments on all processes are significant. The argument `comm` must describe the same communicator on all processes.

[ No “in place” option is supported. ] Like for `MPI_ALLTOALLV`, the “in place” option for intracommunicators is specified by passing `MPI_IN_PLACE` to the argument `sendbuf` at all processes. In such a case, `sendcounts`, `sdispls` and `sendtypes` are ignored. The data to be sent is taken from the `recvbuf` and replaced by the received data. Data sent and received must have the same type map as specified by the `recvcounts` and `recvtypes` arrays, and is taken from the locations of the receive buffer specified by `rdispls`.

If `comm` is an intercommunicator, then the outcome is as if each process in group A sends a message to each process in group B, and vice versa. The  $j$ -th send buffer of process  $i$  in group A should be consistent with the  $i$ -th receive buffer of process  $j$  in group B, and vice versa.

*Rationale.* The `MPI_ALLTOALLW` function generalizes several MPI functions by carefully selecting the input arguments. For example, by making all but one process have `sendcounts[i] = 0`, this achieves an `MPI_SCATTERW` function. (*End of rationale.*)

## 5.9 Global Reduction Operations

The functions in this section perform a global reduce operation [(such as `sum`, `max`, `logical AND`, etc.)](for example `sum`, `maximum`, and `logical and`) across all members of a group. The reduction operation can be either one of a predefined list of operations, or a user-defined operation. The global reduction functions come in several flavors: a reduce that returns the result of the reduction to one member of a group, an all-reduce that returns this result to all members of a group, and two scan (parallel prefix) operations. In addition, a reduce-scatter operation combines the functionality of a reduce and of a scatter operation.

## 5.9.1 Reduce

`MPI_REDUCE( sendbuf, recvbuf, count, datatype, op, root, comm)`

IN	<code>sendbuf</code>	address of send buffer (choice)
OUT	<code>recvbuf</code>	address of receive buffer (choice, significant only at root)
IN	<code>count</code>	number of elements in send buffer (non-negative integer)
IN	<code>datatype</code>	data type of elements of send buffer (handle)
IN	<code>op</code>	reduce operation (handle)
IN	<code>root</code>	rank of root process (integer)
IN	<code>comm</code>	communicator (handle)

```
int MPI_Reduce(void* sendbuf, void* recvbuf, int count,
               MPI_Datatype datatype, MPI_Op op, int root, MPI_Comm comm)
```

```
MPI_REDUCE(SENDBUF, RECVBUF, COUNT, DATATYPE, OP, ROOT, COMM, IERROR)
<type> SENDBUF(*), RECVBUF(*)
INTEGER COUNT, DATATYPE, OP, ROOT, COMM, IERROR
```

```
{void MPI::Comm::Reduce(const void* sendbuf, void* recvbuf, int count,
                        const MPI::Datatype& datatype, const MPI::Op& op, int root)
  const = 0 (binding deprecated, see Section 15.2) }
```

If `comm` is an intracommunicator, `MPI_REDUCE` combines the elements provided in the input buffer of each process in the group, using the operation `op`, and returns the combined value in the output buffer of the process with rank `root`. The input buffer is defined by the arguments `sendbuf`, `count` and `datatype`; the output buffer is defined by the arguments `recvbuf`, `count` and `datatype`; both have the same number of elements, with the same type. The routine is called by all group members using the same arguments for `count`, `datatype`, `op`, `root` and `comm`. Thus, all processes provide input buffers and output buffers of the same length, with elements of the same type. Each process can provide one element, or a sequence of elements, in which case the combine operation is executed element-wise on each entry of the sequence. For example, if the operation is `MPI_MAX` and the send buffer contains two elements that are floating point numbers (`count = 2` and `datatype = MPI_FLOAT`), then `recvbuf(1) = global max(sendbuf(1))` and `recvbuf(2) = global max(sendbuf(2))`.

Section 5.9.2, lists the set of predefined operations provided by MPI. That section also enumerates the datatypes [ each operation can be applied to. ] to which each operation can be applied. In addition, users may define their own operations that can be overloaded to operate on several datatypes, either basic or derived. This is further explained in Section 5.9.5.

The operation `op` is always assumed to be associative. All predefined operations are also assumed to be commutative. Users may define operations that are assumed to be associative, but not commutative. The “canonical” evaluation order of a reduction is determined by the ranks of the processes in the group. However, the implementation can take advantage of

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23 ticket150.  
24  
25  
26 ticket150.

40 ticket90.  
41  
42  
43  
44  
45  
46  
47  
48



associativity, or associativity and commutativity in order to change the order of evaluation. This may change the result of the reduction for operations that are not strictly associative and commutative, such as floating point addition.

*Advice to implementors.* It is strongly recommended that `MPI_REDUCE` be implemented so that the same result be obtained whenever the function is applied on the same arguments, appearing in the same order. Note that this may prevent optimizations that take advantage of the physical location of processors. (*End of advice to implementors.*)

*Advice to users.* Some applications may not be able to ignore the non-associative nature of floating-point operations or may use user-defined operations (see Section 5.9.5) that require a special reduction order and cannot be treated as associative. Such applications should enforce the order of evaluation explicitly. For example, in the case of operations that require a strict left-to-right (or right-to-left) evaluation order, this could be done by gathering all operands at a single process (e.g., with `MPI_GATHER`), applying the reduction operation in the desired order (e.g., with `MPI_REDUCE_LOCAL`), and if needed, broadcast or scatter the result to the other processes (e.g., with `MPI_BCAST`). (*End of advice to users.*)

The `datatype` argument of `MPI_REDUCE` must be compatible with `op`. Predefined operators work only with the MPI types listed in Section 5.9.2 and Section 5.9.4. Furthermore, the `datatype` and `op` given for predefined operators must be the same on all processes.

Note that it is possible for users to supply different user-defined operations to `MPI_REDUCE` in each process. MPI does not define which operations are used on which operands in this case. User-defined operators may operate on general, derived datatypes. In this case, each argument that the reduce operation is applied to is one element described by such a datatype, which may contain several basic values. This is further explained in Section 5.9.5.

*Advice to users.* Users should make no assumptions about how `MPI_REDUCE` is implemented. [Safest is]It is safest to ensure that the same function is passed to `MPI_REDUCE` by each process. (*End of advice to users.*)

Overlapping datatypes are permitted in “send” buffers. Overlapping datatypes in “receive” buffers are erroneous and may give unpredictable results.

The “in place” option for intracommunicators is specified by passing the value `MPI_IN_PLACE` to the argument `sendbuf` at the root. In such a case, the input data is taken at the root from the receive buffer, where it will be replaced by the output data.

If `comm` is an intercommunicator, then the call involves all processes in the intercommunicator, but with one group (group A) defining the root process. All processes in the other group (group B) pass the same value in argument `root`, which is the rank of the root in group A. The root passes the value `MPI_ROOT` in `root`. All other processes in group A pass the value `MPI_PROC_NULL` in `root`. Only send buffer arguments are significant in group B and only receive buffer arguments are significant at the root.



## 5.9.2 Predefined Reduction Operations

The following predefined operations are supplied for `MPI_REDUCE` and related functions `MPI_ALLREDUCE`, `MPI_REDUCE_SCATTER`, `MPI_SCAN`, and `MPI_EXSCAN`. These operations are invoked by placing the following in `op`.

Name	Meaning
<code>MPI_MAX</code>	maximum
<code>MPI_MIN</code>	minimum
<code>MPI_SUM</code>	sum
<code>MPI_PROD</code>	product
<code>MPI_LAND</code>	logical and
<code>MPI_BAND</code>	bit-wise and
<code>MPI_LOR</code>	logical or
<code>MPI BOR</code>	bit-wise or
<code>MPI_LXOR</code>	logical exclusive or (xor)
<code>MPI_BXOR</code>	bit-wise exclusive or (xor)
<code>MPI_MAXLOC</code>	max value and location
<code>MPI_MINLOC</code>	min value and location

The two operations `MPI_MINLOC` and `MPI_MAXLOC` are discussed separately in Section 5.9.4. For the other predefined operations, we enumerate below the allowed combinations of `op` and `datatype` arguments. First, define groups of MPI basic datatypes in the following way.

C integer:	<code>MPI_INT</code> , <code>MPI_LONG</code> , <code>MPI_SHORT</code> , <code>MPI_UNSIGNED_SHORT</code> , <code>MPI_UNSIGNED</code> , <code>MPI_UNSIGNED_LONG</code> , <code>MPI_LONG_LONG_INT</code> , <code>MPI_LONG_LONG</code> (as synonym), <code>MPI_UNSIGNED_LONG_LONG</code> , <code>MPI_SIGNED_CHAR</code> , <code>MPI_UNSIGNED_CHAR</code> , <code>MPI_INT8_T</code> , <code>MPI_INT16_T</code> , <code>MPI_INT32_T</code> , <code>MPI_INT64_T</code> , <code>MPI_UINT8_T</code> , <code>MPI_UINT16_T</code> , <code>MPI_UINT32_T</code> , <code>MPI_UINT64_T</code>
Fortran integer:	<code>MPI_INTEGER</code> , <code>MPI_AINT</code> , <code>MPI_OFFSET</code> , and handles returned from <code>MPI_TYPE_CREATE_F90_INTEGER</code> , and if available: <code>MPI_INTEGER1</code> , <code>MPI_INTEGER2</code> , <code>MPI_INTEGER4</code> , <code>MPI_INTEGER8</code> , <code>MPI_INTEGER16</code>
Floating point:	<code>MPI_FLOAT</code> , <code>MPI_DOUBLE</code> , <code>MPI_REAL</code> , <code>MPI_DOUBLE_PRECISION</code> , <code>MPI_LONG_DOUBLE</code> and handles returned from <code>MPI_TYPE_CREATE_F90_REAL</code> ,

		and if available: MPI_REAL2,
		MPI_REAL4, MPI_REAL8, MPI_REAL16
ticket18.	Logical:	MPI_LOGICAL, MPI_C_BOOL
ticket18.	Complex:	MPI_COMPLEX,
ticket18.		MPI_C_FLOAT_COMPLEX,
		MPI_C_DOUBLE_COMPLEX,
ticket64.		MPI_C_LONG_DOUBLE_COMPLEX,
		and handles returned from
		MPI_TYPE_CREATE_F90_COMPLEX,
		and if available: MPI_DOUBLE_COMPLEX,
		MPI_COMPLEX4, MPI_COMPLEX8,
		MPI_COMPLEX16, MPI_COMPLEX32
	Byte:	MPI_BYTE

Now, the valid datatypes for each option is specified below.

Op	Allowed Types
MPI_MAX, MPI_MIN	C integer, Fortran integer, Floating point
MPI_SUM, MPI_PROD	C integer, Fortran integer, Floating point, Complex
MPI_LAND, MPI_LOR, MPI_LXOR	C integer, Logical
MPI_BAND, MPI BOR, MPI_BXOR	C integer, Fortran integer, Byte

The following examples use intracommunicators.

**Example 5.15** A routine that computes the dot product of two vectors that are distributed across a group of processes and returns the answer at node zero.

```

SUBROUTINE PAR_BLAS1(m, a, b, c, comm)
REAL a(m), b(m)          ! local slice of array
REAL c                    ! result (at node zero)
REAL sum
INTEGER m, comm, i, ierr

! local sum
sum = 0.0
DO i = 1, m
    sum = sum + a(i)*b(i)
END DO

! global sum
CALL MPI_REDUCE(sum, c, 1, MPI_REAL, MPI_SUM, 0, comm, ierr)
RETURN

```

**Example 5.16** A routine that computes the product of a vector and an array that are distributed across a group of processes and returns the answer at node zero.

```

SUBROUTINE PAR_BLAS2(m, n, a, b, c, comm)
REAL a(m), b(m,n)        ! local slice of array

```

```

REAL c(n)          ! result
REAL sum(n)
INTEGER n, comm, i, j, ierr

! local sum
DO j= 1, n
    sum(j) = 0.0
    DO i = 1, m
        sum(j) = sum(j) + a(i)*b(i,j)
    END DO
END DO

! global sum
CALL MPI_REDUCE(sum, c, n, MPI_REAL, MPI_SUM, 0, comm, ierr)

! return result at node zero (and garbage at the other nodes)
RETURN

```

### 5.9.3 Signed Characters and Reductions

The types `MPI_SIGNED_CHAR` and `MPI_UNSIGNED_CHAR` can be used in reduction operations. `MPI_CHAR`, `MPI_WCHAR`, and `MPI_CHARACTER` (which represent[s] printable characters) cannot be used in reduction operations. In a heterogeneous environment, `MPI_CHAR`[and `MPI_WCHAR`], `MPI_WCHAR`, and `MPI_CHARACTER` will be translated so as to preserve the printable character, whereas `MPI_SIGNED_CHAR` and `MPI_UNSIGNED_CHAR` will be translated so as to preserve the integer value.

*Advice to users.* The types `MPI_CHAR`, `MPI_WCHAR`, and `MPI_CHARACTER` are intended for characters, and so will be translated to preserve the printable representation, rather than the integer value, if sent between machines with different character codes. The types `MPI_SIGNED_CHAR` and `MPI_UNSIGNED_CHAR` should be used in C if the integer value should be preserved. (*End of advice to users.*)

### 5.9.4 MINLOC and MAXLOC

The operator `MPI_MINLOC` is used to compute a global minimum and also an index attached to the minimum value. `MPI_MAXLOC` similarly computes a global maximum and index. One application of these is to compute a global minimum (maximum) and the rank of the process containing this value.

The operation that defines `MPI_MAXLOC` is:

$$\begin{pmatrix} u \\ i \end{pmatrix} \circ \begin{pmatrix} v \\ j \end{pmatrix} = \begin{pmatrix} w \\ k \end{pmatrix}$$

where

$$w = \max(u, v)$$

and

$$k = \begin{cases} i & \text{if } u > v \\ \min(i, j) & \text{if } u = v \\ j & \text{if } u < v \end{cases}$$

MPI\_MINLOC is defined similarly:

$$\begin{pmatrix} u \\ i \end{pmatrix} \circ \begin{pmatrix} v \\ j \end{pmatrix} = \begin{pmatrix} w \\ k \end{pmatrix}$$

where

$$w = \min(u, v)$$

and

$$k = \begin{cases} i & \text{if } u < v \\ \min(i, j) & \text{if } u = v \\ j & \text{if } u > v \end{cases}$$

Both operations are associative and commutative. Note that if MPI\_MAXLOC is applied to reduce a sequence of pairs  $(u_0, 0), (u_1, 1), \dots, (u_{n-1}, n-1)$ , then the value returned is  $(u, r)$ , where  $u = \max_i u_i$  and  $r$  is the index of the first global maximum in the sequence. Thus, if each process supplies a value and its rank within the group, then a reduce operation with `op = MPI_MAXLOC` will return the maximum value and the rank of the first process with that value. Similarly, MPI\_MINLOC can be used to return a minimum and its index. More generally, MPI\_MINLOC computes a *lexicographic minimum*, where elements are ordered according to the first component of each pair, and ties are resolved according to the second component.

The reduce operation is defined to operate on arguments that consist of a pair: value and index. For both Fortran and C, types are provided to describe the pair. The potentially mixed-type nature of such arguments is a problem in Fortran. The problem is circumvented, for Fortran, by having the MPI-provided type consist of a pair of the same type as value, and coercing the index to this type also. In C, the MPI-provided pair type has distinct types and the index is an `int`.

In order to use MPI\_MINLOC and MPI\_MAXLOC in a reduce operation, one must provide a `datatype` argument that represents a pair (value and index). MPI provides nine such predefined datatypes. The operations MPI\_MAXLOC and MPI\_MINLOC can be used with each of the following datatypes.

Fortran:

Name	Description
MPI_2REAL	pair of REALs
MPI_2DOUBLE_PRECISION	pair of DOUBLE PRECISION variables
MPI_2INTEGER	pair of INTEGERS

C:

Name	Description
MPI_FLOAT_INT	float and int

MPI_DOUBLE_INT	double and int	1
MPI_LONG_INT	long and int	2
MPI_2INT	pair of int	3
MPI_SHORT_INT	short and int	4
MPI_LONG_DOUBLE_INT	long double and int	5

The datatype MPI\_2REAL is *as if* defined by the following (see Section 4.1).

```
MPI_TYPE_CONTIGUOUS(2, MPI_REAL, MPI_2REAL)
```

Similar statements apply for MPI\_2INTEGER, MPI\_2DOUBLE\_PRECISION, and MPI\_2INT.

The datatype MPI\_FLOAT\_INT is *as if* defined by the following sequence of instructions.

```
type[0] = MPI_FLOAT
type[1] = MPI_INT
disp[0] = 0
disp[1] = sizeof(float)
block[0] = 1
block[1] = 1
MPI_TYPE_[ticket118.]CREATE_STRUCT(2, block, disp, type, MPI_FLOAT_INT)
```

Similar statements apply for MPI\_LONG\_INT and MPI\_DOUBLE\_INT.

The following examples use intracommunicators.

**Example 5.17** Each process has an array of 30 doubles, in C. For each of the 30 locations, compute the value and rank of the process containing the largest value.

```
...
/* each process has an array of 30 double: ain[30]
*/
double ain[30], aout[30];
int ind[30];
struct {
    double val;
    int rank;
} in[30], out[30];
int i, myrank, root;

MPI_Comm_rank(comm, &myrank);
for (i=0; i<30; ++i) {
    in[i].val = ain[i];
    in[i].rank = myrank;
}
MPI_Reduce( in, out, 30, MPI_DOUBLE_INT, MPI_MAXLOC, root, comm );
/* At this point, the answer resides on process root
*/
if (myrank == root) {
    /* read ranks out
    */
    for (i=0; i<30; ++i) {
```

```

1         aout[i] = out[i].val;
2         ind[i] = out[i].rank;
3     }
4 }

```

**Example 5.18** Same example, in Fortran.

```

7     ...
8     ! each process has an array of 30 double: ain(30)
9
10    DOUBLE PRECISION ain(30), aout(30)
11    INTEGER ind(30)
12    DOUBLE PRECISION in(2,30), out(2,30)
13    INTEGER i, myrank, root, ierr
14
15    CALL MPI_COMM_RANK(comm, myrank, ierr)
16    DO I=1, 30
17        in(1,i) = ain(i)
18        in(2,i) = myrank    ! myrank is coerced to a double
19    END DO
20
21    CALL MPI_REDUCE( in, out, 30, MPI_2DOUBLE_PRECISION, MPI_MAXLOC, root,
22                                     comm, ierr )
23
24    ! At this point, the answer resides on process root
25
26    IF (myrank .EQ. root) THEN
27        ! read ranks out
28        DO I= 1, 30
29            aout(i) = out(1,i)
30            ind(i) = out(2,i) ! rank is coerced back to an integer
31        END DO
32    END IF

```

**Example 5.19** Each process has a non-empty array of values. Find the minimum global value, the rank of the process that holds it and its index on this process.

```

36    #define LEN    1000
37
38    float val[LEN];          /* local array of values */
39    int count;               /* local number of values */
40    int myrank, minrank, minindex;
41    float minval;
42
43    struct {
44        float value;
45        int index;
46    } in, out;
47
48    /* local minloc */

```

```

in.value = val[0];
in.index = 0;
for (i=1; i < count; i++)
    if (in.value > val[i]) {
        in.value = val[i];
        in.index = i;
    }

    /* global minloc */
MPI_Comm_rank(comm, &myrank);
in.index = myrank*LEN + in.index;
MPI_Reduce( [ticket118.]&in, [ticket118.]&out, 1, MPI_FLOAT_INT, MPI_MINLOC, root, comm );
    /* At this point, the answer resides on process root
    */
if (myrank == root) {
    /* read answer out
    */
    minval = out.value;
    minrank = out.index / LEN;
    minindex = out.index % LEN;
}

```

*Rationale.* The definition of MPI\_MINLOC and MPI\_MAXLOC given here has the advantage that it does not require any special-case handling of these two operations: they are handled like any other reduce operation. A programmer can provide his or her own definition of MPI\_MAXLOC and MPI\_MINLOC, if so desired. The disadvantage is that values and indices have to be first interleaved, and that indices and values have to be coerced to the same type, in Fortran. (*End of rationale.*)

### 5.9.5 User-Defined Reduction Operations

MPI\_OP\_CREATE(function, commute, op)

IN	function	user defined function (function)
IN	commute	true if commutative; false otherwise.
OUT	op	operation (handle)

```
int MPI_Op_create(MPI_User_function *function, int commute, MPI_Op *op)
```

```
MPI_OP_CREATE( FUNCTION, COMMUTE, OP, IERROR)
```

```
EXTERNAL FUNCTION
```

```
LOGICAL COMMUTE
```

```
INTEGER OP, IERROR
```

```
{void MPI::Op::Init(MPI::User_function* function, bool commute) (binding
deprecated, see Section 15.2) }
```

MPI\_OP\_CREATE binds a user-defined [global]reduction operation to an op handle that

ticket150.

ticket150.

ticket120.

can subsequently be used in `MPI_REDUCE`, `MPI_ALLREDUCE`, `MPI_REDUCE_SCATTER`, `MPI_SCAN`, and `MPI_EXSCAN`. The user-defined operation is assumed to be associative. If `commute = true`, then the operation should be both commutative and associative. If `commute = false`, then the order of operands is fixed and is defined to be in ascending, process rank order, beginning with process zero. The order of evaluation can be changed, talking advantage of the associativity of the operation. If `commute = true` then the order of evaluation can be changed, taking advantage of commutativity and associativity.

The `argument` function is the user-defined function, which must have the following four arguments: `invec`, `inoutvec`, `len` and `datatype`.

The ISO C prototype for the function is the following.

```
typedef void MPI_User_function(void *invec, void *inoutvec, int *len,
                               MPI_Datatype *datatype);
```

The Fortran declaration of the user-defined function appears below.

```
SUBROUTINE USER_FUNCTION(INVEC, INOUTVEC, LEN, TYPE)
  <type> INVEC(LEN), INOUTVEC(LEN)
  INTEGER LEN, TYPE
```

The C++ declaration of the user-defined function appears below.

```
{typedef void MPI::User_function(const void* invec, void *inoutvec, int
    len, const Datatype& datatype); (binding deprecated, see
    Section 15.2) }
```

The `datatype` argument is a handle to the data type that was passed into the call to `MPI_REDUCE`. The user reduce function should be written such that the following holds: Let `u[0], ... , u[len-1]` be the `len` elements in the communication buffer described by the arguments `invec`, `len` and `datatype` when the function is invoked; let `v[0], ... , v[len-1]` be `len` elements in the communication buffer described by the arguments `inoutvec`, `len` and `datatype` when the function is invoked; let `w[0], ... , w[len-1]` be `len` elements in the communication buffer described by the arguments `inoutvec`, `len` and `datatype` when the function returns; then  $w[i] = u[i] \circ v[i]$ , for  $i=0, \dots, len-1$ , where  $\circ$  is the reduce operation that the function computes.

Informally, we can think of `invec` and `inoutvec` as arrays of `len` elements that function is combining. The result of the reduction over-writes values in `inoutvec`, hence the name. Each invocation of the function results in the pointwise evaluation of the reduce operator on `len` elements: [I.e] i.e., the function returns in `inoutvec[i]` the value `invec[i]  $\circ$  inoutvec[i]`, for  $i = 0, \dots, count - 1$ , where  $\circ$  is the combining operation computed by the function.

*Rationale.* The `len` argument allows `MPI_REDUCE` to avoid calling the function for each element in the input buffer. Rather, the system can choose to apply the function to chunks of input. In C, it is passed in as a reference for reasons of compatibility with Fortran.

By internally comparing the value of the `datatype` argument to known, global handles, it is possible to overload the use of a single user-defined function for several, different data types. (*End of rationale.*)

General datatypes may be passed to the user function. However, use of datatypes that are not contiguous is likely to lead to inefficiencies.

No MPI communication function may be called inside the user function. `MPI_ABORT` may be called inside the function in case of an error.



*Advice to users.* Suppose one defines a library of user-defined reduce functions that are overloaded: the `datatype` argument is used to select the right execution path at each invocation, according to the types of the operands. The user-defined reduce function cannot “decode” the `datatype` argument that it is passed, and cannot identify, by itself, the correspondence between the datatype handles and the datatype they represent. This correspondence was established when the datatypes were created. Before the library is used, a library initialization preamble must be executed. This preamble code will define the datatypes that are used by the library, and store handles to these datatypes in global, static variables that are shared by the user code and the library code.

The Fortran version of `MPI_REDUCE` will invoke a user-defined reduce function using the Fortran calling conventions and will pass a Fortran-type datatype argument; the C version will use C calling convention and the C representation of a datatype handle. Users who plan to mix languages should define their reduction functions accordingly. (*End of advice to users.*)

*Advice to implementors.* We outline below a naive and inefficient implementation of `MPI_REDUCE` not supporting the “in place” option.

```

MPI_Comm_size(comm, &groupsize);
MPI_Comm_rank(comm, &rank);
if (rank > 0) {
    MPI_Recv(tempbuf, count, datatype, rank-1,...);
    User_reduce(tempbuf, sendbuf, count, datatype);
}
if (rank < groupsize-1) {
    MPI_Send(sendbuf, count, datatype, rank+1, ...);
}
/* answer now resides in process groupsize-1 ... now send to root
*/
if (rank == root) {
    MPI_Irecv(recvbuf, count, datatype, groupsize-1,..., &req);
}
if (rank == groupsize-1) {
    MPI_Send(sendbuf, count, datatype, root, ...);
}
if (rank == root) {
    MPI_Wait(&req, &status);
}

```

The reduction computation proceeds, sequentially, from process 0 to process `groupsize-1`. This order is chosen so as to respect the order of a possibly non-commutative operator defined by the function `User_reduce()`. A more efficient implementation is achieved by taking advantage of associativity and using a logarithmic tree reduction. Commutativity can be used to advantage, for those cases in which the `commute` argument to `MPI_OP_CREATE` is true. Also, the amount of temporary buffer required can be reduced, and communication can be pipelined with computation, by transferring and reducing the elements in chunks of size `len < count`.

The predefined reduce operations can be implemented as a library of user-defined operations. However, better performance might be achieved if MPI\_REDUCE handles these functions as a special case. (*End of advice to implementors.*)

MPI\_OP\_FREE( op)

INOUT op operation (handle)

int MPI\_op\_free( MPI\_Op \*op)

MPI\_OP\_FREE( OP, IERROR)

INTEGER OP, IERROR

{void MPI::Op::Free() (*binding deprecated, see Section 15.2*) }

Marks a user-defined reduction operation for deallocation and sets op to MPI\_OP\_NULL.

### Example of User-defined Reduce

It is time for an example of user-defined reduction. The example in this section uses an intracommunicator.

**Example 5.20** Compute the product of an array of complex numbers, in C.

```
typedef struct {
    double real,imag;
} Complex;

/* the user-defined function
*/
void myProd( Complex *in, Complex *inout, int *len, MPI_Datatype *dptr )
{
    int i;
    Complex c;

    for (i=0; i< *len; ++i) {
        c.real = inout->real*in->real -
                inout->imag*in->imag;
        c.imag = inout->real*in->imag +
                inout->imag*in->real;
        *inout = c;
        in++; inout++;
    }
}

/* and, to call it...
*/
...
```

```

/* each process has an array of 100 Complexes
*/
Complex a[100], answer[100];
MPI_Op myOp;
MPI_Datatype ctype;

/* explain to MPI how type Complex is defined
*/
MPI_Type_contiguous( 2, MPI_DOUBLE, &ctype );
MPI_Type_commit( &ctype );
/* create the complex-product user-op
*/
MPI_Op_create( myProd, [ticket118.] [True]1, &myOp );

MPI_Reduce( a, answer, 100, ctype, myOp, root, comm );

/* At this point, the answer, which consists of 100 Complexes,
* resides on process root
*/

```

### 5.9.6 All-Reduce

MPI includes a variant of the reduce operations where the result is returned to all processes in a group. MPI requires that all processes from the same group participating in these operations receive identical results.

**MPI\_ALLREDUCE( sendbuf, recvbuf, count, datatype, op, comm)**

IN	sendbuf	starting address of send buffer (choice)
OUT	recvbuf	starting address of receive buffer (choice)
IN	count	number of elements in send buffer (non-negative integer)
IN	datatype	data type of elements of send buffer (handle)
IN	op	operation (handle)
IN	comm	communicator (handle)

```

int MPI_Allreduce(void* sendbuf, void* recvbuf, int count,
                 MPI_Datatype datatype, MPI_Op op, MPI_Comm comm)

```

```

MPI_ALLREDUCE(SENDBUF, RECVBUF, COUNT, DATATYPE, OP, COMM, IERROR)
<type> SENDBUF(*), RECVBUF(*)
INTEGER COUNT, DATATYPE, OP, COMM, IERROR

```

```

{void MPI::Comm::Allreduce(const void* sendbuf, void* recvbuf, int count,
                          const MPI::Datatype& datatype, const MPI::Op& op) const = 0
  (binding deprecated, see Section 15.2) }

```

44 ticket150.

47 ticket150.

If `comm` is an intracommunicator, `MPI_ALLREDUCE` behaves the same as `MPI_REDUCE` except that the result appears in the receive buffer of all the group members.

*Advice to implementors.* The all-reduce operations can be implemented as a reduce, followed by a broadcast. However, a direct implementation can lead to better performance. (*End of advice to implementors.*)

The “in place” option for intracommunicators is specified by passing the value `MPI_IN_PLACE` to the argument `sendbuf` at all processes. In this case, the input data is taken at each process from the receive buffer, where it will be replaced by the output data.

If `comm` is an intercommunicator, then the result of the reduction of the data provided by processes in group A is stored at each process in group B, and vice versa. Both groups should provide `count` and `datatype` arguments that specify the same type signature.

The following example uses an intracommunicator.

**Example 5.21** A routine that computes the product of a vector and an array that are distributed across a group of processes and returns the answer at all nodes (see also Example 5.16).

```

SUBROUTINE PAR_BLAS2(m, n, a, b, c, comm)
  REAL a(m), b(m,n)      ! local slice of array
  REAL c(n)              ! result
  REAL sum(n)
  INTEGER n, comm, i, j, ierr

  ! local sum
  DO j= 1, n
    sum(j) = 0.0
    DO i = 1, m
      sum(j) = sum(j) + a(i)*b(i,j)
    END DO
  END DO

  ! global sum
  CALL MPI_ALLREDUCE(sum, c, n, MPI_REAL, MPI_SUM, comm, ierr)

  ! return result at all nodes
  RETURN

```

ticket24.

### 5.9.7 Process-local reduction

The functions in this section are of importance to library implementors who may want to implement special reduction patterns that are otherwise not easily covered by the standard MPI operations.

The following function applies a reduction operator to local arguments.

`MPI_REDUCE_LOCAL( inbuf, inoutbuf, count, datatype, op)`

IN	inbuf	input buffer (choice)
INOUT	inoutbuf	combined input and output buffer (choice)
IN	count	number of elements in inbuf and inoutbuf buffers (non-negative integer)
IN	datatype	data type of elements of inbuf and inoutbuf buffers (handle)
IN	op	operation (handle)

```
int MPI_Reduce_local(void* inbuf, void* inoutbuf, int count,
                    MPI_Datatype datatype, MPI_Op op)
```

```
MPI_REDUCE_LOCAL(INBUF, INOUBUF, COUNT, DATATYPE, OP, IERROR)
    <type> INBUF(*), INOUTBUF(*)
    INTEGER COUNT, DATATYPE, OP, IERROR
```

```
{void MPI::Op::Reduce_local(const void* inbuf, void* inoutbuf, int count,
    const MPI::Datatype& datatype) const (binding deprecated, see
    Section 15.2) }
```

The function applies the operation given by `op` element-wise to the elements of `inbuf` and `inoutbuf` with the result stored element-wise in `inoutbuf`, as explained for user-defined operations in Section 5.9.5. Both `inbuf` and `inoutbuf` (input as well as result) have the same number of elements given by `count` and the same datatype given by `datatype`. The `MPI_IN_PLACE` option is not allowed.

Reduction operations can be queried for their commutativity.

`MPI_OP_COMMUTATIVE( op, commute)`

IN	op	operation (handle)
OUT	commute	true if <code>op</code> is commutative, false otherwise (logical)

```
int MPI_Op_commutative(MPI_Op op, int *commute)
```

```
MPI_OP_COMMUTATIVE(OP, COMMUTE, IERROR)
    LOGICAL COMMUTE
    INTEGER OP, IERROR
```

```
{bool MPI::Op::Is_commutative() const (binding deprecated, see Section 15.2) }
```

## 5.10 Reduce-Scatter

[MPI includes a variant of the reduce operations where the result is scattered to all processes in a group on return. ]MPI includes variants of the reduce operations where the result is scattered to all processes in a group on return. One variant scatters equal-sized blocks to all processes, while another variant scatters blocks that may vary in size for each process.

## 5.10.1 MPI\_REDUCE\_SCATTER\_BLOCK

MPI_REDUCE_SCATTER_BLOCK( sendbuf, recvbuf, recvcnt, datatype, op, comm)			
IN	sendbuf		starting address of send buffer (choice)
OUT	recvbuf		starting address of receive buffer (choice)
IN	recvcnt		element count per block (non-negative integer)
IN	datatype		data type of elements of send and receive buffers (handle)
IN	op		operation (handle)
IN	comm		communicator (handle)

```
int MPI_Reduce_scatter_block(void* sendbuf, void* recvbuf, int recvcnt,
                             MPI_Datatype datatype, MPI_Op op, MPI_Comm comm)
```

```
MPI_REDUCE_SCATTER_BLOCK(SENDBUF, RECVBUF, RECVCOUNT, DATATYPE, OP, COMM,
                           IERROR)
```

```
<type> SENDBUF(*), RECVBUF(*)
```

```
INTEGER RECVCOUNT, DATATYPE, OP, COMM, IERROR
```

```
{void MPI::Comm::Reduce_scatter_block(const void* sendbuf, void* recvbuf,
                                     int recvcnt, const MPI::Datatype& datatype,
                                     const MPI::Op& op) const = 0 (binding deprecated, see Section 15.2) }
```

If `comm` is an intracommunicator, `MPI_REDUCE_SCATTER_BLOCK` first performs a global, element-wise reduction on vectors of `count = n*recvcnt` elements in the send buffers defined by `sendbuf`, `count` and `datatype`, using the operation `op`, where `n` is the number of processes in the group of `comm`. The routine is called by all group members using the same arguments for `recvcnt`, `datatype`, `op` and `comm`. The resulting vector is treated as `n` consecutive blocks of `recvcnt` elements that are scattered to the processes of the group. The `i`-th block is sent to process `i` and stored in the receive buffer defined by `recvbuf`, `recvcnt`, and `datatype`.

*Advice to implementors.* The `MPI_REDUCE_SCATTER_BLOCK` routine is functionally equivalent to: an `MPI_REDUCE` collective operation with `count` equal to `recvcnt*n`, followed by an `MPI_SCATTER` with `sendcount` equal to `recvcnt`. However, a direct implementation may run faster. (*End of advice to implementors.*)

The “in place” option for intracommunicators is specified by passing `MPI_IN_PLACE` in the `sendbuf` argument on *all* processes. In this case, the input data is taken from the receive buffer.

If `comm` is an intercommunicator, then the result of the reduction of the data provided by processes in one group (group A) is scattered among processes in the other group (group B) and vice versa. Within each group, all processes provide the same value for the `recvcnt` argument, and provide input vectors of `count = n*recvcnt` elements stored in the send buffers, where `n` is the size of the group. The number of elements `count` must be the same for the two groups. The resulting vector from the other group is scattered in blocks of `recvcnt` elements among the processes in the group.

*Rationale.* The last restriction is needed so that the length of the send buffer of one group can be determined by the local `recvcount` argument of the other group. Otherwise, a communication is needed to figure out how many elements are reduced. (*End of rationale.*)

### 5.10.2 MPI\_REDUCE\_SCATTER

`MPI_REDUCE_SCATTER` extends the functionality of `MPI_REDUCE_SCATTER_BLOCK` such that the scattered blocks can vary in size. Block sizes are determined by the `recvcounts` array, such that the *i*-th block contains `recvcounts[i]` elements.

`MPI_REDUCE_SCATTER( sendbuf, recvbuf, recvcounts, datatype, op, comm)`

IN	sendbuf	starting address of send buffer (choice)
OUT	recvbuf	starting address of receive buffer (choice)
IN	recvcounts	non-negative integer array (of length group size) specifying the number of elements [in]of the result distributed to each process. [Array must be identical on all calling processes.]
IN	datatype	data type of elements of [input buffer]send and receive buffers (handle)
IN	op	operation (handle)
IN	comm	communicator (handle)

```
int MPI_Reduce_scatter(void* sendbuf, void* recvbuf, int *recvcounts,
                      MPI_Datatype datatype, MPI_Op op, MPI_Comm comm)
```

```
MPI_REDUCE_SCATTER(SENDBUF, RECVBUF, RECVCOUNTS, DATATYPE, OP, COMM,
                   IERROR)
```

```
<type> SENDBUF(*), RECVBUF(*)
```

```
INTEGER RECVCOUNTS(*), DATATYPE, OP, COMM, IERROR
```

```
{void MPI::Comm::Reduce_scatter(const void* sendbuf, void* recvbuf,
                               int recvcounts[], const MPI::Datatype& datatype,
                               const MPI::Op& op) const = 0 (binding deprecated, see Section 15.2) }
```

If `comm` is an intracommunicator, `MPI_REDUCE_SCATTER` first [does an element-wise reduction on vector of count =  $\sum_i \text{recvcounts}[i]$  elements in the send buffer defined by `sendbuf`, count and `datatype`. Next, the resulting vector of results is split into *n* disjoint segments, where *n* is the number of members in the group. Segment *i* contains `recvcounts[i]` elements. The *i*-th segment ]performs a global, element-wise reduction on vectors of count =  $\sum_{i=0}^{n-1} \text{recvcounts}[i]$  elements in the send buffers defined by `sendbuf`, count and `datatype`, using the operation `op`, where *n* is the number of processes in the group of `comm`. The routine is called by all group members using the same arguments for `recvcounts`, `datatype`, `op` and `comm`. The resulting vector is treated as *n* consecutive blocks where the number of elements of the *i*-th block is `recvcounts[i]`. The blocks are scattered to the processes of the group.

The *i*-th block is sent to process *i* and stored in the receive buffer defined by `recvbuf`, `recvcounts[i]` and `datatype`.

*Advice to implementors.* The `MPI_REDUCE_SCATTER` routine is functionally equivalent to: an `MPI_REDUCE` collective operation with `count` equal to the sum of `recvcounts[i]` followed by `MPI_SCATTERV` with `sendcounts` equal to `recvcounts`. However, a direct implementation may run faster. (*End of advice to implementors.*)

The “in place” option for intracommunicators is specified by passing `MPI_IN_PLACE` in the `sendbuf` argument. In this case, the input data is taken from the [top of the receive]receive buffer. It is not required to specify the “in place” option on all processes, since the processes for which `recvcounts[i]==0` may not have allocated a receive buffer.

If `comm` is an intercommunicator, then the result of the reduction of the data provided by processes in [group A]one group (group A) is scattered among processes in [group B]the other group (group B), and vice versa. Within each group, all processes provide the same `recvcounts` argument, and [the sum of the `recvcounts` entries should]provide input vectors of  $\text{count} = \sum_{i=0}^{n-1} \text{recvcounts}[i]$  elements stored in the send buffers, where *n* is the size of the group. The resulting vector from the other group is scattered in blocks of `recvcounts[i]` elements among the processes in the group. The number of elements `count` must be the same for the two groups.

*Rationale.* The last restriction is needed so that the length of the send buffer can be determined by the sum of the local `recvcounts` entries. Otherwise, a communication is needed to figure out how many elements are reduced. (*End of rationale.*)

## 5.11 Scan

### 5.11.1 Inclusive Scan

`MPI_SCAN( sendbuf, recvbuf, count, datatype, op, comm )`

IN	<code>sendbuf</code>	starting address of send buffer (choice)
OUT	<code>recvbuf</code>	starting address of receive buffer (choice)
IN	<code>count</code>	number of elements in input buffer (non-negative integer)
IN	<code>datatype</code>	data type of elements of input buffer (handle)
IN	<code>op</code>	operation (handle)
IN	<code>comm</code>	communicator (handle)

```
int MPI_Scan(void* sendbuf, void* recvbuf, int count,
             MPI_Datatype datatype, MPI_Op op, MPI_Comm comm )
```

```
MPI_SCAN(SENDBUF, RECVBUF, COUNT, DATATYPE, OP, COMM, IERROR)
```

```
<type> SENDBUF(*), RECVBUF(*)
```

```
INTEGER COUNT, DATATYPE, OP, COMM, IERROR
```



ticket150.

```
{void MPI::Intracomm::Scan(const void* sendbuf, void* recvbuf, int count,
    const MPI::Datatype& datatype, const MPI::Op& op) const
    (binding deprecated, see Section 15.2) }
```

If `comm` is an intracommunicator, `MPI_SCAN` is used to perform a prefix reduction on data distributed across the group. The operation returns, in the receive buffer of the process with rank `i`, the reduction of the values in the send buffers of processes with ranks `0, ..., i` (inclusive). The type of operations supported, their semantics, and the constraints on send and receive buffers are as for `MPI_REDUCE`.

The “in place” option for intracommunicators is specified by passing `MPI_IN_PLACE` in the `sendbuf` argument. In this case, the input data is taken from the receive buffer, and replaced by the output data.

This operation is invalid for intercommunicators.

### 5.11.2 Exclusive Scan

`MPI_EXSCAN(sendbuf, recvbuf, count, datatype, op, comm)`

IN	<code>sendbuf</code>	starting address of send buffer (choice)
OUT	<code>recvbuf</code>	starting address of receive buffer (choice)
IN	<code>count</code>	number of elements in input buffer (non-negative integer)
IN	<code>datatype</code>	data type of elements of input buffer (handle)
IN	<code>op</code>	operation (handle)
IN	<code>comm</code>	intracommunicator (handle)

```
int MPI_Exscan(void *sendbuf, void *recvbuf, int count,
    MPI_Datatype datatype, MPI_Op op, MPI_Comm comm)
```

```
MPI_EXSCAN(SENDBUF, RECVBUF, COUNT, DATATYPE, OP, COMM, IERROR)
    <type> SENDBUF(*), RECVBUF(*)
    INTEGER COUNT, DATATYPE, OP, COMM, IERROR
```

```
{void MPI::Intracomm::Exscan(const void* sendbuf, void* recvbuf, int count,
    const MPI::Datatype& datatype, const MPI::Op& op) const
    (binding deprecated, see Section 15.2) }
```

If `comm` is an intracommunicator, `MPI_EXSCAN` is used to perform a prefix reduction on data distributed across the group. The value in `recvbuf` on the process with rank 0 is undefined, and `recvbuf` is not significant on process 0. The value in `recvbuf` on the process with rank 1 is defined as the value in `sendbuf` on the process with rank 0. For processes with rank `i > 1`, the operation returns, in the receive buffer of the process with rank `i`, the reduction of the values in the send buffers of processes with ranks `0, ..., i - 1` (inclusive). The type of operations supported, their semantics, and the constraints on send and receive buffers, are as for `MPI_REDUCE`.

[No “in place” option is supported. ]The “in place” option for intracommunicators is specified by passing `MPI_IN_PLACE` in the `sendbuf` argument. In this case, the input data is taken from the receive buffer, and replaced by the output data. The receive buffer on rank 0 is not changed by this operation.

This operation is invalid for intercommunicators.

*Advice to users.* As for `MPI_SCAN`, MPI does not specify which processes may call the operation, only that the result be correctly computed. In particular, note that the process with rank 1 need not call the `MPI_Op`, since all it needs to do is to receive the value from the process with rank 0. However, all processes, even the processes with ranks zero and one, must provide the same `op`. (*End of advice to users.*)

*Rationale.* The exclusive scan is more general than the inclusive scan. Any inclusive scan operation can be achieved by using the exclusive scan and then locally combining the local contribution. Note that for non-invertable operations such as `MPI_MAX`, the exclusive scan cannot be computed with the inclusive scan. [

MPI-2.1 Ballots 1-4 No in-place version is specified for `MPI_EXSCAN` because it is not clear what this means for the process with rank zero. MPI-2.1 Ballots 1-4 ](*End of rationale.*)

### 5.11.3 Example using `MPI_SCAN`

The example in this section uses an intracommunicator.

**Example 5.22** This example uses a user-defined operation to produce a *segmented scan*. A segmented scan takes, as input, a set of values and a set of logicals, and the logicals delineate the various segments of the scan. For example:

<i>values</i>	$v_1$	$v_2$	$v_3$	$v_4$	$v_5$	$v_6$	$v_7$	$v_8$
<i>logicals</i>	0	0	1	1	1	0	0	1
<i>result</i>	$v_1$	$v_1 + v_2$	$v_3$	$v_3 + v_4$	$v_3 + v_4 + v_5$	$v_6$	$v_6 + v_7$	$v_8$

The operator that produces this effect is,

$$\begin{pmatrix} u \\ i \end{pmatrix} \circ \begin{pmatrix} v \\ j \end{pmatrix} = \begin{pmatrix} w \\ j \end{pmatrix},$$

where,

$$w = \begin{cases} u + v & \text{if } i = j \\ v & \text{if } i \neq j \end{cases}.$$

Note that this is a non-commutative operator. C code that implements it is given below.

```

typedef struct {
    double val;
    int log;
} SegScanPair;

/* the user-defined function
 */
void segScan( SegScanPair *in, SegScanPair *inout, int *len,
              MPI_Datatype *dptr )
{
    int i;
    SegScanPair c;

    for (i=0; i< *len; ++i) {
        if ( in->log == inout->log )
            c.val = in->val + inout->val;
        else
            c.val = inout->val;
        c.log = inout->log;
        *inout = c;
        in++; inout++;
    }
}

```

Note that the `inout` argument to the user-defined function corresponds to the right-hand operand of the operator. When using this operator, we must be careful to specify that it is non-commutative, as in the following.

```

int i, base;
Se[ticket118.] [q]gScanPair  a, answer;
MPI_Op      myOp;
MPI_Datatype type[2] = {MPI_DOUBLE, MPI_INT};
MPI_Aint     disp[2];
int          blocklen[2] = { 1, 1};
MPI_Datatype sspair;

/* explain to MPI how type SegScanPair is defined
 */
MPI_[ticket118.] [A]Get_address( a, disp);
MPI_[ticket118.] [A]Get_address( a.log, disp+1);
base = disp[0];
for (i=0; i<2; ++i) disp[i] -= base;
MPI_Type_[ticket118.]create_struct( 2, blocklen, disp, type, &sspair );
MPI_Type_commit( &sspair );
/* create the segmented-scan user-op
 */
MPI_Op_create( segScan, 0, &myOp );
...
MPI_Scan( [ticket118.]&a, [ticket118.]&answer, 1, sspair, myOp, comm );

```

## 5.12 Correctness

A correct, portable program must invoke collective communications so that deadlock will not occur, whether collective communications are synchronizing or not. The following examples illustrate dangerous use of collective routines on intracommunicators.

**Example 5.23** The following is erroneous.

```
switch(rank) {
  case 0:
    MPI_Bcast(buf1, count, type, 0, comm);
    MPI_Bcast(buf2, count, type, 1, comm);
    break;
  case 1:
    MPI_Bcast(buf2, count, type, 1, comm);
    MPI_Bcast(buf1, count, type, 0, comm);
    break;
}
```

We assume that the group of `comm` is  $\{0,1\}$ . Two processes execute two broadcast operations in reverse order. If the operation is synchronizing then a deadlock will occur.

Collective operations must be executed in the same order at all members of the communication group.

**Example 5.24** The following is erroneous.

```
switch(rank) {
  case 0:
    MPI_Bcast(buf1, count, type, 0, comm0);
    MPI_Bcast(buf2, count, type, 2, comm2);
    break;
  case 1:
    MPI_Bcast(buf1, count, type, 1, comm1);
    MPI_Bcast(buf2, count, type, 0, comm0);
    break;
  case 2:
    MPI_Bcast(buf1, count, type, 2, comm2);
    MPI_Bcast(buf2, count, type, 1, comm1);
    break;
}
```

Assume that the group of `comm0` is  $\{0,1\}$ , of `comm1` is  $\{1, 2\}$  and of `comm2` is  $\{2,0\}$ . If the broadcast is a synchronizing operation, then there is a cyclic dependency: the broadcast in `comm2` completes only after the broadcast in `comm0`; the broadcast in `comm0` completes only after the broadcast in `comm1`; and the broadcast in `comm1` completes only after the broadcast in `comm2`. Thus, the code will deadlock.

Collective operations must be executed in an order so that no cyclic dependences occur.

**Example 5.25** The following is erroneous.

```

switch(rank) {
    case 0:
        MPI_Bcast(buf1, count, type, 0, comm);
        MPI_Send(buf2, count, type, 1, tag, comm);
        break;
    case 1:
        MPI_Recv(buf2, count, type, 0, tag, comm, status);
        MPI_Bcast(buf1, count, type, 0, comm);
        break;
}

```

Process zero executes a broadcast, followed by a blocking send operation. Process one first executes a blocking receive that matches the send, followed by broadcast call that matches the broadcast of process zero. This program may deadlock. The broadcast call on process zero *may* block until process one executes the matching broadcast call, so that the send is not executed. Process one will definitely block on the receive and so, in this case, never executes the broadcast.

The relative order of execution of collective operations and point-to-point operations should be such, so that even if the collective operations and the point-to-point operations are synchronizing, no deadlock will occur.

**Example 5.26** An unsafe, non-deterministic program.

```

switch(rank) {
    case 0:
        MPI_Bcast(buf1, count, type, 0, comm);
        MPI_Send(buf2, count, type, 1, tag, comm);
        break;
    case 1:
        MPI_Recv(buf2, count, type, MPI_ANY_SOURCE, tag, comm, status);
        MPI_Bcast(buf1, count, type, 0, comm);
        MPI_Recv(buf2, count, type, MPI_ANY_SOURCE, tag, comm, status);
        break;
    case 2:
        MPI_Send(buf2, count, type, 1, tag, comm);
        MPI_Bcast(buf1, count, type, 0, comm);
        break;
}

```

All three processes participate in a broadcast. Process 0 sends a message to process 1 after the broadcast, and process 2 sends a message to process 1 before the broadcast. Process 1 receives before and after the broadcast, with a wildcard source argument.

Two possible executions of this program, with different matchings of sends and receives, are illustrated in Figure 5.12. Note that the second execution has the peculiar effect that a send executed after the broadcast is received at another node before the broadcast. This example illustrates the fact that one should not rely on collective communication functions to have particular synchronization effects. A program that works correctly only when the first execution occurs (only when broadcast is synchronizing) is erroneous.

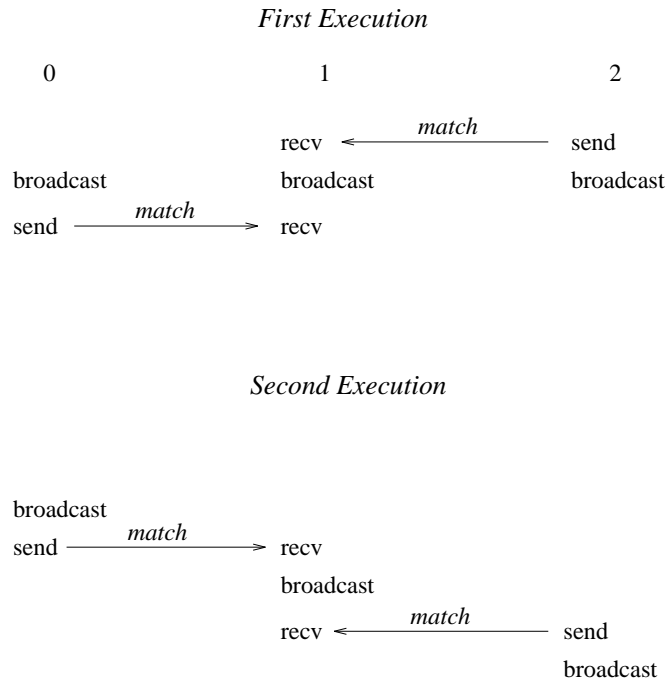


Figure 5.12: A race condition causes non-deterministic matching of sends and receives. One cannot rely on synchronization from a broadcast to make the program deterministic.

Finally, in multithreaded implementations, one can have more than one, concurrently executing, collective communication call at a process. In these situations, it is the user's responsibility to ensure that the same communicator is not used concurrently by two different collective communication calls at the same process.

*Advice to implementors.* Assume that broadcast is implemented using point-to-point MPI communication. Suppose the following two rules are followed.

1. All receives specify their source explicitly (no wildcards).
2. Each process sends all messages that pertain to one collective call before sending any message that pertain to a subsequent collective call.

Then, messages belonging to successive broadcasts cannot be confused, as the order of point-to-point messages is preserved.

It is the implementor's responsibility to ensure that point-to-point messages are not confused with collective messages. One way to accomplish this is, whenever a communicator is created, to also create a "hidden communicator" for collective communication. One could achieve a similar effect more cheaply, for example, by using a hidden tag or context bit to indicate whether the communicator is used for point-to-point or collective communication. (*End of advice to implementors.*)

## Chapter 6

# Groups, Contexts, Communicators, and Caching

### 6.1 Introduction

This chapter introduces MPI features that support the development of parallel libraries. Parallel libraries are needed to encapsulate the distracting complications inherent in parallel implementations of key algorithms. They help to ensure consistent correctness of such procedures, and provide a “higher level” of portability than MPI itself can provide. As such, libraries prevent each programmer from repeating the work of defining consistent data structures, data layouts, and methods that implement key algorithms (such as matrix operations). Since the best libraries come with several variations on parallel systems (different data layouts, different strategies depending on the size of the system or problem, or type of floating point), this too needs to be hidden from the user.

We refer the reader to [42] and [3] for further information on writing libraries in MPI, using the features described in this chapter.

#### 6.1.1 Features Needed to Support Libraries

The key features needed to support the creation of robust parallel libraries are as follows:

- Safe communication space, that guarantees that libraries can communicate as they need to, without conflicting with communication extraneous to the library,
- Group scope for collective operations, that allow libraries to avoid unnecessarily synchronizing uninvolved processes (potentially running unrelated code),
- Abstract process naming to allow libraries to describe their communication in terms suitable to their own data structures and algorithms,
- The ability to “adorn” a set of communicating processes with additional user-defined attributes, such as extra collective operations. This mechanism should provide a means for the user or library writer effectively to extend a message-passing notation.

In addition, a unified mechanism or object is needed for conveniently denoting communication context, the group of communicating processes, to house abstract process naming, and to store adornments.

### 6.1.2 MPI's Support for Libraries

The corresponding concepts that MPI provides, specifically to support robust libraries, are as follows:

- **Contexts** of communication,
- **Groups** of processes,
- **Virtual topologies**,
- **Attribute caching**,
- **Communicators**.

**Communicators** (see [19, 40, 45]) encapsulate all of these ideas in order to provide the appropriate scope for all communication operations in MPI. Communicators are divided into two kinds: intra-communicators for operations within a single group of processes and inter-communicators for operations between two groups of processes.

**Caching.** Communicators (see below) provide a “caching” mechanism that allows one to associate new attributes with communicators, on a par with MPI built-in features. This can be used by advanced users to adorn communicators further, and by MPI to implement some communicator functions. For example, the virtual-topology functions described in Chapter 7 are likely to be supported this way.

**Groups.** Groups define an ordered collection of processes, each with a rank, and it is this group that defines the low-level names for inter-process communication (ranks are used for sending and receiving). Thus, groups define a scope for process names in point-to-point communication. In addition, groups define the scope of collective operations. Groups may be manipulated separately from communicators in MPI, but only communicators can be used in communication operations.

**Intra-communicators.** The most commonly used means for message passing in MPI is via intra-communicators. Intra-communicators contain an instance of a group, contexts of communication for both point-to-point and collective communication, and the ability to include virtual topology and other attributes. These features work as follows:

- **Contexts** provide the ability to have separate safe “universes” of message-passing in MPI. A context is akin to an additional tag that differentiates messages. The system manages this differentiation process. The use of separate communication contexts by distinct libraries (or distinct library invocations) insulates communication internal to the library execution from external communication. This allows the invocation of the library even if there are pending communications on “other” communicators, and avoids the need to synchronize entry or exit into library code. Pending point-to-point communications are also guaranteed not to interfere with collective communications within a single communicator.
- **Groups** define the participants in the communication (see above) of a communicator.



- A **virtual topology** defines a special mapping of the ranks in a group to and from a topology. Special constructors for communicators are defined in Chapter 7 to provide this feature. Intra-communicators as described in this chapter do not have topologies.
- **Attributes** define the local information that the user or library has added to a communicator for later reference.

*Advice to users.* The practice in many communication libraries is that there is a unique, predefined communication universe that includes all processes available when the parallel program is initiated; the processes are assigned consecutive ranks. Participants in a point-to-point communication are identified by their rank; a collective communication (such as broadcast) always involves all processes. This practice can be followed in MPI by using the predefined communicator `MPI_COMM_WORLD`. *Users who are satisfied with this practice can plug in `MPI_COMM_WORLD` wherever a communicator argument is required, and can consequently disregard the rest of this chapter. (End of advice to users.)*

**Inter-communicators.** The discussion has dealt so far with **intra-communication**: communication within a group. MPI also supports **inter-communication**: communication between two non-overlapping groups. When an application is built by composing several parallel modules, it is convenient to allow one module to communicate with another using local ranks for addressing within the second module. This is especially convenient in a client-server computing paradigm, where either client or server are parallel. The support of inter-communication also provides a mechanism for the extension of MPI to a dynamic model where not all processes are preallocated at initialization time. In such a situation, it becomes necessary to support communication across “universes.” Inter-communication is supported by objects called **inter-communicators**. These objects bind two groups together with communication contexts shared by both groups. For inter-communicators, these features work as follows:

- **Contexts** provide the ability to have a separate safe “universe” of message-passing between the two groups. A send in the local group is always a receive in the remote group, and vice versa. The system manages this differentiation process. The use of separate communication contexts by distinct libraries (or distinct library invocations) insulates communication internal to the library execution from external communication. This allows the invocation of the library even if there are pending communications on “other” communicators, and avoids the need to synchronize entry or exit into library code.
- A local and remote group specify the recipients and destinations for an inter-communicator.
- Virtual topology is undefined for an inter-communicator.
- As before, attributes cache defines the local information that the user or library has added to a communicator for later reference.

MPI provides mechanisms for creating and manipulating inter-communicators. They are used for point-to-point and collective communication in an related manner to intra-communicators. Users who do not need inter-communication in their applications can safely

ignore this extension. Users who require inter-communication between overlapping groups must layer this capability on top of MPI.

## 6.2 Basic Concepts

In this section, we turn to a more formal definition of the concepts introduced above.

### 6.2.1 Groups

A **group** is an ordered set of process identifiers (henceforth processes); processes are implementation-dependent objects. Each process in a group is associated with an integer **rank**. Ranks are contiguous and start from zero. Groups are represented by opaque **group objects**, and hence cannot be directly transferred from one process to another. A group is used within a communicator to describe the participants in a communication “universe” and to rank such participants (thus giving them unique names within that “universe” of communication).

There is a special pre-defined group: `MPI_GROUP_EMPTY`, which is a group with no members. The predefined constant `MPI_GROUP_NULL` is the value used for invalid group handles.

*Advice to users.* `MPI_GROUP_EMPTY`, which is a valid handle to an empty group, should not be confused with `MPI_GROUP_NULL`, which in turn is an invalid handle. The former may be used as an argument to group operations; the latter, which is returned when a group is freed, is not a valid argument. (*End of advice to users.*)

*Advice to implementors.* A group may be represented by a virtual-to-real process-address-translation table. Each communicator object (see below) would have a pointer to such a table.

Simple implementations of MPI will enumerate groups, such as in a table. However, more advanced data structures make sense in order to improve scalability and memory usage with large numbers of processes. Such implementations are possible with MPI. (*End of advice to implementors.*)

### 6.2.2 Contexts

A **context** is a property of communicators (defined next) that allows partitioning of the communication space. A message sent in one context cannot be received in another context. Furthermore, where permitted, collective operations are independent of pending point-to-point operations. Contexts are not explicit MPI objects; they appear only as part of the realization of communicators (below).

*Advice to implementors.* Distinct communicators in the same process have distinct contexts. A context is essentially a system-managed tag (or tags) needed to make a communicator safe for point-to-point and MPI-defined collective communication. Safety means that collective and point-to-point communication within one communicator do not interfere, and that communication over distinct communicators don’t interfere.

A possible implementation for a context is as a supplemental tag attached to messages on send and matched on receive. Each intra-communicator stores the value of its two tags (one for point-to-point and one for collective communication). Communicator-generating functions use a collective communication to agree on a new group-wide unique context.

Analogously, in inter-communication, two context tags are stored per communicator, one used by group A to send and group B to receive, and a second used by group B to send and for group A to receive.

Since contexts are not explicit objects, other implementations are also possible. (*End of advice to implementors.*)

### 6.2.3 Intra-Communicators

Intra-communicators bring together the concepts of group and context. To support implementation-specific optimizations, and application topologies (defined in the next chapter, Chapter 7), communicators may also “cache” additional information (see Section 6.7). MPI communication operations reference communicators to determine the scope and the “communication universe” in which a point-to-point or collective operation is to operate.

Each communicator contains a group of valid participants; this group always includes the local process. The source and destination of a message is identified by process rank within that group.

For collective communication, the intra-communicator specifies the set of processes that participate in the collective operation (and their order, when significant). Thus, the communicator restricts the “spatial” scope of communication, and provides machine-independent process addressing through ranks.

Intra-communicators are represented by opaque **intra-communicator objects**, and hence cannot be directly transferred from one process to another.

### 6.2.4 Predefined Intra-Communicators

An initial intra-communicator `MPI_COMM_WORLD` of all processes the local process can communicate with after initialization (itself included) is defined once `MPI_INIT` or `MPI_INIT_THREAD` has been called. In addition, the communicator `MPI_COMM_SELF` is provided, which includes only the process itself.

The predefined constant `MPI_COMM_NULL` is the value used for invalid communicator handles.

In a static-process-model implementation of MPI, all processes that participate in the computation are available after MPI is initialized. For this case, `MPI_COMM_WORLD` is a communicator of all processes available for the computation; this communicator has the same value in all processes. In an implementation of MPI where processes can dynamically join an MPI execution, it may be the case that a process starts an MPI computation without having access to all other processes. In such situations, `MPI_COMM_WORLD` is a communicator incorporating all processes with which the joining process can immediately communicate. Therefore, `MPI_COMM_WORLD` may simultaneously represent disjoint groups in different processes.

All MPI implementations are required to provide the `MPI_COMM_WORLD` communicator. It cannot be deallocated during the life of a process. The group corresponding to this communicator does not appear as a pre-defined constant, but it may be accessed using

MPI\_COMM\_GROUP (see below). MPI does not specify the correspondence between the process rank in MPI\_COMM\_WORLD and its (machine-dependent) absolute address. Neither does MPI specify the function of the host process, if any. Other implementation-dependent, predefined communicators may also be provided.

## 6.3 Group Management

This section describes the manipulation of process groups in MPI. These operations are local and their execution does not require interprocess communication.

### 6.3.1 Group Accessors

MPI\_GROUP\_SIZE(group, size)

IN	group	group (handle)
OUT	size	number of processes in the group (integer)

int MPI\_Group\_size(MPI\_Group group, int \*size)

MPI\_GROUP\_SIZE(GROUP, SIZE, IERROR)

INTEGER GROUP, SIZE, IERROR

{int MPI::Group::Get\_size() const *(binding deprecated, see Section 15.2)* }

MPI\_GROUP\_RANK(group, rank)

IN	group	group (handle)
OUT	rank	rank of the calling process in group, or MPI_UNDEFINED if the process is not a member (integer)

int MPI\_Group\_rank(MPI\_Group group, int \*rank)

MPI\_GROUP\_RANK(GROUP, RANK, IERROR)

INTEGER GROUP, RANK, IERROR

{int MPI::Group::Get\_rank() const *(binding deprecated, see Section 15.2)* }

MPI\_GROUP\_TRANSLATE\_RANKS (group1, n, ranks1, group2, ranks2)

IN	group1	group1 (handle)
IN	n	number of ranks in ranks1 and ranks2 arrays (integer)
IN	ranks1	array of zero or more valid ranks in group1
IN	group2	group2 (handle)
OUT	ranks2	array of corresponding ranks in group2, MPI_UNDEFINED when no correspondence exists.

```
int MPI_Group_translate_ranks (MPI_Group group1, int n, int *ranks1,
                             MPI_Group group2, int *ranks2)
```

```
MPI_GROUP_TRANSLATE_RANKS(GROUP1, N, RANKS1, GROUP2, RANKS2, IERROR)
    INTEGER GROUP1, N, RANKS1(*), GROUP2, RANKS2(*), IERROR
```

```
{static void MPI::Group::Translate_ranks (const MPI::Group& group1, int n,
    const int ranks1[], const MPI::Group& group2, int ranks2[])
    (binding deprecated, see Section 15.2) }
```

This function is important for determining the relative numbering of the same processes in two different groups. For instance, if one knows the ranks of certain processes in the group of MPI\_COMM\_WORLD, one might want to know their ranks in a subset of that group.

MPI\_PROC\_NULL is a valid rank for input to MPI\_GROUP\_TRANSLATE\_RANKS, which returns MPI\_PROC\_NULL as the translated rank.

MPI\_GROUP\_COMPARE(group1, group2, result)

IN	group1	first group (handle)
IN	group2	second group (handle)
OUT	result	result (integer)

```
int MPI_Group_compare(MPI_Group group1, MPI_Group group2, int *result)
```

```
MPI_GROUP_COMPARE(GROUP1, GROUP2, RESULT, IERROR)
    INTEGER GROUP1, GROUP2, RESULT, IERROR
```

```
{static int MPI::Group::Compare(const MPI::Group& group1,
    const MPI::Group& group2) (binding deprecated, see Section 15.2) }
```

MPI\_IDENT results if the group members and group order is exactly the same in both groups. This happens for instance if group1 and group2 are the same handle. MPI\_SIMILAR results if the group members are the same but the order is different. MPI\_UNEQUAL results otherwise.

### 6.3.2 Group Constructors

Group constructors are used to subset and superset existing groups. These constructors construct new groups from existing groups. These are local operations, and distinct groups may be defined on different processes; a process may also define a group that does not include itself. Consistent definitions are required when groups are used as arguments in

communicator-building functions. MPI does not provide a mechanism to build a group from scratch, but only from other, previously defined groups. The base group, upon which all other groups are defined, is the group associated with the initial communicator `MPI_COMM_WORLD` (accessible through the function `MPI_COMM_GROUP`).

*Rationale.* In what follows, there is no group duplication function analogous to `MPI_COMM_DUP`, defined later in this chapter. There is no need for a group duplicator. A group, once created, can have several references to it by making copies of the handle. The following constructors address the need for subsets and supersets of existing groups. (*End of rationale.*)

*Advice to implementors.* Each group constructor behaves as if it returned a new group object. When this new group is a copy of an existing group, then one can avoid creating such new objects, using a reference-count mechanism. (*End of advice to implementors.*)

`MPI_COMM_GROUP(comm, group)`

IN	comm	communicator (handle)
OUT	group	group corresponding to comm (handle)

`int MPI_Comm_group(MPI_Comm comm, MPI_Group *group)`

`MPI_COMM_GROUP(COMM, GROUP, IERROR)`

INTEGER COMM, GROUP, IERROR

`{MPI::Group MPI::Comm::Get_group() const` (*binding deprecated, see Section 15.2*) }

`MPI_COMM_GROUP` returns in `group` a handle to the group of `comm`.

`MPI_GROUP_UNION(group1, group2, newgroup)`

IN	group1	first group (handle)
IN	group2	second group (handle)
OUT	newgroup	union group (handle)

`int MPI_Group_union(MPI_Group group1, MPI_Group group2,  
MPI_Group *newgroup)`

`MPI_GROUP_UNION(GROUP1, GROUP2, NEWGROUP, IERROR)`

INTEGER GROUP1, GROUP2, NEWGROUP, IERROR

`{static MPI::Group MPI::Group::Union(const MPI::Group& group1,  
const MPI::Group& group2)` (*binding deprecated, see Section 15.2*) }

```

MPI_GROUP_INTERSECTION(group1, group2, newgroup)
    IN      group1      first group (handle)
    IN      group2      second group (handle)
    OUT     newgroup     intersection group (handle)

int MPI_Group_intersection(MPI_Group group1, MPI_Group group2,
    MPI_Group *newgroup)

MPI_GROUP_INTERSECTION(GROUP1, GROUP2, NEWGROUP, IERROR)
    INTEGER GROUP1, GROUP2, NEWGROUP, IERROR
{static MPI::Group MPI::Group::Intersect(const MPI::Group& group1,
    const MPI::Group& group2) (binding deprecated, see Section 15.2) }

```

```

MPI_GROUP_DIFFERENCE(group1, group2, newgroup)
    IN      group1      first group (handle)
    IN      group2      second group (handle)
    OUT     newgroup     difference group (handle)

int MPI_Group_difference(MPI_Group group1, MPI_Group group2,
    MPI_Group *newgroup)

MPI_GROUP_DIFFERENCE(GROUP1, GROUP2, NEWGROUP, IERROR)
    INTEGER GROUP1, GROUP2, NEWGROUP, IERROR
{static MPI::Group MPI::Group::Difference(const MPI::Group& group1,
    const MPI::Group& group2) (binding deprecated, see Section 15.2) }

```

The set-like operations are defined as follows:

**union** All elements of the first group (group1), followed by all elements of second group (group2) not in first.

**intersect** all elements of the first group that are also in the second group, ordered as in first group.

**difference** all elements of the first group that are not in the second group, ordered as in the first group.

Note that for these operations the order of processes in the output group is determined primarily by order in the first group (if possible) and then, if necessary, by order in the second group. Neither union nor intersection are commutative, but both are associative.

The new group can be empty, that is, equal to MPI\_GROUP\_EMPTY.

```

1 MPI_GROUP_INCL(group, n, ranks, newgroup)
2     IN      group      group (handle)
3
4     IN      n          number of elements in array ranks (and size of
5                          newgroup) (integer)
6
7     IN      ranks      ranks of processes in group to appear in
8                          newgroup (array of integers)
9
10    OUT     newgroup    new group derived from above, in the order defined by
11                          ranks (handle)

```

```

12 int MPI_Group_incl(MPI_Group group, int n, int *ranks, MPI_Group *newgroup)

```

```

13 MPI_GROUP_INCL(GROUP, N, RANKS, NEWGROUP, IERROR)
14     INTEGER GROUP, N, RANKS(*), NEWGROUP, IERROR

```

```

15 {MPI::Group MPI::Group::Incl(int n, const int ranks[]) const (binding
16 deprecated, see Section 15.2) }

```

The function `MPI_GROUP_INCL` creates a group `newgroup` that consists of the `n` processes in `group` with ranks `rank[0], ..., rank[n-1]`; the process with rank `i` in `newgroup` is the process with rank `ranks[i]` in `group`. Each of the `n` elements of `ranks` must be a valid rank in `group` and all elements must be distinct, or else the program is erroneous. If `n = 0`, then `newgroup` is `MPI_GROUP_EMPTY`. This function can, for instance, be used to reorder the elements of a group. See also `MPI_GROUP_COMPARE`.

```

25
26 MPI_GROUP_EXCL(group, n, ranks, newgroup)
27     IN      group      group (handle)
28
29     IN      n          number of elements in array ranks (integer)
30
31     IN      ranks      array of integer ranks in group not to appear in
32                          newgroup
33
34     OUT     newgroup    new group derived from above, preserving the order
35                          defined by group (handle)

```

```

36 int MPI_Group_excl(MPI_Group group, int n, int *ranks, MPI_Group *newgroup)

```

```

37 MPI_GROUP_EXCL(GROUP, N, RANKS, NEWGROUP, IERROR)
38     INTEGER GROUP, N, RANKS(*), NEWGROUP, IERROR

```

```

39 {MPI::Group MPI::Group::Excl(int n, const int ranks[]) const (binding
40 deprecated, see Section 15.2) }

```

The function `MPI_GROUP_EXCL` creates a group of processes `newgroup` that is obtained by deleting from `group` those processes with ranks `ranks[0] ... ranks[n-1]`. The ordering of processes in `newgroup` is identical to the ordering in `group`. Each of the `n` elements of `ranks` must be a valid rank in `group` and all elements must be distinct; otherwise, the program is erroneous. If `n = 0`, then `newgroup` is identical to `group`.



MPI\_GROUP\_RANGE\_INCL(group, n, ranges, newgroup)

IN	group	group (handle)
IN	n	number of triplets in array <b>ranges</b> (integer)
IN	ranges	a one-dimensional array of integer triplets, of the form (first rank, last rank, stride) indicating ranks in <b>group</b> of processes to be included in <b>newgroup</b>
OUT	newgroup	new group derived from above, in the order defined by <b>ranges</b> (handle)

```
int MPI_Group_range_incl(MPI_Group group, int n, int ranges[][3],
                        MPI_Group *newgroup)
```

```
MPI_GROUP_RANGE_INCL(GROUP, N, RANGES, NEWGROUP, IERROR)
    INTEGER GROUP, N, RANGES(3,*), NEWGROUP, IERROR
```

```
{MPI::Group MPI::Group::Range_incl(int n, const int ranges[][3]) const
    (binding deprecated, see Section 15.2) }
```

If **ranges** consist of the triplets

$$(first_1, last_1, stride_1), \dots, (first_n, last_n, stride_n)$$

then **newgroup** consists of the sequence of processes in **group** with ranks

$$first_1, first_1 + stride_1, \dots, first_1 + \left\lfloor \frac{last_1 - first_1}{stride_1} \right\rfloor stride_1, \dots$$

$$first_n, first_n + stride_n, \dots, first_n + \left\lfloor \frac{last_n - first_n}{stride_n} \right\rfloor stride_n.$$

Each computed rank must be a valid rank in **group** and all computed ranks must be distinct, or else the program is erroneous. Note that we may have  $first_i > last_i$ , and  $stride_i$  may be negative, but cannot be zero.

The functionality of this routine is specified to be equivalent to expanding the array of **ranges** to an array of the included ranks and passing the resulting array of ranks and other arguments to **MPI\_GROUP\_INCL**. A call to **MPI\_GROUP\_INCL** is equivalent to a call to **MPI\_GROUP\_RANGE\_INCL** with each rank *i* in **ranks** replaced by the triplet (*i*, *i*, 1) in the argument **ranges**.

MPI\_GROUP\_RANGE\_EXCL(group, n, ranges, newgroup)

IN	group	group (handle)
IN	n	number of elements in array <b>ranges</b> (integer)
IN	ranges	a one-dimensional array of integer triplets of the form (first rank, last rank, stride), indicating the ranks in <b>group</b> of processes to be excluded from the output group <b>newgroup</b> .
OUT	newgroup	new group derived from above, preserving the order in <b>group</b> (handle)

```

1  int MPI_Group_range_excl(MPI_Group group, int n, int ranges[][3],
2                          MPI_Group *newgroup)
3
4  MPI_GROUP_RANGE_EXCL(GROUP, N, RANGES, NEWGROUP, IERROR)
5  INTEGER GROUP, N, RANGES(3,*), NEWGROUP, IERROR
6
7  {MPI::Group MPI::Group::Range_excl(int n, const int ranges[][3]) const
8
9  (binding deprecated, see Section 15.2) }

```

Each computed rank must be a valid rank in `group` and all computed ranks must be distinct, or else the program is erroneous.

The functionality of this routine is specified to be equivalent to expanding the array of ranges to an array of the excluded ranks and passing the resulting array of ranks and other arguments to `MPI_GROUP_EXCL`. A call to `MPI_GROUP_EXCL` is equivalent to a call to `MPI_GROUP_RANGE_EXCL` with each rank `i` in `ranks` replaced by the triplet `(i,i,1)` in the argument `ranges`.

*Advice to users.* The range operations do not explicitly enumerate ranks, and therefore are more scalable if implemented efficiently. Hence, we recommend MPI programmers to use them whenever possible, as high-quality implementations will take advantage of this fact. (*End of advice to users.*)

*Advice to implementors.* The range operations should be implemented, if possible, without enumerating the group members, in order to obtain better scalability (time and space). (*End of advice to implementors.*)

### 6.3.3 Group Destructors

```

28  MPI_GROUP_FREE(group)
29
30  INOUT    group                group (handle)
31
32  int MPI_Group_free(MPI_Group *group)
33
34  MPI_GROUP_FREE(GROUP, IERROR)
35  INTEGER GROUP, IERROR
36
37  {void MPI::Group::Free() (binding deprecated, see Section 15.2) }

```

This operation marks a group object for deallocation. The handle `group` is set to `MPI_GROUP_NULL` by the call. Any on-going operation using this group will complete normally.

*Advice to implementors.* One can keep a reference count that is incremented for each call to `MPI_COMM_GROUP`, `MPI_COMM_CREATE` and `MPI_COMM_DUP`, and decremented for each call to `MPI_GROUP_FREE` or `MPI_COMM_FREE`; the group object is ultimately deallocated when the reference count drops to zero. (*End of advice to implementors.*)

## 6.4 Communicator Management

This section describes the manipulation of communicators in MPI. Operations that access communicators are local and their execution does not require interprocess communication. Operations that create communicators are collective and may require interprocess communication.

*Advice to implementors.* High-quality implementations should amortize the overheads associated with the creation of communicators (for the same group, or subsets thereof) over several calls, by allocating multiple contexts with one collective communication. (*End of advice to implementors.*)

### 6.4.1 Communicator Accessors

The following are all local operations.

`MPI_COMM_SIZE(comm, size)`

IN	<code>comm</code>	communicator (handle)
OUT	<code>size</code>	number of processes in the group of <code>comm</code> (integer)

`int MPI_Comm_size(MPI_Comm comm, int *size)`

`MPI_COMM_SIZE(COMM, SIZE, IERROR)`

`INTEGER COMM, SIZE, IERROR`

`{int MPI::Comm::Get_size() const (binding deprecated, see Section 15.2) }`

*Rationale.* This function is equivalent to accessing the communicator's group with `MPI_COMM_GROUP` (see above), computing the size using `MPI_GROUP_SIZE`, and then freeing the temporary group via `MPI_GROUP_FREE`. However, this function is so commonly used, that this shortcut was introduced. (*End of rationale.*)

*Advice to users.* This function indicates the number of processes involved in a communicator. For `MPI_COMM_WORLD`, it indicates the total number of processes available (for this version of MPI, there is no standard way to change the number of processes once initialization has taken place).

This call is often used with the next call to determine the amount of concurrency available for a specific library or program. The following call, `MPI_COMM_RANK` indicates the rank of the process that calls it in the range from `0...size-1`, where `size` is the return value of `MPI_COMM_SIZE`. (*End of advice to users.*)

`MPI_COMM_RANK(comm, rank)`

IN	<code>comm</code>	communicator (handle)
OUT	<code>rank</code>	rank of the calling process in group of <code>comm</code> (integer)

```
1 int MPI_Comm_rank(MPI_Comm comm, int *rank)
```

```
2 MPI_COMM_RANK(COMM, RANK, IERROR)
```

```
3 INTEGER COMM, RANK, IERROR
```

```
4 {int MPI::Comm::Get_rank() const (binding deprecated, see Section 15.2) }
```

*Rationale.* This function is equivalent to accessing the communicator's group with MPI\_COMM\_GROUP (see above), computing the rank using MPI\_GROUP\_RANK, and then freeing the temporary group via MPI\_GROUP\_FREE. However, this function is so commonly used, that this shortcut was introduced. (*End of rationale.*)

*Advice to users.* This function gives the rank of the process in the particular communicator's group. It is useful, as noted above, in conjunction with MPI\_COMM\_SIZE.

Many programs will be written with the master-slave model, where one process (such as the rank-zero process) will play a supervisory role, and the other processes will serve as compute nodes. In this framework, the two preceding calls are useful for determining the roles of the various processes of a communicator. (*End of advice to users.*)

```
21 MPI_COMM_COMPARE(comm1, comm2, result)
```

```
22 IN      comm1      first communicator (handle)
```

```
23 IN      comm2      second communicator (handle)
```

```
24 OUT     result     result (integer)
```

```
27 int MPI_Comm_compare(MPI_Comm comm1, MPI_Comm comm2, int *result)
```

```
28 MPI_COMM_COMPARE(COMM1, COMM2, RESULT, IERROR)
```

```
29 INTEGER COMM1, COMM2, RESULT, IERROR
```

```
30 {static int MPI::Comm::Compare(const MPI::Comm& comm1,
31                                const MPI::Comm& comm2) (binding deprecated, see Section 15.2) }
```

MPI\_IDENT results if and only if comm1 and comm2 are handles for the same object (identical groups and same contexts). MPI\_CONGRUENT results if the underlying groups are identical in constituents and rank order; these communicators differ only by context. MPI\_SIMILAR results if the group members of both communicators are the same but the rank order differs. MPI\_UNEQUAL results otherwise.

## 6.4.2 Communicator Constructors

The following are collective functions that are invoked by all processes in the group or groups associated with comm.

*Rationale.* Note that there is a chicken-and-egg aspect to MPI in that a communicator is needed to create a new communicator. The base communicator for all MPI communicators is predefined outside of MPI, and is MPI\_COMM\_WORLD. This model was arrived at after considerable debate, and was chosen to increase “safety” of programs written in MPI. (*End of rationale.*)

The MPI interface provides four communicator construction routines that apply to both intracommunicators and intercommunicators. The construction routine `MPI_INTERCOMM_CREATE` (discussed later) applies only to intercommunicators.

An intracommunicator involves a single group while an intercommunicator involves two groups. Where the following discussions address intercommunicator semantics, the two groups in an intercommunicator are called the *left* and *right* groups. A process in an intercommunicator is a member of either the left or the right group. From the point of view of that process, the group that the process is a member of is called the *local* group; the other group (relative to that process) is the *remote* group. The left and right group labels give us a way to describe the two groups in an intercommunicator that is not relative to any particular process (as the local and remote groups are).

`MPI_COMM_DUP(comm, newcomm)`

IN	comm	communicator (handle)
OUT	newcomm	copy of comm (handle)

`int MPI_Comm_dup(MPI_Comm comm, MPI_Comm *newcomm)`

`MPI_COMM_DUP(COMM, NEWCOMM, IERROR)`  
 INTEGER COMM, NEWCOMM, IERROR

`{MPI::Intracomm MPI::Intracomm::Dup() const` *(binding deprecated, see Section 15.2)*  
`}`

`{MPI::Intercomm MPI::Intercomm::Dup() const` *(binding deprecated, see Section 15.2)*  
`}`

`{MPI::Cartcomm MPI::Cartcomm::Dup() const` *(binding deprecated, see Section 15.2)* `}`

`{MPI::Graphcomm MPI::Graphcomm::Dup() const` *(binding deprecated, see Section 15.2)*  
`}`

`{MPI::Distgraphcomm MPI::Distgraphcomm::Dup() const` *(binding deprecated, see*  
*Section 15.2)* `}`

`{MPI::Comm& MPI::Comm::Clone() const = 0` *(binding deprecated, see Section 15.2)* `}`

`{MPI::Intracomm& MPI::Intracomm::Clone() const` *(binding deprecated, see*  
*Section 15.2)* `}`

`{MPI::Intercomm& MPI::Intercomm::Clone() const` *(binding deprecated, see*  
*Section 15.2)* `}`

`{MPI::Cartcomm& MPI::Cartcomm::Clone() const` *(binding deprecated, see*  
*Section 15.2)* `}`

`{MPI::Graphcomm& MPI::Graphcomm::Clone() const` *(binding deprecated, see*  
*Section 15.2)* `}`

`{MPI::Distgraphcomm& MPI::Distgraphcomm::Clone() const` *(binding deprecated, see*  
*Section 15.2)* `}`

`MPI_COMM_DUP` Duplicates the existing communicator `comm` with associated key values. For each key value, the respective copy callback function determines the attribute value associated with this key in the new communicator; one particular action that a copy callback may take is to delete the attribute from the new communicator. Returns in `newcomm` a new communicator with the same group or groups, any copied cached information, but a new context (see Section 6.7.1). Please see Section 16.1.7 on page 492 for further discussion about the C++ bindings for `Dup()` and `Clone()`.

*Advice to users.* This operation is used to provide a parallel library call with a duplicate communication space that has the same properties as the original communicator. This includes any attributes (see below), and topologies (see Chapter 7). This call is valid even if there are pending point-to-point communications involving the communicator `comm`. A typical call might involve a `MPI_COMM_DUP` at the beginning of the parallel call, and an `MPI_COMM_FREE` of that duplicated communicator at the end of the call. Other models of communicator management are also possible.

This call applies to both intra- and inter-communicators. (*End of advice to users.*)

*Advice to implementors.* One need not actually copy the group information, but only add a new reference and increment the reference count. Copy on write can be used for the cached information. (*End of advice to implementors.*)

`MPI_COMM_CREATE(comm, group, newcomm)`

IN	<code>comm</code>	communicator (handle)
IN	<code>group</code>	Group, which is a subset of the group of <code>comm</code> (handle)
OUT	<code>newcomm</code>	new communicator (handle)

`int MPI_Comm_create(MPI_Comm comm, MPI_Group group, MPI_Comm *newcomm)`

`MPI_COMM_CREATE(COMM, GROUP, NEWCOMM, IERROR)`

`INTEGER COMM, GROUP, NEWCOMM, IERROR`

`{MPI::Intercomm MPI::Intercomm::Create(const MPI::Group& group) const`  
*(binding deprecated, see Section 15.2) }*

`{MPI::Intracomm MPI::Intracomm::Create(const MPI::Group& group) const`  
*(binding deprecated, see Section 15.2) }*

[ If `comm` is an intra-communicator, this function creates a new communicator `newcomm` with communication group defined by `group` and a new context. No cached information propagates from `comm` to `newcomm`. The function returns `MPI_COMM_NULL` to processes that are not in `group`. The call is erroneous if not all `group` arguments have the same value, or if `group` is not a subset of the group associated with `comm`. Note that the call is to be executed by all processes in `comm`, even if they do not belong to the new group. ]

If `comm` is an intracommunicator, this function returns a new communicator `newcomm` with communication group defined by the `group` argument. No cached information propagates from `comm` to `newcomm`. Each process must call with a `group` argument that is a subgroup

of the `group` associated with `comm`; this could be `MPI_GROUP_EMPTY`. The processes may specify different values for the `group` argument. If a process calls with a non-empty `group` then all processes in that `group` must call the function with the same `group` as argument, that is the same processes in the same order. Otherwise the call is erroneous. This implies that the set of groups specified across the processes must be disjoint. If the calling process is a member of the group given as `group` argument, then `newcomm` is a communicator with `group` as its associated group. In the case that a process calls with a `group` to which it does not belong, e.g., `MPI_GROUP_EMPTY`, then `MPI_COMM_NULL` is returned as `newcomm`. The function is collective and must be called by all processes in the group of `comm`.

*Rationale.* The interface supports the original mechanism from MPI-1.1, which required the same `group` in all processes of `comm`. It was extended in MPI-2.2 to allow the use of disjoint subgroups in order to allow implementations to eliminate unnecessary communication that `MPI_COMM_SPLIT` would incur when the user already knows the membership of the disjoint subgroups. (*End of rationale.*)

*Rationale.* The requirement that the entire group of `comm` participate in the call stems from the following considerations:

- It allows the implementation to layer `MPI_COMM_CREATE` on top of regular collective communications.
- It provides additional safety, in particular in the case where partially overlapping groups are used to create new communicators.
- It permits implementations sometimes to avoid communication related to context creation.

(*End of rationale.*)

*Advice to users.* `MPI_COMM_CREATE` provides a means to subset a group of processes for the purpose of separate MIMD computation, with separate communication space. `newcomm`, which emerges from `MPI_COMM_CREATE` can be used in subsequent calls to `MPI_COMM_CREATE` (or other communicator constructors) further to subdivide a computation into parallel sub-computations. A more general service is provided by `MPI_COMM_SPLIT`, below. (*End of advice to users.*)

*Advice to implementors.* [Since all processes calling `MPI_COMM_DUP` or `MPI_COMM_CREATE` provide the same `group` argument, it is theoretically possible to agree on a group-wide unique context with no communication. ]When calling `MPI_COMM_DUP`, all processes call with the same `group` (the `group` associated with the communicator). When calling `MPI_COMM_CREATE`, the processes provide the same `group` or disjoint subgroups. For both calls, it is theoretically possible to agree on a group-wide unique context with no communication. However, local execution of these functions requires use of a larger context name space and reduces error checking. Implementations may strike various compromises between these conflicting goals, such as bulk allocation of multiple contexts in one collective operation. ticket66.

Important: If new communicators are created without synchronizing the processes involved then the communication system should be able to cope with messages arriving in a context that has not yet been allocated at the receiving process. (*End of advice to implementors.*)



If `comm` is an intercommunicator, then the output communicator is also an intercommunicator where the local group consists only of those processes contained in `group` (see Figure 6.1). The `group` argument should only contain those processes in the local group of the input intercommunicator that are to be a part of `newcomm`. All processes in the same local group of `comm` must specify the same value for `group`, i.e., the same members in the same order. If either `group` does not specify at least one process in the local group of the intercommunicator, or if the calling process is not included in the `group`, `MPI_COMM_NULL` is returned.

*Rationale.* In the case where either the left or right group is empty, a null communicator is returned instead of an intercommunicator with `MPI_GROUP_EMPTY` because the side with the empty group must return `MPI_COMM_NULL`. (End of rationale.)

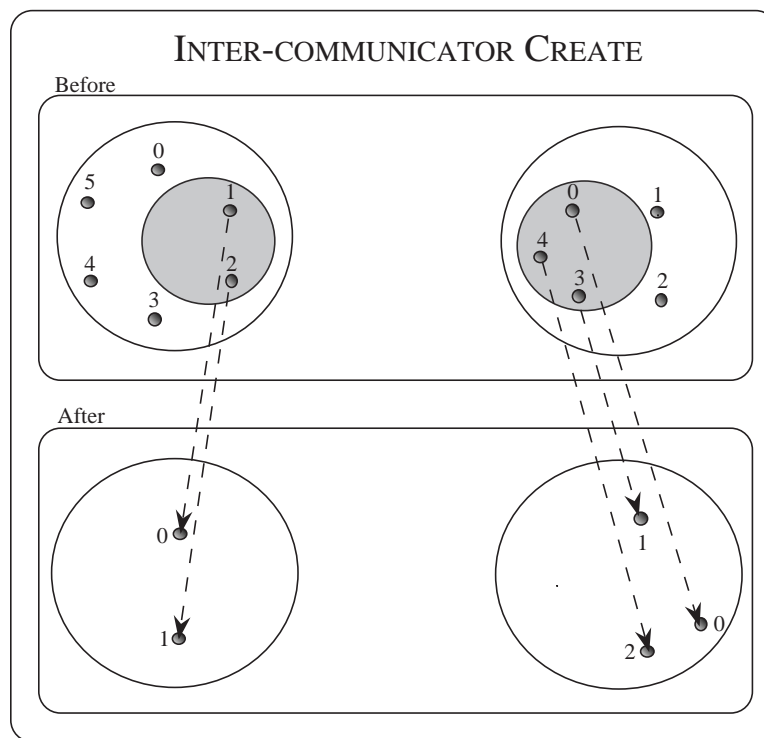


Figure 6.1: Intercommunicator create using `MPI_COMM_CREATE` extended to intercommunicators. The input groups are those in the grey circle.

**Example 6.1** The following example illustrates how the first node in the left side of an intercommunicator could be joined with all members on the right side of an intercommunicator to form a new intercommunicator.

```
MPI_Comm  inter_comm, new_inter_comm;
MPI_Group local_group, group;
int       rank = 0; /* rank on left side to include in
                    new inter-comm */

/* Construct the original intercommunicator: "inter_comm" */
```



```

...
/* Construct the group of processes to be in new
   intercommunicator */
if (/* I'm on the left side of the intercommunicator */) {
    MPI_Comm_group ( inter_comm, &local_group );
    MPI_Group_incl ( local_group, 1, &rank, &group );
    MPI_Group_free ( &local_group );
}
else
    MPI_Comm_group ( inter_comm, &group );

MPI_Comm_create ( inter_comm, group, &new_inter_comm );
MPI_Group_free( &group );

```

MPI\_COMM\_SPLIT(comm, color, key, newcomm)

IN	comm	communicator (handle)
IN	color	control of subset assignment (integer)
IN	key	control of rank assignment (integer)
OUT	newcomm	new communicator (handle)

```

int MPI_Comm_split(MPI_Comm comm, int color, int key, MPI_Comm *newcomm)
MPI_COMM_SPLIT(COMM, COLOR, KEY, NEWCOMM, IERROR)
    INTEGER COMM, COLOR, KEY, NEWCOMM, IERROR
{MPI::Intercomm MPI::Intercomm::Split(int color, int key) const (binding
    deprecated, see Section 15.2) }
{MPI::Intracomm MPI::Intracomm::Split(int color, int key) const (binding
    deprecated, see Section 15.2) }

```

This function partitions the group associated with `comm` into disjoint subgroups, one for each value of `color`. Each subgroup contains all processes of the same color. Within each subgroup, the processes are ranked in the order defined by the value of the argument `key`, with ties broken according to their rank in the old group. A new communicator is created for each subgroup and returned in `newcomm`. A process may supply the color value `MPI_UNDEFINED`, in which case `newcomm` returns `MPI_COMM_NULL`. This is a collective call, but each process is permitted to provide different values for `color` and `key`.

[ A call to `MPI_COMM_CREATE(comm, group, newcomm)` is equivalent to a call to `MPI_COMM_SPLIT(comm, color, key, newcomm)`, where all members of `group` provide `color = 0` and `key = rank in group`, and all processes that are not members of `group` provide `color = MPI_UNDEFINED`. The function `MPI_COMM_SPLIT` allows more general partitioning of a group into one or more subgroups with optional reordering. ]

With an intracommunicator `comm`, a call to `MPI_COMM_CREATE(comm, group, newcomm)` is equivalent to a call to `MPI_COMM_SPLIT(comm, color, key, newcomm)`, where processes that are members of their `group` argument provide `color = number of the group` (based on

a unique numbering of all disjoint groups) and `key = rank in group`, and all processes that are not members of their `group` argument provide `color = MPI_UNDEFINED`.

The value of `color` must be **non-negative**.

*Advice to users.* This is an extremely powerful mechanism for dividing a single communicating group of processes into  $k$  subgroups, with  $k$  chosen implicitly by the user (by the number of colors asserted over all the processes). Each resulting communicator will be non-overlapping. Such a division could be useful for defining a hierarchy of computations, such as for multigrid, or linear algebra. For intracommunicators, `MPI_COMM_SPLIT` provides similar capability as `MPI_COMM_CREATE` to split a communicating group into disjoint subgroups. `MPI_COMM_SPLIT` is useful when some processes do not have complete information of the other members in their group, but all processes know (the color of) the group to which they belong. In this case, the MPI implementation discovers the other group members via communication. `MPI_COMM_CREATE` is useful when all processes have complete information of the members of their group. In this case, MPI can avoid the extra communication required to discover group membership.

Multiple calls to `MPI_COMM_SPLIT` can be used to overcome the requirement that any call have no overlap of the resulting communicators (each process is of only one color per call). In this way, multiple overlapping communication structures can be created. Creative use of the `color` and `key` in such splitting operations is encouraged.

Note that, for a fixed color, the keys need not be unique. It is `MPI_COMM_SPLIT`'s responsibility to sort processes in ascending order according to this key, and to break ties in a consistent way. If all the keys are specified in the same way, then all the processes in a given color will have the relative rank order as they did in their parent group.

Essentially, making the key value zero for all processes of a given color means that one doesn't really care about the rank-order of the processes in the new communicator. (*End of advice to users.*)

*Rationale.* `color` is restricted to be **non-negative**, so as not to conflict with the value assigned to `MPI_UNDEFINED`. (*End of rationale.*)

The result of `MPI_COMM_SPLIT` on an intercommunicator is that those processes on the left with the same `color` as those processes on the right combine to create a new intercommunicator. The `key` argument describes the relative rank of processes on each side of the intercommunicator (see Figure 6.2). For those colors that are specified only on one side of the intercommunicator, `MPI_COMM_NULL` is returned. `MPI_COMM_NULL` is also returned to those processes that specify `MPI_UNDEFINED` as the `color`.

*Advice to users.* For intercommunicators, `MPI_COMM_SPLIT` is more general than `MPI_COMM_CREATE`. A single call to `MPI_COMM_SPLIT` can create a set of disjoint intercommunicators, while a call to `MPI_COMM_CREATE` creates only one. (*End of advice to users.*)

**Example 6.2** (Parallel client-server model). The following client code illustrates how clients on the left side of an intercommunicator could be assigned to a single server from a pool of servers on the right side of an intercommunicator.

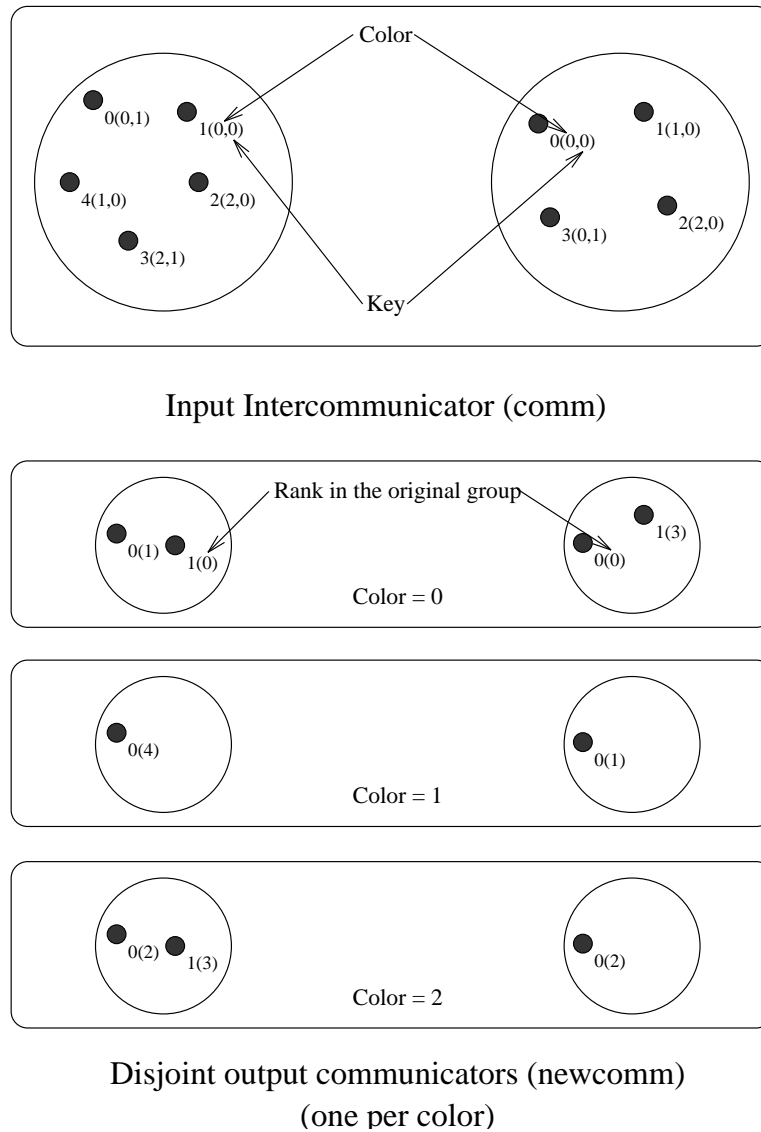


Figure 6.2: Intercommunicator construction achieved by splitting an existing intercommunicator with MPI\_COMM\_SPLIT extended to intercommunicators.

```

1      /* Client code */
2      MPI_Comm  multiple_server_comm;
3      MPI_Comm  single_server_comm;
4      int       color, rank, num_servers;
5
6      /* Create intercommunicator with clients and servers:
7         multiple_server_comm */
8      ...
9
10     /* Find out the number of servers available */
11     MPI_Comm_remote_size ( multiple_server_comm, &num_servers );
12
13     /* Determine my color */
14     MPI_Comm_rank ( multiple_server_comm, &rank );
15     color = rank % num_servers;
16
17     /* Split the intercommunicator */
18     MPI_Comm_split ( multiple_server_comm, color, rank,
19                     &single_server_comm );
20

```

The following is the corresponding server code:

```

22     /* Server code */
23     MPI_Comm  multiple_client_comm;
24     MPI_Comm  single_server_comm;
25     int       rank;
26
27     /* Create intercommunicator with clients and servers:
28        multiple_client_comm */
29     ...
30
31     /* Split the intercommunicator for a single server per group
32        of clients */
33     MPI_Comm_rank ( multiple_client_comm, &rank );
34     MPI_Comm_split ( multiple_client_comm, rank, 0,
35                     &single_server_comm );
36

```

### 6.4.3 Communicator Destructors

MPI\_COMM\_FREE(comm)

INOUT comm                      communicator to be destroyed (handle)

int MPI\_Comm\_free(MPI\_Comm \*comm)

MPI\_COMM\_FREE(COMM, IERROR)

INTEGER COMM, IERROR

{void MPI::Comm::Free() *(binding deprecated, see Section 15.2)* }

ticket150.

ticket150.

This collective operation marks the communication object for deallocation. The handle is set to `MPI_COMM_NULL`. Any pending operations that use this communicator will complete normally; the object is actually deallocated only if there are no other active references to it. This call applies to intra- and inter-communicators. The delete callback functions for all cached attributes (see Section 6.7) are called in arbitrary order.

*Advice to implementors.* A reference-count mechanism may be used: the reference count is incremented by each call to `MPI_COMM_DUP`, and decremented by each call to `MPI_COMM_FREE`. The object is ultimately deallocated when the count reaches zero.

Though collective, it is anticipated that this operation will normally be implemented to be local, though a debugging version of an MPI library might choose to synchronize. (*End of advice to implementors.*)

## 6.5 Motivating Examples

### 6.5.1 Current Practice #1

Example #1a: [

```
%   main(int argc, char **argv)
%   {
%       int me, size;
%       ...
%       MPI_Init ( &argc, &argv );
%       MPI_Comm_rank (MPI_COMM_WORLD, &me);
%       MPI_Comm_size (MPI_COMM_WORLD, &size);
%
%       (void)printf ("Process %d size %d\n", me, size);
%       ...
%       MPI_Finalize();
%   }
%
```

]

```
int main(int argc, char **argv)
{
    int me, size;
    ...
    MPI_Init ( &argc, &argv );
    MPI_Comm_rank (MPI_COMM_WORLD, &me);
    MPI_Comm_size (MPI_COMM_WORLD, &size);

    (void)printf ("Process %d size %d\n", me, size);
    ...
    MPI_Finalize();
}
```

ticket60.

ticket60.

Example #1a is a do-nothing program that initializes itself legally, and refers to the “all” communicator, and prints a message. It terminates itself legally too. This example does not imply that MPI supports `printf`-like communication itself.

ticket60. Example #1b (supposing that `size` is even): [

```

5      %      main(int argc, char **argv)
6      %      {
7      %
8      %          int me, size;
9      %          int SOME_TAG = 0;
10     %          ...
11     %          MPI_Init(&argc, &argv);
12     %
13     %          MPI_Comm_rank(MPI_COMM_WORLD, &me);    /* local */
14     %          MPI_Comm_size(MPI_COMM_WORLD, &size); /* local */
15     %
16     %          if((me % 2) == 0)
17     %          {
18     %              /* send unless highest-numbered process */
19     %              if((me + 1) < size)
20     %                  MPI_Send(..., me + 1, SOME_TAG, MPI_COMM_WORLD);
21     %          }
22     %          else
23     %              MPI_Recv(..., me - 1, SOME_TAG, MPI_COMM_WORLD, &status);
24     %
25     %          ...
26     %          MPI_Finalize();
27     %      }
28     %
29 ]
30
31     int main(int argc, char **argv)
32     {
33         int me, size;
34         int SOME_TAG = 0;
35         ...
36         MPI_Init(&argc, &argv);
37
38         MPI_Comm_rank(MPI_COMM_WORLD, &me);    /* local */
39         MPI_Comm_size(MPI_COMM_WORLD, &size); /* local */
40
41         if((me % 2) == 0)
42         {
43             /* send unless highest-numbered process */
44             if((me + 1) < size)
45                 MPI_Send(..., me + 1, SOME_TAG, MPI_COMM_WORLD);
46         }
47         else
48             MPI_Recv(..., me - 1, SOME_TAG, MPI_COMM_WORLD, &status);

```

```

    ...
    MPI_Finalize();
}

```

Example #1b schematically illustrates message exchanges between “even” and “odd” processes in the “all” communicator.

### 6.5.2 Current Practice #2

```

[
%   main(int argc, char **argv)
%   {
%       int me, count;
%       void *data;
%       ...
%
%       MPI_Init(&argc, &argv);
%       MPI_Comm_rank(MPI_COMM_WORLD, &me);
%
%       if(me == 0)
%       {
%           /* get input, create buffer ‘data’ */
%           ...
%       }
%
%       MPI_Bcast(data, count, MPI_BYTE, 0, MPI_COMM_WORLD);
%
%       ...
%
%       MPI_Finalize();
%   }
%
]

```

```

int main(int argc, char **argv)
{
    int me, count;
    void *data;
    ...

    MPI_Init(&argc, &argv);
    MPI_Comm_rank(MPI_COMM_WORLD, &me);

    if(me == 0)
    {
        /* get input, create buffer ‘data’ */
        ...
    }
}

```

ticket60.

ticket60.

```

1      }
2
3      MPI_Bcast(data, count, MPI_BYTE, 0, MPI_COMM_WORLD);
4
5      ...
6
7      MPI_Finalize();
8  }
9

```

This example illustrates the use of a collective communication.

### 6.5.3 (Approximate) Current Practice #3

ticket60.

```

13  [
14
15  %   main(int argc, char **argv)
16  %   {
17  %       int me, count, count2;
18  %       void *send_buf, *recv_buf, *send_buf2, *recv_buf2;
19  %       MPI_Group MPI_GROUP_WORLD, grprem;
20  %       MPI_Comm commslave;
21  %       static int ranks[] = {0};
22  %       ...
23  %       MPI_Init(&argc, &argv);
24  %       MPI_Comm_group(MPI_COMM_WORLD, &MPI_GROUP_WORLD);
25  %       MPI_Comm_rank(MPI_COMM_WORLD, &me); /* local */
26  %
27  %       MPI_Group_excl(MPI_GROUP_WORLD, 1, ranks, &grprem); /* local */
28  %       MPI_Comm_create(MPI_COMM_WORLD, grprem, &commslave);
29  %
30  %       if(me != 0)
31  %       {
32  %           /* compute on slave */
33  %           ...
34  %           MPI_Reduce(send_buf, recv_buff, count, MPI_INT, MPI_SUM, 1, commslave);
35  %           ...
36  %           MPI_Comm_free(&commslave);
37  %       }
38  %       /* zero falls through immediately to this reduce, others do later... */
39  %       MPI_Reduce(send_buf2, recv_buff2, count2,
40  %                   MPI_INT, MPI_SUM, 0, MPI_COMM_WORLD);
41  %
42  %       MPI_Group_free(&MPI_GROUP_WORLD);
43  %       MPI_Group_free(&grprem);
44  %       MPI_Finalize();
45  %   }
46  %
47
48  ]

```

ticket60.



```

int main(int argc, char **argv)
{
    int me, count, count2;
    void *send_buf, *recv_buf, *send_buf2, *recv_buf2;
    MPI_Group MPI_GROUP_WORLD, grprem;
    MPI_Comm commslave;
    static int ranks[] = {0};
    ...
    MPI_Init(&argc, &argv);
    MPI_Comm_group(MPI_COMM_WORLD, &MPI_GROUP_WORLD);
    MPI_Comm_rank(MPI_COMM_WORLD, &me); /* local */

    MPI_Group_excl(MPI_GROUP_WORLD, 1, ranks, &grprem); /* local */
    MPI_Comm_create(MPI_COMM_WORLD, grprem, &commslave);

    if(me != 0)
    {
        /* compute on slave */
        ...
        MPI_Reduce(send_buf, recv_buf, count, MPI_INT, MPI_SUM, 1, commslave);
        ...
        MPI_Comm_free(&commslave);
    }
    /* zero falls through immediately to this reduce, others do later... */
    MPI_Reduce(send_buf2, recv_buf2, count2,
               MPI_INT, MPI_SUM, 0, MPI_COMM_WORLD);

    MPI_Group_free(&MPI_GROUP_WORLD);
    MPI_Group_free(&grprem);
    MPI_Finalize();
}

```

This example illustrates how a group consisting of all but the zeroth process of the “all” group is created, and then how a communicator is formed (`commslave`) for that new group. The new communicator is used in a collective call, and all processes execute a collective call in the `MPI_COMM_WORLD` context. This example illustrates how the two communicators (that inherently possess distinct contexts) protect communication. That is, communication in `MPI_COMM_WORLD` is insulated from communication in `commslave`, and vice versa.

In summary, “group safety” is achieved via communicators because distinct contexts within communicators are enforced to be unique on any process.

#### 6.5.4 Example #4

The following example is meant to illustrate “safety” between point-to-point and collective communication. MPI guarantees that a single communicator can do safe point-to-point and collective communication. [

```

%   #define TAG_ARBITRARY 12345
%   #define SOME_COUNT      50

```

ticket60.

```

1  %
2  %   main(int argc, char **argv)
3  %   {
4  %       int me;
5  %       MPI_Request request[2];
6  %       MPI_Status status[2];
7  %       MPI_Group MPI_GROUP_WORLD, subgroup;
8  %       int ranks[] = {2, 4, 6, 8};
9  %       MPI_Comm the_comm;
10 %       ...
11 %       MPI_Init(&argc, &argv);
12 %       MPI_Comm_group(MPI_COMM_WORLD, &MPI_GROUP_WORLD);
13 %
14 %       MPI_Group_incl(MPI_GROUP_WORLD, 4, ranks, &subgroup); /* local */
15 %       MPI_Group_rank(subgroup, &me); /* local */
16 %
17 %       MPI_Comm_create(MPI_COMM_WORLD, subgroup, &the_comm);
18 %
19 %       if(me != MPI_UNDEFINED)
20 %       {
21 %           MPI_Irecv(buff1, count, MPI_DOUBLE, MPI_ANY_SOURCE, TAG_ARBITRARY,
22 %                   the_comm, request);
23 %           MPI_Isend(buff2, count, MPI_DOUBLE, (me+1)%4, TAG_ARBITRARY,
24 %                   the_comm, request+1);
25 %           for(i = 0; i < SOME_COUNT, i++)
26 %               MPI_Reduce(..., the_comm);
27 %           MPI_Waitall(2, request, status);
28 %
29 %           MPI_Comm_free(&the_comm);
30 %       }
31 %
32 %       MPI_Group_free(&MPI_GROUP_WORLD);
33 %       MPI_Group_free(&subgroup);
34 %       MPI_Finalize();
35 %   }
36 %
37 %
ticket60. 38 %
39 #define TAG_ARBITRARY 12345
40 #define SOME_COUNT      50
41
42 int main(int argc, char **argv)
43 {
44     int me;
45     MPI_Request request[2];
46     MPI_Status status[2];
47     MPI_Group MPI_GROUP_WORLD, subgroup;
48     int ranks[] = {2, 4, 6, 8};

```

```

MPI_Comm the_comm;
...
MPI_Init(&argc, &argv);
MPI_Comm_group(MPI_COMM_WORLD, &MPI_GROUP_WORLD);

MPI_Group_incl(MPI_GROUP_WORLD, 4, ranks, &subgroup); /* local */
MPI_Group_rank(subgroup, &me); /* local */

MPI_Comm_create(MPI_COMM_WORLD, subgroup, &the_comm);

if(me != MPI_UNDEFINED)
{
    MPI_Irecv(buff1, count, MPI_DOUBLE, MPI_ANY_SOURCE, TAG_ARBITRARY,
              the_comm, request);
    MPI_Isend(buff2, count, MPI_DOUBLE, (me+1)%4, TAG_ARBITRARY,
              the_comm, request+1);
    for(i = 0; i < SOME_COUNT, i++)
        MPI_Reduce(..., the_comm);
    MPI_Waitall(2, request, status);

    MPI_Comm_free(&the_comm);
}

MPI_Group_free(&MPI_GROUP_WORLD);
MPI_Group_free(&subgroup);
MPI_Finalize();
}

```

### 6.5.5 Library Example #1

The main program: [

```

%   main(int argc, char **argv)
%   {
%       int done = 0;
%       user_lib_t *libh_a, *libh_b;
%       void *dataset1, *dataset2;
%       ...
%       MPI_Init(&argc, &argv);
%       ...
%       init_user_lib(MPI_COMM_WORLD, &libh_a);
%       init_user_lib(MPI_COMM_WORLD, &libh_b);
%       ...
%       user_start_op(libh_a, dataset1);
%       user_start_op(libh_b, dataset2);
%       ...
%       while(!done)
%       {

```

ticket60.

```

1  %           /* work */
2  %           ...
3  %           MPI_Reduce(..., MPI_COMM_WORLD);
4  %           ...
5  %           /* see if done */
6  %           ...
7  %       }
8  %       user_end_op(libh_a);
9  %       user_end_op(libh_b);
10 %
11 %       uninit_user_lib(libh_a);
12 %       uninit_user_lib(libh_b);
13 %       MPI_Finalize();
14 %   }
15 %
16
ticket60. 17 ]
18
19 int main(int argc, char **argv)
20 {
21     int done = 0;
22     user_lib_t *libh_a, *libh_b;
23     void *dataset1, *dataset2;
24     ...
25     MPI_Init(&argc, &argv);
26     ...
27     init_user_lib(MPI_COMM_WORLD, &libh_a);
28     init_user_lib(MPI_COMM_WORLD, &libh_b);
29     ...
30     user_start_op(libh_a, dataset1);
31     user_start_op(libh_b, dataset2);
32     ...
33     while(!done)
34     {
35         /* work */
36         ...
37         MPI_Reduce(..., MPI_COMM_WORLD);
38         ...
39         /* see if done */
40         ...
41     }
42     user_end_op(libh_a);
43     user_end_op(libh_b);
44
45     uninit_user_lib(libh_a);
46     uninit_user_lib(libh_b);
47     MPI_Finalize();
48 }

```

The user library initialization code:

```

void init_user_lib(MPI_Comm comm, user_lib_t **handle)
{
    user_lib_t *save;

    user_lib_initsave(&save); /* local */
    MPI_Comm_dup(comm, &(save -> comm));

    /* other inits */
    ...

    *handle = save;
}

```

User start-up code:

```

void user_start_op(user_lib_t *handle, void *data)
{
    MPI_Irecv( ..., handle->comm, &(handle -> irecv_handle) );
    MPI_Isend( ..., handle->comm, &(handle -> isend_handle) );
}

```

User communication clean-up code:

```

void user_end_op(user_lib_t *handle)
{
    MPI_Status status;
    MPI_Wait(handle -> isend_handle, &status);
    MPI_Wait(handle -> irecv_handle, &status);
}

```

User object clean-up code:

```

void uninit_user_lib(user_lib_t *handle)
{
    MPI_Comm_free(&(handle -> comm));
    free(handle);
}

```

### 6.5.6 Library Example #2

The main program: [

```

%   main(int argc, char **argv)
%   {
%       int ma, mb;
%       MPI_Group MPI_GROUP_WORLD, group_a, group_b;
%       MPI_Comm comm_a, comm_b;
%
%       static int list_a[] = {0, 1};

```

ticket60.

```

1  % #if defined(EXAMPLE_2B) | defined(EXAMPLE_2C)
2  %     static int list_b[] = {0, 2 ,3};
3  % #else/* EXAMPLE_2A */
4  %     static int list_b[] = {0, 2};
5  % #endif
6  %     int size_list_a = sizeof(list_a)/sizeof(int);
7  %     int size_list_b = sizeof(list_b)/sizeof(int);
8  %
9  %     ...
10 %     MPI_Init(&argc, &argv);
11 %     MPI_Comm_group(MPI_COMM_WORLD, &MPI_GROUP_WORLD);
12 %
13 %     MPI_Group_incl(MPI_GROUP_WORLD, size_list_a, list_a, &group_a);
14 %     MPI_Group_incl(MPI_GROUP_WORLD, size_list_b, list_b, &group_b);
15 %
16 %     MPI_Comm_create(MPI_COMM_WORLD, group_a, &comm_a);
17 %     MPI_Comm_create(MPI_COMM_WORLD, group_b, &comm_b);
18 %
19 %     if(comm_a != MPI_COMM_NULL)
20 %         MPI_Comm_rank(comm_a, &ma);
21 %     if(comm_b != MPI_COMM_NULL)
22 %         MPI_Comm_rank(comm_b, &mb);
23 %
24 %     if(comm_a != MPI_COMM_NULL)
25 %         lib_call(comm_a);
26 %
27 %     if(comm_b != MPI_COMM_NULL)
28 %     {
29 %         lib_call(comm_b);
30 %         lib_call(comm_b);
31 %     }
32 %
33 %     if(comm_a != MPI_COMM_NULL)
34 %         MPI_Comm_free(&comm_a);
35 %     if(comm_b != MPI_COMM_NULL)
36 %         MPI_Comm_free(&comm_b);
37 %     MPI_Group_free(&group_a);
38 %     MPI_Group_free(&group_b);
39 %     MPI_Group_free(&MPI_GROUP_WORLD);
40 %     MPI_Finalize();
41 % }
42 %
43 ]
44
45 int main(int argc, char **argv)
46 {
47     int ma, mb;
48     MPI_Group MPI_GROUP_WORLD, group_a, group_b;

```

ticket60.

```

MPI_Comm comm_a, comm_b;

static int list_a[] = {0, 1};
#if defined(EXAMPLE_2B) | defined(EXAMPLE_2C)
static int list_b[] = {0, 2, 3};
#else /* EXAMPLE_2A */
static int list_b[] = {0, 2};
#endif

int size_list_a = sizeof(list_a)/sizeof(int);
int size_list_b = sizeof(list_b)/sizeof(int);

...
MPI_Init(&argc, &argv);
MPI_Comm_group(MPI_COMM_WORLD, &MPI_GROUP_WORLD);

MPI_Group_incl(MPI_GROUP_WORLD, size_list_a, list_a, &group_a);
MPI_Group_incl(MPI_GROUP_WORLD, size_list_b, list_b, &group_b);

MPI_Comm_create(MPI_COMM_WORLD, group_a, &comm_a);
MPI_Comm_create(MPI_COMM_WORLD, group_b, &comm_b);

if(comm_a != MPI_COMM_NULL)
    MPI_Comm_rank(comm_a, &ma);
if(comm_b != MPI_COMM_NULL)
    MPI_Comm_rank(comm_b, &mb);

if(comm_a != MPI_COMM_NULL)
    lib_call(comm_a);

if(comm_b != MPI_COMM_NULL)
{
    lib_call(comm_b);
    lib_call(comm_b);
}

if(comm_a != MPI_COMM_NULL)
    MPI_Comm_free(&comm_a);
if(comm_b != MPI_COMM_NULL)
    MPI_Comm_free(&comm_b);
MPI_Group_free(&group_a);
MPI_Group_free(&group_b);
MPI_Group_free(&MPI_GROUP_WORLD);
MPI_Finalize();
}

```

The library:

```

void lib_call(MPI_Comm comm)
{

```

```

1      int me, done = 0;
2      MPI_Status status;
3      MPI_Comm_rank(comm, &me);
4      if(me == 0)
5          while(!done)
6          {
7              MPI_Recv(..., MPI_ANY_SOURCE, MPI_ANY_TAG, comm, &status);
8              ...
9          }
10     else
11     {
12         /* work */
13         MPI_Send(..., 0, ARBITRARY_TAG, comm);
14         ....
15     }
16 #ifdef EXAMPLE_2C
17     /* include (resp, exclude) for safety (resp, no safety): */
18     MPI_Barrier(comm);
19 #endif
20 }

```

The above example is really three examples, depending on whether or not one includes rank 3 in `list_b`, and whether or not a synchronize is included in `lib_call`. This example illustrates that, despite contexts, subsequent calls to `lib_call` with the same context need not be safe from one another (colloquially, “back-masking”). Safety is realized if the `MPI_Barrier` is added. What this demonstrates is that libraries have to be written carefully, even with contexts. When rank 3 is excluded, then the synchronize is not needed to get safety from back masking.

Algorithms like “reduce” and “allreduce” have strong enough source selectivity properties so that they are inherently okay (no backmasking), provided that MPI provides basic guarantees. So are multiple calls to a typical tree-broadcast algorithm with the same root or different roots (see [45]). Here we rely on two guarantees of MPI: pairwise ordering of messages between processes in the same context, and source selectivity — deleting either feature removes the guarantee that backmasking cannot be required.

Algorithms that try to do non-deterministic broadcasts or other calls that include wildcard operations will not generally have the good properties of the deterministic implementations of “reduce,” “allreduce,” and “broadcast.” Such algorithms would have to utilize the monotonically increasing tags (within a communicator scope) to keep things straight.

All of the foregoing is a supposition of “collective calls” implemented with point-to-point operations. MPI implementations may or may not implement collective calls using point-to-point operations. These algorithms are used to illustrate the issues of correctness and safety, independent of how MPI implements its collective calls. See also Section 6.9.

## 6.6 Inter-Communication

This section introduces the concept of inter-communication and describes the portions of MPI that support it. It describes support for writing programs that contain user-level servers.



All communication described thus far has involved communication between processes that are members of the same group. This type of communication is called “intra-communication” and the communicator used is called an “intra-communicator,” as we have noted earlier in the chapter.

In modular and multi-disciplinary applications, different process groups execute distinct modules and processes within different modules communicate with one another in a pipeline or a more general module graph. In these applications, the most natural way for a process to specify a target process is by the rank of the target process within the target group. In applications that contain internal user-level servers, each server may be a process group that provides services to one or more clients, and each client may be a process group that uses the services of one or more servers. It is again most natural to specify the target process by rank within the target group in these applications. This type of communication is called “inter-communication” and the communicator used is called an “inter-communicator,” as introduced earlier.

An inter-communication is a point-to-point communication between processes in different groups. The group containing a process that initiates an inter-communication operation is called the “local group,” that is, the sender in a send and the receiver in a receive. The group containing the target process is called the “remote group,” that is, the receiver in a send and the sender in a receive. As in intra-communication, the target process is specified using a (communicator, rank) pair. Unlike intra-communication, the rank is relative to a second, remote group.

All inter-communicator constructors are blocking and require that the local and remote groups be disjoint.

*Advice to users.* The groups must be disjoint for several reasons. Primarily, this is the intent of the intercommunicators — to provide a communicator for communication between disjoint groups. This is reflected in the definition of `MPI_INTERCOMM_MERGE`, which allows the user to control the ranking of the processes in the created intracommunicator; this ranking makes little sense if the groups are not disjoint. In addition, the natural extension of collective operations to inter-communicators makes the most sense when the groups are disjoint. (*End of advice to users.*)

Here is a summary of the properties of inter-communication and inter-communicators:

- The syntax of point-to-point and collective communication is the same for both inter- and intra-communication. The same communicator can be used both for send and for receive operations.
- A target process is addressed by its rank in the remote group, both for sends and for receives.
- Communications using an inter-communicator are guaranteed not to conflict with any communications that use a different communicator.
- A communicator will provide either intra- or inter-communication, never both.

The routine `MPI_COMM_TEST_INTER` may be used to determine if a communicator is an inter- or intra-communicator. Inter-communicators can be used as arguments to some of the other communicator access routines. Inter-communicators cannot be used as input to some

of the constructor routines for intra-communicators (for instance, `[MPI_COMM_CREATE]` `MPI_CART_CREATE`).

ticket19.

*Advice to implementors.* For the purpose of point-to-point communication, communicators can be represented in each process by a tuple consisting of:

**group**  
**send\_context**  
**receive\_context**  
**source**

For inter-communicators, **group** describes the remote group, and **source** is the rank of the process in the local group. For intra-communicators, **group** is the communicator group (remote=local), **source** is the rank of the process in this group, and **send context** and **receive context** are identical. A group can be represented by a rank-to-absolute-address translation table.

The inter-communicator cannot be discussed sensibly without considering processes in both the local and remote groups. Imagine a process **P** in group  $\mathcal{P}$ , which has an inter-communicator  $C_{\mathcal{P}}$ , and a process **Q** in group  $\mathcal{Q}$ , which has an inter-communicator  $C_{\mathcal{Q}}$ . Then

- $C_{\mathcal{P}}.\text{group}$  describes the group  $\mathcal{Q}$  and  $C_{\mathcal{Q}}.\text{group}$  describes the group  $\mathcal{P}$ .
- $C_{\mathcal{P}}.\text{send\_context} = C_{\mathcal{Q}}.\text{receive\_context}$  and the context is unique in  $\mathcal{Q}$ ;  
 $C_{\mathcal{P}}.\text{receive\_context} = C_{\mathcal{Q}}.\text{send\_context}$  and this context is unique in  $\mathcal{P}$ .
- $C_{\mathcal{P}}.\text{source}$  is rank of **P** in  $\mathcal{P}$  and  $C_{\mathcal{Q}}.\text{source}$  is rank of **Q** in  $\mathcal{Q}$ .

Assume that **P** sends a message to **Q** using the inter-communicator. Then **P** uses the **group** table to find the absolute address of **Q**; **source** and **send\_context** are appended to the message.

Assume that **Q** posts a receive with an explicit source argument using the inter-communicator. Then **Q** matches **receive\_context** to the message context and source argument to the message source.

The same algorithm is appropriate for intra-communicators as well.

In order to support inter-communicator accessors and constructors, it is necessary to supplement this model with additional structures, that store information about the local communication group, and additional safe contexts. (*End of advice to implementors.*)

### 6.6.1 Inter-communicator Accessors

`MPI_COMM_TEST_INTER(comm, flag)`

IN	comm	communicator (handle)
OUT	flag	(logical)

```
int MPI_Comm_test_inter(MPI_Comm comm, int *flag)
```

```
MPI_COMM_TEST_INTER(COMM, FLAG, IERROR)
```

```
    INTEGER COMM, IERROR
```

```
    LOGICAL FLAG
```

```
{bool MPI::Comm::Is_inter() const (binding deprecated, see Section 15.2) }
```

This local routine allows the calling process to determine if a communicator is an inter-communicator or an intra-communicator. It returns true if it is an inter-communicator, otherwise false.

When an inter-communicator is used as an input argument to the communicator accessors described above under intra-communication, the following table describes behavior.

MPI_COMM_SIZE	returns the size of the local group.
MPI_COMM_GROUP	returns the local group.
MPI_COMM_RANK	returns the rank in the local group

Table 6.1: MPI\_COMM\_\* Function Behavior (in Inter-Communication Mode)

Furthermore, the operation MPI\_COMM\_COMPARE is valid for inter-communicators. Both communicators must be either intra- or inter-communicators, or else MPI\_UNEQUAL results. Both corresponding local and remote groups must compare correctly to get the results MPI\_CONGRUENT and MPI\_SIMILAR. In particular, it is possible for MPI\_SIMILAR to result because either the local or remote groups were similar but not identical.

The following accessors provide consistent access to the remote group of an inter-communicator:

The following are all local operations.

```
MPI_COMM_REMOTE_SIZE(comm, size)
```

```
IN      comm      inter-communicator (handle)
```

```
OUT     size      number of processes in the remote group of comm
                        (integer)
```

```
int MPI_Comm_remote_size(MPI_Comm comm, int *size)
```

```
MPI_COMM_REMOTE_SIZE(COMM, SIZE, IERROR)
```

```
    INTEGER COMM, SIZE, IERROR
```

```
{int MPI::Intercomm::Get_remote_size() const (binding deprecated, see
Section 15.2) }
```

```
MPI_COMM_REMOTE_GROUP(comm, group)
```

```
IN      comm      inter-communicator (handle)
```

```
OUT     group      remote group corresponding to comm (handle)
```

```

1  int MPI_Comm_remote_group(MPI_Comm comm, MPI_Group *group)
2
3  MPI_COMM_REMOTE_GROUP(COMM, GROUP, IERROR)
4      INTEGER COMM, GROUP, IERROR
5  {MPI::Group MPI::Intercomm::Get_remote_group() const (binding deprecated, see
6      Section 15.2) }
7
8
9
10
11
12
13

```

*Rationale.* Symmetric access to both the local and remote groups of an inter-communicator is important, so this function, as well as MPI\_COMM\_REMOTE\_SIZE have been provided. (*End of rationale.*)

### 6.6.2 Inter-communicator Operations

This section introduces four blocking inter-communicator operations.

MPI\_INTERCOMM\_CREATE is used to bind two intra-communicators into an inter-communicator; the function MPI\_INTERCOMM\_MERGE creates an intra-communicator by merging the local and remote groups of an inter-communicator. The functions MPI\_COMM\_DUP and MPI\_COMM\_FREE, introduced previously, duplicate and free an inter-communicator, respectively.

Overlap of local and remote groups that are bound into an inter-communicator is prohibited. If there is overlap, then the program is erroneous and is likely to deadlock. (If a process is multithreaded, and MPI calls block only a thread, rather than a process, then “dual membership” can be supported. It is then the user’s responsibility to make sure that calls on behalf of the two “roles” of a process are executed by two independent threads.)

The function MPI\_INTERCOMM\_CREATE can be used to create an inter-communicator from two existing intra-communicators, in the following situation: At least one selected member from each group (the “group leader”) has the ability to communicate with the selected member from the other group; that is, a “peer” communicator exists to which both leaders belong, and each leader knows the rank of the other leader in this peer communicator. Furthermore, members of each group know the rank of their leader.

Construction of an inter-communicator from two intra-communicators requires separate collective operations in the local group and in the remote group, as well as a point-to-point communication between a process in the local group and a process in the remote group.

In standard MPI implementations (with static process allocation at initialization), the MPI\_COMM\_WORLD communicator (or preferably a dedicated duplicate thereof) can be this peer communicator. For applications that have used spawn or join, it may be necessary to first create an intracommunicator to be used as peer.

The application topology functions described in Chapter 7 do not apply to inter-communicators. Users that require this capability should utilize

MPI\_INTERCOMM\_MERGE to build an intra-communicator, then apply the graph or cartesian topology capabilities to that intra-communicator, creating an appropriate topology-oriented intra-communicator. Alternatively, it may be reasonable to devise one’s own application topology mechanisms for this case, without loss of generality.

```
MPI_INTERCOMM_CREATE(local_comm, local_leader, peer_comm, remote_leader, tag,
newintercomm)
```

IN	local_comm	local intra-communicator (handle)
IN	local_leader	rank of local group leader in local_comm (integer)
IN	peer_comm	“peer” communicator; significant only at the local_leader (handle)
IN	remote_leader	rank of remote group leader in peer_comm; significant only at the local_leader (integer)
IN	tag	“safe” tag (integer)
OUT	newintercomm	new inter-communicator (handle)

```
int MPI_Intercomm_create(MPI_Comm local_comm, int local_leader,
MPI_Comm peer_comm, int remote_leader, int tag,
MPI_Comm *newintercomm)
```

```
MPI_INTERCOMM_CREATE(LOCAL_COMM, LOCAL_LEADER, PEER_COMM, REMOTE_LEADER,
TAG, NEWINTERCOMM, IERROR)
INTEGER LOCAL_COMM, LOCAL_LEADER, PEER_COMM, REMOTE_LEADER, TAG,
NEWINTERCOMM, IERROR
```

```
{MPI::Intercomm MPI::Intracomm::Create_intercomm(int local_leader, const
MPI::Comm& peer_comm, int remote_leader, int tag) const
(binding deprecated, see Section 15.2) }
```

ticket150.

ticket150.

This call creates an inter-communicator. It is collective over the union of the local and remote groups. Processes should provide identical local\_comm and local\_leader arguments within each group. Wildcards are not permitted for remote\_leader, local\_leader, and tag.

This call uses point-to-point communication with communicator peer\_comm, and with tag tag between the leaders. Thus, care must be taken that there be no pending communication on peer\_comm that could interfere with this communication.

*Advice to users.* We recommend using a dedicated peer communicator, such as a duplicate of MPI\_COMM\_WORLD, to avoid trouble with peer communicators. (*End of advice to users.*)

```
MPI_INTERCOMM_MERGE(intercomm, high, newintracomm)
```

IN	intercomm	Inter-Communicator (handle)
IN	high	(logical)
OUT	newintracomm	new intra-communicator (handle)

```
int MPI_Intercomm_merge(MPI_Comm intercomm, int high,
MPI_Comm *newintracomm)
```

```
MPI_INTERCOMM_MERGE(INTERCOMM, HIGH, INTRACOMM, IERROR)
INTEGER INTERCOMM, INTRACOMM, IERROR
```

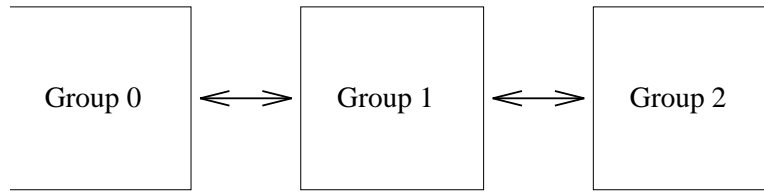


Figure 6.3: Three-group pipeline.

## LOGICAL HIGH

```
{MPI::Intracomm MPI::Intercomm::Merge(bool high) const (binding deprecated, see
Section 15.2) }
```

This function creates an intra-communicator from the union of the two groups that are associated with `intercomm`. All processes should provide the same `high` value within each of the two groups. If processes in one group provided the value `high = false` and processes in the other group provided the value `high = true` then the union orders the “low” group before the “high” group. If all processes provided the same `high` argument then the order of the union is arbitrary. This call is blocking and collective within the union of the two groups.

The error handler on the new intercommunicator in each process is inherited from the communicator that contributes the local group. Note that this can result in different processes in the same communicator having different error handlers.

*Advice to implementors.* The implementation of `MPI_INTERCOMM_MERGE`, `MPI_COMM_FREE` and `MPI_COMM_DUP` are similar to the implementation of `MPI_INTERCOMM_CREATE`, except that contexts private to the input inter-communicator are used for communication between group leaders rather than contexts inside a bridge communicator. (*End of advice to implementors.*)

## 6.6.3 Inter-Communication Examples

## Example 1: Three-Group “Pipeline”

Groups 0 and 1 communicate. Groups 1 and 2 communicate. Therefore, group 0 requires one inter-communicator, group 1 requires two inter-communicators, and group 2 requires 1 inter-communicator.

```
[
%   main(int argc, char **argv)
%   {
%       MPI_Comm    myComm;          /* intra-communicator of local sub-group */
%       MPI_Comm    myFirstComm;    /* inter-communicator */
%       MPI_Comm    mySecondComm; /* second inter-communicator (group 1 only) */
%       int membershipKey;
%       int rank;
%
%       MPI_Init(&argc, &argv);
%       MPI_Comm_rank(MPI_COMM_WORLD, &rank);
%   }
```

```

%      /* User code must generate membershipKey in the range [0, 1, 2] */
%      membershipKey = rank % 3;
%
%      /* Build intra-communicator for local sub-group */
%      MPI_Comm_split(MPI_COMM_WORLD, membershipKey, rank, &myComm);
%
%      /* Build inter-communicators.  Tags are hard-coded. */
%      if (membershipKey == 0)
%      {
%          /* Group 0 communicates with group 1. */
%          MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 1,
%                               1, &myFirstComm);
%      }
%      else if (membershipKey == 1)
%      {
%          /* Group 1 communicates with groups 0 and 2. */
%          MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 0,
%                               1, &myFirstComm);
%          MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 2,
%                               12, &mySecondComm);
%      }
%      else if (membershipKey == 2)
%      {
%          /* Group 2 communicates with group 1. */
%          MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 1,
%                               12, &myFirstComm);
%      }
%
%      /* Do work ... */
%
%      switch(membershipKey) /* free communicators appropriately */
%      {
%      case 1:
%          MPI_Comm_free(&mySecondComm);
%      case 0:
%      case 2:
%          MPI_Comm_free(&myFirstComm);
%          break;
%      }
%
%      MPI_Finalize();
%  }
%
%  ]

```

ticket60.

```

int main(int argc, char **argv)
{
    MPI_Comm    myComm;          /* intra-communicator of local sub-group */
    MPI_Comm    myFirstComm;     /* inter-communicator */
    MPI_Comm    mySecondComm;    /* second inter-communicator (group 1 only) */
    int membershipKey;

```

```

1      int rank;
2
3      MPI_Init(&argc, &argv);
4      MPI_Comm_rank(MPI_COMM_WORLD, &rank);
5
6      /* User code must generate membershipKey in the range [0, 1, 2] */
7      membershipKey = rank % 3;
8
9      /* Build intra-communicator for local sub-group */
10     MPI_Comm_split(MPI_COMM_WORLD, membershipKey, rank, &myComm);
11
12     /* Build inter-communicators.  Tags are hard-coded. */
13     if (membershipKey == 0)
14     {
15         /* Group 0 communicates with group 1. */
16         MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 1,
17                               1, &myFirstComm);
18     }
19     else if (membershipKey == 1)
20     {
21         /* Group 1 communicates with groups 0 and 2. */
22         MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 0,
23                               1, &myFirstComm);
24         MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 2,
25                               12, &mySecondComm);
26     }
27     else if (membershipKey == 2)
28     {
29         /* Group 2 communicates with group 1. */
30         MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 1,
31                               12, &myFirstComm);
32     }
33
34     /* Do work ... */
35
36     switch(membershipKey) /* free communicators appropriately */
37     {
38     case 1:
39         MPI_Comm_free(&mySecondComm);
40     case 0:
41     case 2:
42         MPI_Comm_free(&myFirstComm);
43         break;
44     }
45
46     MPI_Finalize();
47 }
48

```



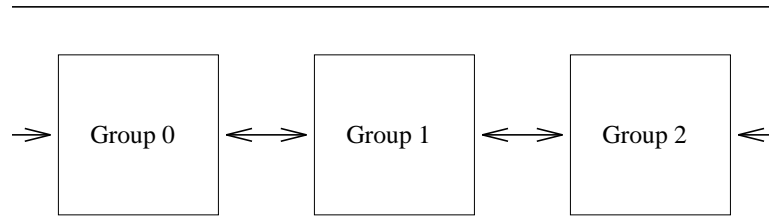


Figure 6.4: Three-group ring.

**Example 2: Three-Group “Ring”**

Groups 0 and 1 communicate. Groups 1 and 2 communicate. Groups 0 and 2 communicate. Therefore, each requires two inter-communicators.

```

[
%   main(int argc, char **argv)
%   {
%       MPI_Comm    myComm;        /* intra-communicator of local sub-group */
%       MPI_Comm    myFirstComm; /* inter-communicators */
%       MPI_Comm    mySecondComm;
%       MPI_Status  status;
%       int  membershipKey;
%       int  rank;
%
%       MPI_Init(&argc, &argv);
%       MPI_Comm_rank(MPI_COMM_WORLD, &rank);
%       ...
%
%       /* User code must generate membershipKey in the range [0, 1, 2] */
%       membershipKey = rank % 3;
%
%       /* Build intra-communicator for local sub-group */
%       MPI_Comm_split(MPI_COMM_WORLD, membershipKey, rank, &myComm);
%
%       /* Build inter-communicators. Tags are hard-coded. */
%       if (membershipKey == 0)
%       {
%           /* Group 0 communicates with groups 1 and 2. */
%           MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 1,
%                               1, &myFirstComm);
%           MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 2,
%                               2, &mySecondComm);
%       }
%       else if (membershipKey == 1)
%       {
%           /* Group 1 communicates with groups 0 and 2. */
%           MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 0,
%                               1, &myFirstComm);
%           MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 2,
%                               12, &mySecondComm);
%       }
%   }

```

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13 ticket60.  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

```

1  %      else if (membershipKey == 2)
2  %      {          /* Group 2 communicates with groups 0 and 1. */
3  %          MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 0,
4  %                               2, &myFirstComm);
5  %          MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 1,
6  %                               12, &mySecondComm);
7  %      }
8  %
9  %      /* Do some work ... */
10 %
11 %      /* Then free communicators before terminating... */
12 %      MPI_Comm_free(&myFirstComm);
13 %      MPI_Comm_free(&mySecondComm);
14 %      MPI_Comm_free(&myComm);
15 %      MPI_Finalize();
16 %  }
17 %
18 %
19 %
20 int main(int argc, char **argv)
21 {
22     MPI_Comm    myComm;          /* intra-communicator of local sub-group */
23     MPI_Comm    myFirstComm; /* inter-communicators */
24     MPI_Comm    mySecondComm;
25     MPI_Status  status;
26     int  membershipKey;
27     int  rank;
28
29     MPI_Init(&argc, &argv);
30     MPI_Comm_rank(MPI_COMM_WORLD, &rank);
31     ...
32
33     /* User code must generate membershipKey in the range [0, 1, 2] */
34     membershipKey = rank % 3;
35
36     /* Build intra-communicator for local sub-group */
37     MPI_Comm_split(MPI_COMM_WORLD, membershipKey, rank, &myComm);
38
39     /* Build inter-communicators.  Tags are hard-coded. */
40     if (membershipKey == 0)
41     {
42         /* Group 0 communicates with groups 1 and 2. */
43         MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 1,
44                               1, &myFirstComm);
45         MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 2,
46                               2, &mySecondComm);
47     }
48     else if (membershipKey == 1)
49     {
50         /* Group 1 communicates with groups 0 and 2. */

```

```

    MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 0,
                          1, &myFirstComm);
    MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 2,
                          12, &mySecondComm);
}
else if (membershipKey == 2)
{
    /* Group 2 communicates with groups 0 and 1. */
    MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 0,
                          2, &myFirstComm);
    MPI_Intercomm_create( myComm, 0, MPI_COMM_WORLD, 1,
                          12, &mySecondComm);
}

/* Do some work ... */

/* Then free communicators before terminating... */
MPI_Comm_free(&myFirstComm);
MPI_Comm_free(&mySecondComm);
MPI_Comm_free(&myComm);
MPI_Finalize();
}
[

```

### Example 3: Building Name Service for Intercommunication

The following procedures exemplify the process by which a user could create name service for building intercommunicators via a rendezvous involving a server communicator, and a tag name selected by both groups.

After all MPI processes execute `MPI_INIT`, every process calls the example function, `Init_server()`, defined below. Then, if the `new_world` returned is `NULL`, the process getting `NULL` is required to implement a server function, in a reactive loop, `Do_server()`. Everyone else just does their prescribed computation, using `new_world` as the new effective “global” communicator. One designated process calls `Undo_Server()` to get rid of the server when it is not needed any longer.

Features of this approach include:

- Support for multiple name servers
- Ability to scope the name servers to specific processes
- Ability to make such servers come and go as desired.

MPI-2.1 - Review item 27.r - formatting HEADER LANG: C SKIPELIPSIS ENDHEADER

```

% \#define INIT_SERVER_TAG_1    666
% \#define UNDO_SERVER_TAG_1    777
%
% static int server_key_val;
%

```

```

1  % /* for attribute management for server_comm, copy callback: */
2  % void handle_copy_fn(MPI_Comm *oldcomm, int *keyval, void *extra_state,
3  % void *attribute_val_in, void **attribute_val_out, int *flag)
4  % {
5  %     /* copy the handle */
6  %     *attribute_val_out = attribute_val_in;
7  %     *flag = 1; /* indicate that copy to happen */
8  % }
9  %
10 % int Init_server(peer_comm, rank_of_server, server_comm, new_world)
11 % MPI_Comm peer_comm;
12 % int rank_of_server;
13 % MPI_Comm *server_comm;
14 % MPI_Comm *new_world; /* new effective world, sans server */
15 % {
16 %     MPI_Comm temp_comm, lone_comm;
17 %     MPI_Group peer_group, temp_group;
18 %     int rank_in_peer_comm, size, color, key = 0;
19 %     int peer_leader, peer_leader_rank_in_temp_comm;
20 %
21 %     MPI_Comm_rank(peer_comm, &rank_in_peer_comm);
22 %     MPI_Comm_size(peer_comm, &size);
23 %
24 %     if ((size < 2) || (0 > rank_of_server) || (rank_of_server >= size))
25 %         return (MPI_ERR_OTHER);
26 %
27 %     /* create two communicators, by splitting peer_comm
28 %        into the server process, and everyone else */
29 %
30 %     peer_leader = (rank_of_server + 1) % size; /* arbitrary choice */
31 %
32 %     if ((color = (rank_in_peer_comm == rank_of_server)))
33 %     {
34 %         MPI_Comm_split(peer_comm, color, key, &lone_comm);
35 %
36 %         MPI_Intercomm_create(lone_comm, 0, peer_comm, peer_leader,
37 %                             INIT_SERVER_TAG_1, server_comm);
38 %
39 %         MPI_Comm_free(&lone_comm);
40 %         *new_world = MPI_COMM_NULL;
41 %     }
42 %     else
43 %     {
44 %         MPI_Comm_Split(peer_comm, color, key, &temp_comm);
45 %
46 %         MPI_Comm_group(peer_comm, &peer_group);
47 %         MPI_Comm_group(temp_comm, &temp_group);
48 %         MPI_Group_translate_ranks(peer_group, 1, &peer_leader,

```

```

%   temp_group, &peer_leader_rank_in_temp_comm);
%
%       MPI_Intercomm_create(temp_comm, peer_leader_rank_in_temp_comm,
%                           peer_comm, rank_of_server,
%                           INIT_SERVER_TAG_1, server_comm);
%
%       /* attach new_world communication attribute to server_comm: */
%
%       /* CRITICAL SECTION FOR MULTITHREADING */
%       if(server_keyval == MPI_KEYVAL_INVALID)
%       {
%           /* acquire the process-local name for the server keyval */
%           MPI_keyval_create(handle_copy_fn, NULL,
%                           &server_keyval, NULL);
%       }
%
%       *new_world = temp_comm;
%
%       /* Cache handle of intra-communicator on inter-communicator: */
%       MPI_Attr_put(server_comm, server_keyval, (void *)(*new_world));
%   }
%
%   return (MPI_SUCCESS);
% }
%

```

The actual server process would commit to running the following code: MPI-2.1 - 57.a: Intercomm\_free - i Comm\_free - Correction due to Reviews at MPI-2.1 Forum meeting April 26-28, 2008 HEADER LANG: C SKIPELIPSIS DECL: #define UNDO\_SERVER\_TAG\_1 777 ENDHEADER

```

% int Do_server(server_comm)
% MPI_Comm server_comm;
% {
%     void init_queue();
%     int en_queue(), de_queue(); /* keep triplets of integers
%                               for later matching (fns not shown) */
%
%     MPI_Comm comm;
%     MPI_Status status;
%     int client_tag, client_source;
%     int client_rank_in_new_world, pairs_rank_in_new_world;
%     int buffer[10], count = 1;
%
%     void *queue;
%     init_queue(&queue);
%
%     for (;;)

```

```

1  %      {
2  %          MPI_Recv(buffer, count, MPI_INT, MPI_ANY_SOURCE, MPI_ANY_TAG,
3  %                  server_comm, &status); /* accept from any client */
4  %
5  %          /* determine client: */
6  %          client_tag = status.MPI_TAG;
7  %          client_source = status.MPI_SOURCE;
8  %          client_rank_in_new_world = buffer[0];
9  %
10 %          if (client_tag == UNDO_SERVER_TAG_1)          /* client that
11 %                                                         terminates server */
12 %          {
13 %              while (de_queue(queue, MPI_ANY_TAG, &pairs_rank_in_new_world,
14 %                  &pairs_rank_in_server))
15 %              ;
16 %
17 %              MPI_Comm_free(&server_comm);
18 %              break;
19 %          }
20 %
21 %          if (de_queue(queue, client_tag, &pairs_rank_in_new_world,
22 %                  &pairs_rank_in_server))
23 %          {
24 %              /* matched pair with same tag, tell them
25 %              about each other! */
26 %              buffer[0] = pairs_rank_in_new_world;
27 %              MPI_Send(buffer, 1, MPI_INT, client_src, client_tag,
28 %                      server_comm);
29 %
30 %              buffer[0] = client_rank_in_new_world;
31 %              MPI_Send(buffer, 1, MPI_INT, pairs_rank_in_server, client_tag,
32 %                      server_comm);
33 %          }
34 %          else
35 %              enqueue(queue, client_tag, client_source,
36 %                  client_rank_in_new_world);
37 %
38 %      }
39 % }
40 %
41
42     A particular process would be responsible for ending the server when it is no longer
43     needed. Its call to Undo_server would terminate server function. MPI-2.1 - 57.a: Inter-
44     comm_free -i Comm_free - Correction due to Reviews at MPI-2.1 Forum meeting April
45     26-28, 2008 HEADER LANG: C SKIPELIPSIS DECL: #define UNDO_SERVER_TAG_1
46     777 ENDHEADER
47
48 % int Undo_server(server_comm)          /* example client that ends server */
49 % MPI_Comm *server_comm;

```

```

% {
%     int buffer = 0;
%     MPI_Send(&buffer, 1, MPI_INT, 0, UNDO_SERVER_TAG_1, *server_comm);
%     MPI_Comm_free(server_comm);
% }
%

```

The following is a blocking name-service for inter-communication, with same semantic restrictions as `MPI_Intercomm_create`, but simplified syntax. It uses the functionality just defined to create the name service. HEADER LANG: C DECL: static int server\_key\_val; SKIPELIPSIS ENDHEADER

```

% int Intercomm_name_create(local_comm, server_comm, tag, comm)
% MPI_Comm local_comm, server_comm;
% int tag;
% MPI_Comm *comm;
% {
%     int error;
%     int found; /* attribute acquisition mgmt for new_world */
%               /* comm in server_comm */
%     void *val;
%
%     MPI_Comm new_world;
%
%     int buffer[10], rank;
%     int local_leader = 0;
%
%     MPI_Attr_get(server_comm, server_keyval, &val, &found);
%     new_world = (MPI_Comm)val; /* retrieve cached handle */
%
%     MPI_Comm_rank(server_comm, &rank); /* rank in local group */
%
%     if (rank == local_leader)
%     {
%         buffer[0] = rank;
%         MPI_Send(&buffer, 1, MPI_INT, 0, tag, server_comm);
%         MPI_Recv(&buffer, 1, MPI_INT, 0, tag, server_comm);
%     }
%
%     error = MPI_Intercomm_create(local_comm, local_leader, new_world,
%                                buffer[0], tag, comm);
%
%     return(error);
% }
%
]

```

## 6.7 Caching

MPI provides a “caching” facility that allows an application to attach arbitrary pieces of information, called **attributes**, to three kinds of MPI objects, communicators, windows and datatypes. More precisely, the caching facility allows a portable library to do the following:

- pass information between calls by associating it with an MPI intra- or inter-communicator, window or datatype,
- quickly retrieve that information, and
- be guaranteed that out-of-date information is never retrieved, even if the object is freed and its handle subsequently reused by MPI.

The caching capabilities, in some form, are required by built-in MPI routines such as collective communication and application topology. Defining an interface to these capabilities as part of the MPI standard is valuable because it permits routines like collective communication and application topologies to be implemented as portable code, and also because it makes MPI more extensible by allowing user-written routines to use standard MPI calling sequences.

*Advice to users.* The communicator `MPI_COMM_SELF` is a suitable choice for posting process-local attributes, via this attributing-caching mechanism. (*End of advice to users.*)

*Rationale.* In one extreme one can allow caching on all opaque handles. The other extreme is to only allow it on communicators. Caching has a cost associated with it and should only be allowed when it is clearly needed and the increased cost is modest. This is the reason that windows and datatypes were added but not other handles. (*End of rationale.*)

One difficulty is the potential for size differences between Fortran integers and C pointers. To overcome this problem with attribute caching on communicators, functions are also given for this case. The functions to cache on datatypes and windows also address this issue. For a general discussion of the address size problem, see Section 16.3.6.

*Advice to implementors.* High-quality implementations should raise an error when a keyval that was created by a call to `MPI_XXX_CREATE_KEYVAL` is used with an object of the wrong type with a call to `MPI_YYY_GET_ATTR`, `MPI_YYY_SET_ATTR`, `MPI_YYY_DELETE_ATTR`, or `MPI_YYY_FREE_KEYVAL`. To do so, it is necessary to maintain, with each keyval, information on the type of the associated user function. (*End of advice to implementors.*)

### 6.7.1 Functionality

Attributes can be attached to communicators, windows, and datatypes. Attributes are local to the process and specific to the communicator to which they are attached. Attributes are not propagated by MPI from one communicator to another except when the communicator is duplicated using `MPI_COMM_DUP` (and even then the application must give specific permission through callback functions for the attribute to be copied).



*Advice to users.* Attributes in C are of type void \*. Typically, such an attribute will be a pointer to a structure that contains further information, or a handle to an MPI object. In Fortran, attributes are of type INTEGER. Such attribute can be a handle to an MPI object, or just an integer-valued attribute. (*End of advice to users.*)

*Advice to implementors.* Attributes are scalar values, equal in size to, or larger than a C-language pointer. Attributes can always hold an MPI handle. (*End of advice to implementors.*)

The caching interface defined here requires that attributes be stored by MPI opaquely within a communicator, window, and datatype. Accessor functions include the following:

- obtain a key value (used to identify an attribute); the user specifies “callback” functions by which MPI informs the application when the communicator is destroyed or copied.
- store and retrieve the value of an attribute;

*Advice to implementors.* Caching and callback functions are only called synchronously, in response to explicit application requests. This avoids problems that result from repeated crossings between user and system space. (This synchronous calling rule is a general property of MPI.)

The choice of key values is under control of MPI. This allows MPI to optimize its implementation of attribute sets. It also avoids conflict between independent modules caching information on the same communicators.

A much smaller interface, consisting of just a callback facility, would allow the entire caching facility to be implemented by portable code. However, with the minimal callback interface, some form of table searching is implied by the need to handle arbitrary communicators. In contrast, the more complete interface defined here permits rapid access to attributes through the use of pointers in communicators (to find the attribute table) and cleverly chosen key values (to retrieve individual attributes). In light of the efficiency “hit” inherent in the minimal interface, the more complete interface defined here is seen to be superior. (*End of advice to implementors.*)

MPI provides the following services related to caching. They are all process local.

### 6.7.2 Communicators

Functions for caching on communicators are:

`MPI_COMM_CREATE_KEYVAL(comm_copy_attr_fn, comm_delete_attr_fn, comm_keyval, extra_state)`

IN	<code>comm_copy_attr_fn</code>	copy callback function for <code>comm_keyval</code> (function)
IN	<code>comm_delete_attr_fn</code>	delete callback function for <code>comm_keyval</code> (function)
OUT	<code>comm_keyval</code>	key value for future access (integer)
IN	<code>extra_state</code>	extra state for callback functions

```
int MPI_Comm_create_keyval(MPI_Comm_copy_attr_function *comm_copy_attr_fn,
                           MPI_Comm_delete_attr_function *comm_delete_attr_fn,
```

```

1         int *comm_keyval, void *extra_state)
2
3     MPI_COMM_CREATE_KEYVAL(COMM_COPY_ATTR_FN, COMM_DELETE_ATTR_FN, COMM_KEYVAL,
4         EXTRA_STATE, IERROR)
5     EXTERNAL COMM_COPY_ATTR_FN, COMM_DELETE_ATTR_FN
6     INTEGER COMM_KEYVAL, IERROR
7     INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE

```

```

8     {static int MPI::Comm::Create_keyval(MPI::Comm::Copy_attr_function*
9         comm_copy_attr_fn,
10        MPI::Comm::Delete_attr_function* comm_delete_attr_fn,
11        void* extra_state) (binding deprecated, see Section 15.2) }

```

Generates a new attribute key. Keys are locally unique in a process, and opaque to user, though they are explicitly stored in integers. Once allocated, the key value can be used to associate attributes and access them on any locally defined communicator.

This function replaces `MPI_KEYVAL_CREATE`, whose use is deprecated. The C binding is identical. The Fortran binding differs in that `extra_state` is an address-sized integer. Also, the copy and delete callback functions have Fortran bindings that are consistent with address-sized attributes.

The C callback functions are:

```

21 typedef int MPI_Comm_copy_attr_function(MPI_Comm oldcomm, int comm_keyval,
22     void *extra_state, void *attribute_val_in,
23     void *attribute_val_out, int *flag);

```

and

```

25 typedef int MPI_Comm_delete_attr_function(MPI_Comm comm, int comm_keyval,
26     void *attribute_val, void *extra_state);

```

which are the same as the MPI-1.1 calls but with a new name. The old names are deprecated.

The Fortran callback functions are:

```

30 SUBROUTINE COMM_COPY_ATTR_FN(OLDCOMM, COMM_KEYVAL, EXTRA_STATE,
31     ATTRIBUTE_VAL_IN, ATTRIBUTE_VAL_OUT, FLAG, IERROR)
32     INTEGER OLDCOMM, COMM_KEYVAL, IERROR
33     INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE, ATTRIBUTE_VAL_IN,
34     ATTRIBUTE_VAL_OUT
35     LOGICAL FLAG

```

and

```

37 SUBROUTINE COMM_DELETE_ATTR_FN(COMM, COMM_KEYVAL, ATTRIBUTE_VAL,
38     EXTRA_STATE, IERROR)
39     INTEGER COMM, COMM_KEYVAL, IERROR
40     INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL, EXTRA_STATE

```

The C++ callbacks are:

```

43 {typedef int MPI::Comm::Copy_attr_function(const MPI::Comm& oldcomm,
44     int comm_keyval, void* extra_state, void* attribute_val_in,
45     void* attribute_val_out, bool& flag); (binding deprecated, see
46     Section 15.2) }

```

and

```
{typedef int MPI::Comm::Delete_attr_function(MPI::Comm& comm,
      int comm_keyval, void* attribute_val, void* extra_state);
      (binding deprecated, see Section 15.2) }
```

ticket150.

The `comm_copy_attr_fn` function is invoked when a communicator is duplicated by `MPI_COMM_DUP`. `comm_copy_attr_fn` should be of type `MPI_Comm_copy_attr_function`. The copy callback function is invoked for each key value in `oldcomm` in arbitrary order. Each call to the copy callback is made with a key value and its corresponding attribute. If it returns `flag = 0`, then the attribute is deleted in the duplicated communicator. Otherwise (`flag = 1`), the new attribute value is set to the value returned in `attribute_val_out`. The function returns `MPI_SUCCESS` on success and an error code on failure (in which case `MPI_COMM_DUP` will fail).

The argument `comm_copy_attr_fn` may be specified as `MPI_COMM_NULL_COPY_FN` or `MPI_COMM_DUP_FN` from either C, C++, or Fortran. `MPI_COMM_NULL_COPY_FN` is a function that does nothing other than returning `flag = 0` and `MPI_SUCCESS`. `MPI_COMM_DUP_FN` is a simple-minded copy function that sets `flag = 1`, returns the value of `attribute_val_in` in `attribute_val_out`, and returns `MPI_SUCCESS`. These replace the MPI-1 predefined callbacks `MPI_NULL_COPY_FN` and `MPI_DUP_FN`, whose use is deprecated.

*Advice to users.* Even though both formal arguments `attribute_val_in` and `attribute_val_out` are of type `void *`, their usage differs. The C copy function is passed by MPI in `attribute_val_in` the *value* of the attribute, and in `attribute_val_out` the *address* of the attribute, so as to allow the function to return the (new) attribute value. The use of type `void *` for both is to avoid messy type casts.

A valid copy function is one that completely duplicates the information by making a full duplicate copy of the data structures implied by an attribute; another might just make another reference to that data structure, while using a reference-count mechanism. Other types of attributes might not copy at all (they might be specific to `oldcomm` only). (*End of advice to users.*)

*Advice to implementors.* A C interface should be assumed for copy and delete functions associated with key values created in C; a Fortran calling interface should be assumed for key values created in Fortran. (*End of advice to implementors.*)

Analogous to `comm_copy_attr_fn` is a callback deletion function, defined as follows. The `comm_delete_attr_fn` function is invoked when a communicator is deleted by `MPI_COMM_FREE` or when a call is made explicitly to `MPI_COMM_DELETE_ATTR`. `comm_delete_attr_fn` should be of type `MPI_Comm_delete_attr_function`.

This function is called by `MPI_COMM_FREE`, `MPI_COMM_DELETE_ATTR`, and `MPI_COMM_SET_ATTR` to do whatever is needed to remove an attribute. The function returns `MPI_SUCCESS` on success and an error code on failure (in which case `MPI_COMM_FREE` will fail).

The argument `comm_delete_attr_fn` may be specified as `MPI_COMM_NULL_DELETE_FN` from either C, C++, or Fortran. `MPI_COMM_NULL_DELETE_FN` is a function that does nothing, other than returning `MPI_SUCCESS`. `MPI_COMM_NULL_DELETE_FN` replaces `MPI_NULL_DELETE_FN`, whose use is deprecated.

If an attribute copy function or attribute delete function returns other than `MPI_SUCCESS`, then the call that caused it to be invoked (for example, `MPI_COMM_FREE`), is erroneous.

The special key value `MPI_KEYVAL_INVALID` is never returned by `MPI_KEYVAL_CREATE`. Therefore, it can be used for static initialization of key values.

*Advice to implementors.* To be able to use the predefined C functions `MPI_COMM_NULL_COPY_FN` or `MPI_COMM_DUP_FN` as `comm_copy_attr_fn` argument and/or `MPI_COMM_NULL_DELETE_FN` as the `comm_delete_attr_fn` argument in a call to the C++ routine `MPI::Comm::Create_keyval`, this routine may be overloaded with 3 additional routines that accept the C functions as the first, the second, or both input arguments (instead of an argument that matches the C++ prototype). *(End of advice to implementors.)*

*Advice to users.* If a user wants to write a “wrapper” routine that internally calls `MPI::Comm::Create_keyval` and `comm_copy_attr_fn` and/or `comm_delete_attr_fn` are arguments of this wrapper routine, and if this wrapper routine should be callable with both user-defined C++ copy and delete functions and with the predefined C functions, then the same overloading as described above in the advice to implementors may be necessary. *(End of advice to users.)*

`MPI_COMM_FREE_KEYVAL(comm_keyval)`

INOUT    `comm_keyval`                      key value (integer)

`int MPI_Comm_free_keyval(int *comm_keyval)`

`MPI_COMM_FREE_KEYVAL(COMM_KEYVAL, IERROR)`

INTEGER `COMM_KEYVAL, IERROR`

`{static void MPI::Comm::Free_keyval(int& comm_keyval) (binding deprecated, see Section 15.2) }`

Frees an extant attribute key. This function sets the value of `keyval` to `MPI_KEYVAL_INVALID`. Note that it is not erroneous to free an attribute key that is in use, because the actual free does not transpire until after all references (in other communicators on the process) to the key have been freed. These references need to be explicitly freed by the program, either via calls to `MPI_COMM_DELETE_ATTR` that free one attribute instance, or by calls to `MPI_COMM_FREE` that free all attribute instances associated with the freed communicator.

This call is identical to the MPI-1 call `MPI_KEYVAL_FREE` but is needed to match the new communicator-specific creation function. The use of `MPI_KEYVAL_FREE` is deprecated.

`MPI_COMM_SET_ATTR(comm, comm_keyval, attribute_val)`

INOUT    `comm`                                  communicator from which attribute will be attached (handle)

IN        `comm_keyval`                      key value (integer)

IN        `attribute_val`                      attribute value

`int MPI_Comm_set_attr(MPI_Comm comm, int comm_keyval, void *attribute_val)`

```

MPI_COMM_SET_ATTR(COMM, COMM_KEYVAL, ATTRIBUTE_VAL, IERROR)
    INTEGER COMM, COMM_KEYVAL, IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL

```

```

{void MPI::Comm::Set_attr(int comm_keyval, const void* attribute_val) const
    (binding deprecated, see Section 15.2) }

```

This function stores the stipulated attribute value `attribute_val` for subsequent retrieval by `MPI_COMM_GET_ATTR`. If the value is already present, then the outcome is as if `MPI_COMM_DELETE_ATTR` was first called to delete the previous value (and the callback function `comm_delete_attr_fn` was executed), and a new value was next stored. The call is erroneous if there is no key with value `keyval`; in particular `MPI_KEYVAL_INVALID` is an erroneous key value. The call will fail if the `comm_delete_attr_fn` function returned an error code other than `MPI_SUCCESS`.

This function replaces `MPI_ATTR_PUT`, whose use is deprecated. The C binding is identical. The Fortran binding differs in that `attribute_val` is an address-sized integer.

```

MPI_COMM_GET_ATTR(comm, comm_keyval, attribute_val, flag)

```

IN	comm	communicator to which the attribute is attached (handle)
IN	comm_keyval	key value (integer)
OUT	attribute_val	attribute value, unless <code>flag = false</code>
OUT	flag	false if no attribute is associated with the key (logical)

```

int MPI_Comm_get_attr(MPI_Comm comm, int comm_keyval, void *attribute_val,
    int *flag)

```

```

MPI_COMM_GET_ATTR(COMM, COMM_KEYVAL, ATTRIBUTE_VAL, FLAG, IERROR)
    INTEGER COMM, COMM_KEYVAL, IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL
    LOGICAL FLAG

```

```

{bool MPI::Comm::Get_attr(int comm_keyval, void* attribute_val) const
    (binding deprecated, see Section 15.2) }

```

Retrieves attribute value by key. The call is erroneous if there is no key with value `keyval`. On the other hand, the call is correct if the key value exists, but no attribute is attached on `comm` for that key; in such case, the call returns `flag = false`. In particular `MPI_KEYVAL_INVALID` is an erroneous key value.

*Advice to users.* The call to `MPI_Comm_set_attr` passes in `attribute_val` the *value* of the attribute; the call to `MPI_Comm_get_attr` passes in `attribute_val` the *address* of the location where the attribute value is to be returned. Thus, if the attribute value itself is a pointer of type `void*`, then the actual `attribute_val` parameter to `MPI_Comm_set_attr` will be of type `void*` and the actual `attribute_val` parameter to `MPI_Comm_get_attr` will be of type `void**`. (*End of advice to users.*)

*Rationale.* The use of a formal parameter `attribute_val` or type `void*` (rather than `void**`) avoids the messy type casting that would be needed if the attribute value is

declared with a type other than void\*. (*End of rationale.*)

This function replaces MPI\_ATTR\_GET, whose use is deprecated. The C binding is identical. The Fortran binding differs in that attribute\_val is an address-sized integer.

MPI\_COMM\_DELETE\_ATTR(comm, comm\_keyval)

INOUT	comm	communicator from which the attribute is deleted (handle)
-------	------	---

IN	comm_keyval	key value (integer)
----	-------------	---------------------

int MPI\_Comm\_delete\_attr(MPI\_Comm comm, int comm\_keyval)

MPI\_COMM\_DELETE\_ATTR(COMM, COMM\_KEYVAL, IERROR)

INTEGER COMM, COMM\_KEYVAL, IERROR

{void MPI::Comm::Delete\_attr(int comm\_keyval) (*binding deprecated, see Section 15.2*) }

Delete attribute from cache by key. This function invokes the attribute delete function comm\_delete\_attr\_fn specified when the keyval was created. The call will fail if the comm\_delete\_attr\_fn function returns an error code other than MPI\_SUCCESS.

Whenever a communicator is replicated using the function MPI\_COMM\_DUP, all callback copy functions for attributes that are currently set are invoked (in arbitrary order). Whenever a communicator is deleted using the function MPI\_COMM\_FREE all callback delete functions for attributes that are currently set are invoked.

This function is the same as MPI\_ATTR\_DELETE but is needed to match the new communicator specific functions. The use of MPI\_ATTR\_DELETE is deprecated.

### 6.7.3 Windows

The new functions for caching on windows are:

MPI\_WIN\_CREATE\_KEYVAL(win\_copy\_attr\_fn, win\_delete\_attr\_fn, win\_keyval, extra\_state)

IN	win_copy_attr_fn	copy callback function for win_keyval (function)
IN	win_delete_attr_fn	delete callback function for win_keyval (function)
OUT	win_keyval	key value for future access (integer)
IN	extra_state	extra state for callback functions

int MPI\_Win\_create\_keyval(MPI\_Win\_copy\_attr\_function \*win\_copy\_attr\_fn,  
MPI\_Win\_delete\_attr\_function \*win\_delete\_attr\_fn,  
int \*win\_keyval, void \*extra\_state)

MPI\_WIN\_CREATE\_KEYVAL(WIN\_COPY\_ATTR\_FN, WIN\_DELETE\_ATTR\_FN, WIN\_KEYVAL,  
EXTRA\_STATE, IERROR)

EXTERNAL WIN\_COPY\_ATTR\_FN, WIN\_DELETE\_ATTR\_FN

```

INTEGER WIN_KEYVAL, IERROR
INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE
{static int MPI::Win::Create_keyval(MPI::Win::Copy_attr_function*
    win_copy_attr_fn,
    MPI::Win::Delete_attr_function* win_delete_attr_fn,
    void* extra_state) (binding deprecated, see Section 15.2) }

```

The argument `win_copy_attr_fn` may be specified as `MPI_WIN_NULL_COPY_FN` or `MPI_WIN_DUP_FN` from either C, C++, or Fortran. `MPI_WIN_NULL_COPY_FN` is a function that does nothing other than returning `flag = 0` and `MPI_SUCCESS`. `MPI_WIN_DUP_FN` is a simple-minded copy function that sets `flag = 1`, returns the value of `attribute_val_in` in `attribute_val_out`, and returns `MPI_SUCCESS`.

The argument `win_delete_attr_fn` may be specified as `MPI_WIN_NULL_DELETE_FN` from either C, C++, or Fortran. `MPI_WIN_NULL_DELETE_FN` is a function that does nothing, other than returning `MPI_SUCCESS`.

The C callback functions are:

```

typedef int MPI_Win_copy_attr_function(MPI_Win oldwin, int win_keyval,
    void *extra_state, void *attribute_val_in,
    void *attribute_val_out, int *flag);

```

and

```

typedef int MPI_Win_delete_attr_function(MPI_Win win, int win_keyval,
    void *attribute_val, void *extra_state);

```

The Fortran callback functions are:

```

SUBROUTINE WIN_COPY_ATTR_FN(OLDWIN, WIN_KEYVAL, EXTRA_STATE,
    ATTRIBUTE_VAL_IN, ATTRIBUTE_VAL_OUT, FLAG, IERROR)
INTEGER OLDWIN, WIN_KEYVAL, IERROR
INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE, ATTRIBUTE_VAL_IN,
    ATTRIBUTE_VAL_OUT
LOGICAL FLAG

```

and

```

SUBROUTINE WIN_DELETE_ATTR_FN(WIN, WIN_KEYVAL, ATTRIBUTE_VAL, EXTRA_STATE,
    IERROR)
INTEGER WIN, WIN_KEYVAL, IERROR
INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL, EXTRA_STATE

```

The C++ callbacks are:

```

{typedef int MPI::Win::Copy_attr_function(const MPI::Win& oldwin,
    int win_keyval, void* extra_state, void* attribute_val_in,
    void* attribute_val_out, bool& flag); (binding deprecated, see
    Section 15.2) }

```

and

```

{typedef int MPI::Win::Delete_attr_function(MPI::Win& win, int win_keyval,
    void* attribute_val, void* extra_state); (binding deprecated, see
    Section 15.2) }

```

If an attribute copy function or attribute delete function returns other than MPI\_SUCCESS, then the call that caused it to be invoked (for example, MPI\_WIN\_FREE), is erroneous.

MPI\_WIN\_FREE\_KEYVAL(win\_keyval)

INOUT win\_keyval key value (integer)

int MPI\_Win\_free\_keyval(int \*win\_keyval)

MPI\_WIN\_FREE\_KEYVAL(WIN\_KEYVAL, IERROR)

INTEGER WIN\_KEYVAL, IERROR

{static void MPI::Win::Free\_keyval(int& win\_keyval) *(binding deprecated, see Section 15.2)* }

MPI\_WIN\_SET\_ATTR(win, win\_keyval, attribute\_val)

INOUT win window to which attribute will be attached (handle)

IN win\_keyval key value (integer)

IN attribute\_val attribute value

int MPI\_Win\_set\_attr(MPI\_Win win, int win\_keyval, void \*attribute\_val)

MPI\_WIN\_SET\_ATTR(WIN, WIN\_KEYVAL, ATTRIBUTE\_VAL, IERROR)

INTEGER WIN, WIN\_KEYVAL, IERROR

INTEGER(KIND=MPI\_ADDRESS\_KIND) ATTRIBUTE\_VAL

{void MPI::Win::Set\_attr(int win\_keyval, const void\* attribute\_val) *(binding deprecated, see Section 15.2)* }

MPI\_WIN\_GET\_ATTR(win, win\_keyval, attribute\_val, flag)

IN win window to which the attribute is attached (handle)

IN win\_keyval key value (integer)

OUT attribute\_val attribute value, unless flag = false

OUT flag false if no attribute is associated with the key (logical)

int MPI\_Win\_get\_attr(MPI\_Win win, int win\_keyval, void \*attribute\_val, int \*flag)

MPI\_WIN\_GET\_ATTR(WIN, WIN\_KEYVAL, ATTRIBUTE\_VAL, FLAG, IERROR)

INTEGER WIN, WIN\_KEYVAL, IERROR

INTEGER(KIND=MPI\_ADDRESS\_KIND) ATTRIBUTE\_VAL

LOGICAL FLAG

{bool MPI::Win::Get\_attr(int win\_keyval, void\* attribute\_val) const *(binding deprecated, see Section 15.2)* }



*deprecated, see Section 15.2) }*

MPI\_WIN\_DELETE\_ATTR(win, win\_keyval)

INOUT	win	window from which the attribute is deleted (handle)
IN	win_keyval	key value (integer)

int MPI\_Win\_delete\_attr(MPI\_Win win, int win\_keyval)

MPI\_WIN\_DELETE\_ATTR(WIN, WIN\_KEYVAL, IERROR)

INTEGER WIN, WIN\_KEYVAL, IERROR

*{void MPI::Win::Delete\_attr(int win\_keyval) (binding deprecated, see Section 15.2) }*

ticket150.  
ticket150.

#### 6.7.4 Datatypes

The new functions for caching on datatypes are:

MPI\_TYPE\_CREATE\_KEYVAL(type\_copy\_attr\_fn, type\_delete\_attr\_fn, type\_keyval, extra\_state)

IN	type_copy_attr_fn	copy callback function for type_keyval (function)
IN	type_delete_attr_fn	delete callback function for type_keyval (function)
OUT	type_keyval	key value for future access (integer)
IN	extra_state	extra state for callback functions

int MPI\_Type\_create\_keyval(MPI\_Type\_copy\_attr\_function \*type\_copy\_attr\_fn,  
MPI\_Type\_delete\_attr\_function \*type\_delete\_attr\_fn,  
int \*type\_keyval, void \*extra\_state)

MPI\_TYPE\_CREATE\_KEYVAL(TYPE\_COPY\_ATTR\_FN, TYPE\_DELETE\_ATTR\_FN, TYPE\_KEYVAL,  
EXTRA\_STATE, IERROR)

EXTERNAL TYPE\_COPY\_ATTR\_FN, TYPE\_DELETE\_ATTR\_FN

INTEGER TYPE\_KEYVAL, IERROR

INTEGER(KIND=MPI\_ADDRESS\_KIND) EXTRA\_STATE

*{static int MPI::Datatype::Create\_keyval(MPI::Datatype::Copy\_attr\_function\*  
type\_copy\_attr\_fn, MPI::Datatype::Delete\_attr\_function\*  
type\_delete\_attr\_fn, void\* extra\_state) (binding deprecated, see  
Section 15.2) }*

ticket150.  
ticket150.

The argument type\_copy\_attr\_fn may be specified as MPI\_TYPE\_NULL\_COPY\_FN or MPI\_TYPE\_DUP\_FN from either C, C++, or Fortran. MPI\_TYPE\_NULL\_COPY\_FN is a function that does nothing other than returning flag = 0 and MPI\_SUCCESS.

MPI\_TYPE\_DUP\_FN is a simple-minded copy function that sets flag = 1, returns the value of attribute\_val\_in in attribute\_val\_out, and returns MPI\_SUCCESS.

The argument `type_delete_attr_fn` may be specified as `MPI_TYPE_NULL_DELETE_FN` from either C, C++, or Fortran. `MPI_TYPE_NULL_DELETE_FN` is a function that does nothing, other than returning `MPI_SUCCESS`.

The C callback functions are:

```
typedef int MPI_Type_copy_attr_function(MPI_Datatype oldtype,
                                       int type_keyval, void *extra_state, void *attribute_val_in,
                                       void *attribute_val_out, int *flag);

and

typedef int MPI_Type_delete_attr_function(MPI_Datatype type,
                                       int type_keyval, void *attribute_val, void *extra_state);
```

The Fortran callback functions are:

```
SUBROUTINE TYPE_COPY_ATTR_FN(OLDTYPE, TYPE_KEYVAL, EXTRA_STATE,
                             ATTRIBUTE_VAL_IN, ATTRIBUTE_VAL_OUT, FLAG, IERROR)
    INTEGER OLDTYPE, TYPE_KEYVAL, IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE,
    ATTRIBUTE_VAL_IN, ATTRIBUTE_VAL_OUT
    LOGICAL FLAG

and

SUBROUTINE TYPE_DELETE_ATTR_FN(TYPE, TYPE_KEYVAL, ATTRIBUTE_VAL,
                              EXTRA_STATE, IERROR)
    INTEGER TYPE, TYPE_KEYVAL, IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL, EXTRA_STATE
```

The C++ callbacks are:

```
{typedef int
    MPI::Datatype::Copy_attr_function(const MPI::Datatype& oldtype,
    int type_keyval, void* extra_state,
    const void* attribute_val_in, void* attribute_val_out,
    bool& flag); (binding deprecated, see Section 15.2) }

and

{typedef int MPI::Datatype::Delete_attr_function(MPI::Datatype& type,
    int type_keyval, void* attribute_val, void* extra_state);
    (binding deprecated, see Section 15.2) }
```

If an attribute copy function or attribute delete function returns other than `MPI_SUCCESS`, then the call that caused it to be invoked (for example, `MPI_TYPE_FREE`), is erroneous.

`MPI_TYPE_FREE_KEYVAL`(`type_keyval`)

INOUT    `type_keyval`                      key value (integer)

`int MPI_Type_free_keyval(int *type_keyval)`

```
MPI_TYPE_FREE_KEYVAL(TYPE_KEYVAL, IERROR)
    INTEGER TYPE_KEYVAL, IERROR
```

```

{static void MPI::Datatype::Free_keyval(int& type_keyval) (binding deprecated, 1 ticket150.
see Section 15.2) } 2
3
4
MPI_TYPE_SET_ATTR(type, type_keyval, attribute_val) 5
    INOUT    type                datatype to which attribute will be attached (handle) 6
    IN       type_keyval         key value (integer) 7
    IN       attribute_val       attribute value 8
9
10
int MPI_Type_set_attr(MPI_Datatype type, int type_keyval, 11
    void *attribute_val) 12
13
MPI_TYPE_SET_ATTR(TYPE, TYPE_KEYVAL, ATTRIBUTE_VAL, IERROR) 14
    INTEGER TYPE, TYPE_KEYVAL, IERROR 15
    INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL 16
17 ticket150.
{void MPI::Datatype::Set_attr(int type_keyval, const void* attribute_val) 18
    (binding deprecated, see Section 15.2) } 19 ticket150.
20
21
MPI_TYPE_GET_ATTR(type, type_keyval, attribute_val, flag) 22
    IN       type                datatype to which the attribute is attached (handle) 23
    IN       type_keyval         key value (integer) 24
    OUT      attribute_val       attribute value, unless flag = false 25
    OUT      flag                false if no attribute is associated with the key (logical) 26
27
28
int MPI_Type_get_attr(MPI_Datatype type, int type_keyval, void 29
    *attribute_val, int *flag) 30
31
MPI_TYPE_GET_ATTR(TYPE, TYPE_KEYVAL, ATTRIBUTE_VAL, FLAG, IERROR) 32
    INTEGER TYPE, TYPE_KEYVAL, IERROR 33
    INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL 34
    LOGICAL FLAG 35
36 ticket150.
{bool MPI::Datatype::Get_attr(int type_keyval, void* attribute_val) const 37
    (binding deprecated, see Section 15.2) } 38 ticket150.
39
40
MPI_TYPE_DELETE_ATTR(type, type_keyval) 41
    INOUT    type                datatype from which the attribute is deleted (handle) 42
    IN       type_keyval         key value (integer) 43
44
45
int MPI_Type_delete_attr(MPI_Datatype type, int type_keyval) 46
47
MPI_TYPE_DELETE_ATTR(TYPE, TYPE_KEYVAL, IERROR) 48
    INTEGER TYPE, TYPE_KEYVAL, IERROR

```

```

1
2 {void MPI::Datatype::Delete_attr(int type_keyval) (binding deprecated, see
3 Section 15.2) }
4
5
6

```

### 6.7.5 Error Class for Invalid Keyval

Key values for attributes are system-allocated, by MPI\_{TYPE,COMM,WIN}\_CREATE\_KEYVAL. Only such values can be passed to the functions that use key values as input arguments. In order to signal that an erroneous key value has been passed to one of these functions, there is a new MPI error class: MPI\_ERR\_KEYVAL. It can be returned by MPI\_ATTR\_PUT, MPI\_ATTR\_GET, MPI\_ATTR\_DELETE, MPI\_KEYVAL\_FREE, MPI\_{TYPE,COMM,WIN}\_DELETE\_ATTR, MPI\_{TYPE,COMM,WIN}\_SET\_ATTR, MPI\_{TYPE,COMM,WIN}\_GET\_ATTR, MPI\_{TYPE,COMM,WIN}\_FREE\_KEYVAL, MPI\_COMM\_DUP, MPI\_COMM\_DISCONNECT, and MPI\_COMM\_FREE. The last three are included because keyval is an argument to the copy and delete functions for attributes.

### 6.7.6 Attributes Example

*Advice to users.* This example shows how to write a collective communication operation that uses caching to be more efficient after the first call. The coding style assumes that MPI function results return only error statuses. (*End of advice to users.*)

```

22
23 /* key for this module's stuff: */
24 static int gop_key = MPI_KEYVAL_INVALID;
25
26 typedef struct
27 {
28     int ref_count;          /* reference count */
29     /* other stuff, whatever else we want */
30 } gop_stuff_type;
31
32 Efficient_Collective_Op (comm, ...)
33 MPI_Comm comm;
34 {
35     gop_stuff_type *gop_stuff;
36     MPI_Group      group;
37     int            foundflag;
38
39     MPI_Comm_group(comm, &group);
40
41     if (gop_key == MPI_KEYVAL_INVALID) /* get a key on first call ever */
42     {
43         if ( ! MPI_Comm_create_keyval( gop_stuff_copier,
44                                         gop_stuff_destructor,
45                                         &gop_key, (void *)0));
46         /* get the key while assigning its copy and delete callback
47            behavior. */
48

```

```

    MPI_Abort (comm, 99);
}

MPI_Comm_get_attr (comm, gop_key, &gop_stuff, &foundflag);
if (foundflag)
{ /* This module has executed in this group before.
   We will use the cached information */
}
else
{ /* This is a group that we have not yet cached anything in.
   We will now do so.
   */

    /* First, allocate storage for the stuff we want,
       and initialize the reference count */

    gop_stuff = (gop_stuff_type *) malloc (sizeof(gop_stuff_type));
    if (gop_stuff == NULL) { /* abort on out-of-memory error */ }

    gop_stuff -> ref_count = 1;

    /* Second, fill in *gop_stuff with whatever we want.
       This part isn't shown here */

    /* Third, store gop_stuff as the attribute value */
    MPI_Comm_set_attr ( comm, gop_key, gop_stuff);
}
/* Then, in any case, use contents of *gop_stuff
   to do the global op ... */
}

/* The following routine is called by MPI when a group is freed */

gop_stuff_destructor (comm, keyval, gop_stuff, extra)
MPI_Comm comm;
int keyval;
gop_stuff_type *gop_stuff;
void *extra;
{
    if (keyval != gop_key) { /* abort -- programming error */ }

    /* The group's being freed removes one reference to gop_stuff */
    gop_stuff -> ref_count -= 1;

    /* If no references remain, then free the storage */
    if (gop_stuff -> ref_count == 0) {
        free((void *)gop_stuff);
    }
}

```

```

1      }
2
3      /* The following routine is called by MPI when a group is copied */
4      gop_stuff_copier (comm, keyval, extra, gop_stuff_in, gop_stuff_out, flag)
5      MPI_Comm comm;
6      int keyval;
7      gop_stuff_type *gop_stuff_in, *gop_stuff_out;
8      void *extra;
9      {
10         if (keyval != gop_key) { /* abort -- programming error */ }
11
12         /* The new group adds one reference to this gop_stuff */
13         gop_stuff -> ref_count += 1;
14         gop_stuff_out = gop_stuff_in;
15     }
16

```

## 6.8 Naming Objects

There are many occasions on which it would be useful to allow a user to associate a printable identifier with an MPI communicator, window, or datatype, for instance error reporting, debugging, and profiling. The names attached to opaque objects do not propagate when the object is duplicated or copied by MPI routines. For communicators this can be achieved using the following two functions.

**MPI\_COMM\_SET\_NAME** (comm, comm\_name)

INOUT	comm	communicator whose identifier is to be set (handle)
IN	comm_name	the character string which is remembered as the name (string)

```
int MPI_Comm_set_name(MPI_Comm comm, char *comm_name)
```

```
MPI_COMM_SET_NAME(COMM, COMM_NAME, IERROR)
```

```
INTEGER COMM, IERROR
```

```
CHARACTER*(*) COMM_NAME
```

```
{void MPI::Comm::Set_name(const char* comm_name) (binding deprecated, see
Section 15.2) }
```

**MPI\_COMM\_SET\_NAME** allows a user to associate a name string with a communicator. The character string which is passed to **MPI\_COMM\_SET\_NAME** will be saved inside the MPI library (so it can be freed by the caller immediately after the call, or allocated on the stack). Leading spaces in name are significant but trailing ones are not.

**MPI\_COMM\_SET\_NAME** is a local (non-collective) operation, which only affects the name of the communicator as seen in the process which made the **MPI\_COMM\_SET\_NAME** call. There is no requirement that the same (or any) name be assigned to a communicator in every process where it exists.

*Advice to users.* Since `MPI_COMM_SET_NAME` is provided to help debug code, it is sensible to give the same name to a communicator in all of the processes where it exists, to avoid confusion. (*End of advice to users.*)

The length of the name which can be stored is limited to the value of `MPI_MAX_OBJECT_NAME` in Fortran and `MPI_MAX_OBJECT_NAME-1` in C and C++ to allow for the null terminator. Attempts to put names longer than this will result in truncation of the name. `MPI_MAX_OBJECT_NAME` must have a value of at least 64.

*Advice to users.* Under circumstances of store exhaustion an attempt to put a name of any length could fail, therefore the value of `MPI_MAX_OBJECT_NAME` should be viewed only as a strict upper bound on the name length, not a guarantee that setting names of less than this length will always succeed. (*End of advice to users.*)

*Advice to implementors.* Implementations which pre-allocate a fixed size space for a name should use the length of that allocation as the value of `MPI_MAX_OBJECT_NAME`. Implementations which allocate space for the name from the heap should still define `MPI_MAX_OBJECT_NAME` to be a relatively small value, since the user has to allocate space for a string of up to this size when calling `MPI_COMM_GET_NAME`. (*End of advice to implementors.*)

#### `MPI_COMM_GET_NAME` (comm, comm\_name, resultlen)

IN	comm	communicator whose name is to be returned (handle)
OUT	comm_name	the name previously stored on the communicator, or an empty string if no such name exists (string)
OUT	resultlen	length of returned name (integer)

```
int MPI_Comm_get_name(MPI_Comm comm, char *comm_name, int *resultlen)
```

```
MPI_COMM_GET_NAME(COMM, COMM_NAME, RESULTLEN, IERROR)
```

```
INTEGER COMM, RESULTLEN, IERROR
```

```
CHARACTER*(*) COMM_NAME
```

```
{void MPI::Comm::Get_name(char* comm_name, int& resultlen) const (binding  
deprecated, see Section 15.2) }
```

`MPI_COMM_GET_NAME` returns the last name which has previously been associated with the given communicator. The name may be set and got from any language. The same name will be returned independent of the language used. name should be allocated so that it can hold a resulting string of length `MPI_MAX_OBJECT_NAME` characters.

`MPI_COMM_GET_NAME` returns a copy of the set name in name.

In C, a null character is additionally stored at `name[resultlen]`. `resultlen` cannot be larger than `[MPI_MAX_OBJECT]MPI_MAX_OBJECT_NAME-1`. In Fortran, name is padded on the right with blank characters. `resultlen` cannot be larger than `[MPI_MAX_OBJECT]MPI_MAX_OBJECT_NAME`.

If the user has not associated a name with a communicator, or an error occurs, `MPI_COMM_GET_NAME` will return an empty string (all spaces in Fortran, "" in C and

ticket150.

ticket150.

ticket49.

ticket49.

C++). The three predefined communicators will have predefined names associated with them. Thus, the names of `MPI_COMM_WORLD`, `MPI_COMM_SELF`, and the communicator returned by `MPI_COMM_GET_PARENT` (if not `MPI_COMM_NULL`) will have the default of `MPI_COMM_WORLD`, `MPI_COMM_SELF`, and `MPI_COMM_PARENT`. The fact that the system may have chosen to give a default name to a communicator does not prevent the user from setting a name on the same communicator; doing this removes the old name and assigns the new one.

*Rationale.* We provide separate functions for setting and getting the name of a communicator, rather than simply providing a predefined attribute key for the following reasons:

- It is not, in general, possible to store a string as an attribute from Fortran.
- It is not easy to set up the delete function for a string attribute unless it is known to have been allocated from the heap.
- To make the attribute key useful additional code to call `strdup` is necessary. If this is not standardized then users have to write it. This is extra unneeded work which we can easily eliminate.
- The Fortran binding is not trivial to write (it will depend on details of the Fortran compilation system), and will not be portable. Therefore it should be in the library rather than in user code.

*(End of rationale.)*

*Advice to users.* The above definition means that it is safe simply to print the string returned by `MPI_COMM_GET_NAME`, as it is always a valid string even if there was no name.

Note that associating a name with a communicator has no effect on the semantics of an MPI program, and will (necessarily) increase the store requirement of the program, since the names must be saved. Therefore there is no requirement that users use these functions to associate names with communicators. However debugging and profiling MPI applications may be made easier if names are associated with communicators, since the debugger or profiler should then be able to present information in a less cryptic manner. *(End of advice to users.)*

The following functions are used for setting and getting names of datatypes.

`MPI_TYPE_SET_NAME (type, type_name)`

INOUT	type	datatype whose identifier is to be set (handle)
IN	type_name	the character string which is remembered as the name (string)

`int MPI_Type_set_name(MPI_Datatype type, char *type_name)`

`MPI_TYPE_SET_NAME(TYPE, TYPE_NAME, IERROR)`

INTEGER TYPE, IERROR

CHARACTER\*(\*) TYPE\_NAME



ticket150.

ticket150.

```
{void MPI::Datatype::Set_name(const char* type_name) (binding deprecated, see
Section 15.2) }
```

MPI\_TYPE\_GET\_NAME (type, type\_name, resultlen)

IN	type	datatype whose name is to be returned (handle)
OUT	type_name	the name previously stored on the datatype, or a empty string if no such name exists (string)
OUT	resultlen	length of returned name (integer)

```
int MPI_Type_get_name(MPI_Datatype type, char *type_name, int *resultlen)
```

```
MPI_TYPE_GET_NAME(TYPE, TYPE_NAME, RESULTLEN, IERROR)
```

```
    INTEGER TYPE, RESULTLEN, IERROR
```

```
    CHARACTER*(*) TYPE_NAME
```

```
{void MPI::Datatype::Get_name(char* type_name, int& resultlen) const
(binding deprecated, see Section 15.2) }
```

Named predefined datatypes have the default names of the datatype name. For example, MPI\_WCHAR has the default name of MPI\_WCHAR.

The following functions are used for setting and getting names of windows.

MPI\_WIN\_SET\_NAME (win, win\_name)

INOUT	win	window whose identifier is to be set (handle)
IN	win_name	the character string which is remembered as the name (string)

```
int MPI_Win_set_name(MPI_Win win, char *win_name)
```

```
MPI_WIN_SET_NAME(WIN, WIN_NAME, IERROR)
```

```
    INTEGER WIN, IERROR
```

```
    CHARACTER*(*) WIN_NAME
```

```
{void MPI::Win::Set_name(const char* win_name) (binding deprecated, see
Section 15.2) }
```

MPI\_WIN\_GET\_NAME (win, win\_name, resultlen)

IN	win	window whose name is to be returned (handle)
OUT	win_name	the name previously stored on the window, or a empty string if no such name exists (string)
OUT	resultlen	length of returned name (integer)

```
int MPI_Win_get_name(MPI_Win win, char *win_name, int *resultlen)
```

```

1 MPI_WIN_GET_NAME(WIN, WIN_NAME, RESULTLEN, IERROR)
2     INTEGER WIN, RESULTLEN, IERROR
3     CHARACTER*(*) WIN_NAME

```

```

4 {void MPI::Win::Get_name(char* win_name, int& resultlen) const (binding
5     deprecated, see Section 15.2) }
6
7
8

```

## 6.9 Formalizing the Loosely Synchronous Model

In this section, we make further statements about the loosely synchronous model, with particular attention to intra-communication.

### 6.9.1 Basic Statements

When a caller passes a communicator (that contains a context and group) to a callee, that communicator must be free of side effects throughout execution of the subprogram: there should be no active operations on that communicator that might involve the process. This provides one model in which libraries can be written, and work “safely.” For libraries so designated, the callee has permission to do whatever communication it likes with the communicator, and under the above guarantee knows that no other communications will interfere. Since we permit good implementations to create new communicators without synchronization (such as by preallocated contexts on communicators), this does not impose a significant overhead.

This form of safety is analogous to other common computer-science usages, such as passing a descriptor of an array to a library routine. The library routine has every right to expect such a descriptor to be valid and modifiable.

### 6.9.2 Models of Execution

In the loosely synchronous model, transfer of control to a **parallel procedure** is effected by having each executing process invoke the procedure. The invocation is a collective operation: it is executed by all processes in the execution group, and invocations are similarly ordered at all processes. However, the invocation need not be synchronized.

We say that a parallel procedure is *active* in a process if the process belongs to a group that may collectively execute the procedure, and some member of that group is currently executing the procedure code. If a parallel procedure is active in a process, then this process may be receiving messages pertaining to this procedure, even if it does not currently execute the code of this procedure.

#### Static communicator allocation

This covers the case where, at any point in time, at most one invocation of a parallel procedure can be active at any process, and the group of executing processes is fixed. For example, all invocations of parallel procedures involve all processes, processes are single-threaded, and there are no recursive invocations.

In such a case, a communicator can be statically allocated to each procedure. The static allocation can be done in a preamble, as part of initialization code. If the parallel procedures can be organized into libraries, so that only one procedure of each library can

be concurrently active in each processor, then it is sufficient to allocate one communicator per library.

#### Dynamic communicator allocation

Calls of parallel procedures are well-nested if a new parallel procedure is always invoked in a subset of a group executing the same parallel procedure. Thus, processes that execute the same parallel procedure have the same execution stack.

In such a case, a new communicator needs to be dynamically allocated for each new invocation of a parallel procedure. The allocation is done by the caller. A new communicator can be generated by a call to `MPI_COMM_DUP`, if the callee execution group is identical to the caller execution group, or by a call to `MPI_COMM_SPLIT` if the caller execution group is split into several subgroups executing distinct parallel routines. The new communicator is passed as an argument to the invoked routine.

The need for generating a new communicator at each invocation can be alleviated or avoided altogether in some cases: If the execution group is not split, then one can allocate a stack of communicators in a preamble, and next manage the stack in a way that mimics the stack of recursive calls.

One can also take advantage of the well-ordering property of communication to avoid confusing caller and callee communication, even if both use the same communicator. To do so, one needs to abide by the following two rules:

- messages sent before a procedure call (or before a return from the procedure) are also received before the matching call (or return) at the receiving end;
- messages are always selected by source (no use is made of `MPI_ANY_SOURCE`).

#### The General case

In the general case, there may be multiple concurrently active invocations of the same parallel procedure within the same group; invocations may not be well-nested. A new communicator needs to be created for each invocation. It is the user's responsibility to make sure that, should two distinct parallel procedures be invoked concurrently on overlapping sets of processes, then communicator creation be properly coordinated.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

# Chapter 7

## Process Topologies

### 7.1 Introduction

This chapter discusses the MPI topology mechanism. A topology is an extra, optional attribute that one can give to an intra-communicator; topologies cannot be added to inter-communicators. A topology can provide a convenient naming mechanism for the processes of a group (within a communicator), and additionally, may assist the runtime system in mapping the processes onto hardware.

As stated in Chapter 6, a process group in MPI is a collection of  $n$  processes. Each process in the group is assigned a rank between 0 and  $n-1$ . In many parallel applications a linear ranking of processes does not adequately reflect the logical communication pattern of the processes (which is usually determined by the underlying problem geometry and the numerical algorithm used). Often the processes are arranged in topological patterns such as two- or three-dimensional grids. More generally, the logical process arrangement is described by a graph. In this chapter we will refer to this logical process arrangement as the “virtual topology.”

A clear distinction must be made between the virtual process topology and the topology of the underlying, physical hardware. The virtual topology can be exploited by the system in the assignment of processes to physical processors, if this helps to improve the communication performance on a given machine. How this mapping is done, however, is outside the scope of MPI. The description of the virtual topology, on the other hand, depends only on the application, and is machine-independent. The functions that are described in this chapter deal only with machine-independent mapping.

*Rationale.* Though physical mapping is not discussed, the existence of the virtual topology information may be used as advice by the runtime system. There are well-known techniques for mapping grid/torus structures to hardware topologies such as hypercubes or grids. For more complicated graph structures good heuristics often yield nearly optimal results [32]. On the other hand, if there is no way for the user to specify the logical process arrangement as a “virtual topology,” a random mapping is most likely to result. On some machines, this will lead to unnecessary contention in the interconnection network. Some details about predicted and measured performance improvements that result from good process-to-processor mapping on modern wormhole-routing architectures can be found in [10, 11].

Besides possible performance benefits, the virtual topology can function as a convenient, process-naming structure, with significant benefits for program readability and

notational power in message-passing programming. (*End of rationale.*)

## 7.2 Virtual Topologies

The communication pattern of a set of processes can be represented by a graph. The nodes represent processes, and the edges connect processes that communicate with each other. MPI provides message-passing between any pair of processes in a group. There is no requirement for opening a channel explicitly. Therefore, a “missing link” in the user-defined process graph does not prevent the corresponding processes from exchanging messages. It means rather that this connection is neglected in the virtual topology. This strategy implies that the topology gives no convenient way of naming this pathway of communication. Another possible consequence is that an automatic mapping tool (if one exists for the runtime environment) will not take account of this edge when mapping. [ Edges in the communication graph are not weighted, so that processes are either simply connected or not connected at all.

*Rationale.* Experience with similar techniques in PARMACS MPI-2.1 Correction due to Reviews to MPI-2.1 draft Feb.23, 2008 [5, 9] MPI-2.1 End of review based correction show that this information is usually sufficient for a good mapping. Additionally, a more precise specification is more difficult for the user to set up, and it would make the interface functions substantially more complicated. (*End of rationale.*)

Specifying the virtual topology in terms of a graph is sufficient for all applications. However, in many applications the graph structure is regular, and the detailed set-up of the graph would be inconvenient for the user and might be less efficient at run time. A large fraction of all parallel applications use process topologies like rings, two- or higher-dimensional grids, or tori. These structures are completely defined by the number of dimensions and the numbers of processes in each coordinate direction. Also, the mapping of grids and tori is generally an easier problem than that of general graphs. Thus, it is desirable to address these cases explicitly.

Process coordinates in a Cartesian structure begin their numbering at 0. Row-major numbering is always used for the processes in a Cartesian structure. This means that, for example, the relation between group rank and coordinates for four processes in a  $(2 \times 2)$  grid is as follows.

```
coord (0,0):  rank 0
coord (0,1):  rank 1
coord (1,0):  rank 2
coord (1,1):  rank 3
```

## 7.3 Embedding in MPI

The support for virtual topologies as defined in this chapter is consistent with other parts of MPI, and, whenever possible, makes use of functions that are defined elsewhere. Topology information is associated with communicators. It is added to communicators using the caching mechanism described in Chapter 6.

## 7.4 Overview of the Functions

The functions `MPI_GRAPH_CREATE`, `MPI_DIST_GRAPH_CREATE_ADJACENT`, `MPI_DIST_GRAPH_CREATE` and `MPI_CART_CREATE` are used to create general (graph) virtual topologies and Cartesian topologies, respectively. These topology creation functions are collective. As with other collective calls, the program must be written to work correctly, whether the call synchronizes or not.

The topology creation functions take as input an existing communicator `comm_old`, which defines the set of processes on which the topology is to be mapped. [ `MPI-2.1 Ballots 1-4` All input arguments must have identical values on all processes of the group of `comm_old`. A `MPI-2.1 Ballots 1-4` ]For `MPI_GRAPH_CREATE` and `MPI_CART_CREATE`, all input arguments must have identical values on all processes of the group of `comm_old`. For `MPI_DIST_GRAPH_CREATE_ADJACENT` and `MPI_DIST_GRAPH_CREATE` the input communication graph is distributed across the calling processes. Therefore the processes provide different values for the arguments specifying the graph. However, all processes must give the same value for `reorder` and the `info` argument. In all cases, a new communicator `comm_topol` is created that carries the topological structure as cached information (see Chapter 6). In analogy to function `MPI_COMM_CREATE`, no cached information propagates from `comm_old` to `comm_topol`.

`MPI_CART_CREATE` can be used to describe Cartesian structures of arbitrary dimension. For each coordinate direction one specifies whether the process structure is periodic or not. Note that an  $n$ -dimensional hypercube is an  $n$ -dimensional torus with 2 processes per coordinate direction. Thus, special support for hypercube structures is not necessary. The local auxiliary function `MPI_DIMS_CREATE` can be used to compute a balanced distribution of processes among a given number of dimensions.

*Rationale.* Similar functions are contained in EXPRESS [12] and PARMACS. (*End of rationale.*)

The function `MPI_TOPO_TEST` can be used to inquire about the topology associated with a communicator. The topological information can be extracted from the communicator using the functions `MPI_GRAPHDIMS_GET` and `MPI_GRAPH_GET`, for general graphs, and `MPI_CARTDIM_GET` and `MPI_CART_GET`, for Cartesian topologies. Several additional functions are provided to manipulate Cartesian topologies: the functions `MPI_CART_RANK` and `MPI_CART_COORDS` translate Cartesian coordinates into a group rank, and vice-versa; the function `MPI_CART_SUB` can be used to extract a Cartesian subspace (analogous to `MPI_COMM_SPLIT`). The function `MPI_CART_SHIFT` provides the information needed to communicate with neighbors in a Cartesian dimension. The two functions `MPI_GRAPH_NEIGHBORS_COUNT` and `MPI_GRAPH_NEIGHBORS` can be used to extract the neighbors of a node in a graph. For distributed graphs, the functions `MPI_DIST_NEIGHBORS_COUNT` and `MPI_DIST_NEIGHBORS` can be used to extract the neighbors of the calling node. The function `MPI_CART_SUB` is collective over the input communicator's group; all other functions are local.

Two additional functions, `MPI_GRAPH_MAP` and `MPI_CART_MAP` are presented in the last section. In general these functions are not called by the user directly. However, together with the communicator manipulation functions presented in Chapter 6, they are sufficient to implement all other topology functions. Section 7.5.8 outlines such an implementation.

## 7.5 Topology Constructors

### 7.5.1 Cartesian Constructor

`MPI_CART_CREATE(comm_old, ndims, dims, periods, reorder, comm_cart)`

IN	<code>comm_old</code>	input communicator (handle)
IN	<code>ndims</code>	number of dimensions of Cartesian grid (integer)
IN	<code>dims</code>	integer array of size <code>ndims</code> specifying the number of processes in each dimension
IN	<code>periods</code>	logical array of size <code>ndims</code> specifying whether the grid is periodic ( <code>true</code> ) or not ( <code>false</code> ) in each dimension
IN	<code>reorder</code>	ranking may be reordered ( <code>true</code> ) or not ( <code>false</code> ) (logical)
OUT	<code>comm_cart</code>	communicator with new Cartesian topology (handle)

```
int MPI_Cart_create(MPI_Comm comm_old, int ndims, int *dims, int *periods,
                   int reorder, MPI_Comm *comm_cart)
```

```
MPI_CART_CREATE(COMM_OLD, NDIMS, DIMS, PERIODS, REORDER, COMM_CART, IERROR)
                INTEGER COMM_OLD, NDIMS, DIMS(*), COMM_CART, IERROR
                LOGICAL PERIODS(*), REORDER
```

```
{MPI::Cartcomm MPI::Intracomm::Create_cart(int ndims, const int dims[],
      const bool periods[], bool reorder) const (binding deprecated, see
      Section 15.2) }
```

`MPI_CART_CREATE` returns a handle to a new communicator to which the Cartesian topology information is attached. If `reorder = false` then the rank of each process in the new group is identical to its rank in the old group. Otherwise, the function may reorder the processes (possibly so as to choose a good embedding of the virtual topology onto the physical machine). If the total size of the Cartesian grid is smaller than the size of the group of `comm`, then some processes are returned `MPI_COMM_NULL`, in analogy to `MPI_COMM_SPLIT`. If `ndims` is zero then a zero-dimensional Cartesian topology is created. The call is erroneous if it specifies a grid that is larger than the group size or if `ndims` is negative.

### 7.5.2 Cartesian Convenience Function: `MPI_DIMS_CREATE`

For Cartesian topologies, the function `MPI_DIMS_CREATE` helps the user select a balanced distribution of processes per coordinate direction, depending on the number of processes in the group to be balanced and optional constraints that can be specified by the user. One use is to partition all the processes (the size of `MPI_COMM_WORLD`'s group) into an  $n$ -dimensional topology.



`MPI_DIMS_CREATE(nnodes, ndims, dims)`

IN	nnodes	number of nodes in a grid (integer)
IN	ndims	number of Cartesian dimensions (integer)
INOUT	dims	integer array of size <code>ndims</code> specifying the number of nodes in each dimension

`int MPI_Dims_create(int nnodes, int ndims, int *dims)`

`MPI_DIMS_CREATE(NNODES, NDIMS, DIMS, IERROR)`

INTEGER NNODES, NDIMS, DIMS(\*), IERROR

`{void MPI::Compute_dims(int nnodes, int ndims, int dims[]) (binding deprecated, see Section 15.2) }`

The entries in the array `dims` are set to describe a Cartesian grid with `ndims` dimensions and a total of `nnodes` nodes. The dimensions are set to be as close to each other as possible, using an appropriate divisibility algorithm. The caller may further constrain the operation of this routine by specifying elements of array `dims`. If `dims[i]` is set to a positive number, the routine will not modify the number of nodes in dimension `i`; only those entries where `dims[i] = 0` are modified by the call.

Negative input values of `dims[i]` are erroneous. An error will occur if `nnodes` is not a multiple of  $\prod_{i, \text{dims}[i] \neq 0} \text{dims}[i]$ .

For `dims[i]` set by the call, `dims[i]` will be ordered in non-increasing order. Array `dims` is suitable for use as input to routine `MPI_CART_CREATE`. `MPI_DIMS_CREATE` is local.

**Example 7.1**

dims before call	function call	dims on return
(0,0)	<code>MPI_DIMS_CREATE(6, 2, dims)</code>	(3,2)
(0,0)	<code>MPI_DIMS_CREATE(7, 2, dims)</code>	(7,1)
(0,3,0)	<code>MPI_DIMS_CREATE(6, 3, dims)</code>	(2,3,1)
(0,3,0)	<code>MPI_DIMS_CREATE(7, 3, dims)</code>	erroneous call

### 7.5.3 General (Graph) Constructor

```

MPI_GRAPH_CREATE(comm_old, nnodes, index, edges, reorder, comm_graph)

    IN      comm_old      input communicator (handle)
    IN      nnodes        number of nodes in graph (integer)
    IN      index          array of integers describing node degrees (see below)
    IN      edges          array of integers describing graph edges (see below)
    IN      reorder        ranking may be reordered (true) or not (false) (logical)
    OUT     comm_graph     communicator with graph topology added (handle)

int MPI_Graph_create(MPI_Comm comm_old, int nnodes, int *index, int *edges,
                    int reorder, MPI_Comm *comm_graph)

MPI_GRAPH_CREATE(COMM_OLD, NNODES, INDEX, EDGES, REORDER, COMM_GRAPH,
                IERROR)
    INTEGER COMM_OLD, NNODES, INDEX(*), EDGES(*), COMM_GRAPH, IERROR
    LOGICAL REORDER

{MPI::Graphcomm MPI::Intracomm::Create_graph(int nnodes, const int index[],
    const int edges[], bool reorder) const (binding deprecated, see
Section 15.2) }

```

MPI\_GRAPH\_CREATE returns a handle to a new communicator to which the graph topology information is attached. If `reorder = false` then the rank of each process in the new group is identical to its rank in the old group. Otherwise, the function may reorder the processes. If the size, `nnodes`, of the graph is smaller than the size of the group of `comm`, then some processes are returned MPI\_COMM\_NULL, in analogy to MPI\_CART\_CREATE and MPI\_COMM\_SPLIT. If the graph is empty, i.e., `nnodes == 0`, then MPI\_COMM\_NULL is returned in all processes. The call is erroneous if it specifies a graph that is larger than the group size of the input communicator.

The three parameters `nnodes`, `index` and `edges` define the graph structure. `nnodes` is the number of nodes of the graph. The nodes are numbered from 0 to `nnodes-1`. The `i`-th entry of array `index` stores the total number of neighbors of the first `i` graph nodes. The lists of neighbors of nodes 0, 1, ..., `nnodes-1` are stored in consecutive locations in array `edges`. The array `edges` is a flattened representation of the edge lists. The total number of entries in `index` is `nnodes` and the total number of entries in `edges` is equal to the number of graph edges.

The definitions of the arguments `nnodes`, `index`, and `edges` are illustrated with the following simple example.

**Example 7.2** Assume there are four processes 0, 1, 2, 3 with the following adjacency matrix:

process	neighbors
0	1, 3
1	0
2	3
3	0, 2

Then, the input arguments are:

```

nnodes = 4
index = 2, 3, 4, 6
edges = 1, 3, 0, 3, 0, 2

```

Thus, in C, `index[0]` is the degree of node zero, and `index[i] - index[i-1]` is the degree of node `i`, `i=1, ..., nnodes-1`; the list of neighbors of node zero is stored in `edges[j]`, for  $0 \leq j \leq \text{index}[0] - 1$  and the list of neighbors of node `i`, `i > 0`, is stored in `edges[j]`,  $\text{index}[i-1] \leq j \leq \text{index}[i] - 1$ .

In Fortran, `index(1)` is the degree of node zero, and `index(i+1) - index(i)` is the degree of node `i`, `i=1, ..., nnodes-1`; the list of neighbors of node zero is stored in `edges(j)`, for  $1 \leq j \leq \text{index}(1)$  and the list of neighbors of node `i`, `i > 0`, is stored in `edges(j)`,  $\text{index}(i) + 1 \leq j \leq \text{index}(i+1)$ .

A single process is allowed to be defined multiple times in the list of neighbors of a process (i.e., there may be multiple edges between two processes). A process is also allowed to be a neighbor to itself (i.e., a self loop in the graph). The adjacency matrix is allowed to be non-symmetric.

*Advice to users.* Performance implications of using multiple edges or a non-symmetric adjacency matrix are not defined. The definition of a node-neighbor edge does not imply a direction of the communication. (*End of advice to users.*)

*Advice to implementors.* The following topology information is likely to be stored with a communicator:

- Type of topology (Cartesian/graph),
- For a Cartesian topology:
  1. `ndims` (number of dimensions),
  2. `dims` (numbers of processes per coordinate direction),
  3. `periods` (periodicity information),
  4. `own_position` (own position in grid, could also be computed from rank and `dims`)
- For a graph topology:
  1. `index`,
  2. `edges`,

which are the vectors defining the graph structure.

For a graph structure the number of nodes is equal to the number of processes in the group. Therefore, the number of nodes does not have to be stored explicitly. An additional zero entry at the start of array `index` simplifies access to the topology information. (*End of advice to implementors.*)

### 7.5.4 Distributed (Graph) Constructor

The general graph constructor assumes that each process passes the full (global) communication graph to the call. This limits the scalability of this constructor. With the distributed graph interface, the communication graph is specified in a fully distributed fashion. Each process specifies only the part of the communication graph of which it is aware. Typically, this could be the set of processes from which the process will eventually receive or get data, or the set of processes to which the process will send or put data, or some combination of such edges. Two different interfaces can be used to create a distributed graph topology. `MPI_DIST_GRAPH_CREATE_ADJACENT` creates a distributed graph communicator with each process specifying all of its incoming and outgoing (adjacent) edges in the logical communication graph and thus requires minimal communication during creation. `MPI_DIST_GRAPH_CREATE` provides full flexibility, and processes can indicate that communication will occur between other pairs of processes.

To provide better possibilities for optimization by the MPI library, the distributed graph constructors permit weighted communication edges and take an `info` argument that can further influence process reordering or other optimizations performed by the MPI library. For example, hints can be provided on how edge weights are to be interpreted, the quality of the reordering, and/or the time permitted for the MPI library to process the graph.

`MPI_DIST_GRAPH_CREATE_ADJACENT(comm_old, indegree, sources, sourceweights, outdegree, destinations, destweights, info, reorder, comm_dist_graph)`

IN	comm_old	input communicator (handle)
IN	indegree	size of <code>sources</code> and <code>sourceweights</code> arrays (non-negative integer)
IN	sources	ranks of processes for which the calling process is a destination (array of non-negative integers)
IN	sourceweights	weights of the edges into the calling process (array of non-negative integers)
IN	outdegree	size of <code>destinations</code> and <code>destweights</code> arrays (non-negative integer)
IN	destinations	ranks of processes for which the calling process is a source (array of non-negative integers)
IN	destweights	weights of the edges out of the calling process (array of non-negative integers)
IN	info	hints on optimization and interpretation of weights (handle)
IN	reorder	the ranks may be reordered (true) or not (false) (logical)
OUT	comm_dist_graph	communicator with distributed graph topology (handle)

```
int MPI_Dist_graph_create_adjacent(MPI_Comm comm_old, int indegree,
                                   int sources[], int sourceweights[], int outdegree,
```

```

        int destinations[], int destweights[], MPI_Info info,
        int reorder, MPI_Comm *comm_dist_graph)
MPI_DIST_GRAPH_CREATE_ADJACENT(COMM_OLD, INDEGREE, SOURCES, SOURCEWEIGHTS,
        OUTDEGREE, DESTINATIONS, DESTWEIGHTS, INFO, REORDER,
        COMM_DIST_GRAPH, IERROR)
    INTEGER COMM_OLD, INDEGREE, SOURCES(*), SOURCEWEIGHTS(*), OUTDEGREE,
        DESTINATIONS(*), DESTWEIGHTS(*), INFO, COMM_DIST_GRAPH, IERROR
    LOGICAL REORDER
{MPI::Distgraphcomm MPI::Intracomm::Dist_graph_create_adjacent(int
        indegree, const int sources[], const int sourceweights[],
        int outdegree, const int destinations[],
        const int destweights[], const MPI::Info& info, bool reorder)
        const (binding deprecated, see Section 15.2) }
{MPI::Distgraphcomm
        MPI::Intracomm::Dist_graph_create_adjacent(int indegree,
        const int sources[], int outdegree, const int destinations[],
        const MPI::Info& info, bool reorder) const (binding deprecated,
        see Section 15.2) }

```

`MPI_DIST_GRAPH_CREATE_ADJACENT` returns a handle to a new communicator to which the distributed graph topology information is attached. Each process passes all information about the edges to its neighbors in the virtual distributed graph topology. The calling processes must ensure that each edge of the graph is described in the source and in the destination process with the same weights. If there are multiple edges for a given (source,dest) pair, then the sequence of the weights of these edges does not matter. The complete communication topology is the combination of all edges shown in the `sources` arrays of all processes in `comm_old`, which must be identical to the combination of all edges shown in the `destinations` arrays. Source and destination ranks must be process ranks of `comm_old`. This allows a fully distributed specification of the communication graph. Isolated processes (i.e., processes with no outgoing or incoming edges, that is, processes that have specified `indegree` and `outdegree` as zero and that thus do not occur as source or destination rank in the graph specification) are allowed.

The call creates a new communicator `comm_dist_graph` of distributed graph topology type to which topology information has been attached. The number of processes in `comm_dist_graph` is identical to the number of processes in `comm_old`. The call to `MPI_DIST_GRAPH_CREATE_ADJACENT` is collective.

Weights are specified as non-negative integers and can be used to influence the process remapping strategy and other internal MPI optimizations. For instance, approximate count arguments of later communication calls along specific edges could be used as their edge weights. Multiplicity of edges can likewise indicate more intense communication between pairs of processes. However, the exact meaning of edge weights is not specified by the MPI standard and is left to the implementation. In C or Fortran, an application can supply the special value `MPI_UNWEIGHTED` for the weight array to indicate that all edges have the same (effectively no) weight. In C++, this constant does not exist and the weight arguments may be omitted from the argument list. It is erroneous to supply `MPI_UNWEIGHTED`, or in C++ omit the weight arrays, for some but not all processes of `comm_old`. Note that

MPI\_UNWEIGHTED is not a special weight value; rather it is a special value for the total array argument. In C, one would expect it to be NULL. In Fortran, MPI\_UNWEIGHTED is an object like MPI\_BOTTOM (not usable for initialization or assignment). See Section 2.5.4.

The meaning of the info and reorder arguments is defined in the description of the following routine.

**MPI\_DIST\_GRAPH\_CREATE(comm\_old, n, sources, degrees, destinations, weights, info, reorder, comm\_dist\_graph)**

IN	comm_old	input communicator (handle)
IN	n	number of source nodes for which this process specifies edges (non-negative integer)
IN	sources	array containing the n source nodes for which this process specifies edges (array of non-negative integers)
IN	degrees	array specifying the number of destinations for each source node in the source node array (array of non-negative integers)
IN	destinations	destination nodes for the source nodes in the source node array (array of non-negative integers)
IN	weights	weights for source to destination edges (array of non-negative integers)
IN	info	hints on optimization and interpretation of weights (handle)
IN	reorder	the process may be reordered (true) or not (false) (logical)
OUT	comm_dist_graph	communicator with distributed graph topology added (handle)

```
int MPI_Dist_graph_create(MPI_Comm comm_old, int n, int sources[],
                        int degrees[], int destinations[], int weights[],
                        MPI_Info info, int reorder, MPI_Comm *comm_dist_graph)
```

```
MPI_DIST_GRAPH_CREATE(COMM_OLD, N, SOURCES, DEGREES, DESTINATIONS, WEIGHTS,
                      INFO, REORDER, COMM_DIST_GRAPH, IERROR)
INTEGER COMM_OLD, N, SOURCES(*), DEGREES(*), DESTINATIONS(*),
WEIGHTS(*), INFO, COMM_DIST_GRAPH, IERROR
LOGICAL REORDER
```

```
{MPI::Distgraphcomm MPI::Intracomm::Dist_graph_create(int n,
               const int sources[], const int degrees[], const int
               destinations[], const int weights[], const MPI::Info& info,
               bool reorder) const (binding deprecated, see Section 15.2) }

{MPI::Distgraphcomm MPI::Intracomm::Dist_graph_create(int n,
               const int sources[], const int degrees[],
               const int destinations[], const MPI::Info& info, bool reorder)
               const (binding deprecated, see Section 15.2) }
```

`MPI_DIST_GRAPH_CREATE` returns a handle to a new communicator to which the distributed graph topology information is attached. Concretely, each process calls the constructor with a set of directed (`source,destination`) communication edges as described below. Every process passes an array of `n` source nodes in the `sources` array. For each source node, a non-negative number of destination nodes is specified in the `degrees` array. The destination nodes are stored in the corresponding consecutive segment of the `destinations` array. More precisely, if the *i*-th node in `sources` is *s*, this specifies `degrees[i]` edges (*s,d*) with *d* of the *j*-th such edge stored in `destinations[degrees[0]+...+degrees[i-1]+j]`. The weight of this edge is stored in `weights[degrees[0]+...+degrees[i-1]+j]`. Both the `sources` and the `destinations` arrays may contain the same node more than once, and the order in which nodes are listed as destinations or sources is not significant. Similarly, different processes may specify edges with the same source and destination nodes. Source and destination nodes must be process ranks of `comm_old`. Different processes may specify different numbers of source and destination nodes, as well as different source to destination edges. This allows a fully distributed specification of the communication graph. Isolated processes (i.e., processes with no outgoing or incoming edges, that is, processes that do not occur as source or destination node in the graph specification) are allowed.

The call creates a new communicator `comm_dist_graph` of distributed graph topology type to which topology information has been attached. The number of processes in `comm_dist_graph` is identical to the number of processes in `comm_old`. The call to `MPI_Dist_graph_create` is collective.

If `reorder = false`, all processes will have the same rank in `comm_dist_graph` as in `comm_old`. If `reorder = true` then the MPI library is free to remap to other processes (of `comm_old`) in order to improve communication on the edges of the communication graph. The weight associated with each edge is a hint to the MPI library about the amount or intensity of communication on that edge, and may be used to compute a “best” reordering.

Weights are specified as non-negative integers and can be used to influence the process remapping strategy and other internal MPI optimizations. For instance, approximate count arguments of later communication calls along specific edges could be used as their edge weights. Multiplicity of edges can likewise indicate more intense communication between pairs of processes. However, the exact meaning of edge weights is not specified by the MPI standard and is left to the implementation. In C or Fortran, an application can supply the special value `MPI_UNWEIGHTED` for the weight array to indicate that all edges have the same (effectively no) weight. In C++, this constant does not exist and the weights argument may be omitted from the argument list. It is erroneous to supply `MPI_UNWEIGHTED`, or in C++ omit the weight arrays, for some but not all processes of `comm_old`. Note that `MPI_UNWEIGHTED` is not a special weight value; rather it is a special value for the total array argument. In C, one would expect it to be `NULL`. In Fortran, `MPI_UNWEIGHTED` is an object like `MPI_BOTTOM` (not usable for initialization or assignment). See Section 2.5.4

The meaning of the `weights` argument can be influenced by the `info` argument. `Info` arguments can be used to guide the mapping; possible options include minimizing the maximum number of edges between processes on different SMP nodes, or minimizing the sum of all such edges. An MPI implementation is not obliged to follow specific hints, and it is valid for an MPI implementation not to do any reordering. An MPI implementation may specify more `info` key-value pairs. All processes must specify the same set of key-value `info` pairs.

*Advice to implementors.* MPI implementations must document any additionally

supported key-value info pairs. `MPI_INFO_NULL` is always valid, and may indicate the default creation of the distributed graph topology to the MPI library.

An implementation does not explicitly need to construct the topology from its distributed parts. However, all processes can construct the full topology from the distributed specification and use this in a call to `MPI_GRAPH_CREATE` to create the topology. This may serve as a reference implementation of the functionality, and may be acceptable for small communicators. However, a scalable high-quality implementation would save the topology graph in a distributed way. (*End of advice to implementors.*)

**Example 7.3** As for Example 7.2, assume there are four processes 0, 1, 2, 3 with the following adjacency matrix and unit edge weights:

process	neighbors
0	1, 3
1	0
2	3
3	0, 2

With `MPI_DIST_GRAPH_CREATE`, this graph could be constructed in many different ways. One way would be that each process specifies its outgoing edges. The arguments per process would be:

process	n	sources	degrees	destinations	weights
0	1	0	2	1,3	1,1
1	1	1	1	0	1
2	1	2	1	3	1
3	1	3	2	0,2	1,1

Another way would be to pass the whole graph on process 0, which could be done with the following arguments per process:

process	n	sources	degrees	destinations	weights
0	4	0,1,2,3	2,1,1,2	1,3,0,3,0,2	1,1,1,1,1,1
1	0	-	-	-	-
2	0	-	-	-	-
3	0	-	-	-	-

In both cases above, the application could supply `MPI_UNWEIGHTED` instead of explicitly providing identical weights.

`MPI_DIST_GRAPH_CREATE_ADJACENT` could be used to specify this graph using the following arguments:

process	indegree	sources	sourceweights	outdegree	destinations	destweights
0	2	1,3	1,1	2	1,3	1,1
1	1	0	1	1	0	1
2	1	3	1	1	3	1
3	2	0,2	1,1	2	0,2	1,1



**Example 7.4** A two-dimensional  $P \times Q$  torus where all processes communicate along the dimensions and along the diagonal edges. This cannot be modelled with Cartesian topologies, but can easily be captured with `MPI_DIST_GRAPH_CREATE` as shown in the following code. In this example, the communication along the dimensions is twice as heavy as the communication along the diagonals:

```

/*
Input:      dimensions P, Q
Condition:  number of processes equal to P*Q; otherwise only
            ranks smaller than P*Q participate
*/
int rank, x, y;
int sources[1], degrees[1];
int destinations[8], weights[8];

MPI_Comm_rank(MPI_COMM_WORLD, &rank);

/* get x and y dimension */
y=rank/P; x=rank%P;

/* get my communication partners along x dimension */
destinations[0] = P*y+(x+1)%P; weights[0] = 2;
destinations[1] = P*y+(P+x-1)%P; weights[1] = 2;

/* get my communication partners along y dimension */
destinations[2] = P*((y+1)%Q)+x; weights[2] = 2;
destinations[3] = P*((Q+y-1)%Q)+x; weights[3] = 2;

/* get my communication partners along diagonals */
destinations[4] = P*((y+1)%Q)+(x+1)%P; weights[4] = 1;
destinations[5] = P*((Q+y-1)%Q)+(x+1)%P; weights[5] = 1;
destinations[6] = P*((y+1)%Q)+(P+x-1)%P; weights[6] = 1;
destinations[7] = P*((Q+y-1)%Q)+(P+x-1)%P; weights[7] = 1;

sources[0] = rank;
degrees[0] = 8;
MPI_Dist_graph_create(MPI_COMM_WORLD, 1, sources, degrees, destinations,
                     weights, MPI_INFO_NULL, 1, comm_dist_graph)

```

### 7.5.5 Topology Inquiry Functions

If a topology has been defined with one of the above functions, then the topology information can be looked up using inquiry functions. They all are local calls.

```
1 MPI_TOPO_TEST(comm, status)
```

```
2     IN          comm          communicator (handle)
```

```
3     OUT        status        topology type of communicator comm (state)
```

```
5
6 int MPI_Topo_test(MPI_Comm comm, int *status)
```

```
7 MPI_TOPO_TEST(COMM, STATUS, IERROR)
```

```
8     INTEGER COMM, STATUS, IERROR
```

```
9 {int MPI::Comm::Get_topology() const (binding deprecated, see Section 15.2) }
```

The function `MPI_TOPO_TEST` returns the type of topology that is assigned to a communicator.

The output value `status` is one of the following:

```
15 MPI_GRAPH          graph topology
```

```
16 MPI_CART          Cartesian topology
```

```
17 MPI_DIST_GRAPH    distributed graph topology
```

```
18 MPI_UNDEFINED     no topology
```

```
21 MPI_GRAPHDIMS_GET(comm, nnodes, nedges)
```

```
22
23     IN          comm          communicator for group with graph structure (handle)
```

```
24     OUT        nnodes        number of nodes in graph (integer) (same as number
25                                of processes in the group)
```

```
26     OUT        nedges        number of edges in graph (integer)
```

```
28
29 int MPI_Graphdims_get(MPI_Comm comm, int *nnodes, int *nedges)
```

```
30 MPI_GRAPHDIMS_GET(COMM, NNODES, NEDGES, IERROR)
```

```
31     INTEGER COMM, NNODES, NEDGES, IERROR
```

```
32 {void MPI::Graphcomm::Get_dims(int nnodes[], int nedges[]) const (binding
33 deprecated, see Section 15.2) }
```

Functions `MPI_GRAPHDIMS_GET` and `MPI_GRAPH_GET` retrieve the graph-topology information that was associated with a communicator by `MPI_GRAPH_CREATE`.

The information provided by `MPI_GRAPHDIMS_GET` can be used to dimension the vectors `index` and `edges` correctly for the following call to `MPI_GRAPH_GET`.

```

MPI_GRAPH_GET(comm, maxindex, maxedges, index, edges)
    IN      comm      communicator with graph structure (handle)
    IN      maxindex   length of vector index in the calling program
                        (integer)
    IN      maxedges   length of vector edges in the calling program
                        (integer)
    OUT     index      array of integers containing the graph structure (for
                        details see the definition of MPI_GRAPH_CREATE)
    OUT     edges      array of integers containing the graph structure

int MPI_Graph_get(MPI_Comm comm, int maxindex, int maxedges, int *index,
                  int *edges)

MPI_GRAPH_GET(COMM, MAXINDEX, MAXEDGES, INDEX, EDGES, IERROR)
    INTEGER COMM, MAXINDEX, MAXEDGES, INDEX(*), EDGES(*), IERROR
{void MPI::Graphcomm::Get_topo(int maxindex, int maxedges, int index[],
    int edges[]) const (binding deprecated, see Section 15.2) }

MPI_CARTDIM_GET(comm, ndims)
    IN      comm      communicator with Cartesian structure (handle)
    OUT     ndims      number of dimensions of the Cartesian structure (in-
                        teger)

int MPI_Cartdim_get(MPI_Comm comm, int *ndims)

MPI_CARTDIM_GET(COMM, NDIMS, IERROR)
    INTEGER COMM, NDIMS, IERROR
{int MPI::Cartcomm::Get_dim() const (binding deprecated, see Section 15.2) }

```

The functions MPI\_CARTDIM\_GET and MPI\_CART\_GET return the Cartesian topology information that was associated with a communicator by MPI\_CART\_CREATE. If comm is associated with a zero-dimensional Cartesian topology, MPI\_CARTDIM\_GET returns ndims=0 and MPI\_CART\_GET will keep all output arguments unchanged.

```

1 MPI_CART_GET(comm, maxdims, dims, periods, coords)
2     IN      comm      communicator with Cartesian structure (handle)
3
4     IN      maxdims    length of vectors dims, periods, and coords in the
5                          calling program (integer)
6
7     OUT     dims      number of processes for each Cartesian dimension (ar-
8                          ray of integer)
9
10    OUT     periods    periodicity (true/false) for each Cartesian dimension
11                          (array of logical)
12
13    OUT     coords     coordinates of calling process in Cartesian structure
14                          (array of integer)

```

```

14 int MPI_Cart_get(MPI_Comm comm, int maxdims, int *dims, int *periods,
15                  int *coords)

```

```

16 MPI_CART_GET(COMM, MAXDIMS, DIMS, PERIODS, COORDS, IERROR)
17     INTEGER COMM, MAXDIMS, DIMS(*), COORDS(*), IERROR
18     LOGICAL PERIODS(*)

```

```

19 {void MPI::Cartcomm::Get_topo(int maxdims, int dims[], bool periods[],
20                               int coords[]) const (binding deprecated, see Section 15.2) }

```

```

24 MPI_CART_RANK(comm, coords, rank)

```

```

25     IN      comm      communicator with Cartesian structure (handle)
26
27     IN      coords     integer array (of size ndims) specifying the Cartesian
28                          coordinates of a process
29
30     OUT     rank      rank of specified process (integer)

```

```

31 int MPI_Cart_rank(MPI_Comm comm, int *coords, int *rank)

```

```

33 MPI_CART_RANK(COMM, COORDS, RANK, IERROR)
34     INTEGER COMM, COORDS(*), RANK, IERROR

```

```

35 {int MPI::Cartcomm::Get_cart_rank(const int coords[]) const (binding
36 deprecated, see Section 15.2) }

```

For a process group with Cartesian structure, the function `MPI_CART_RANK` translates the logical process coordinates to process ranks as they are used by the point-to-point routines.

For dimension `i` with `periods(i) = true`, if the coordinate, `coords(i)`, is out of range, that is, `coords(i) < 0` or `coords(i) ≥ dims(i)`, it is shifted back to the interval  $0 \leq \text{coords}(i) < \text{dims}(i)$  automatically. Out-of-range coordinates are erroneous for non-periodic dimensions.

If `comm` is associated with a zero-dimensional Cartesian topology, `coords` is not significant and 0 is returned in `rank`.

MPI\_CART\_COORDS(comm, rank, maxdims, coords)

IN	comm	communicator with Cartesian structure (handle)
IN	rank	rank of a process within group of comm (integer)
IN	maxdims	length of vector <code>coords</code> in the calling program (integer)
OUT	coords	integer array (of size <code>ndims</code> ) containing the Cartesian coordinates of specified process (array of integers)

```
int MPI_Cart_coords(MPI_Comm comm, int rank, int maxdims, int *coords)
```

```
MPI_CART_COORDS(COMM, RANK, MAXDIMS, COORDS, IERROR)
```

```
INTEGER COMM, RANK, MAXDIMS, COORDS(*), IERROR
```

```
{void MPI::Cartcomm::Get_coords(int rank, int maxdims, int coords[]) const  
    (binding deprecated, see Section 15.2) }
```

The inverse mapping, rank-to-coordinates translation is provided by MPI\_CART\_COORDS.

If comm is associated with a zero-dimensional Cartesian topology, coords will be unchanged.

MPI\_GRAPH\_NEIGHBORS\_COUNT(comm, rank, nneighbors)

IN	comm	communicator with graph topology (handle)
IN	rank	rank of process in group of comm (integer)
OUT	nneighbors	number of neighbors of specified process (integer)

```
int MPI_Graph_neighbors_count(MPI_Comm comm, int rank, int *nneighbors)
```

```
MPI_GRAPH_NEIGHBORS_COUNT(COMM, RANK, NNEIGHBORS, IERROR)
```

```
INTEGER COMM, RANK, NNEIGHBORS, IERROR
```

```
{int MPI::Graphcomm::Get_neighbors_count(int rank) const (binding deprecated,  
    see Section 15.2) }
```

[ MPI\_GRAPH\_NEIGHBORS\_COUNT and MPI\_GRAPH\_NEIGHBORS provide MPI-2.1 round-two - removed , adjacency information for a general graph topology. MPI-2.1 round-two ]

```

1 MPI_GRAPH_NEIGHBORS(comm, rank, maxneighbors, neighbors)
2     IN      comm      communicator with graph topology (handle)
3     IN      rank      rank of process in group of comm (integer)
4     IN      maxneighbors size of array neighbors (integer)
5     OUT     neighbors  ranks of processes that are neighbors to specified pro-
6                          cess (array of integer)
7
8
9

```

```

10 int MPI_Graph_neighbors(MPI_Comm comm, int rank, int maxneighbors,
11                        int *neighbors)
12

```

```

13 MPI_GRAPH_NEIGHBORS(COMM, RANK, MAXNEIGHBORS, NEIGHBORS, IERROR)
14     INTEGER COMM, RANK, MAXNEIGHBORS, NEIGHBORS(*), IERROR
15

```

```

16 {void MPI::Graphcomm::Get_neighbors(int rank, int maxneighbors, int
17     neighbors[]) const (binding deprecated, see Section 15.2) }
18

```

**MPI\_GRAPH\_NEIGHBORS\_COUNT** and **MPI\_GRAPH\_NEIGHBORS** provide adjacency information for a general graph topology. The returned count and array of neighbors for the queried rank will both include *all* neighbors and reflect the same edge ordering as was specified by the original call to **MPI\_GRAPH\_CREATE**. Specifically, **MPI\_GRAPH\_NEIGHBORS\_COUNT** and **MPI\_GRAPH\_NEIGHBORS** will return values based on the original **index** and **edges** array passed to **MPI\_GRAPH\_CREATE** (assuming that **index[-1]** effectively equals zero):

- The count returned from **MPI\_GRAPH\_NEIGHBORS\_COUNT** will be (**index[rank] - index[rank-1]**).
- The **neighbors** array returned from **MPI\_GRAPH\_NEIGHBORS** will be **edges[index[rank-1]]** through **edges[index[rank]-1]**.

**Example 7.5** Assume there are four processes 0, 1, 2, 3 with the following adjacency matrix (note that some neighbors are listed multiple times):

process	neighbors
0	1, 1, 3
1	0, 0
2	3
3	0, 2, 2

Thus, the input arguments to **MPI\_GRAPH\_CREATE** are:

```

nnodes = 4
index = 3, 5, 6, 9
edges = 1, 1, 3, 0, 0, 3, 0, 2, 2

```

Therefore, calling **MPI\_GRAPH\_NEIGHBORS\_COUNT** and **MPI\_GRAPH\_NEIGHBORS** for each of the 4 processes will return:

Input rank	Count	Neighbors
0	3	1, 1, 3
1	2	0, 0
2	1	3
3	3	0, 2, 2

**Example 7.6** Suppose that `comm` is a communicator with a shuffle-exchange topology. The group has  $2^n$  members. Each process is labeled by  $a_1, \dots, a_n$  with  $a_i \in \{0, 1\}$ , and has three neighbors:  $\text{exchange}(a_1, \dots, a_n) = a_1, \dots, a_{n-1}, \bar{a}_n$  ( $\bar{a} = 1 - a$ ),  $\text{shuffle}(a_1, \dots, a_n) = a_2, \dots, a_n, a_1$ , and  $\text{unshuffle}(a_1, \dots, a_n) = a_n, a_1, \dots, a_{n-1}$ . The graph adjacency list is illustrated below for  $n = 3$ .

node	exchange neighbors(1)	shuffle neighbors(2)	unshuffle neighbors(3)
0 (000)	1	0	0
1 (001)	0	2	4
2 (010)	3	4	1
3 (011)	2	6	5
4 (100)	5	1	2
5 (101)	4	3	6
6 (110)	7	5	3
7 (111)	6	7	7

Suppose that the communicator `comm` has this topology associated with it. The following code fragment cycles through the three types of neighbors and performs an appropriate permutation for each.

```

C  assume: each process has stored a real number A.
C  extract neighborhood information
      CALL MPI_COMM_RANK(comm, myrank, ierr)
      CALL MPI_GRAPH_NEIGHBORS(comm, myrank, 3, neighbors, ierr)
C  perform exchange permutation
      CALL MPI_SENDRECV_REPLACE(A, 1, MPI_REAL, neighbors(1), 0,
+    neighbors(1), 0, comm, status, ierr)
C  perform shuffle permutation
      CALL MPI_SENDRECV_REPLACE(A, 1, MPI_REAL, neighbors(2), 0,
+    neighbors(3), 0, comm, status, ierr)
C  perform unshuffle permutation
      CALL MPI_SENDRECV_REPLACE(A, 1, MPI_REAL, neighbors(3), 0,
+    neighbors(2), 0, comm, status, ierr)

```

**MPI\_DIST\_GRAPH\_NEIGHBORS\_COUNT** and **MPI\_DIST\_GRAPH\_NEIGHBORS** provide adjacency information for a distributed graph topology.

ticket33.

```

1 MPI_DIST_GRAPH_NEIGHBORS_COUNT(comm, indegree, outdegree, weighted)
2
3     IN      comm      communicator with distributed graph topology (han-
4                        dle)
5
6     OUT     indegree   number of edges into this process (non-negative inte-
7                        ger)
8
9     OUT     outdegree  number of edges out of this process (non-negative in-
10                      teger)
11
12     OUT     weighted   false if MPI_UNWEIGHTED was supplied during cre-
13                      ation, true otherwise (logical)
14
15 int MPI_Dist_graph_neighbors_count(MPI_Comm comm, int *indegree,
16                                   int *outdegree, int *weighted)
17
18 MPI_DIST_GRAPH_NEIGHBORS_COUNT(COMM, INDEGREE, OUTDEGREE, WEIGHTED, IERROR)
19
20 MPI_DIST_GRAPH_NEIGHBORS_COUNT(COMM, INDEGREE, OUTDEGREE, IERROR,
21                                LOGICAL WEIGHTED)
22
23 {void MPI::Distgraphcomm::Get_dist_neighbors_count(int rank,
24             int indegree[], int outdegree[], bool& weighted) const (binding
25             deprecated, see Section 15.2) }
26
27 MPI_DIST_GRAPH_NEIGHBORS(comm, maxindegree, sources, sourceweights, maxoutdegree,
28 destinations, destweights)
29
30     IN      comm      communicator with distributed graph topology (han-
31                        dle)
32
33     IN      maxindegree size of sources and sourceweights arrays (non-negative
34                        integer)
35
36     OUT     sources     processes for which the calling process is a destination
37                        (array of non-negative integers)
38
39     OUT     sourceweights weights of the edges into the calling process (array of
40                        non-negative integers)
41
42     IN      maxoutdegree size of destinations and destweights arrays (non-negative
43                        integer)
44
45     OUT     destinations processes for which the calling process is a source (ar-
46                        ray of non-negative integers)
47
48     OUT     destweights  weights of the edges out of the calling process (array
49                        of non-negative integers)
50
51 int MPI_Dist_graph_neighbors(MPI_Comm comm, int maxindegree, int sources[],
52                               int sourceweights[], int maxoutdegree, int destinations[],
53                               int destweights[])
54
55 MPI_DIST_GRAPH_NEIGHBORS(COMM, MAXINDEGREE, SOURCES, SOURCEWEIGHTS,
56                           MAXOUTDEGREE, DESTINATIONS, DESTWEIGHTS, IERROR)

```

ticket150.

ticket150.



```

    INTEGER COMM, MAXINDEGREE, SOURCES(*), SOURCEWEIGHTS(*), MAXOUTDEGREE,
    DESTINATIONS(*), DESTWEIGHTS(*), IERROR
{void MPI::Distgraphcomm::Get_dist_neighbors(int maxindegree,
    int sources[], int sourceweights[], int maxoutdegree,
    int destinations[], int destweights[]) (binding deprecated, see
    Section 15.2) }

```

These calls are local. The number of edges into and out of the process returned by `MPI_DIST_GRAPH_NEIGHBORS_COUNT` are the total number of such edges given in the call to `MPI_DIST_GRAPH_CREATE_ADJACENT` or `MPI_DIST_GRAPH_CREATE` (potentially by processes other than the calling process in the case of `MPI_DIST_GRAPH_CREATE`). Multiply defined edges are all counted and returned by `MPI_DIST_GRAPH_NEIGHBORS` in some order. If `MPI_UNWEIGHTED` is supplied for `sourceweights` or `destweights` or both, or if `MPI_UNWEIGHTED` was supplied during the construction of the graph then no weight information is returned in that array or those arrays. The only requirement on the order of values in `sources` and `destinations` is that two calls to the routine with same input argument `comm` will return the same sequence of edges. If `maxindegree` or `maxoutdegree` is smaller than the numbers returned by `MPI_DIST_GRAPH_NEIGHBOR_COUNT`, then only the first part of the full list is returned. Note, that the order of returned edges does need not to be identical to the order that was provided in the creation of `comm` for the case that `MPI_DIST_GRAPH_CREATE_ADJACENT` was used.

*Advice to implementors.* Since the query calls are defined to be local, each process needs to store the list of its neighbors with incoming and outgoing edges. Communication is required at the collective `MPI_DIST_GRAPH_CREATE` call in order to compute the neighbor lists for each process from the distributed graph specification. (*End of advice to implementors.*)

### 7.5.6 Cartesian Shift Coordinates

If the process topology is a Cartesian structure, an `MPI_SENDRECV` operation is likely to be used along a coordinate direction to perform a shift of data. As input, `MPI_SENDRECV` takes the rank of a source process for the receive, and the rank of a destination process for the send. If the function `MPI_CART_SHIFT` is called for a Cartesian process group, it provides the calling process with the above identifiers, which then can be passed to `MPI_SENDRECV`. The user specifies the coordinate direction and the size of the step (positive or negative). The function is local.

```

1 MPI_CART_SHIFT(comm, direction, disp, rank_source, rank_dest)
2     IN          comm          communicator with Cartesian structure (handle)
3     IN          direction      coordinate dimension of shift (integer)
4     IN          disp           displacement (> 0: upwards shift, < 0: downwards
5                                shift) (integer)
6     OUT         rank_source     rank of source process (integer)
7     OUT         rank_dest      rank of destination process (integer)

```

```

10
11 int MPI_Cart_shift(MPI_Comm comm, int direction, int disp,
12                   int *rank_source, int *rank_dest)

```

```

13 MPI_CART_SHIFT(COMM, DIRECTION, DISP, RANK_SOURCE, RANK_DEST, IERROR)
14 INTEGER COMM, DIRECTION, DISP, RANK_SOURCE, RANK_DEST, IERROR

```

```

15 {void MPI::Cartcomm::Shift(int direction, int disp, int& rank_source,
16                             int& rank_dest) const (binding deprecated, see Section 15.2) }

```

[ The direction argument indicates the dimension of the shift, i.e., the coordinate which value is modified by the shift. The coordinates are numbered from 0 to `ndims-1`, when `ndims` is the number of dimensions. ] The direction argument indicates the coordinate dimension to be traversed by the shift. The dimensions are numbered from 0 to `ndims-1`, where `ndims` is the number of dimensions.

Depending on the periodicity of the Cartesian group in the specified coordinate direction, `MPI_CART_SHIFT` provides the identifiers for a circular or an end-off shift. In the case of an end-off shift, the value `MPI_PROC_NULL` may be returned in `rank_source` or `rank_dest`, indicating that the source or the destination for the shift is out of range.

It is erroneous to call `MPI_CART_SHIFT` with a direction that is either negative or greater than or equal to the number of dimensions in the Cartesian communicator. This implies that it is erroneous to call `MPI_CART_SHIFT` with a `comm` that is associated with a zero-dimensional Cartesian topology.

**Example 7.7** The communicator, `comm`, has a two-dimensional, periodic, Cartesian topology associated with it. A two-dimensional array of `REALs` is stored one element per process, in variable `A`. One wishes to skew this array, by shifting column `i` (vertically, i.e., along the column) by `i` steps. [

```

36 %....
37 %C find process rank
38 %     CALL MPI_COMM_RANK(comm, rank, ierr))
39 %C find Cartesian coordinates
40 %     CALL MPI_CART_COORDS(comm, rank, maxdims, coords, ierr)
41 %C compute shift source and destination
42 %     CALL MPI_CART_SHIFT(comm, 0, coords(2), source, dest, ierr)
43 %C skew array
44 %     CALL MPI_SENDRECV_REPLACE(A, 1, MPI_REAL, dest, 0, source, 0, comm,
45 %     +                          status, ierr)
46 %
47

```

]

```

....
C find process rank
    CALL MPI_COMM_RANK(comm, rank, ierr)
C find Cartesian coordinates
    CALL MPI_CART_COORDS(comm, rank, maxdims, coords, ierr)
C compute shift source and destination
    CALL MPI_CART_SHIFT(comm, 0, coords(2), source, dest, ierr)
C skew array
    CALL MPI_SENDRECV_REPLACE(A, 1, MPI_REAL, dest, 0, source, 0, comm,
+                               status, ierr)

```

*Advice to users.* In Fortran, the dimension indicated by `DIRECTION = i` has `DIMS(i+1)` nodes, where `DIMS` is the array that was used to create the grid. In C, the dimension indicated by `direction = i` is the dimension specified by `dims[i]`. (*End of advice to users.*)

### 7.5.7 Partitioning of Cartesian structures

`MPI_CART_SUB(comm, remain_dims, newcomm)`

IN	<code>comm</code>	communicator with Cartesian structure (handle)
IN	<code>remain_dims</code>	the <i>i</i> -th entry of <code>remain_dims</code> specifies whether the <i>i</i> -th dimension is kept in the subgrid ( <code>true</code> ) or is dropped ( <code>false</code> ) (logical vector)
OUT	<code>newcomm</code>	communicator containing the subgrid that includes the calling process (handle)

`int MPI_Cart_sub(MPI_Comm comm, int *remain_dims, MPI_Comm *newcomm)`

`MPI_CART_SUB(COMM, REMAIN_DIMS, NEWCOMM, IERROR)`

INTEGER COMM, NEWCOMM, IERROR

LOGICAL REMAIN\_DIMS(\*)

`{MPI::Cartcomm MPI::Cartcomm::Sub(const bool remain_dims[]) const` (*binding deprecated, see Section 15.2*) `}`

If a Cartesian topology has been created with `MPI_CART_CREATE`, the function `MPI_CART_SUB` can be used to partition the communicator group into subgroups that form lower-dimensional Cartesian subgrids, and to build for each subgroup a communicator with the associated subgrid Cartesian topology. If all entries in `remain_dims` are false or `comm` is already associated with a zero-dimensional Cartesian topology then `newcomm` is associated with a zero-dimensional Cartesian topology. (This function is closely related to `MPI_COMM_SPLIT`.)

**Example 7.8** Assume that `MPI_CART_CREATE(..., comm)` has defined a  $(2 \times 3 \times 4)$  grid. Let `remain_dims = (true, false, true)`. Then a call to,

`MPI_CART_SUB(comm, remain_dims, comm_new),`

ticket150.  
ticket150.

will create three communicators each with eight processes in a  $2 \times 4$  Cartesian topology. If `remain_dims = (false, false, true)` then the call to `MPI_CART_SUB(comm, remain_dims, comm_new)` will create six non-overlapping communicators, each with four processes, in a one-dimensional Cartesian topology.

### 7.5.8 Low-Level Topology Functions

The two additional functions introduced in this section can be used to implement all other topology functions. In general they will not be called by the user directly, unless he or she is creating additional virtual topology capability other than that provided by MPI.

`MPI_CART_MAP(comm, ndims, dims, periods, newrank)`

IN	<code>comm</code>	input communicator (handle)
IN	<code>ndims</code>	number of dimensions of Cartesian structure (integer)
IN	<code>dims</code>	integer array of size <code>ndims</code> specifying the number of processes in each coordinate direction
IN	<code>periods</code>	logical array of size <code>ndims</code> specifying the periodicity specification in each coordinate direction
OUT	<code>newrank</code>	reordered rank of the calling process; MPI_UNDEFINED if calling process does not belong to grid (integer)

```
int MPI_Cart_map(MPI_Comm comm, int ndims, int *dims, int *periods,
                 int *newrank)
```

```
MPI_CART_MAP(COMM, NDIMS, DIMS, PERIODS, NEWRANK, IERROR)
INTEGER COMM, NDIMS, DIMS(*), NEWRANK, IERROR
LOGICAL PERIODS(*)
```

```
{int MPI::Cartcomm::Map(int ndims, const int dims[], const bool periods[])
    const (binding deprecated, see Section 15.2) }
```

`MPI_CART_MAP` computes an “optimal” placement for the calling process on the physical machine. A possible implementation of this function is to always return the rank of the calling process, that is, not to perform any reordering.

*Advice to implementors.* The function `MPI_CART_CREATE(comm, ndims, dims, periods, reorder, comm_cart)`, with `reorder = true` can be implemented by calling `MPI_CART_MAP(comm, ndims, dims, periods, newrank)`, then calling `MPI_COMM_SPLIT(comm, color, key, comm_cart)`, with `color = 0` if `newrank ≠ MPI_UNDEFINED`, `color = MPI_UNDEFINED` otherwise, and `key = newrank`.

The function `MPI_CART_SUB(comm, remain_dims, comm_new)` can be implemented by a call to `MPI_COMM_SPLIT(comm, color, key, comm_new)`, using a single number encoding of the lost dimensions as `color` and a single number encoding of the preserved dimensions as `key`.

All other Cartesian topology functions can be implemented locally, using the topology information that is cached with the communicator. (*End of advice to implementors.*)

The corresponding new function for general graph structures is as follows.

**MPI\_GRAPH\_MAP(comm, nnodes, index, edges, newrank)**

IN	comm	input communicator (handle)
IN	nnodes	number of graph nodes (integer)
IN	index	integer array specifying the graph structure, see MPI_GRAPH_CREATE
IN	edges	integer array specifying the graph structure
OUT	newrank	reordered rank of the calling process; MPI_UNDEFINED if the calling process does not be- long to graph (integer)

```
int MPI_Graph_map(MPI_Comm comm, int nnodes, int *index, int *edges,
                  int *newrank)
```

```
MPI_GRAPH_MAP(COMM, NNODES, INDEX, EDGES, NEWRANK, IERROR)
      INTEGER COMM, NNODES, INDEX(*), EDGES(*), NEWRANK, IERROR
```

```
{int MPI::Graphcomm::Map(int nnodes, const int index[], const int edges[])
    const (binding deprecated, see Section 15.2) }
```

*Advice to implementors.* The function MPI\_GRAPH\_CREATE(comm, nnodes, index, edges, reorder, comm\_graph), with `reorder = true` can be implemented by calling MPI\_GRAPH\_MAP(comm, nnodes, index, edges, newrank), then calling MPI\_COMM\_SPLIT(comm, color, key, comm\_graph), with `color = 0` if `newrank ≠ MPI_UNDEFINED`, `color = MPI_UNDEFINED` otherwise, and `key = newrank`.

All other graph topology functions can be implemented locally, using the topology information that is cached with the communicator. (*End of advice to implementors.*)

## 7.6 An Application Example

**Example 7.9** The example in Figure 7.1 shows how the grid definition and inquiry functions can be used in an application program. A partial differential equation, for instance the Poisson equation, is to be solved on a rectangular domain. First, the processes organize themselves in a two-dimensional structure. Each process then inquires about the ranks of its neighbors in the four directions (up, down, right, left). The numerical problem is solved by an iterative method, the details of which are hidden in the subroutine `relax`.

In each relaxation step each process computes new values for the solution grid function at all points owned by the process. Then the values at inter-process boundaries have to be exchanged with neighboring processes. For example, the exchange subroutine might contain a call like `MPI_SEND(...,neigh_rank(1),...)` to send updated values to the left-hand neighbor `(i-1,j)`.

```

1
2
3     integer ndims, num_neigh
4     logical reorder
5     parameter (ndims=2, num_neigh=4, reorder=.true.)
6     integer comm, comm_cart, dims(ndims), neigh_def(ndims), ierr
7     integer neigh_rank(num_neigh), own_position(ndims), i, j
8     logical periods(ndims)
9     real*8 u(0:101,0:101), f(0:101,0:101)
10    data dims / ndims * 0 /
11    comm = MPI_COMM_WORLD
12    C    Set process grid size and periodicity
13    call MPI_DIMS_CREATE(comm, ndims, dims,ierr)
14    periods(1) = .TRUE.
15    periods(2) = .TRUE.
16    C    Create a grid structure in WORLD group and inquire about own position
17    call MPI_CART_CREATE (comm, ndims, dims, periods, reorder, comm_cart,ierr)
18    call MPI_CART_GET (comm_cart, ndims, dims, periods, own_position,ierr)
19    C    Look up the ranks for the neighbors. Own process coordinates are (i,j).
20    C    Neighbors are (i-1,j), (i+1,j), (i,j-1), (i,j+1)
21    i = own_position(1)
22    j = own_position(2)
23    neigh_def(1) = i-1
24    neigh_def(2) = j
25    call MPI_CART_RANK (comm_cart, neigh_def, neigh_rank(1),ierr)
26    neigh_def(1) = i+1
27    neigh_def(2) = j
28    call MPI_CART_RANK (comm_cart, neigh_def, neigh_rank(2),ierr)
29    neigh_def(1) = i
30    neigh_def(2) = j-1
31    call MPI_CART_RANK (comm_cart, neigh_def, neigh_rank(3),ierr)
32    neigh_def(1) = i
33    neigh_def(2) = j+1
34    call MPI_CART_RANK (comm_cart, neigh_def, neigh_rank(4),ierr)
35    C    Initialize the grid functions and start the iteration
36    call init (u, f)
37    do 10 it=1,100
38        call relax (u, f)
39    C    Exchange data with neighbor processes
40        call exchange (u, comm_cart, neigh_rank, num_neigh)
41    10 continue
42    call output (u)
43    end
44
45
46
47
48

```

Figure 7.1: Set-up of process structure for two-dimensional parallel Poisson solver.

## Chapter 8

# MPI Environmental Management

This chapter discusses routines for getting and, where appropriate, setting various parameters that relate to the MPI implementation and the execution environment (such as error handling). The procedures for entering and leaving the MPI execution environment are also described here.

### 8.1 Implementation Information

#### 8.1.1 Version Inquiries

In order to cope with changes to the MPI Standard, there are both compile-time and run-time ways to determine which version of the standard is in use in the environment one is using.

The “version” will be represented by two separate integers, for the version and subversion: In C and C++,

```
#define MPI_VERSION      2
#define MPI_SUBVERSION [ticket101.] [1]2
```

in Fortran,

```
INTEGER MPI_VERSION, MPI_SUBVERSION
PARAMETER (MPI_VERSION      = 2)
PARAMETER (MPI_SUBVERSION = [ticket101.] [1]2)
```

For runtime determination,

`MPI_GET_VERSION( version, subversion )`

OUT	version	version number (integer)
OUT	subversion	subversion number (integer)

```
int MPI_Get_version(int *version, int *subversion)
```

```
MPI_GET_VERSION(VERSION, SUBVERSION, IERROR)
```

```
INTEGER VERSION, SUBVERSION, IERROR
```

```
{void MPI::Get_version(int& version, int& subversion) (binding deprecated, see
```

ticket150.  
ticket150.

*Section 15.2) }*

MPI\_GET\_VERSION is one of the few functions that can be called before MPI\_INIT and after MPI\_FINALIZE. Valid (MPI\_VERSION, MPI\_SUBVERSION) pairs in this and previous versions of the MPI standard are (2,2), (2,1), (2,0), and (1,2).

### 8.1.2 Environmental Inquiries

A set of attributes that describe the execution environment are attached to the communicator MPI\_COMM\_WORLD when MPI is initialized. The value of these attributes can be inquired by using the function [MPI\_ATTR\_GET]MPI\_COMM\_GET\_ATTR described in Chapter 6. It is erroneous to delete these attributes, free their keys, or change their values.

The list of predefined attribute keys include

**MPI\_TAG\_UB** Upper bound for tag value.

**MPI\_HOST** Host process rank, if such exists, MPI\_PROC\_NULL, otherwise.

**MPI\_IO** rank of a node that has regular I/O facilities (possibly myrank). Nodes in the same communicator may return different values for this parameter.

**MPI\_WTIME\_IS\_GLOBAL** Boolean variable that indicates whether clocks are synchronized.

Vendors may add implementation specific parameters (such as node number, real memory size, virtual memory size, etc.)

These predefined attributes do not change value between MPI initialization (MPI\_INIT and MPI completion (MPI\_FINALIZE), and cannot be updated or deleted by users.

*Advice to users.* Note that in the C binding, the value returned by these attributes is a *pointer* to an `int` containing the requested value. (*End of advice to users.*)

The required parameter values are discussed in more detail below:

#### Tag Values

Tag values range from 0 to the value returned for MPI\_TAG\_UB inclusive. These values are guaranteed to be unchanging during the execution of an MPI program. In addition, the tag upper bound value must be *at least* 32767. An MPI implementation is free to make the value of MPI\_TAG\_UB larger than this; for example, the value  $2^{30} - 1$  is also a legal value for MPI\_TAG\_UB.

The attribute MPI\_TAG\_UB has the same value on all processes of MPI\_COMM\_WORLD.

#### Host Rank

The value returned for MPI\_HOST gets the rank of the HOST process in the group associated with communicator MPI\_COMM\_WORLD, if there is such. MPI\_PROC\_NULL is returned if there is no host. MPI does not specify what it means for a process to be a HOST, nor does it requires that a HOST exists.

The attribute MPI\_HOST has the same value on all processes of MPI\_COMM\_WORLD.



## IO Rank

The value returned for `MPI_IO` is the rank of a processor that can provide language-standard I/O facilities. For Fortran, this means that all of the Fortran I/O operations are supported (e.g., `OPEN`, `REWIND`, `WRITE`). For C and C++, this means that all of the ISO C and C++, I/O operations are supported (e.g., `fopen`, `fprintf`, `lseek`).

If every process can provide language-standard I/O, then the value `MPI_ANY_SOURCE` will be returned. Otherwise, if the calling process can provide language-standard I/O, then its rank will be returned. Otherwise, if some process can provide language-standard I/O then the rank of one such process will be returned. The same value need not be returned by all processes. If no process can provide language-standard I/O, then the value `MPI_PROC_NULL` will be returned.

*Advice to users.* Note that input is not collective, and this attribute does *not* indicate which process can or does provide input. (*End of advice to users.*)

## Clock Synchronization

The value returned for `MPI_WTIME_IS_GLOBAL` is 1 if clocks at all processes in `MPI_COMM_WORLD` are synchronized, 0 otherwise. A collection of clocks is considered synchronized if explicit effort has been taken to synchronize them. The expectation is that the variation in time, as measured by calls to `MPI_WTIME`, will be less than one half the round-trip time for an MPI message of length zero. If time is measured at a process just before a send and at another process just after a matching receive, the second time should be always higher than the first one.

The attribute `MPI_WTIME_IS_GLOBAL` need not be present when the clocks are not synchronized (however, the attribute key `MPI_WTIME_IS_GLOBAL` is always valid). This attribute may be associated with communicators other than `MPI_COMM_WORLD`.

The attribute `MPI_WTIME_IS_GLOBAL` has the same value on all processes of `MPI_COMM_WORLD`.

`MPI_GET_PROCESSOR_NAME( name, resultlen )`

OUT	name	A unique specifier for the actual (as opposed to virtual) node.
OUT	resultlen	Length (in printable characters) of the result returned in name

```
int MPI_Get_processor_name(char *name, int *resultlen)
```

```
MPI_GET_PROCESSOR_NAME( NAME, RESULTLEN, IERROR)
```

```
CHARACTER*(*) NAME
```

```
INTEGER RESULTLEN, IERROR
```

```
{void MPI::Get_processor_name(char* name, int& resultlen) (binding deprecated,  
see Section 15.2) }
```

This routine returns the name of the processor on which it was called at the moment of the call. The name is a character string for maximum flexibility. From this value it must be possible to identify a specific piece of hardware; possible values include “processor

ticket150.

ticket150.

9 in rack 4 of mpp.cs.org” and “231” (where 231 is the actual processor number in the running homogeneous system). The argument `name` must represent storage that is at least `MPI_MAX_PROCESSOR_NAME` characters long. `MPI_GET_PROCESSOR_NAME` may write up to this many characters into `name`.

The number of characters actually written is returned in the output argument, `resultlen`. In C, a null character is additionally stored at `name[resultlen]`. The `resultlen` cannot be larger than `MPI_MAX_PROCESSOR_NAME-1`. In Fortran, `name` is padded on the right with blank characters. The `resultlen` cannot be larger than `MPI_MAX_PROCESSOR_NAME`.

*Rationale.* This function allows MPI implementations that do process migration to return the current processor. Note that nothing in MPI *requires* or defines process migration; this definition of `MPI_GET_PROCESSOR_NAME` simply allows such an implementation. (*End of rationale.*)

*Advice to users.* The user must provide at least `MPI_MAX_PROCESSOR_NAME` space to write the processor name — processor names can be this long. The user should examine the output argument, `resultlen`, to determine the actual length of the name. (*End of advice to users.*)

The constant `MPI_BSEND_OVERHEAD` provides an upper bound on the fixed overhead per message buffered by a call to `MPI_BSEND` (see Section 3.6.1).

## 8.2 Memory Allocation

In some systems, message-passing and remote-memory-access (RMA) operations run faster when accessing specially allocated memory (e.g., memory that is shared by the other processes in the communicating group on an SMP). MPI provides a mechanism for allocating and freeing such special memory. The use of such memory for message-passing or RMA is not mandatory, and this memory can be used without restrictions as any other dynamically allocated memory. However, implementations may restrict the use of the `MPI_WIN_LOCK` and `MPI_WIN_UNLOCK` functions to windows allocated in such memory (see Section 11.4.3.)

`MPI_ALLOC_MEM(size, info, baseptr)`

ticket74.	IN	size	size of memory segment in bytes ([nonnegative]non-negative integer)
	IN	info	info argument (handle)
	OUT	baseptr	pointer to beginning of memory segment allocated

`int MPI_Alloc_mem(MPI_Aint size, MPI_Info info, void *baseptr)`

`MPI_ALLOC_MEM(SIZE, INFO, BASEPTR, IERROR)`

INTEGER INFO, IERROR

INTEGER(KIND=MPI\_ADDRESS\_KIND) SIZE, BASEPTR

`{void* MPI::Alloc_mem(MPI::Aint size, const MPI::Info& info) (binding deprecated, see Section 15.2) }`

The `info` argument can be used to provide directives that control the desired location of the allocated memory. Such a directive does not affect the semantics of the call. Valid `info` values are implementation-dependent; a null directive value of `info = MPI_INFO_NULL` is always valid.

The function `MPI_ALLOC_MEM` may return an error code of class `MPI_ERR_NO_MEM` to indicate it failed because memory is exhausted.

MPI\_FREE\_MEM(base)

IN	base	initial address of memory segment allocated by MPI_ALLOC_MEM (choice)
----	------	--

```
int MPI_Free_mem(void *base)
```

MPI\_FREE\_MEM(BASE, IERROR)

&lt;type&gt; BASE(\*)

INTEGER IERROR

```
{void MPI::Free_mem(void *base) (binding deprecated, see Section 15.2)}
```

The function `MPI_FREE_MEM` may return an error code of class `MPI_ERR_BASE` to indicate an invalid base argument.

*Rationale.* The C and C++ bindings of MPI\_ALLOC\_MEM and MPI\_FREE\_MEM are similar to the bindings for the malloc and free C library calls: a call to MPI\_Alloc\_mem(..., &base) should be paired with a call to MPI\_Free\_mem(base) (one less level of indirection). Both arguments are declared to be of same type void\* so as to facilitate type casting. The Fortran binding is consistent with the C and C++ bindings: the Fortran MPI\_ALLOC\_MEM call returns in baseptr the (integer valued) address of the allocated memory. The base argument of MPI\_FREE\_MEM is a choice argument, which passes (a reference to) the variable stored at that location. (*End of rationale.*)

*Advice to implementors.* If `MPI_ALLOC_MEM` allocates special memory, then a design similar to the design of C `malloc` and `free` functions has to be used, in order to find out the size of a memory segment, when the segment is freed. If no special memory is used, `MPI_ALLOC_MEM` simply invokes `malloc`, and `MPI_FREE_MEM` invokes `free`.

A call to `MPI_ALLOC_MEM` can be used in shared memory systems to allocate memory in a shared memory segment. (*End of advice to implementors.*)

**Example 8.1** Example of use of `MPI_ALLOC_MEM`, in Fortran with pointer support. We assume 4-byte REALs, and assume that pointers are address-sized.

```
REAL A
POINTER (P, A(100,100))    ! no memory is allocated
CALL MPI_ALLOC_MEM(4*100*100, MPI_INFO_NULL, P, IERR)
! memory is allocated
...
A(3,5) = 2.71;
```

```

1  ...
2  CALL MPI_FREE_MEM(A, IERR) ! memory is freed

```

Since standard Fortran does not support (C-like) pointers, this code is not Fortran 77 or Fortran 90 code. Some compilers (in particular, at the time of writing, g77 and Fortran compilers for Intel) do not support this code.

**Example 8.2** Same example, in C

```

9  float  (* f)[100][100] ;
10 /* no memory is allocated */
11 MPI_Alloc_mem(sizeof(float)*100*100, MPI_INFO_NULL, &f);
12 /* memory allocated */
13 ...
14 (*f)[5][3] = 2.71;
15 ...
16 MPI_Free_mem(f);

```

### 8.3 Error Handling

An MPI implementation cannot or may choose not to handle some errors that occur during MPI calls. These can include errors that generate exceptions or traps, such as floating point errors or access violations. The set of errors that are handled by MPI is implementation-dependent. Each such error generates an **MPI exception**.

The above text takes precedence over any text on error handling within this document. Specifically, text that states that errors *will* be handled should be read as *may* be handled.

A user can associate error handlers to three types of objects: communicators, windows, and files. The specified error handling routine will be used for any MPI exception that occurs during a call to MPI for the respective object. MPI calls that are not related to any objects are considered to be attached to the communicator MPI\_COMM\_WORLD. The attachment of error handlers to objects is purely local: different processes may attach different error handlers to corresponding objects.

Several predefined error handlers are available in MPI:

**MPI\_ERRORS\_ARE\_FATAL** The handler, when called, causes the program to abort on all executing processes. This has the same effect as if MPI\_ABORT was called by the process that invoked the handler.

**MPI\_ERRORS\_RETURN** The handler has no effect other than returning the error code to the user.

Implementations may provide additional predefined error handlers and programmers can code their own error handlers.

The error handler MPI\_ERRORS\_ARE\_FATAL is associated by default with MPI\_COMM\_WORLD after initialization. Thus, if the user chooses not to control error handling, every error that MPI handles is treated as fatal. Since (almost) all MPI calls return an error code, a user may choose to handle errors in its main code, by testing the return code of MPI calls and executing a suitable recovery code when the call was not successful. In this case, the error handler MPI\_ERRORS\_RETURN will be used. Usually it is more convenient and more

efficient not to test for errors after each MPI call, and have such error handled by a non trivial MPI error handler.

After an error is detected, the state of MPI is undefined. That is, using a user-defined error handler, or `MPI_ERRORS_RETURN`, does *not* necessarily allow the user to continue to use MPI after an error is detected. The purpose of these error handlers is to allow a user to issue user-defined error messages and to take actions unrelated to MPI (such as flushing I/O buffers) before a program exits. An MPI implementation is free to allow MPI to continue after an error but is not required to do so.

*Advice to implementors.* A good quality implementation will, to the greatest possible extent, circumscribe the impact of an error, so that normal processing can continue after an error handler was invoked. The implementation documentation will provide information on the possible effect of each class of errors. (*End of advice to implementors.*)

An MPI error handler is an opaque object, which is accessed by a handle. MPI calls are provided to create new error handlers, to associate error handlers with objects, and to test which error handler is associated with an object. C and C++ have distinct typedefs for user defined error handling callback functions that accept communicator, file, and window arguments. In Fortran there are three user routines.

An error handler object is created by a call to `MPI_XXX_CREATE_ERRHANDLER(function, errhandler)`, where XXX is, respectively, `COMM`, `WIN`, or `FILE`.

An error handler is attached to a communicator, window, or file by a call to `MPI_XXX_SET_ERRHANDLER`. The error handler must be either a predefined error handler, or an error handler that was created by a call to `MPI_XXX_CREATE_ERRHANDLER`, with matching XXX. The predefined error handlers `MPI_ERRORS_RETURN` and `MPI_ERRORS_ARE_FATAL` can be attached to communicators, windows, and files. In C++, the predefined error handler `MPI::ERRORS_THROW_EXCEPTIONS` can also be attached to communicators, windows, and files.

The error handler currently associated with a communicator, window, or file can be retrieved by a call to `MPI_XXX_GET_ERRHANDLER`.

The MPI function `MPI_ERRHANDLER_FREE` can be used to free an error handler that was created by a call to `MPI_XXX_CREATE_ERRHANDLER`.

`MPI_{COMM,WIN,FILE}_GET_ERRHANDLER` behave as if a new error handler object is created. That is, once the error handler is no longer needed, `MPI_ERRHANDLER_FREE` should be called with the error handler returned from `MPI_ERRHANDLER_GET` or `MPI_{COMM,WIN,FILE}_GET_ERRHANDLER` to mark the error handler for deallocation. This provides behavior similar to that of `MPI_COMM_GROUP` and `MPI_GROUP_FREE`.

*Advice to implementors.* High-quality implementation should raise an error when an error handler that was created by a call to `MPI_XXX_CREATE_ERRHANDLER` is attached to an object of the wrong type with a call to `MPI_YYY_SET_ERRHANDLER`. To do so, it is necessary to maintain, with each error handler, information on the typedef of the associated user function. (*End of advice to implementors.*)

The syntax for these calls is given below.

## 8.3.1 Error Handlers for Communicators

MPI\_COMM\_CREATE\_ERRHANDLER(function, errhandler)

IN	function	user defined error handling procedure (function)
OUT	errhandler	MPI error handler (handle)

```
int MPI_Comm_create_errhandler(MPI_Comm_errhandler_ [fn]function *function,
                               MPI_Errhandler *errhandler)
```

MPI\_COMM\_CREATE\_ERRHANDLER(FUNCTION, ERRHANDLER, IERROR)

EXTERNAL FUNCTION

INTEGER ERRHANDLER, IERROR

{static MPI::Errhandler

```
    MPI::Comm::Create_errhandler(MPI::Comm::Errhandler_ [fn]function*
    function) (binding deprecated, see Section 15.2) }
```

Creates an error handler that can be attached to communicators. This function is identical to MPI\_ERRHANDLER\_CREATE, whose use is deprecated.

The user routine should be, in C, a function of type [MPI\_Comm\_errhandler\_fn] MPI\_Comm\_errhandler\_function, which is defined as

[ typedef void MPI\_Comm\_errhandler\_fn(MPI\_Comm \*, int \*, ...);

]typedef void MPI\_Comm\_errhandler\_function(MPI\_Comm \*, int \*, ...);

The first argument is the communicator in use. The second is the error code to be returned by the MPI routine that raised the error. If the routine would have returned MPI\_ERR\_IN\_STATUS, it is the error code returned in the status for the request that caused the error handler to be invoked. The remaining arguments are “stdargs” arguments whose number and meaning is implementation-dependent. An implementation should clearly document these arguments. Addresses are used so that the handler may be written in Fortran. This typedef replaces MPI\_Handler\_function, whose use is deprecated.

In Fortran, the user routine should be of the form:

[ SUBROUTINE COMM\_ERRHANDLER\_FN(COMM, ERROR\_CODE, ...)

INTEGER COMM, ERROR\_CODE

]SUBROUTINE COMM\_ERRHANDLER\_FUNCTION(COMM, ERROR\_CODE)

INTEGER COMM, ERROR\_CODE

[

*Advice to users.* Users are discouraged from using a Fortran MPI-2.1 Correction due to Reviews at MPI-2.1 Forum meeting April 26-28, 2008 HANDLER\_FUNCTION {COMM|WIN|FILE}\_ERRHANDLER\_FUNCTION MPI-2.1 End of correction since the routine expects a variable number of arguments. Some Fortran systems may allow this but some may fail to give the correct result or compile/link this code. Thus, it will not, in general, be possible to create portable code with a Fortran MPI-2.1 Correction due to Reviews at MPI-2.1 Forum meeting April 26-28, 2008 HANDLER\_FUNCTION.

```

{COMM|WIN|FILE}_ERRHANDLER_FUNCTION. MPI-2.1 End of correction (End of
advice to users.)
]

```

In C++, the user routine should be of the form:

```

[ {typedef void MPI::Comm::Errhandler_fn(MPI::Comm &, int *, ...);
    (binding deprecated, see Section 15.2) }

] {typedef void MPI::Comm::Errhandler_function(MPI::Comm &, int *, ...);
    (binding deprecated, see Section 15.2) }

```

*Rationale.* The variable argument list is provided because it provides an ISO-standard hook for providing additional information to the error handler; without this hook, ISO C prohibits additional arguments. (*End of rationale.*)

*Advice to users.* A newly created communicator inherits the error handler that is associated with the “parent” communicator. In particular, the user can specify a “global” error handler for all communicators by associating this handler with the communicator MPI\_COMM\_WORLD immediately after initialization. (*End of advice to users.*)

MPI\_COMM\_SET\_ERRHANDLER(comm, errhandler)

INOUT	comm	communicator (handle)
IN	errhandler	new error handler for communicator (handle)

int MPI\_Comm\_set\_errhandler(MPI\_Comm comm, MPI\_Errhandler errhandler)

MPI\_COMM\_SET\_ERRHANDLER(COMM, ERRHANDLER, IERROR)  
 INTEGER COMM, ERRHANDLER, IERROR

```

{void MPI::Comm::Set_errhandler(const MPI::Errhandler& errhandler) (binding
deprecated, see Section 15.2) }

```

Attaches a new error handler to a communicator. The error handler must be either a predefined error handler, or an error handler created by a call to MPI\_COMM\_CREATE\_ERRHANDLER. This call is identical to MPI\_ERRHANDLER\_SET, whose use is deprecated.

MPI\_COMM\_GET\_ERRHANDLER(comm, errhandler)

IN	comm	communicator (handle)
OUT	errhandler	error handler currently associated with communicator (handle)

int MPI\_Comm\_get\_errhandler(MPI\_Comm comm, MPI\_Errhandler \*errhandler)

MPI\_COMM\_GET\_ERRHANDLER(COMM, ERRHANDLER, IERROR)

INTEGER COMM, ERRHANDLER, IERROR

ticket150.

```
{MPI::Errhandler MPI::Comm::Get_errhandler() const (binding deprecated, see
Section 15.2) }
```

Retrieves the error handler currently associated with a communicator. This call is identical to MPI\_ERRHANDLER\_GET, whose use is deprecated.

Example: A library function may register at its entry point the current error handler for a communicator, set its own private error handler for this communicator, and restore before exiting the previous error handler.

### 8.3.2 Error Handlers for Windows

MPI\_WIN\_CREATE\_ERRHANDLER(function, errhandler)

IN	function	user defined error handling procedure (function)
OUT	errhandler	MPI error handler (handle)

```
[ int MPI_Win_create_errhandler(MPI_Win_errhandler_fn *function,
MPI_Errhandler *errhandler)
```

```
]int MPI_Win_create_errhandler(MPI_Win_errhandler_function *function,
MPI_Errhandler *errhandler)
```

MPI\_WIN\_CREATE\_ERRHANDLER(FUNCTION, ERRHANDLER, IERROR)

EXTERNAL FUNCTION

INTEGER ERRHANDLER, IERROR

```
[ {static MPI::Errhandler
MPI::Win::Create_errhandler(MPI::Win::Errhandler_fn* function)
(binding deprecated, see Section 15.2) }
```

```
] {static MPI::Errhandler
MPI::Win::Create_errhandler(MPI::Win::Errhandler_function*
function) (binding deprecated, see Section 15.2) }
```

Creates an error handler that can be attached to a window object. The user routine should be, in C, a function of type [MPI\_Win\_errhandler\_fn]MPI\_Win\_errhandler\_function which is defined as

```
[ typedef void MPI_Win_errhandler_fn(MPI_Win *, int *, ...);
```

```
]typedef void MPI_Win_errhandler_function(MPI_Win *, int *, ...);
```

The first argument is the window in use, the second is the error code to be returned.

In Fortran, the user routine should be of the form:

```
[ SUBROUTINE WIN_ERRHANDLER_FN(WIN, ERROR_CODE, ...)
INTEGER WIN, ERROR_CODE
```

```
]SUBROUTINE WIN_ERRHANDLER_FUNCTION(WIN, ERROR_CODE)
INTEGER WIN, ERROR_CODE
```



ticket7.

In C++, the user routine should be of the form:

```
[ {typedef void MPI::Win::Errhandler_fn(MPI::Win &, int *, ...); (binding deprecated, see Section 15.2) }
```

```
] {typedef void MPI::Win::Errhandler_function(MPI::Win &, int *, ...); (binding deprecated, see Section 15.2) }
```

MPI\_WIN\_SET\_ERRHANDLER(win, errhandler)

INOUT win window (handle)

IN errhandler new error handler for window (handle)

int MPI\_Win\_set\_errhandler(MPI\_Win win, MPI\_Errhandler errhandler)

MPI\_WIN\_SET\_ERRHANDLER(WIN, ERRHANDLER, IERROR)

INTEGER WIN, ERRHANDLER, IERROR

```
{void MPI::Win::Set_errhandler(const MPI::Errhandler& errhandler) (binding deprecated, see Section 15.2) }
```

Attaches a new error handler to a window. The error handler must be either a pre-defined error handler, or an error handler created by a call to MPI\_WIN\_CREATE\_ERRHANDLER.

MPI\_WIN\_GET\_ERRHANDLER(win, errhandler)

IN win window (handle)

OUT errhandler error handler currently associated with window (handle)

int MPI\_Win\_get\_errhandler(MPI\_Win win, MPI\_Errhandler \*errhandler)

MPI\_WIN\_GET\_ERRHANDLER(WIN, ERRHANDLER, IERROR)

INTEGER WIN, ERRHANDLER, IERROR

```
{MPI::Errhandler MPI::Win::Get_errhandler() const (binding deprecated, see Section 15.2) }
```

Retrieves the error handler currently associated with a window.

### 8.3.3 Error Handlers for Files

MPI\_FILE\_CREATE\_ERRHANDLER(function, errhandler)

IN function user defined error handling procedure (function)

OUT errhandler MPI error handler (handle)

1  
2 ticket150.  
3 ticket150.  
4  
5 ticket7.  
6 ticket150.  
7 ticket150.  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17 ticket150.  
18 ticket150.  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34 ticket150.  
35 ticket150.  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47 ticket7.  
48

```

1      [ int MPI_File_create_errhandler(MPI_File_errhandler_fn *function,
2          MPI_Errhandler *errhandler)
3
4      ]int MPI_File_create_errhandler(MPI_File_errhandler_function *function,
5          MPI_Errhandler *errhandler)
6
7      MPI_FILE_CREATE_ERRHANDLER(FUNCTION, ERRHANDLER, IERROR)
8      EXTERNAL FUNCTION
9      INTEGER ERRHANDLER, IERROR
10
11      [ {static MPI::Errhandler
12          MPI::File::Create_errhandler(MPI::File::Errhandler_fn*
13          function) (binding deprecated, see Section 15.2) }
14
15      ]{static MPI::Errhandler
16          MPI::File::Create_errhandler(MPI::File::Errhandler_function*
17          function) (binding deprecated, see Section 15.2) }
18
19      Creates an error handler that can be attached to a file object. The user routine should
20      be, in C, a function of type [MPI_File_errhandler_fn]MPI_File_errhandler_function, which is de-
21      fined as
22
23      [ typedef void MPI_File_errhandler_fn(MPI_File *, int *, ...);
24
25      ]typedef void MPI_File_errhandler_function(MPI_File *, int *, ...);
26
27      The first argument is the file in use, the second is the error code to be returned.
28      In Fortran, the user routine should be of the form:
29
30      [ SUBROUTINE FILE_ERRHANDLER_FN(FILE, ERROR_CODE, ...)
31          INTEGER FILE, ERROR_CODE
32
33      ]SUBROUTINE FILE_ERRHANDLER_FUNCTION(FILE, ERROR_CODE)
34          INTEGER FILE, ERROR_CODE
35
36      In C++, the user routine should be of the form:
37
38      [ {typedef void MPI::File::Errhandler_fn(MPI::File &, int *, ...);
39          (binding deprecated, see Section 15.2) }
40
41      ]{typedef void MPI::File::Errhandler_function(MPI::File &, int *, ...);
42          (binding deprecated, see Section 15.2) }
43
44      MPI_FILE_SET_ERRHANDLER(file, errhandler)
45
46      INOUT    file                file (handle)
47
48      IN       errhandler          new error handler for file (handle)
49
50      int MPI_File_set_errhandler(MPI_File file, MPI_Errhandler errhandler)
51
52      MPI_FILE_SET_ERRHANDLER(FILE, ERRHANDLER, IERROR)
53      INTEGER FILE, ERRHANDLER, IERROR
54
55      {void MPI::File::Set_errhandler(const MPI::Errhandler& errhandler) (binding
56          deprecated, see Section 15.2) }
57
58

```

Attaches a new error handler to a file. The error handler must be either a predefined error handler, or an error handler created by a call to `MPI_FILE_CREATE_ERRHANDLER`.

`MPI_FILE_GET_ERRHANDLER(file, errhandler)`

IN	file	file (handle)
OUT	errhandler	error handler currently associated with file (handle)

`int MPI_File_get_errhandler(MPI_File file, MPI_Errhandler *errhandler)`

`MPI_FILE_GET_ERRHANDLER(FILE, ERRHANDLER, IERROR)`

INTEGER FILE, ERRHANDLER, IERROR

`{MPI::Errhandler MPI::File::Get_errhandler() const` *(binding deprecated, see Section 15.2)* `}`

Retrieves the error handler currently associated with a file.

#### 8.3.4 Freeing Errorhandlers and Retrieving Error Strings

`MPI_ERRHANDLER_FREE( errhandler )`

INOUT	errhandler	MPI error handler (handle)
-------	------------	----------------------------

`int MPI_Errhandler_free(MPI_Errhandler *errhandler)`

`MPI_ERRHANDLER_FREE(ERRHANDLER, IERROR)`

INTEGER ERRHANDLER, IERROR

`{void MPI::Errhandler::Free() (binding deprecated, see Section 15.2) }`

Marks the error handler associated with `errhandler` for deallocation and sets `errhandler` to `MPI_ERRHANDLER_NULL`. The error handler will be deallocated after all the objects associated with it (communicator, window, or file) have been deallocated.

`MPI_ERROR_STRING( errorcode, string, resultlen )`

IN	errorcode	Error code returned by an MPI routine
OUT	string	Text that corresponds to the <code>errorcode</code>
OUT	resultlen	Length (in printable characters) of the result returned in string

`int MPI_Error_string(int errorcode, char *string, int *resultlen)`

`MPI_ERROR_STRING(ERRORCODE, STRING, RESULTLEN, IERROR)`

INTEGER ERRORCODE, RESULTLEN, IERROR

CHARACTER\*(\*) STRING

```

1  {void MPI::Get_error_string(int errorcode, char* name, int& resultlen)
ticket150. 2      (binding deprecated, see Section 15.2) }
3

```

Returns the error string associated with an error code or class. The argument `string` must represent storage that is at least `MPI_MAX_ERROR_STRING` characters long.

The number of characters actually written is returned in the output argument, `resultlen`.

*Rationale.* The form of this function was chosen to make the Fortran and C bindings similar. A version that returns a pointer to a string has two difficulties. First, the return string must be statically allocated and different for each error message (allowing the pointers returned by successive calls to `MPI_ERROR_STRING` to point to the correct message). Second, in Fortran, a function declared as returning `CHARACTER(*)` can not be referenced in, for example, a `PRINT` statement. (*End of rationale.*)

## 8.4 Error Codes and Classes

The error codes returned by MPI are left entirely to the implementation (with the exception of `MPI_SUCCESS`). This is done to allow an implementation to provide as much information as possible in the error code (for use with `MPI_ERROR_STRING`).

To make it possible for an application to interpret an error code, the routine `MPI_ERROR_CLASS` converts any error code into one of a small set of standard error codes, called *error classes*. Valid error classes are shown in Table 8.1 and Table 8.2.

The error classes are a subset of the error codes: an MPI function may return an error class number; and the function `MPI_ERROR_STRING` can be used to compute the error string associated with an error class. An MPI error class is a valid MPI error code. Specifically, the values defined for MPI error classes are valid MPI error codes.

The error codes satisfy,

$$0 = \text{MPI\_SUCCESS} < \text{MPI\_ERR\_...} \leq \text{MPI\_ERR\_LASTCODE}.$$

*Rationale.* The difference between `MPI_ERR_UNKNOWN` and `MPI_ERR_OTHER` is that `MPI_ERROR_STRING` can return useful information about `MPI_ERR_OTHER`.

Note that `MPI_SUCCESS = 0` is necessary to be consistent with C practice; the separation of error classes and error codes allows us to define the error classes this way. Having a known `LASTCODE` is often a nice sanity check as well. (*End of rationale.*)

```

36 MPI_ERROR_CLASS( errorcode, errorclass )
37

```

IN	errorcode	Error code returned by an MPI routine
OUT	errorclass	Error class associated with errorcode

```

40
41 int MPI_Error_class(int errorcode, int *errorclass)
42

```

```

43 MPI_ERROR_CLASS(ERRORCODE, ERRORCLASS, IERROR)
44     INTEGER ERRORCODE, ERRORCLASS, IERROR

```

```

ticket150. 45 {int MPI::Get_error_class(int errorcode) (binding deprecated, see Section 15.2) }
ticket150. 46

```

The function `MPI_ERROR_CLASS` maps each standard error code (error class) onto itself.

MPI_SUCCESS	No error
MPI_ERR_BUFFER	Invalid buffer pointer
MPI_ERR_COUNT	Invalid count argument
MPI_ERR_TYPE	Invalid datatype argument
MPI_ERR_TAG	Invalid tag argument
MPI_ERR_COMM	Invalid communicator
MPI_ERR_RANK	Invalid rank
MPI_ERR_REQUEST	Invalid request (handle)
MPI_ERR_ROOT	Invalid root
MPI_ERR_GROUP	Invalid group
MPI_ERR_OP	Invalid operation
MPI_ERR_TOPOLOGY	Invalid topology
MPI_ERR_DIMS	Invalid dimension argument
MPI_ERR_ARG	Invalid argument of some other kind
MPI_ERR_UNKNOWN	Unknown error
MPI_ERR_TRUNCATE	Message truncated on receive
MPI_ERR_OTHER	Known error not in this list
MPI_ERR_INTERN	Internal MPI (implementation) error
MPI_ERR_IN_STATUS	Error code is in status
MPI_ERR_PENDING	Pending request
MPI_ERR_KEYVAL	Invalid keyval has been passed
MPI_ERR_NO_MEM	MPI_ALLOC_MEM failed because memory is exhausted
MPI_ERR_BASE	Invalid base passed to MPI_FREE_MEM
MPI_ERR_INFO_KEY	Key longer than MPI_MAX_INFO_KEY
MPI_ERR_INFO_VALUE	Value longer than MPI_MAX_INFO_VAL
MPI_ERR_INFO_NOKEY	Invalid key passed to MPI_INFO_DELETE
MPI_ERR_SPAWN	Error in spawning processes
MPI_ERR_PORT	Invalid port name passed to MPI_COMM_CONNECT
MPI_ERR_SERVICE	Invalid service name passed to MPI_UNPUBLISH_NAME
MPI_ERR_NAME	Invalid service name passed to MPI_LOOKUP_NAME
MPI_ERR_WIN	Invalid win argument
MPI_ERR_SIZE	Invalid size argument
MPI_ERR_DISP	Invalid disp argument
MPI_ERR_INFO	Invalid info argument
MPI_ERR_LOCKTYPE	Invalid locktype argument
MPI_ERR_ASSERT	Invalid assert argument
MPI_ERR_RMA_CONFLICT	Conflicting accesses to window
MPI_ERR_RMA_SYNC	Wrong synchronization of RMA calls

Table 8.1: Error classes (Part 1)

1	MPI_ERR_FILE	Invalid file handle
2	MPI_ERR_NOT_SAME	Collective argument not identical on all
3		processes, or collective routines called in
4		a different order by different processes
5	MPI_ERR_AMODE	Error related to the <code>amode</code> passed to
6		<code>MPI_FILE_OPEN</code>
7	MPI_ERR_UNSUPPORTED_DATAREP	Unsupported <code>datarep</code> passed to
8		<code>MPI_FILE_SET_VIEW</code>
9	MPI_ERR_UNSUPPORTED_OPERATION	Unsupported operation, such as seeking on
10		a file which supports sequential access only
11	MPI_ERR_NO_SUCH_FILE	File does not exist
12	MPI_ERR_FILE_EXISTS	File exists
13	MPI_ERR_BAD_FILE	Invalid file name (e.g., path name too long)
14	MPI_ERR_ACCESS	Permission denied
15	MPI_ERR_NO_SPACE	Not enough space
16	MPI_ERR_QUOTA	Quota exceeded
17	MPI_ERR_READ_ONLY	Read-only file or file system
18	MPI_ERR_FILE_IN_USE	File operation could not be completed, as
19		the file is currently open by some process
20	MPI_ERR_DUP_DATAREP	Conversion functions could not be regis-
21		tered because a data representation identi-
22		fier that was already defined was passed to
23		<code>MPI_REGISTER_DATAREP</code>
24	MPI_ERR_CONVERSION	An error occurred in a user supplied data
25		conversion function.
26	MPI_ERR_IO	Other I/O error
27	MPI_ERR_LASTCODE	Last error code

Table 8.2: Error classes (Part 2)

## 8.5 Error Classes, Error Codes, and Error Handlers

Users may want to write a layered library on top of an existing MPI implementation, and this library may have its own set of error codes and classes. An example of such a library is an I/O library based on MPI, see Chapter 13 on page 407. For this purpose, functions are needed to:

1. add a new error class to the ones an MPI implementation already knows.
2. associate error codes with this error class, so that `MPI_ERROR_CLASS` works.
3. associate strings with these error codes, so that `MPI_ERROR_STRING` works.
4. invoke the error handler associated with a communicator, window, or object.

Several functions are provided to do this. They are all local. No functions are provided to free error classes or codes: it is not expected that an application will generate them in significant numbers.

```

MPI_ADD_ERROR_CLASS(errorclass)
    OUT      errorclass      value for the new error class (integer)

int MPI_Add_error_class(int *errorclass)

MPI_ADD_ERROR_CLASS(ERRORCLASS, IERROR)
    INTEGER ERRORCLASS, IERROR

{int MPI::Add_error_class() (binding deprecated, see Section 15.2) }

```

Creates a new error class and returns the value for it.

*Rationale.* To avoid conflicts with existing error codes and classes, the value is set by the implementation and not by the user. (*End of rationale.*)

*Advice to implementors.* A high-quality implementation will return the value for a new `errorclass` in the same deterministic way on all processes. (*End of advice to implementors.*)

*Advice to users.* Since a call to `MPI_ADD_ERROR_CLASS` is local, the same `errorclass` may not be returned on all processes that make this call. Thus, it is not safe to assume that registering a new error on a set of processes at the same time will yield the same `errorclass` on all of the processes. However, if an implementation returns the new `errorclass` in a deterministic way, and they are always generated in the same order on the same set of processes (for example, all processes), then the value will be the same. However, even if a deterministic algorithm is used, the value can vary across processes. This can happen, for example, if different but overlapping groups of processes make a series of calls. As a result of these issues, getting the “same” error on multiple processes may not cause the same value of error code to be generated. (*End of advice to users.*)

The value of `MPI_ERR_LASTCODE` is a constant value and is not affected by new user-defined error codes and classes. Instead, a predefined attribute key `MPI_LASTUSED` is associated with `MPI_COMM_WORLD`. The attribute value corresponding to this key is the current maximum error class including the user-defined ones. This is a local value and may be different on different processes. The value returned by this key is always greater than or equal to `MPI_ERR_LASTCODE`.

*Advice to users.* The value returned by the key `MPI_LASTUSED` will not change unless the user calls a function to explicitly add an error class/code. In a multi-threaded environment, the user must take extra care in assuming this value has not changed. Note that error codes and error classes are not necessarily dense. A user may not assume that each error class below `MPI_LASTUSED` is valid. (*End of advice to users.*)

```

1 MPI_ADD_ERROR_CODE(errorclass, errorcode)
2     IN          errorclass          error class (integer)
3
4     OUT         errorcode           new error code to associated with errorclass (integer)

```

```

5
6 int MPI_Add_error_code(int errorclass, int *errorcode)

```

```

7 MPI_ADD_ERROR_CODE(ERRORCLASS, ERRORCODE, IERROR)

```

```

8     INTEGER ERRORCLASS, ERRORCODE, IERROR

```

```

9 {int MPI::Add_error_code(int errorclass) (binding deprecated, see Section 15.2) }

```

Creates new error code associated with `errorclass` and returns its value in `errorcode`.

*Rationale.* To avoid conflicts with existing error codes and classes, the value of the new error code is set by the implementation and not by the user. (*End of rationale.*)

*Advice to implementors.* A high-quality implementation will return the value for a new `errorcode` in the same deterministic way on all processes. (*End of advice to implementors.*)

```

21
22 MPI_ADD_ERROR_STRING(errorcode, string)

```

```

23     IN          errorcode          error code or class (integer)

```

```

24     IN          string             text corresponding to errorcode (string)

```

```

25
26
27 int MPI_Add_error_string(int errorcode, char *string)

```

```

28 MPI_ADD_ERROR_STRING(ERRORCODE, STRING, IERROR)

```

```

29     INTEGER ERRORCODE, IERROR

```

```

30     CHARACTER*(*) STRING

```

```

31 {void MPI::Add_error_string(int errorcode, const char* string) (binding
32 deprecated, see Section 15.2) }

```

Associates an error string with an error code or class. The string must be no more than `MPI_MAX_ERROR_STRING` characters long. The length of the string is as defined in the calling language. The length of the string does not include the null terminator in C or C++. Trailing blanks will be stripped in Fortran. Calling `MPI_ADD_ERROR_STRING` for an `errorcode` that already has a string will replace the old string with the new string. It is erroneous to call `MPI_ADD_ERROR_STRING` for an error code or class with a value  $\leq$  `MPI_ERR_LASTCODE`.

If `MPI_ERROR_STRING` is called when no string has been set, it will return a empty string (all spaces in Fortran, "" in C and C++).

Section 8.3 on page 292 describes the methods for creating and associating error handlers with communicators, files, and windows.



MPI\_COMM\_CALL\_ERRHANDLER (comm, errorcode)

IN        comm                                communicator with error handler (handle)  
IN        errorcode                           error code (integer)

int MPI\_Comm\_call\_errhandler(MPI\_Comm comm, int errorcode)

MPI\_COMM\_CALL\_ERRHANDLER(COMM, ERRORCODE, IERROR)  
INTEGER COMM, ERRORCODE, IERROR

{void MPI::Comm::Call\_errhandler(int errorcode) const (*binding deprecated, see*  
*Section 15.2*) }

This function invokes the error handler assigned to the communicator with the error code supplied. This function returns MPI\_SUCCESS in C and C++ and the same value in IERROR if the error handler was successfully called (assuming the process is not aborted and the error handler returns).

*Advice to users.* Users should note that the default error handler is MPI\_ERRORS\_ARE\_FATAL. Thus, calling MPI\_COMM\_CALL\_ERRHANDLER will abort the comm processes if the default error handler has not been changed for this communicator or on the parent before the communicator was created. (*End of advice to users.*)

MPI\_WIN\_CALL\_ERRHANDLER (win, errorcode)

IN        win                                window with error handler (handle)  
IN        errorcode                           error code (integer)

int MPI\_Win\_call\_errhandler(MPI\_Win win, int errorcode)

MPI\_WIN\_CALL\_ERRHANDLER(WIN, ERRORCODE, IERROR)  
INTEGER WIN, ERRORCODE, IERROR

{void MPI::Win::Call\_errhandler(int errorcode) const (*binding deprecated, see*  
*Section 15.2*) }

This function invokes the error handler assigned to the window with the error code supplied. This function returns MPI\_SUCCESS in C and C++ and the same value in IERROR if the error handler was successfully called (assuming the process is not aborted and the error handler returns).

*Advice to users.* As with communicators, the default error handler for windows is MPI\_ERRORS\_ARE\_FATAL. (*End of advice to users.*)

MPI\_FILE\_CALL\_ERRHANDLER (fh, errorcode)

IN        fh                                file with error handler (handle)  
IN        errorcode                           error code (integer)

```

1  int MPI_File_call_errhandler(MPI_File fh, int errorcode)
2
3  MPI_FILE_CALL_ERRHANDLER(FH, ERRORCODE, IERROR)
4      INTEGER FH, ERRORCODE, IERROR

```

```

5  {void MPI::File::Call_errhandler(int errorcode) const (binding deprecated, see
6      Section 15.2) }

```

This function invokes the error handler assigned to the file with the error code supplied. This function returns MPI\_SUCCESS in C and C++ and the same value in IERROR if the error handler was successfully called (assuming the process is not aborted and the error handler returns).

*Advice to users.* Unlike errors on communicators and windows, the default behavior for files is to have MPI\_ERRORS\_RETURN. (*End of advice to users.*)

*Advice to users.* Users are warned that handlers should not be called recursively with MPI\_COMM\_CALL\_ERRHANDLER, MPI\_FILE\_CALL\_ERRHANDLER, or MPI\_WIN\_CALL\_ERRHANDLER. Doing this can create a situation where an infinite recursion is created. This can occur if MPI\_COMM\_CALL\_ERRHANDLER, MPI\_FILE\_CALL\_ERRHANDLER, or MPI\_WIN\_CALL\_ERRHANDLER is called inside an error handler.

Error codes and classes are associated with a process. As a result, they may be used in any error handler. Error handlers should be prepared to deal with any error code they are given. Furthermore, it is good practice to only call an error handler with the appropriate error codes. For example, file errors would normally be sent to the file error handler. (*End of advice to users.*)

## 8.6 Timers and Synchronization

MPI defines a timer. A timer is specified even though it is not “message-passing,” because timing parallel programs is important in “performance debugging” and because existing timers (both in POSIX 1003.1-1988 and 1003.4D 14.1 and in Fortran 90) are either inconvenient or do not provide adequate access to high-resolution timers. See also Section 2.6.5 on page 22.

```

36
37 MPI_WTIME()

```

```

38 double MPI_Wtime(void)

```

```

39
40 DOUBLE PRECISION MPI_WTIME()

```

```

41 {double MPI::Wtime() (binding deprecated, see Section 15.2) }

```

MPI\_WTIME returns a floating-point number of seconds, representing elapsed wall-clock time since some time in the past.

The “time in the past” is guaranteed not to change during the life of the process. The user is responsible for converting large numbers of seconds to other units if they are preferred.

This function is portable (it returns seconds, not “ticks”), it allows high-resolution, and carries no unnecessary baggage. One would use it like this:

```
{
    double starttime, endtime;
    starttime = MPI_Wtime();
    .... stuff to be timed ...
    endtime = MPI_Wtime();
    printf("That took %f seconds\n",endtime-starttime);
}
```

The times returned are local to the node that called them. There is no requirement that different nodes return “the same time.” (But see also the discussion of MPI\_WTIME\_IS\_GLOBAL).

MPI\_WTICK()

```
double MPI_Wtick(void)
```

```
DOUBLE PRECISION MPI_WTICK()
```

```
{double MPI::Wtick() (binding deprecated, see Section 15.2) }
```

MPI\_WTICK returns the resolution of MPI\_WTIME in seconds. That is, it returns, as a double precision value, the number of seconds between successive clock ticks. For example, if the clock is implemented by the hardware as a counter that is incremented every millisecond, the value returned by MPI\_WTICK should be  $10^{-3}$ .

## 8.7 Startup

One goal of MPI is to achieve *source code portability*. By this we mean that a program written using MPI and complying with the relevant language standards is portable as written, and must not require any source code changes when moved from one system to another. This explicitly does *not* say anything about how an MPI program is started or launched from the command line, nor what the user must do to set up the environment in which an MPI program will run. However, an implementation may require some setup to be performed before other MPI routines may be called. To provide for this, MPI includes an initialization routine MPI\_INIT.

MPI\_INIT()

```
int MPI_Init(int *argc, char ***argv)
```

```
MPI_INIT(IERROR)
```

```
INTEGER IERROR
```

```
{void MPI::Init(int& argc, char**& argv) (binding deprecated, see Section 15.2) }
```

```
{void MPI::Init() (binding deprecated, see Section 15.2) }
```

[This routine must be called before any other MPI routine. It must be called at most once; subsequent calls are erroneous (see `MPI_INITIALIZED`).

All MPI programs must contain a call to `MPI_INIT`; this routine must be called before any other MPI routine (apart from `MPI_GET_VERSION`, `MPI_INITIALIZED`, and `MPI_FINALIZED`) is called. The version for ISO C accepts the `argc` and `argv` that are provided by the arguments to `main`: ]All MPI programs must contain exactly one call to an MPI initialization routine: `MPI_INIT` or `MPI_INIT_THREAD`. Subsequent calls to any initialization routines are erroneous. The only MPI functions that may be invoked before the MPI initialization routines are called are `MPI_GET_VERSION`, `MPI_INITIALIZED`, and `MPI_FINALIZED`. The version for ISO C accepts the `argc` and `argv` that are provided by the arguments to `main` or `NULL`:

```
int main([ticket60.]int argc, [ticket60.]char **argv)
[ticket60.][int argc;char **argv;]{
    MPI_Init(&argc, &argv);

    /* parse arguments */
    /* main program */

    MPI_Finalize();    /* see below */
}
```

The Fortran version takes only `IERROR`.

Conforming implementations of MPI are required to allow applications to pass `NULL` for both the `argc` and `argv` arguments of `main` in C and C++. In C++, there is an alternative binding for `MPI::Init` that does not have these arguments at all.

*Rationale.* In some applications, libraries may be making the call to `MPI_Init`, and may not have access to `argc` and `argv` from `main`. It is anticipated that applications requiring special information about the environment or information supplied by `mpiexec` can get that information from environment variables. (*End of rationale.*)

`MPI_FINALIZE()`

```
int MPI_Finalize(void)
```

```
MPI_FINALIZE(IERROR)
```

```
INTEGER IERROR
```

```
{void MPI::Finalize() (binding deprecated, see Section 15.2) }
```

This routine cleans up all MPI state. Each process must call `MPI_FINALIZE` before it exits. Unless there has been a call to `MPI_ABORT`, each process must ensure that all pending [non-blocking]nonblocking communications are (locally) complete before calling `MPI_FINALIZE`. Further, at the instant at which the last process calls `MPI_FINALIZE`, all pending sends must be matched by a receive, and all pending receives must be matched by a send.

For example, the following program is correct:

Process 0	Process 1
-----	-----
MPI_Init();	MPI_Init();
MPI_Send(dest=1);	MPI_Recv(src=0);
MPI_Finalize();	MPI_Finalize();

Without the matching receive, the program is erroneous:

Process 0	Process 1
-----	-----
MPI_Init();	MPI_Init();
MPI_Send (dest=1);	
MPI_Finalize();	MPI_Finalize();

A successful return from a blocking communication operation or from `MPI_WAIT` or `MPI_TEST` tells the user that the buffer can be reused and means that the communication is completed by the user, but does not guarantee that the local process has no more work to do. A successful return from `MPI_REQUEST_FREE` with a request handle generated by an `MPI_ISEND` nullifies the handle but provides no assurance of operation completion. The `MPI_ISEND` is complete only when it is known by some means that a matching receive has completed. `MPI_FINALIZE` guarantees that all local actions required by communications the user has completed will, in fact, occur before it returns.

`MPI_FINALIZE` guarantees nothing about pending communications that have not been completed (completion is assured only by `MPI_WAIT`, `MPI_TEST`, or `MPI_REQUEST_FREE` combined with some other verification of completion).

**Example 8.3** This program is correct:

rank 0	rank 1
=====	
...	...
MPI_Isend();	MPI_Recv();
MPI_Request_free();	MPI_Barrier();
MPI_Barrier();	MPI_Finalize();
MPI_Finalize();	exit();
exit();	

**Example 8.4** This program is erroneous and its behavior is undefined:

rank 0	rank 1
=====	
...	...
MPI_Isend();	MPI_Recv();
MPI_Request_free();	MPI_Finalize();
MPI_Finalize();	exit();
exit();	

If no `MPI_BUFFER_DETACH` occurs between an `MPI_BSEND` (or other buffered send) and `MPI_FINALIZE`, the `MPI_FINALIZE` implicitly supplies the `MPI_BUFFER_DETACH`.

**Example 8.5** This program is correct, and after the `MPI_Finalize`, it is as if the buffer had been detached.

```

rank 0                                rank 1
=====
...
buffer = malloc(1000000);             MPI_Recv();
MPI_Buffer_attach();                  MPI_Finalize();
MPI_Bsend();                          exit();
MPI_Finalize();
free(buffer);
exit();

```

**Example 8.6** In this example, `MPI_Iprobe()` must return a `FALSE` flag. `MPI_Test_cancelled()` must return a `TRUE` flag, independent of the relative order of execution of `MPI_Cancel()` in process 0 and `MPI_Finalize()` in process 1.

The `MPI_Iprobe()` call is there to make sure the implementation knows that the “tag1” message exists at the destination, without being able to claim that the user knows about it.

```

rank 0                                rank 1
=====
MPI_Init();                          MPI_Init();
MPI_Isend(tag1);                      MPI_Barrier();
MPI_Barrier();                       MPI_Iprobe(tag2);
MPI_Barrier();                       MPI_Barrier();
MPI_Finalize();                      MPI_Finalize();
exit();
MPI_Cancel();
MPI_Wait();
MPI_Test_cancelled();
MPI_Finalize();
exit();

```

*Advice to implementors.* An implementation may need to delay the return from `MPI_FINALIZE` until all potential future message cancellations have been processed. One possible solution is to place a barrier inside `MPI_FINALIZE` (*End of advice to implementors.*)

Once `MPI_FINALIZE` returns, no MPI routine (not even `MPI_INIT`) may be called, except for `MPI_GET_VERSION`, `MPI_INITIALIZED`, and `MPI_FINALIZED`. Each process must complete any pending communication it initiated before it calls `MPI_FINALIZE`. If the call returns, each process may continue local computations, or exit, without participating in further MPI communication with other processes. `MPI_FINALIZE` is collective over all connected processes. If no processes were spawned, accepted or connected then this means over `MPI_COMM_WORLD`; otherwise it is collective over the union of all processes that have been and continue to be connected, as explained in Section 10.5.4 on page 348.

*Advice to implementors.* Even though a process has completed all the communication it initiated, such communication may not yet be completed from the viewpoint of the underlying MPI system. E.g., a blocking send may have completed, even though the data is still buffered at the sender. The MPI implementation must ensure that a process has completed any involvement in MPI communication before MPI\_FINALIZE returns. Thus, if a process exits after the call to MPI\_FINALIZE, this will not cause an ongoing communication to fail. (*End of advice to implementors.*)

Although it is not required that all processes return from MPI\_FINALIZE, it is required that at least process 0 in MPI\_COMM\_WORLD return, so that users can know that the MPI portion of the computation is over. In addition, in a POSIX environment, they may desire to supply an exit code for each process that returns from MPI\_FINALIZE.

**Example 8.7** The following illustrates the use of requiring that at least one process return and that it be known that process 0 is one of the processes that return. One wants code like the following to work no matter how many processes return.

```
...
MPI_Comm_rank(MPI_COMM_WORLD, &myrank);
...
MPI_Finalize();
if (myrank == 0) {
    resultfile = fopen("outfile","w");
    dump_results(resultfile);
    fclose(resultfile);
}
exit(0);
```

MPI\_INITIALIZED( flag )

OUT	flag	Flag is true if MPI_INIT has been called and false otherwise.
-----	------	---

int MPI\_Initialized(int \*flag)

MPI\_INITIALIZED(FLAG, IERROR)

LOGICAL FLAG

INTEGER IERROR

{bool MPI::Is\_initialized() (*binding deprecated, see Section 15.2*) }

This routine may be used to determine whether MPI\_INIT has been called. MPI\_INITIALIZED returns true if the calling process has called MPI\_INIT. Whether MPI\_FINALIZE has been called does not affect the behavior of MPI\_INITIALIZED. It is one of the few routines that may be called before MPI\_INIT is called.

39 ticket150.

40 ticket150.

```

1  MPI_ABORT( comm, errorcode )
2      IN      comm      communicator of tasks to abort
3      IN      errorcode  error code to return to invoking environment
4
5
6  int MPI_Abort(MPI_Comm comm, int errorcode)
7
8  MPI_ABORT(COMM, ERRORCODE, IERROR)
9      INTEGER COMM, ERRORCODE, IERROR
10 {void MPI::Comm::Abort(int errorcode) (binding deprecated, see Section 15.2) }

```

This routine makes a “best attempt” to abort all tasks in the group of `comm`. This function does not require that the invoking environment take any action with the error code. However, a Unix or POSIX environment should handle this as a `return errorcode` from the main program.

It may not be possible for an MPI implementation to abort only the processes represented by `comm` if this is a subset of the processes. In this case, the MPI implementation should attempt to abort all the connected processes but should not abort any unconnected processes. If no processes were spawned, accepted or connected then this has the effect of aborting all the processes associated with `MPI_COMM_WORLD`.

*Rationale.* The communicator argument is provided to allow for future extensions of MPI to environments with, for example, dynamic process management. In particular, it allows but does not require an MPI implementation to abort a subset of `MPI_COMM_WORLD`. (*End of rationale.*)

*Advice to users.* Whether the errorcode is returned from the executable or from the MPI process startup mechanism (e.g., `mpiexec`), is an aspect of quality of the MPI library but not mandatory. (*End of advice to users.*)

*Advice to implementors.* Where possible, a high-quality implementation will try to return the errorcode from the MPI process startup mechanism (e.g. `mpiexec` or singleton init). (*End of advice to implementors.*)

### 8.7.1 Allowing User Functions at Process Termination

There are times in which it would be convenient to have actions happen when an MPI process finishes. For example, a routine may do initializations that are useful until the MPI job (or that part of the job that being terminated in the case of dynamically created processes) is finished. This can be accomplished in MPI by attaching an attribute to `MPI_COMM_SELF` with a callback function. When `MPI_FINALIZE` is called, it will first execute the equivalent of an `MPI_COMM_FREE` on `MPI_COMM_SELF`. This will cause the delete callback function to be executed on all keys associated with `MPI_COMM_SELF`, *[in an arbitrary order] in the reverse order that they were set on `MPI_COMM_SELF`*. If no key has been attached to `MPI_COMM_SELF`, then no callback is invoked. The “freeing” of `MPI_COMM_SELF` occurs before any other parts of MPI are affected. Thus, for example, calling `MPI_FINALIZED` will return false in any of these callback functions. Once done with `MPI_COMM_SELF`, the order and rest of the actions taken by `MPI_FINALIZE` is not specified.



*Advice to implementors.* Since attributes can be added from any supported language, the MPI implementation needs to remember the creating language so the correct callback is made. Implementations that use the attribute delete callback on `MPI_COMM_SELF` internally should register their internal callbacks before returning from `MPI_INIT` / `MPI_INIT_THREAD`, so that libraries or applications will not have portions of the MPI implementation shut down before the application-level callbacks are made. (*End of advice to implementors.*)

### 8.7.2 Determining Whether MPI Has Finished

One of the goals of MPI was to allow for layered libraries. In order for a library to do this cleanly, it needs to know if MPI is active. In MPI the function `MPI_INITIALIZED` was provided to tell if MPI had been initialized. The problem arises in knowing if MPI has been finalized. Once MPI has been finalized it is no longer active and cannot be restarted. A library needs to be able to determine this to act accordingly. To achieve this the following function is needed:

MPI\_FINALIZED(flag)

OUT	flag	true if MPI was finalized (logical)
-----	------	-------------------------------------

```
int MPI_Finalized(int *flag)
```

MPI\_FINALIZED(FLAG, IERROR)

LOGICAL FLAG

INTEGER IERROR

```
{bool MPI::Is_finalized() (binding deprecated, see Section 15.2) }
```

This routine returns true if MPI\_FINALIZE has completed. It is legal to call MPI\_FINALIZED before MPI\_INIT and after MPI\_FINALIZE.

*Advice to users.* MPI is “active” and it is thus safe to call MPI functions if MPI\_INIT has completed and MPI\_FINALIZE has not completed. If a library has no other way of knowing whether MPI is active or not, then it can use MPI\_INITIALIZED and MPI\_FINALIZED to determine this. For example, MPI is “active” in callback functions that are invoked during MPI\_FINALIZE. (*End of advice to users.*)

## 8.8 Portable MPI Process Startup

A number of implementations of MPI provide a startup command for MPI programs that is of the form

```
mpirun <mpirun arguments> <program> <program arguments>
```

Separating the command to start the program from the program itself provides flexibility, particularly for network and heterogeneous implementations. For example, the startup script need not run on one of the machines that will be executing the MPI program itself.

Having a standard startup mechanism also extends the portability of MPI programs one step further, to the command lines and scripts that manage them. For example, a validation suite script that runs hundreds of programs can be a portable script if it is written using such a standard startup mechanism. In order that the “standard” command not be confused with existing practice, which is not standard and not portable among implementations, instead of `mpirun` MPI specifies `mpiexec`.

While a standardized startup mechanism improves the usability of MPI, the range of environments is so diverse (e.g., there may not even be a command line interface) that MPI cannot mandate such a mechanism. Instead, MPI specifies an `mpiexec` startup command and recommends but does not require it, as advice to implementors. However, if an implementation does provide a command called `mpiexec`, it must be of the form described below.

It is suggested that

```
mpiexec -n <numprocs> <program>
```

be at least one way to start `<program>` with an initial `MPI_COMM_WORLD` whose group contains `<numprocs>` processes. Other arguments to `mpiexec` may be implementation-dependent.

*Advice to implementors.* Implementors, if they do provide a special startup command for MPI programs, are advised to give it the following form. The syntax is chosen in order that `mpiexec` be able to be viewed as a command-line version of `MPI_COMM_SPAWN` (See Section 10.3.4).

Analogous to `MPI_COMM_SPAWN`, we have

```
mpiexec -n    <maxprocs>
           -soft <      >
           -host <      >
           -arch <      >
           -wdir <      >
           -path <      >
           -file <      >
           ...
           <command line>
```

for the case where a single command line for the application program and its arguments will suffice. See Section 10.3.4 for the meanings of these arguments. For the case corresponding to `MPI_COMM_SPAWN_MULTIPLE` there are two possible formats:

Form A:

```
mpiexec { <above arguments> } : { ... } : { ... } : ... : { ... }
```

As with `MPI_COMM_SPAWN`, all the arguments are optional. (Even the `-n x` argument is optional; the default is implementation dependent. It might be 1, it might be taken from an environment variable, or it might be specified at compile time.) The names and meanings of the arguments are taken from the keys in the `info` argument

to MPI\_COMM\_SPAWN. There may be other, implementation-dependent arguments as well.

Note that Form A, though convenient to type, prevents colons from being program arguments. Therefore an alternate, file-based form is allowed:

Form B:

```
mpiexec -configfile <filename>
```

where the lines of <filename> are of the form separated by the colons in Form A. Lines beginning with '#' are comments, and lines may be continued by terminating the partial line with '\'.

**Example 8.8** Start 16 instances of `myprog` on the current or default machine:

```
mpiexec -n 16 myprog
```

**Example 8.9** Start 10 processes on the machine called `ferrari`:

```
mpiexec -n 10 -host ferrari myprog
```

**Example 8.10** Start three copies of the same program with different command-line arguments:

```
mpiexec myprog infile1 : myprog infile2 : myprog infile3
```

**Example 8.11** Start the `ocean` program on five Suns and the `atmos` program on 10 RS/6000's:

```
mpiexec -n 5 -arch sun ocean : -n 10 -arch rs6000 atmos
```

It is assumed that the implementation in this case has a method for choosing hosts of the appropriate type. Their ranks are in the order specified.

**Example 8.12** Start the `ocean` program on five Suns and the `atmos` program on 10 RS/6000's (Form B):

```
mpiexec -configfile myfile
```

where `myfile` contains

```
-n 5 -arch sun    ocean
-n 10 -arch rs6000 atmos
```

*(End of advice to implementors.)*

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

## Chapter 9

# The Info Object

Many of the routines in MPI take an argument `info`. `info` is an opaque object with a handle of type `MPI_Info` in C, `MPI::Info` in C++, and `INTEGER` in Fortran. It stores an unordered set of (key,value) pairs (both key and value are strings). A key can have only one value. MPI reserves several keys and requires that if an implementation uses a reserved key, it must provide the specified functionality. An implementation is not required to support these keys and may support any others not reserved by MPI.

An implementation must support info objects as caches for arbitrary (key, value) pairs, regardless of whether it recognizes the key. Each function that takes hints in the form of an `MPI_Info` must be prepared to ignore any key it does not recognize. This description of info objects does not attempt to define how a particular function should react if it recognizes a key but not the associated value. `MPI_INFO_GET_NKEYS`, `MPI_INFO_GET_NTHKEY`, `MPI_INFO_GET_VALUELEN`, and `MPI_INFO_GET` must retain all (key,value) pairs so that layered functionality can also use the `Info` object.

Keys have an implementation-defined maximum length of `MPI_MAX_INFO_KEY`, which is at least 32 and at most 255. Values have an implementation-defined maximum length of `MPI_MAX_INFO_VAL`. In Fortran, leading and trailing spaces are stripped from both. Returned values will never be larger than these maximum lengths. Both key and value are case sensitive.

*Rationale.* Keys have a maximum length because the set of known keys will always be finite and known to the implementation and because there is no reason for keys to be complex. The small maximum size allows applications to declare keys of size `MPI_MAX_INFO_KEY`. The limitation on value sizes is so that an implementation is not forced to deal with arbitrarily long strings. (*End of rationale.*)

*Advice to users.* `MPI_MAX_INFO_VAL` might be very large, so it might not be wise to declare a string of that size. (*End of advice to users.*)

When it is an argument to a **nonblocking** routine, `info` is parsed before that routine returns, so that it may be modified or freed immediately after return.

When the descriptions refer to a key or value as being a boolean, an integer, or a list, they mean the string representation of these types. An implementation may define its own rules for how info value strings are converted to other types, but to ensure portability, every implementation must support the following representations. Legal values for a boolean must include the strings “true” and “false” (all lowercase). For integers, legal values must include

string representations of decimal values of integers that are within the range of a standard integer type in the program. (However it is possible that not every legal integer is a legal value for a given key.) On positive numbers, + signs are optional. No space may appear between a + or – sign and the leading digit of a number. For comma separated lists, the string must contain legal elements separated by commas. Leading and trailing spaces are stripped automatically from the types of info values described above and for each element of a comma separated list. These rules apply to all info values of these types. Implementations are free to specify a different interpretation for values of other info keys.

MPI\_INFO\_CREATE(info)

OUT	info	info object created (handle)
-----	------	------------------------------

int MPI\_Info\_create(MPI\_Info \*info)

MPI\_INFO\_CREATE(INFO, IERROR)

INTEGER INFO, IERROR

{static MPI::Info MPI::Info::Create() *(binding deprecated, see Section 15.2)*}

MPI\_INFO\_CREATE creates a new info object. The newly created object contains no key/value pairs.

MPI\_INFO\_SET(info, key, value)

INOUT	info	info object (handle)
IN	key	key (string)
IN	value	value (string)

int MPI\_Info\_set(MPI\_Info info, char \*key, char \*value)

MPI\_INFO\_SET(INFO, KEY, VALUE, IERROR)

INTEGER INFO, IERROR

CHARACTER\*(\*) KEY, VALUE

{void MPI::Info::Set(const char\* key, const char\* value) *(binding deprecated, see Section 15.2)*}

MPI\_INFO\_SET adds the (key,value) pair to info, and overrides the value if a value for the same key was previously set. key and value are null-terminated strings in C. In Fortran, leading and trailing spaces in key and value are stripped. If either key or value are larger than the allowed maximums, the errors MPI\_ERR\_INFO\_KEY or MPI\_ERR\_INFO\_VALUE are raised, respectively.

MPI\_INFO\_DELETE(info, key)

INOUT	info	info object (handle)
IN	key	key (string)

```

int MPI_Info_delete(MPI_Info info, char *key)
MPI_INFO_DELETE(INFO, KEY, IERROR)
    INTEGER INFO, IERROR
    CHARACTER*(*) KEY
{void MPI::Info::Delete(const char* key) (binding deprecated, see Section 15.2) }

```

MPI\_INFO\_DELETE deletes a (key,value) pair from info. If key is not defined in info, the call raises an error of class MPI\_ERR\_INFO\_NOKEY.

```

MPI_INFO_GET(info, key, valuelen, value, flag)

```

IN	info	info object (handle)
IN	key	key (string)
IN	valuelen	length of value arg (integer)
OUT	value	value (string)
OUT	flag	true if key defined, false if not (boolean)

```

int MPI_Info_get(MPI_Info info, char *key, int valuelen, char *value,
    int *flag)

```

```

MPI_INFO_GET(INFO, KEY, VALUELEN, VALUE, FLAG, IERROR)
    INTEGER INFO, VALUELEN, IERROR
    CHARACTER*(*) KEY, VALUE
    LOGICAL FLAG

```

```

{bool MPI::Info::Get(const char* key, int valuelen, char* value) const
    (binding deprecated, see Section 15.2) }

```

This function retrieves the value associated with key in a previous call to MPI\_INFO\_SET. If such a key exists, it sets flag to true and returns the value in value, otherwise it sets flag to false and leaves value unchanged. valuelen is the number of characters available in value. If it is less than the actual size of the value, the value is truncated. In C, valuelen should be one less than the amount of allocated space to allow for the null terminator.

If key is larger than MPI\_MAX\_INFO\_KEY, the call is erroneous.

```

MPI_INFO_GET_VALUELEN(info, key, valuelen, flag)

```

IN	info	info object (handle)
IN	key	key (string)
OUT	valuelen	length of value arg (integer)
OUT	flag	true if key defined, false if not (boolean)

```

int MPI_Info_get_valuelen(MPI_Info info, char *key, int *valuelen,
    int *flag)

```

```

1 MPI_INFO_GET_VALUELEN(INFO, KEY, VALUELEN, FLAG, IERROR)
2     INTEGER INFO, VALUELEN, IERROR
3     LOGICAL FLAG
4     CHARACTER*(*) KEY

```

```

5 {bool MPI::Info::Get_valuelen(const char* key, int& valuelen) const (binding
6     deprecated, see Section 15.2) }
7

```

Retrieves the length of the value associated with key. If key is defined, valuelen is set to the length of its associated value and flag is set to true. If key is not defined, valuelen is not touched and flag is set to false. The length returned in C or C++ does not include the end-of-string character.

If key is larger than MPI\_MAX\_INFO\_KEY, the call is erroneous.

```

14 MPI_INFO_GET_NKEYS(info, nkeys)
15

```

IN	info	info object (handle)
OUT	nkeys	number of defined keys (integer)

```

19 int MPI_Info_get_nkeys(MPI_Info info, int *nkeys)
20

```

```

21 MPI_INFO_GET_NKEYS(INFO, NKEYS, IERROR)
22     INTEGER INFO, NKEYS, IERROR

```

```

23 {int MPI::Info::Get_nkeys() const (binding deprecated, see Section 15.2) }
24

```

MPI\_INFO\_GET\_NKEYS returns the number of currently defined keys in info.

```

27 MPI_INFO_GET_NTHKEY(info, n, key)
28

```

IN	info	info object (handle)
IN	n	key number (integer)
OUT	key	key (string)

```

33 int MPI_Info_get_nthkey(MPI_Info info, int n, char *key)
34

```

```

35 MPI_INFO_GET_NTHKEY(INFO, N, KEY, IERROR)
36     INTEGER INFO, N, IERROR
37     CHARACTER*(*) KEY

```

```

38 {void MPI::Info::Get_nthkey(int n, char* key) const (binding deprecated, see
39     Section 15.2) }
40

```

This function returns the nth defined key in info. Keys are numbered  $0 \dots N - 1$  where  $N$  is the value returned by MPI\_INFO\_GET\_NKEYS. All keys between 0 and  $N - 1$  are guaranteed to be defined. The number of a given key does not change as long as info is not modified with MPI\_INFO\_SET or MPI\_INFO\_DELETE.



MPI\_INFO\_DUP(info, newinfo)

IN	info	info object (handle)
OUT	newinfo	info object (handle)

int MPI\_Info\_dup(MPI\_Info info, MPI\_Info \*newinfo)

MPI\_INFO\_DUP(INFO, NEWINFO, IERROR)  
 INTEGER INFO, NEWINFO, IERROR

*{MPI::Info MPI::Info::Dup() const (binding deprecated, see Section 15.2) }*

MPI\_INFO\_DUP duplicates an existing info object, creating a new object, with the same (key,value) pairs and the same ordering of keys.

MPI\_INFO\_FREE(info)

INOUT	info	info object (handle)
-------	------	----------------------

int MPI\_Info\_free(MPI\_Info \*info)

MPI\_INFO\_FREE(INFO, IERROR)  
 INTEGER INFO, IERROR

*{void MPI::Info::Free() (binding deprecated, see Section 15.2) }*

This function frees info and sets it to MPI\_INFO\_NULL. The value of an info argument is interpreted each time the info is passed to a routine. Changes to an info after return from a routine do not affect that interpretation.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

# Chapter 10

## Process Creation and Management

### 10.1 Introduction

MPI is primarily concerned with communication rather than process or resource management. However, it is necessary to address these issues to some degree in order to define a useful framework for communication. This chapter presents a set of MPI interfaces that allow for a variety of approaches to process management while placing minimal restrictions on the execution environment.

The MPI model for process creation allows both the creation of an initial set of processes related by their membership in a common MPI\_COMM\_WORLD and the creation and management of processes after an MPI application has been started. A major impetus for the later form of process creation comes from the PVM [23] research effort. This work has provided a wealth of experience with process management and resource control that illustrates their benefits and potential pitfalls.

The MPI Forum decided not to address resource control because it was not able to design a portable interface that would be appropriate for the broad spectrum of existing and potential resource and process controllers. Resource control can encompass a wide range of abilities, including adding and deleting nodes from a virtual parallel machine, reserving and scheduling resources, managing compute partitions of an MPP, and returning information about available resources. assumes that resource control is provided externally — probably by computer vendors, in the case of tightly coupled systems, or by a third party software package when the environment is a cluster of workstations.

The reasons for including process management in MPI are both technical and practical. Important classes of message-passing applications require process control. These include task farms, serial applications with parallel modules, and problems that require a run-time assessment of the number and type of processes that should be started. On the practical side, users of workstation clusters who are migrating from PVM to MPI may be accustomed to using PVM's capabilities for process and resource management. The lack of these features would be a practical stumbling block to migration.

The following goals are central to the design of MPI process management:

- The MPI process model must apply to the vast majority of current parallel environments. These include everything from tightly integrated MPPs to heterogeneous networks of workstations.
- MPI must not take over operating system responsibilities. It should instead provide a

clean interface between an application and system software.

- MPI must guarantee communication determinism in the presense of dynamic processes, i.e., dynamic process management must not introduce unavoidable race conditions.
- MPI must not contain features that compromise performance.

The process management model addresses these issues in two ways. First, MPI remains primarily a communication library. It does not manage the parallel environment in which a parallel program executes, though it provides a minimal interface between an application and external resource and process managers.

Second, MPI maintains a consistent concept of a communicator, regardless of how its members came into existence. A communicator is never changed once created, and it is always created using deterministic collective operations.

## 10.2 The Dynamic Process Model

The dynamic process model allows for the creation and cooperative termination of processes after an MPI application has started. It provides a mechanism to establish communication between the newly created processes and the existing MPI application. It also provides a mechanism to establish communication between two existing MPI applications, even when one did not “start” the other.

### 10.2.1 Starting Processes

[ MPI applications may start new processes through an interface to an external process manager, which can range from a parallel operating system (CMOST) to layered software (POE) to an rsh command (p4). ] MPI applications may start new processes through an interface to an external process manager.

MPI\_COMM\_SPAWN starts MPI processes and establishes communication with them, returning an intercommunicator. MPI\_COMM\_SPAWN\_MULTIPLE starts several different binaries (or the same binary with different arguments), placing them in the same MPI\_COMM\_WORLD and returning an intercommunicator.

MPI uses the existing group abstraction to represent processes. A process is identified by a (group, rank) pair.

### 10.2.2 The Runtime Environment

The MPI\_COMM\_SPAWN and MPI\_COMM\_SPAWN\_MULTIPLE routines provide an interface between MPI and the *runtime environment* of an MPI application. The difficulty is that there is an enormous range of runtime environments and application requirements, and MPI must not be tailored to any particular one. Examples of such environments are:

- **MPP managed by a batch queueing system.** Batch queueing systems generally allocate resources before an application begins, enforce limits on resource use (CPU time, memory use, etc.), and do not allow a change in resource allocation after a job begins. Moreover, many MPPs have special limitations or extensions, such as a limit on the number of processes that may run on one processor, or the ability to gang-schedule processes of a parallel application.

- **Network of workstations with PVM.** PVM (Parallel Virtual Machine) allows a user to create a “virtual machine” out of a network of workstations. An application may extend the virtual machine or manage processes (create, kill, redirect output, etc.) through the PVM library. Requests to manage the machine or processes may be intercepted and handled by an external resource manager.
- **Network of workstations managed by a load balancing system.** A load balancing system may choose the location of spawned processes based on dynamic quantities, such as load average. It may transparently migrate processes from one machine to another when a resource becomes unavailable.
- **Large SMP with Unix.** Applications are run directly by the user. They are scheduled at a low level by the operating system. Processes may have special scheduling characteristics (gang-scheduling, processor affinity, deadline scheduling, processor locking, etc.) and be subject to OS resource limits (number of processes, amount of memory, etc.).

MPI assumes, implicitly, the existence of an environment in which an application runs. It does not provide “operating system” services, such as a general ability to query what processes are running, to kill arbitrary processes, to find out properties of the runtime environment (how many processors, how much memory, etc.).

Complex interaction of an MPI application with its runtime environment should be done through an environment-specific API. An example of such an API would be the PVM task and machine management routines — `pvm_addhosts`, `pvm_config`, `pvm_tasks`, etc., possibly modified to return an MPI (group,rank) when possible. A Condor or PBS API would be another possibility.

At some low level, obviously, MPI must be able to interact with the runtime system, but the interaction is not visible at the application level and the details of the interaction are not specified by the MPI standard.

In many cases, it is impossible to keep environment-specific information out of the MPI interface without seriously compromising MPI functionality. To permit applications to take advantage of environment-specific functionality, many MPI routines take an `info` argument that allows an application to specify environment-specific information. There is a tradeoff between functionality and portability: applications that make use of `info` are not portable.

MPI does not require the existence of an underlying “virtual machine” model, in which there is a consistent global view of an MPI application and an implicit “operating system” managing resources and processes. For instance, processes spawned by one task may not be visible to another; additional hosts added to the runtime environment by one process may not be visible in another process; tasks spawned by different processes may not be automatically distributed over available resources.

Interaction between MPI and the runtime environment is limited to the following areas:

- A process may start new processes with `MPI_COMM_SPAWN` and `MPI_COMM_SPAWN_MULTIPLE`.
- When a process spawns a child process, it may optionally use an `info` argument to tell the runtime environment where or how to start the process. This extra information may be opaque to MPI.

- An attribute `MPI_UNIVERSE_SIZE` on `MPI_COMM_WORLD` tells a program how “large” the initial runtime environment is, namely how many processes can usefully be started in all. One can subtract the size of `MPI_COMM_WORLD` from this value to find out how many processes might usefully be started in addition to those already running.

## 10.3 Process Manager Interface

### 10.3.1 Processes in MPI

A process is represented in MPI by a (group, rank) pair. A (group, rank) pair specifies a unique process but a process does not determine a unique (group, rank) pair, since a process may belong to several groups.

### 10.3.2 Starting Processes and Establishing Communication

The following routine starts a number of MPI processes and establishes communication with them, returning an intercommunicator.

*Advice to users.* It is possible in MPI to start a static SPMD or MPMD application by starting first one process and having that process start its siblings with `MPI_COMM_SPAWN`. This practice is discouraged primarily for reasons of performance. If possible, it is preferable to start all processes at once, as a single MPI application. (*End of advice to users.*)

`MPI_COMM_SPAWN(command, argv, maxprocs, info, root, comm, intercomm, array_of_errcodes)`

IN	command	name of program to be spawned (string, significant only at root)
IN	argv	arguments to <code>command</code> (array of strings, significant only at root)
IN	maxprocs	maximum number of processes to start (integer, significant only at root)
IN	info	a set of key-value pairs telling the runtime system where and how to start the processes (handle, significant only at root)
IN	root	rank of process in which previous arguments are examined (integer)
IN	comm	intracommunicator containing group of spawning processes (handle)
OUT	intercomm	intercommunicator between original group and the newly spawned group (handle)
OUT	array_of_errcodes	one code per process (array of integer)

```

int MPI_Comm_spawn(char *command, char *argv[], int maxprocs, MPI_Info
                    info, int root, MPI_Comm comm, MPI_Comm *intercomm,
                    int array_of_errcodes[])
MPI_COMM_SPAWN(COMMAND, ARGV, MAXPROCS, INFO, ROOT, COMM, INTERCOMM,
                ARRAY_OF_ERRCODES, IERROR)
CHARACTER*(*) COMMAND, ARGV(*)
INTEGER INFO, MAXPROCS, ROOT, COMM, INTERCOMM, ARRAY_OF_ERRCODES(*),
IERROR
{MPI::Intercomm MPI::Intracomm::Spawn(const char* command,
const char* argv[], int maxprocs, const MPI::Info& info,
int root, int array_of_errcodes[]) const (binding deprecated, see
Section 15.2) }
{MPI::Intercomm MPI::Intracomm::Spawn(const char* command,
const char* argv[], int maxprocs, const MPI::Info& info,
int root) const (binding deprecated, see Section 15.2) }

```

MPI\_COMM\_SPAWN tries to start maxprocs identical copies of the MPI program specified by `command`, establishing communication with them and returning an intercommunicator. The spawned processes are referred to as children. The children have their own MPI\_COMM\_WORLD, which is separate from that of the parents. MPI\_COMM\_SPAWN is collective over `comm`, and also may not return until MPI\_INIT has been called in the children. Similarly, MPI\_INIT in the children may not return until all parents have called MPI\_COMM\_SPAWN. In this sense, MPI\_COMM\_SPAWN in the parents and MPI\_INIT in the children form a collective operation over the union of parent and child processes. The intercommunicator returned by MPI\_COMM\_SPAWN contains the parent processes in the local group and the child processes in the remote group. The ordering of processes in the local and remote groups is the same as the ordering of the group of the `comm` in the parents and of MPI\_COMM\_WORLD of the children, respectively. This intercommunicator can be obtained in the children through the function MPI\_COMM\_GET\_PARENT.

*Advice to users.* An implementation may automatically establish communication before MPI\_INIT is called by the children. Thus, completion of MPI\_COMM\_SPAWN in the parent does not necessarily mean that MPI\_INIT has been called in the children (although the returned intercommunicator can be used immediately). (*End of advice to users.*)

**The command argument** The `command` argument is a string containing the name of a program to be spawned. The string is null-terminated in C. In Fortran, leading and trailing spaces are stripped. MPI does not specify how to find the executable or how the working directory is determined. These rules are implementation-dependent and should be appropriate for the runtime environment.

*Advice to implementors.* The implementation should use a natural rule for finding executables and determining working directories. For instance, a homogeneous system with a global file system might look first in the working directory of the spawning process, or might search the directories in a PATH environment variable as do Unix

shells. An implementation on top of PVM would use PVM's rules for finding executables (usually in `$HOME/pvm3/bin/$PVM_ARCH`). An MPI implementation running under POE on an IBM SP would use POE's method of finding executables. An implementation should document its rules for finding executables and determining working directories, and a high-quality implementation should give the user some control over these rules. (*End of advice to implementors.*)

If the program named in `command` does not call `MPI_INIT`, but instead forks a process that calls `MPI_INIT`, the results are undefined. Implementations may allow this case to work but are not required to.

*Advice to users.* MPI does not say what happens if the program you start is a shell script and that shell script starts a program that calls `MPI_INIT`. Though some implementations may allow you to do this, they may also have restrictions, such as requiring that arguments supplied to the shell script be supplied to the program, or requiring that certain parts of the environment not be changed. (*End of advice to users.*)

The `argv` argument `argv` is an array of strings containing arguments that are passed to the program. The first element of `argv` is the first argument passed to `command`, not, as is conventional in some contexts, the command itself. The argument list is terminated by `NULL` in C and C++ and an empty string in Fortran. In Fortran, leading and trailing spaces are always stripped, so that a string consisting of all spaces is considered an empty string. The constant `MPI_ARGV_NULL` may be used in C, C++ and Fortran to indicate an empty argument list. In C and C++, this constant is the same as `NULL`.

#### Example 10.1 Examples of `argv` in C and Fortran

To run the program "ocean" with arguments "-gridfile" and "ocean1.grd" in C:

```
char command[] = "ocean";
char *argv[] = {"-gridfile", "ocean1.grd", NULL};
MPI_Comm_spawn(command, argv, ...);
```

or, if not everything is known at compile time:

```
char *command;
char **argv;
command = "ocean";
argv=(char **)malloc(3 * sizeof(char *));
argv[0] = "-gridfile";
argv[1] = "ocean1.grd";
argv[2] = NULL;
MPI_Comm_spawn(command, argv, ...);
```

In Fortran:

```
CHARACTER*25 command, argv(3)
command = ' ocean '
argv(1) = ' -gridfile '
argv(2) = ' ocean1.grd'
argv(3) = ' '
call MPI_COMM_SPAWN(command, argv, ...)
```



Arguments are supplied to the program if this is allowed by the operating system. In C, the `MPI_COMM Spawn` argument `argv` differs from the `argv` argument of `main` in two respects. First, it is shifted by one element. Specifically, `argv[0]` of `main` is provided by the implementation and conventionally contains the name of the program (given by command). `argv[1]` of `main` corresponds to `argv[0]` in `MPI_COMM Spawn`, `argv[2]` of `main` to `argv[1]` of `MPI_COMM Spawn`, etc. Second, `argv` of `MPI_COMM Spawn` must be null-terminated, so that its length can be determined. Passing an `argv` of `MPI_ARGV_NULL` to `MPI_COMM Spawn` results in `main` receiving `argc` of 1 and an `argv` whose element 0 is (conventionally) the name of the program.

If a Fortran implementation supplies routines that allow a program to obtain its arguments, the arguments may be available through that mechanism. In C, if the operating system does not support arguments appearing in `argv` of `main()`, the MPI implementation may add the arguments to the `argv` that is passed to `MPI_INIT`.

**The `maxprocs` argument** MPI tries to spawn `maxprocs` processes. If it is unable to spawn `maxprocs` processes, it raises an error of class `MPI_ERR_SPAWN`.

An implementation may allow the `info` argument to change the default behavior, such that if the implementation is unable to spawn all `maxprocs` processes, it may spawn a smaller number of processes instead of raising an error. In principle, the `info` argument may specify an arbitrary set  $\{m_i : 0 \leq m_i \leq \text{maxprocs}\}$  of allowed values for the number of processes spawned. The set  $\{m_i\}$  does not necessarily include the value `maxprocs`. If an implementation is able to spawn one of these allowed numbers of processes, `MPI_COMM Spawn` returns successfully and the number of spawned processes,  $m$ , is given by the size of the remote group of `intercomm`. If  $m$  is less than `maxproc`, reasons why the other processes were not spawned are given in `array_of_errcodes` as described below. If it is not possible to spawn one of the allowed numbers of processes, `MPI_COMM Spawn` raises an error of class `MPI_ERR_SPAWN`.

A spawn call with the default behavior is called *hard*. A spawn call for which fewer than `maxprocs` processes may be returned is called *soft*. See Section 10.3.4 on page 333 for more information on the *soft* key for `info`.

*Advice to users.* By default, requests are hard and MPI errors are fatal. This means that by default there will be a fatal error if MPI cannot spawn all the requested processes. If you want the behavior “spawn as many processes as possible, up to  $N$ ,” you should do a soft spawn, where the set of allowed values  $\{m_i\}$  is  $\{0 \dots N\}$ . However, this is not completely portable, as implementations are not required to support soft spawning. (*End of advice to users.*)

**The `info` argument** The `info` argument to all of the routines in this chapter is an opaque handle of type `MPI_Info` in C, `MPI::Info` in C++ and `INTEGER` in Fortran. It is a container for a number of user-specified (key,value) pairs. `key` and `value` are strings (null-terminated `char*` in C, `character*(*)` in Fortran). Routines to create and manipulate the `info` argument are described in Section 9 on page 317.

For the `SPAWN` calls, `info` provides additional (and possibly implementation-dependent) instructions to MPI and the runtime system on how to start processes. An application may pass `MPI_INFO_NULL` in C or Fortran. Portable programs not requiring detailed control over process locations should use `MPI_INFO_NULL`.

MPI does not specify the content of the `info` argument, except to reserve a number of special key values (see Section 10.3.4 on page 333). The `info` argument is quite flexible and could even be used, for example, to specify the executable and its command-line arguments. In this case the `command` argument to `MPI_COMM_SPAWN` could be empty. The ability to do this follows from the fact that MPI does not specify how an executable is found, and the `info` argument can tell the runtime system where to “find” the executable “” (empty string). Of course a program that does this will not be portable across MPI implementations.

**The root argument** All arguments before the `root` argument are examined only on the process whose rank in `comm` is equal to `root`. The value of these arguments on other processes is ignored.

**The `array_of_errcodes` argument** The `array_of_errcodes` is an array of length `maxprocs` in which MPI reports the status of each process that MPI was requested to start. If all `maxprocs` processes were spawned, `array_of_errcodes` is filled in with the value `MPI_SUCCESS`. If only  $m$  ( $0 \leq m < \text{maxprocs}$ ) processes are spawned,  $m$  of the entries will contain `MPI_SUCCESS` and the rest will contain an implementation-specific error code indicating the reason MPI could not start the process. MPI does not specify which entries correspond to failed processes. An implementation may, for instance, fill in error codes in one-to-one correspondence with a detailed specification in the `info` argument. These error codes all belong to the error class `MPI_ERR_SPAWN` if there was no error in the argument list. In C or Fortran, an application may pass `MPI_ERRCODES_IGNORE` if it is not interested in the error codes. In C++ this constant does not exist, and the `array_of_errcodes` argument may be omitted from the argument list.

*Advice to implementors.* `MPI_ERRCODES_IGNORE` in Fortran is a special type of constant, like `MPI_BOTTOM`. See the discussion in Section 2.5.4 on page 14. (*End of advice to implementors.*)

`MPI_COMM_GET_PARENT(parent)`

OUT      `parent`      the parent communicator (handle)

`int MPI_Comm_get_parent(MPI_Comm *parent)`

`MPI_COMM_GET_PARENT(PARENT, IERROR)`

INTEGER `PARENT`, `IERROR`

`{static MPI::Intercomm MPI::Comm::Get_parent() (binding deprecated, see Section 15.2) }`

If a process was started with `MPI_COMM_SPAWN` or `MPI_COMM_SPAWN_MULTIPLE`, `MPI_COMM_GET_PARENT` returns the “parent” intercommunicator of the current process. This parent intercommunicator is created implicitly inside of `MPI_INIT` and is the same intercommunicator returned by `SPAWN` in the parents.

If the process was not spawned, `MPI_COMM_GET_PARENT` returns `MPI_COMM_NULL`.

After the parent communicator is freed or disconnected, `MPI_COMM_GET_PARENT` returns `MPI_COMM_NULL`.

ticket150.

ticket150.

*Advice to users.* MPI\_COMM\_GET\_PARENT returns a handle to a single intercommunicator. Calling MPI\_COMM\_GET\_PARENT a second time returns a handle to the same intercommunicator. Freeing the handle with MPI\_COMM\_DISCONNECT or MPI\_COMM\_FREE will cause other references to the intercommunicator to become invalid (dangling). Note that calling MPI\_COMM\_FREE on the parent communicator is not useful. (*End of advice to users.*)

*Rationale.* The desire of the Forum was to create a constant MPI\_COMM\_PARENT similar to MPI\_COMM\_WORLD. Unfortunately such a constant cannot be used (syntactically) as an argument to MPI\_COMM\_DISCONNECT, which is explicitly allowed. (*End of rationale.*)

### 10.3.3 Starting Multiple Executables and Establishing Communication

While MPI\_COMM\_SPAWN is sufficient for most cases, it does not allow the spawning of multiple binaries, or of the same binary with multiple sets of arguments. The following routine spawns multiple binaries or the same binary with multiple sets of arguments, establishing communication with them and placing them in the same MPI\_COMM\_WORLD.

MPI\_COMM\_SPAWN\_MULTIPLE(count, array\_of\_commands, array\_of\_argv, array\_of\_maxprocs, array\_of\_info, root, comm, intercomm, array\_of\_errcodes)

IN	count	number of commands (positive integer, significant to MPI only at root — see advice to users)
IN	array_of_commands	programs to be executed (array of strings, significant only at root)
IN	array_of_argv	arguments for commands (array of array of strings, significant only at root)
IN	array_of_maxprocs	maximum number of processes to start for each command (array of integer, significant only at root)
IN	array_of_info	info objects telling the runtime system where and how to start processes (array of handles, significant only at root)
IN	root	rank of process in which previous arguments are examined (integer)
IN	comm	intracommunicator containing group of spawning processes (handle)
OUT	intercomm	intercommunicator between original group and newly spawned group (handle)
OUT	array_of_errcodes	one error code per process (array of integer)

```
int MPI_Comm_spawn_multiple(int count, char *array_of_commands[],
                           char **array_of_argv[], int array_of_maxprocs[],
                           MPI_Info array_of_info[], int root, MPI_Comm comm,
                           MPI_Comm *intercomm, int array_of_errcodes[])
```

```

1  MPI_COMM_SPAWN_MULTIPLE(COUNT, ARRAY_OF_COMMANDS, ARRAY_OF_ARGV,
2                          ARRAY_OF_MAXPROCS, ARRAY_OF_INFO, ROOT, COMM, INTERCOMM,
3                          ARRAY_OF_ERRCODES, IERROR)
4  INTEGER COUNT, ARRAY_OF_INFO(*), ARRAY_OF_MAXPROCS(*), ROOT, COMM,
5  INTERCOMM, ARRAY_OF_ERRCODES(*), IERROR
6  CHARACTER*(*) ARRAY_OF_COMMANDS(*), ARRAY_OF_ARGV(COUNT, *)
ticket150. 7
8  {MPI::Intercomm MPI::Intracomm::Spawn_multiple(int count,
9          const char* array_of_commands[], const char** array_of_argv[],
10         const int array_of_maxprocs[],
11         const MPI::Info array_of_info[], int root,
ticket150. 12         int array_of_errcodes[]) (binding deprecated, see Section 15.2) }
ticket150. 13
14  {MPI::Intercomm MPI::Intracomm::Spawn_multiple(int count,
15         const char* array_of_commands[], const char** array_of_argv[],
16         const int array_of_maxprocs[],
ticket150. 16         const MPI::Info array_of_info[], int root) (binding deprecated,
17         see Section 15.2) }
18

```

MPI\_COMM\_SPAWN\_MULTIPLE is identical to MPI\_COMM\_SPAWN except that there are multiple executable specifications. The first argument, `count`, gives the number of specifications. Each of the next four arguments are simply arrays of the corresponding arguments in MPI\_COMM\_SPAWN. For the Fortran version of `array_of_argv`, the element `array_of_argv(i,j)` is the  $j$ -th argument to command number  $i$ .

*Rationale.* This may seem backwards to Fortran programmers who are familiar with Fortran's column-major ordering. However, it is necessary to do it this way to allow MPI\_COMM\_SPAWN to sort out arguments. Note that the leading dimension of `array_of_argv` *must* be the same as `count`. (*End of rationale.*)

*Advice to users.* The argument `count` is interpreted by MPI only at the root, as is `array_of_argv`. Since the leading dimension of `array_of_argv` is `count`, a non-positive value of `count` at a non-root node could theoretically cause a runtime bounds check error, even though `array_of_argv` should be ignored by the subroutine. If this happens, you should explicitly supply a reasonable value of `count` on the non-root nodes. (*End of advice to users.*)

In any language, an application may use the constant MPI\_ARGVS\_NULL (which is likely to be `(char ***)0` in C) to specify that no arguments should be passed to any commands. The effect of setting individual elements of `array_of_argv` to MPI\_ARGV\_NULL is not defined. To specify arguments for some commands but not others, the commands without arguments should have a corresponding `argv` whose first element is null (`(char *)0` in C and empty string in Fortran).

All of the spawned processes have the same MPI\_COMM\_WORLD. Their ranks in MPI\_COMM\_WORLD correspond directly to the order in which the commands are specified in MPI\_COMM\_SPAWN\_MULTIPLE. Assume that  $m_1$  processes are generated by the first command,  $m_2$  by the second, etc. The processes corresponding to the first command have ranks  $0, 1, \dots, m_1 - 1$ . The processes in the second command have ranks  $m_1, m_1 + 1, \dots, m_1 + m_2 - 1$ . The processes in the third have ranks  $m_1 + m_2, m_1 + m_2 + 1, \dots, m_1 + m_2 + m_3 - 1$ , etc.

*Advice to users.* Calling MPI\_COMM\_SPAWN multiple times would create many sets of children with different MPI\_COMM\_WORLDS whereas MPI\_COMM\_SPAWN\_MULTIPLE creates children with a single MPI\_COMM\_WORLD, so the two methods are not completely equivalent. There are also two performance-related reasons why, if you need to spawn multiple executables, you may want to use MPI\_COMM\_SPAWN\_MULTIPLE instead of calling MPI\_COMM\_SPAWN several times. First, spawning several things at once may be faster than spawning them sequentially. Second, in some implementations, communication between processes spawned at the same time may be faster than communication between processes spawned separately. (*End of advice to users.*)

The array\_of\_errcodes argument is a 1-dimensional array of size  $\sum_{i=1}^{count} n_i$ , where  $n_i$  is the  $i$ -th element of array\_of\_maxprocs. Command number  $i$  corresponds to the  $n_i$  contiguous slots in this array from element  $\sum_{j=1}^{i-1} n_j$  to  $\left[\sum_{j=1}^i n_j\right] - 1$ . Error codes are treated as for MPI\_COMM\_SPAWN.

#### Example 10.2 Examples of array\_of\_argv in C and Fortran

To run the program “ocean” with arguments “-gridfile” and “ocean1.grd” and the program “atmos” with argument “atmos.grd” in C:

```
char *array_of_commands[2] = {"ocean", "atmos"};
char **array_of_argv[2];
char *argv0[] = {"-gridfile", "ocean1.grd", (char *)0};
char *argv1[] = {"atmos.grd", (char *)0};
array_of_argv[0] = argv0;
array_of_argv[1] = argv1;
MPI_Comm_spawn_multiple(2, array_of_commands, array_of_argv, ...);
```

Here’s how you do it in Fortran:

```
CHARACTER*25 commands(2), array_of_argv(2, 3)
commands(1) = ' ocean '
array_of_argv(1, 1) = ' -gridfile '
array_of_argv(1, 2) = ' ocean1.grd'
array_of_argv(1, 3) = ' '

commands(2) = ' atmos '
array_of_argv(2, 1) = ' atmos.grd '
array_of_argv(2, 2) = ' '

call MPI_COMM_SPAWN_MULTIPLE(2, commands, array_of_argv, ...)
```

#### 10.3.4 Reserved Keys

The following keys are reserved. An implementation is not required to interpret these keys, but if it does interpret the key, it must provide the functionality described.

**host** Value is a hostname. The format of the hostname is determined by the implementation.

**arch** Value is an architecture name. Valid architecture names and what they mean are determined by the implementation.

**wdir** Value is the name of a directory on a machine on which the spawned process(es) execute(s). This directory is made the working directory of the executing process(es). The format of the directory name is determined by the implementation.

**path** Value is a directory or set of directories where the implementation should look for the executable. The format of path is determined by the implementation.

**file** Value is the name of a file in which additional information is specified. The format of the filename and internal format of the file are determined by the implementation.

**soft** Value specifies a set of numbers which are allowed values for the number of processes that `MPI_COMM_SPAWN` (et al.) may create. The format of the value is a comma-separated list of Fortran-90 triplets each of which specifies a set of integers and which together specify the set formed by the union of these sets. Negative values in this set and values greater than `maxprocs` are ignored. MPI will spawn the largest number of processes it can, consistent with some number in the set. The order in which triplets are given is not significant.

By Fortran-90 triplets, we mean:

1. `a` means  $a$
2. `a:b` means  $a, a + 1, a + 2, \dots, b$
3. `a:b:c` means  $a, a + c, a + 2c, \dots, a + ck$ , where for  $c > 0$ ,  $k$  is the largest integer for which  $a + ck \leq b$  and for  $c < 0$ ,  $k$  is the largest integer for which  $a + ck \geq b$ . If  $b > a$  then  $c$  must be positive. If  $b < a$  then  $c$  must be negative.

Examples:

1. `a:b` gives a range between  $a$  and  $b$
2. `0:N` gives full “soft” functionality
3. `1,2,4,8,16,32,64,128,256,512,1024,2048,4096` allows power-of-two number of processes.
4. `2:10000:2` allows even number of processes.
5. `2:10:2,7` allows 2, 4, 6, 7, 8, or 10 processes.

### 10.3.5 Spawn Example

Manager-worker Example, Using `MPI_COMM_SPAWN`.

```
/* manager */
#include "mpi.h"
int main(int argc, char *argv[])
{
    int world_size, universe_size, *universe_sizep, flag;
    MPI_Comm everyone;          /* intercommunicator */
    char worker_program[100];

    MPI_Init(&argc, &argv);
    MPI_Comm_size(MPI_COMM_WORLD, &world_size);
```

```

1  if (world_size != 1)      error("Top heavy with management");
2
3  MPI_Comm_get_attr(MPI_COMM_WORLD, MPI_UNIVERSE_SIZE,
4                      &universe_sizep, &flag);
5
6  if (!flag) {
7      printf("This MPI does not support UNIVERSE_SIZE. How many\n\
8  processes total?");
9      scanf("%d", &universe_size);
10 } else universe_size = *universe_sizep;
11 if (universe_size == 1) error("No room to start workers");
12
13 /*
14  * Now spawn the workers. Note that there is a run-time determination
15  * of what type of worker to spawn, and presumably this calculation must
16  * be done at run time and cannot be calculated before starting
17  * the program. If everything is known when the application is
18  * first started, it is generally better to start them all at once
19  * in a single MPI_COMM_WORLD.
20  */
21
22 choose_worker_program(worker_program);
23 MPI_Comm_spawn(worker_program, MPI_ARGV_NULL, universe_size-1,
24               MPI_INFO_NULL, 0, MPI_COMM_SELF, &everyone,
25               MPI_ERRCODES_IGNORE);
26
27 /*
28  * Parallel code here. The communicator "everyone" can be used
29  * to communicate with the spawned processes, which have ranks 0,..
30  * MPI_UNIVERSE_SIZE-1 in the remote group of the intercommunicator
31  * "everyone".
32  */
33
34 MPI_Finalize();
35 return 0;
36 }
37
38 /* worker */
39
40 #include "mpi.h"
41 int main(int argc, char *argv[])
42 {
43     int size;
44     MPI_Comm parent;
45     MPI_Init(&argc, &argv);
46     MPI_Comm_get_parent(&parent);
47     if (parent == MPI_COMM_NULL) error("No parent!");
48     MPI_Comm_remote_size(parent, &size);
49     if (size != 1) error("Something's wrong with the parent");
50

```

```

1      /*
2      * Parallel code here.
3      * The manager is represented as the process with rank 0 in (the remote
4      * group of) the parent communicator. If the workers need to communicate
5      * among themselves, they can use MPI_COMM_WORLD.
6      */
7
8      MPI_Finalize();
9      return 0;
10     }

```

## 10.4 Establishing Communication

This section provides functions that establish communication between two sets of MPI processes that do not share a communicator.

Some situations in which these functions are useful are:

1. Two parts of an application that are started independently need to communicate.
2. A visualization tool wants to attach to a running process.
3. A server wants to accept connections from multiple clients. Both clients and server may be parallel programs.

In each of these situations, MPI must establish communication channels where none existed before, and there is no parent/child relationship. The routines described in this section establish communication between the two sets of processes by creating an MPI intercommunicator, where the two groups of the intercommunicator are the original sets of processes.

Establishing contact between two groups of processes that do not share an existing communicator is a collective but asymmetric process. One group of processes indicates its willingness to accept connections from other groups of processes. We will call this group the (parallel) *server*, even if this is not a client/server type of application. The other group connects to the server; we will call it the *client*.

*Advice to users.* While the names *client* and *server* are used throughout this section, MPI does not guarantee the traditional robustness of client server systems. The functionality described in this section is intended to allow two cooperating parts of the same application to communicate with one another. For instance, a client that gets a segmentation fault and dies, or one that doesn't participate in a collective operation may cause a server to crash or hang. (*End of advice to users.*)

### 10.4.1 Names, Addresses, Ports, and All That

Almost all of the complexity in MPI client/server routines addresses the question “how does the client find out how to contact the server?” The difficulty, of course, is that there is no existing communication channel between them, yet they must somehow agree on a rendezvous point where they will establish communication. [ — Catch 22. ]



Agreeing on a rendezvous point always involves a third party. The third party may itself provide the rendezvous point or may communicate rendezvous information from server to client. Complicating matters might be the fact that a client doesn't really care what server it contacts, only that it be able to get in touch with one that can handle its request.

Ideally, MPI can accommodate a wide variety of run-time systems while retaining the ability to write simple portable code. The following should be compatible with MPI:

- The server resides at a well-known internet address host:port.
- The server prints out an address to the terminal, the user gives this address to the client program.
- The server places the address information on a nameserver, where it can be retrieved with an agreed-upon name.
- The server to which the client connects is actually a broker, acting as a middleman between the client and the real server.

MPI does not require a nameserver, so not all implementations will be able to support all of the above scenarios. However, MPI provides an optional nameserver interface, and is compatible with external name servers.

A `port_name` is a *system-supplied* string that encodes a low-level network address at which a server can be contacted. Typically this is an IP address and a port number, but an implementation is free to use any protocol. The server establishes a `port_name` with the `MPI_OPEN_PORT` routine. It accepts a connection to a given port with `MPI_COMM_ACCEPT`. A client uses `port_name` to connect to the server.

By itself, the `port_name` mechanism is completely portable, but it may be clumsy to use because of the necessity to communicate `port_name` to the client. It would be more convenient if a server could specify that it be known by an *application-supplied* `service_name` so that the client could connect to that `service_name` without knowing the `port_name`.

An MPI implementation may allow the server to publish a (`port_name`, `service_name`) pair with `MPI_PUBLISH_NAME` and the client to retrieve the port name from the service name with `MPI_LOOKUP_NAME`. This allows three levels of portability, with increasing levels of functionality.

1. Applications that do not rely on the ability to publish names are the most portable. Typically the `port_name` must be transferred "by hand" from server to client.
2. Applications that use the `MPI_PUBLISH_NAME` mechanism are completely portable among implementations that provide this service. To be portable among all implementations, these applications should have a fall-back mechanism that can be used when names are not published.
3. Applications may ignore MPI's name publishing functionality and use their own mechanism (possibly system-supplied) to publish names. This allows arbitrary flexibility but is not portable.

### 10.4.2 Server Routines

A server makes itself available with two routines. First it must call `MPI_OPEN_PORT` to establish a port at which it may be contacted. Secondly it must call `MPI_COMM_ACCEPT` to accept connections from clients.

`MPI_OPEN_PORT(info, port_name)`

IN	info	implementation-specific information on how to establish an address (handle)
OUT	port_name	newly established port (string)

`int MPI_Open_port(MPI_Info info, char *port_name)`

`MPI_OPEN_PORT(INFO, PORT_NAME, IERROR)`

`CHARACTER*(*) PORT_NAME`

`INTEGER INFO, IERROR`

`{void MPI::Open_port(const MPI::Info& info, char* port_name) (binding deprecated, see Section 15.2) }`

This function establishes a network address, encoded in the `port_name` string, at which the server will be able to accept connections from clients. `port_name` is supplied by the system, possibly using information in the `info` argument.

MPI copies a system-supplied port name into `port_name`. `port_name` identifies the newly opened port and can be used by a client to contact the server. The maximum size string that may be supplied by the system is `MPI_MAX_PORT_NAME`.

*Advice to users.* The system copies the port name into `port_name`. The application must pass a buffer of sufficient size to hold this value. (*End of advice to users.*)

`port_name` is essentially a network address. It is unique within the communication universe to which it belongs (determined by the implementation), and may be used by any client within that communication universe. For instance, if it is an internet (host:port) address, it will be unique on the internet. If it is a low level switch address on an IBM SP, it will be unique to that SP.

*Advice to implementors.* These examples are not meant to constrain implementations. A `port_name` could, for instance, contain a user name or the name of a batch job, as long as it is unique within some well-defined communication domain. The larger the communication domain, the more useful MPI's client/server functionality will be. (*End of advice to implementors.*)

The precise form of the address is implementation-defined. For instance, an internet address may be a host name or IP address, or anything that the implementation can decode into an IP address. A port name may be reused after it is freed with `MPI_CLOSE_PORT` and released by the system.

*Advice to implementors.* Since the user may type in `port_name` by hand, it is useful to choose a form that is easily readable and does not have embedded spaces. (*End of advice to implementors.*)

info may be used to tell the implementation how to establish the address. It may, and usually will, be MPI\_INFO\_NULL in order to get the implementation defaults.

MPI\_CLOSE\_PORT(port\_name)

IN port\_name a port (string)

int MPI\_Close\_port(char \*port\_name)

MPI\_CLOSE\_PORT(PORT\_NAME, IERROR)

CHARACTER\*(\*) PORT\_NAME

INTEGER IERROR

{void MPI::Close\_port(const char\* port\_name) (*binding deprecated, see Section 15.2*) }

This function releases the network address represented by port\_name.

MPI\_COMM\_ACCEPT(port\_name, info, root, comm, newcomm)

IN port\_name port name (string, used only on root)

IN info implementation-dependent information (handle, used only on root)

IN root rank in comm of root node (integer)

IN comm intracommunicator over which call is collective (handle)

OUT newcomm intercommunicator with client as remote group (handle)

int MPI\_Comm\_accept(char \*port\_name, MPI\_Info info, int root, MPI\_Comm comm, MPI\_Comm \*newcomm)

MPI\_COMM\_ACCEPT(PORT\_NAME, INFO, ROOT, COMM, NEWCOMM, IERROR)

CHARACTER\*(\*) PORT\_NAME

INTEGER INFO, ROOT, COMM, NEWCOMM, IERROR

{MPI::Intercomm MPI::Intracomm::Accept(const char\* port\_name, const MPI::Info& info, int root) const (*binding deprecated, see Section 15.2*) }

MPI\_COMM\_ACCEPT establishes communication with a client. It is collective over the calling communicator. It returns an intercommunicator that allows communication with the client.

The port\_name must have been established through a call to MPI\_OPEN\_PORT.

info is a implementation-defined string that may allow fine control over the ACCEPT call.

ticket150.  
ticket150.

ticket150.  
ticket150.

### 10.4.3 Client Routines

There is only one routine on the client side.

`MPI_COMM_CONNECT(port_name, info, root, comm, newcomm)`

IN	<code>port_name</code>	network address (string, used only on root)
IN	<code>info</code>	implementation-dependent information (handle, used only on root)
IN	<code>root</code>	rank in <code>comm</code> of root node (integer)
IN	<code>comm</code>	intracommunicator over which call is collective (handle)
OUT	<code>newcomm</code>	intercommunicator with server as remote group (handle)

```
int MPI_Comm_connect(char *port_name, MPI_Info info, int root,
                    MPI_Comm comm, MPI_Comm *newcomm)
```

```
MPI_COMM_CONNECT(PORT_NAME, INFO, ROOT, COMM, NEWCOMM, IERROR)
    CHARACTER*(*) PORT_NAME
    INTEGER INFO, ROOT, COMM, NEWCOMM, IERROR
```

```
{MPI::Intercomm MPI::Intracomm::Connect(const char* port_name,
    const MPI::Info& info, int root) const (binding deprecated, see
    Section 15.2) }
```

This routine establishes communication with a server specified by `port_name`. It is collective over the calling communicator and returns an intercommunicator in which the remote group participated in an `MPI_COMM_ACCEPT`.

If the named port does not exist (or has been closed), `MPI_COMM_CONNECT` raises an error of class `MPI_ERR_PORT`.

If the port exists, but does not have a pending `MPI_COMM_ACCEPT`, the connection attempt will eventually time out after an implementation-defined time, or succeed when the server calls `MPI_COMM_ACCEPT`. In the case of a time out, `MPI_COMM_CONNECT` raises an error of class `MPI_ERR_PORT`.

*Advice to implementors.* The time out period may be arbitrarily short or long. However, a high quality implementation will try to queue connection attempts so that a server can handle simultaneous requests from several clients. A high quality implementation may also provide a mechanism, through the `info` arguments to `MPI_OPEN_PORT`, `MPI_COMM_ACCEPT` and/or `MPI_COMM_CONNECT`, for the user to control timeout and queuing behavior. (*End of advice to implementors.*)

`MPI` provides no guarantee of fairness in servicing connection attempts. That is, connection attempts are not necessarily satisfied in the order they were initiated and competition from other connection attempts may prevent a particular connection attempt from being satisfied.

`port_name` is the address of the server. It must be the same as the name returned by `MPI_OPEN_PORT` on the server. Some freedom is allowed here. If there are equivalent

forms of `port_name`, an implementation may accept them as well. For instance, if `port_name` is (hostname:port), an implementation may accept (ip\_address:port) as well.

#### 10.4.4 Name Publishing

The routines in this section provide a mechanism for publishing names. A (`service_name`, `port_name`) pair is published by the server, and may be retrieved by a client using the `service_name` only. An MPI implementation defines the *scope* of the `service_name`, that is, the domain over which the `service_name` can be retrieved. If the domain is the empty set, that is, if no client can retrieve the information, then we say that name publishing is not supported. Implementations should document how the scope is determined. High-quality implementations will give some control to users through the `info` arguments to name publishing functions. Examples are given in the descriptions of individual functions.

`MPI_PUBLISH_NAME(service_name, info, port_name)`

IN	<code>service_name</code>	a service name to associate with the port (string)
IN	<code>info</code>	implementation-specific information (handle)
IN	<code>port_name</code>	a port name (string)

`int MPI_Publish_name(char *service_name, MPI_Info info, char *port_name)`

`MPI_PUBLISH_NAME(SERVICE_NAME, INFO, PORT_NAME, IERROR)`

INTEGER `INFO`, `IERROR`

CHARACTER\*(\*) `SERVICE_NAME`, `PORT_NAME`

```
{void MPI::Publish_name(const char* service_name, const MPI::Info& info,
    const char* port_name) (binding deprecated, see Section 15.2) }
```

This routine publishes the pair (`port_name`, `service_name`) so that an application may retrieve a system-supplied `port_name` using a well-known `service_name`.

The implementation must define the *scope* of a published service name, that is, the domain over which the service name is unique, and conversely, the domain over which the (port name, service name) pair may be retrieved. For instance, a service name may be unique to a job (where job is defined by a distributed operating system or batch scheduler), unique to a machine, or unique to a Kerberos realm. The scope may depend on the `info` argument to `MPI_PUBLISH_NAME`.

MPI permits publishing more than one `service_name` for a single `port_name`. On the other hand, if `service_name` has already been published within the scope determined by `info`, the behavior of `MPI_PUBLISH_NAME` is undefined. An MPI implementation may, through a mechanism in the `info` argument to `MPI_PUBLISH_NAME`, provide a way to allow multiple servers with the same service in the same scope. In this case, an implementation-defined policy will determine which of several port names is returned by `MPI_LOOKUP_NAME`.

Note that while `service_name` has a limited scope, determined by the implementation, `port_name` always has global scope within the communication universe used by the implementation (i.e., it is globally unique).

`port_name` should be the name of a port established by `MPI_OPEN_PORT` and not yet deleted by `MPI_CLOSE_PORT`. If it is not, the result is undefined.

*Advice to implementors.* In some cases, an MPI implementation may use a name service that a user can also access directly. In this case, a name published by MPI could easily conflict with a name published by a user. In order to avoid such conflicts, MPI implementations should mangle service names so that they are unlikely to conflict with user code that makes use of the same service. Such name mangling will of course be completely transparent to the user.

The following situation is problematic but unavoidable, if we want to allow implementations to use nameservers. Suppose there are multiple instances of “ocean” running on a machine. If the scope of a service name is confined to a job, then multiple oceans can coexist. If an implementation provides site-wide scope, however, multiple instances are not possible as all calls to MPI\_PUBLISH\_NAME after the first may fail. There is no universal solution to this.

To handle these situations, a high-quality implementation should make it possible to limit the domain over which names are published. (*End of advice to implementors.*)

```
MPI_UNPUBLISH_NAME(service_name, info, port_name)
```

```
IN      service_name      a service name (string)
```

```
IN      info              implementation-specific information (handle)
```

```
IN      port_name         a port name (string)
```

```
int MPI_Unpublish_name(char *service_name, MPI_Info info, char *port_name)
```

```
MPI_UNPUBLISH_NAME(SERVICE_NAME, INFO, PORT_NAME, IERROR)
```

```
INTEGER INFO, IERROR
```

```
CHARACTER*(*) SERVICE_NAME, PORT_NAME
```

```
{void MPI::Unpublish_name(const char* service_name, const MPI::Info& info,
    const char* port_name) (binding deprecated, see Section 15.2) }
```

This routine unpublishes a service name that has been previously published. Attempting to unpublish a name that has not been published or has already been unpublished is erroneous and is indicated by the error class MPI\_ERR\_SERVICE.

All published names must be unpublished before the corresponding port is closed and before the publishing process exits. The behavior of MPI\_UNPUBLISH\_NAME is implementation dependent when a process tries to unpublish a name that it did not publish.

If the info argument was used with MPI\_PUBLISH\_NAME to tell the implementation how to publish names, the implementation may require that info passed to MPI\_UNPUBLISH\_NAME contain information to tell the implementation how to unpublish a name.

```
MPI_LOOKUP_NAME(service_name, info, port_name)
```

```
IN      service_name      a service name (string)
IN      info               implementation-specific information (handle)
OUT     port_name          a port name (string)
```

```
int MPI_Lookup_name(char *service_name, MPI_Info info, char *port_name)
```

```
MPI_LOOKUP_NAME(SERVICE_NAME, INFO, PORT_NAME, IERROR)
```

```
CHARACTER*(*) SERVICE_NAME, PORT_NAME
```

```
INTEGER INFO, IERROR
```

```
{void MPI::Lookup_name(const char* service_name, const MPI::Info& info,
    char* port_name) (binding deprecated, see Section 15.2) }
```

This function retrieves a `port_name` published by `MPI_PUBLISH_NAME` with `service_name`. If `service_name` has not been published, it raises an error in the error class `MPI_ERR_NAME`. The application must supply a `port_name` buffer large enough to hold the largest possible port name (see discussion above under `MPI_OPEN_PORT`).

If an implementation allows multiple entries with the same `service_name` within the same scope, a particular `port_name` is chosen in a way determined by the implementation.

If the `info` argument was used with `MPI_PUBLISH_NAME` to tell the implementation how to publish names, a similar `info` argument may be required for `MPI_LOOKUP_NAME`.

#### 10.4.5 Reserved Key Values

The following key values are reserved. An implementation is not required to interpret these key values, but if it does interpret the key value, it must provide the functionality described.

`ip_port` Value contains IP port number at which to establish a `port`. (Reserved for `MPI_OPEN_PORT` only).

`ip_address` Value contains IP address at which to establish a `port`. If the address is not a valid IP address of the host on which the `MPI_OPEN_PORT` call is made, the results are undefined. (Reserved for `MPI_OPEN_PORT` only).

#### 10.4.6 Client/Server Examples

Simplest Example — Completely Portable.

The following example shows the simplest way to use the client/server interface. It does not use service names at all.

On the server side:

```
char myport[MPI_MAX_PORT_NAME];
MPI_Comm intercomm;
/* ... */
MPI_Open_port(MPI_INFO_NULL, myport);
printf("port name is: %s\n", myport);
```

```

1      MPI_Comm_accept(myport, MPI_INFO_NULL, 0, MPI_COMM_SELF, &intercomm);
2      /* do something with intercomm */

```

The server prints out the port name to the terminal and the user must type it in when starting up the client (assuming the MPI implementation supports stdin such that this works). On the client side:

```

7      MPI_Comm intercomm;
8      char name[MPI_MAX_PORT_NAME];
9      printf("enter port name: ");
10     gets(name);
11     MPI_Comm_connect(name, MPI_INFO_NULL, 0, MPI_COMM_SELF, &intercomm);

```

### Ocean/Atmosphere - Relies on Name Publishing

In this example, the “ocean” application is the “server” side of a coupled ocean-atmosphere climate model. It assumes that the MPI implementation publishes names.

```

19     MPI_Open_port(MPI_INFO_NULL, port_name);
20     MPI_Publish_name("ocean", MPI_INFO_NULL, port_name);

22     MPI_Comm_accept(port_name, MPI_INFO_NULL, 0, MPI_COMM_SELF, &intercomm);
23     /* do something with intercomm */
24     MPI_Unpublish_name("ocean", MPI_INFO_NULL, port_name);

```

On the client side:

```

28     MPI_Lookup_name("ocean", MPI_INFO_NULL, port_name);
29     MPI_Comm_connect( port_name, MPI_INFO_NULL, 0, MPI_COMM_SELF,
30                      &intercomm);

```

### Simple Client-Server Example.

This is a simple example; the server accepts only a single connection at a time and serves that connection until the client requests to be disconnected. The server is a single process.

Here is the server. It accepts a single connection and then processes data until it receives a message with tag 1. A message with tag 0 tells the server to exit.

```

38     #include "mpi.h"
39     int main( int argc, char **argv )
40     {
41
42         MPI_Comm client;
43         MPI_Status status;
44         char port_name[MPI_MAX_PORT_NAME];
45         double buf[MAX_DATA];
46         int    size, again;

47
48         MPI_Init( &argc, &argv );

```



```

MPI_Comm_size(MPI_COMM_WORLD, &size);
if (size != 1) error(FATAL, "Server too big");
MPI_Open_port(MPI_INFO_NULL, port_name);
printf("server available at %s\n", port_name);
while (1) {
    MPI_Comm_accept( port_name, MPI_INFO_NULL, 0, MPI_COMM_WORLD,
                    &client );
    again = 1;
    while (again) {
        MPI_Recv( buf, MAX_DATA, MPI_DOUBLE,
                  MPI_ANY_SOURCE, MPI_ANY_TAG, client, &status );
        switch (status.MPI_TAG) {
            case 0: MPI_Comm_free( &client );
                   MPI_Close_port(port_name);
                   MPI_Finalize();
                   return 0;
            case 1: MPI_Comm_disconnect( &client );
                   again = 0;
                   break;
            case 2: /* do something */
            ...
            default:
                   /* Unexpected message type */
                   MPI_Abort( MPI_COMM_WORLD, 1 );
        }
    }
}

```

Here is the client.

```

#include "mpi.h"
int main( int argc, char **argv )
{
    MPI_Comm server;
    double buf[MAX_DATA];
    char port_name[MPI_MAX_PORT_NAME];

    MPI_Init( &argc, &argv );
    strcpy(port_name, argv[1] ); /* assume server's name is cmd-line arg */

    MPI_Comm_connect( port_name, MPI_INFO_NULL, 0, MPI_COMM_WORLD,
                     &server );

    while (!done) {
        tag = 2; /* Action to perform */
        MPI_Send( buf, n, MPI_DOUBLE, 0, tag, server );
        /* etc */
    }
}

```

```

1      }
2      MPI_Send( buf, 0, MPI_DOUBLE, 0, 1, server );
3      MPI_Comm_disconnect( &server );
4      MPI_Finalize();
5      return 0;
6  }

```

## 10.5 Other Functionality

### 10.5.1 Universe Size

Many “dynamic” MPI applications are expected to exist in a static runtime environment, in which resources have been allocated before the application is run. When a user (or possibly a batch system) runs one of these quasi-static applications, she will usually specify a number of processes to start and a total number of processes that are expected. An application simply needs to know how many slots there are, i.e., how many processes it should spawn.

MPI provides an attribute on `MPI_COMM_WORLD`, `MPI_UNIVERSE_SIZE`, that allows the application to obtain this information in a portable manner. This attribute indicates the total number of processes that are expected. In Fortran, the attribute is the integer value. In C, the attribute is a pointer to the integer value. An application typically subtracts the size of `MPI_COMM_WORLD` from `MPI_UNIVERSE_SIZE` to find out how many processes it should spawn. `MPI_UNIVERSE_SIZE` is initialized in `MPI_INIT` and is not changed by MPI. If defined, it has the same value on all processes of `MPI_COMM_WORLD`. `MPI_UNIVERSE_SIZE` is determined by the application startup mechanism in a way not specified by MPI. (The size of `MPI_COMM_WORLD` is another example of such a parameter.)

Possibilities for how `MPI_UNIVERSE_SIZE` might be set include

- A `-universe_size` argument to a program that starts MPI processes.
- Automatic interaction with a batch scheduler to figure out how many processors have been allocated to an application.
- An environment variable set by the user.
- Extra information passed to `MPI_COMM_SPAWN` through the `info` argument.

An implementation must document how `MPI_UNIVERSE_SIZE` is set. An implementation may not support the ability to set `MPI_UNIVERSE_SIZE`, in which case the attribute `MPI_UNIVERSE_SIZE` is not set.

`MPI_UNIVERSE_SIZE` is a recommendation, not necessarily a hard limit. For instance, some implementations may allow an application to spawn 50 processes per processor, if they are requested. However, it is likely that the user only wants to spawn one process per processor.

`MPI_UNIVERSE_SIZE` is assumed to have been specified when an application was started, and is in essence a portable mechanism to allow the user to pass to the application (through the MPI process startup mechanism, such as `mpiexec`) a piece of critical runtime information. Note that no interaction with the runtime environment is required. If the runtime environment changes size while an application is running, `MPI_UNIVERSE_SIZE` is not updated, and the application must find out about the change through direct communication with the runtime system.

### 10.5.2 Singleton MPI\_INIT

A high-quality implementation will allow any process (including those not started with a “parallel application” mechanism) to become an MPI process by calling MPI\_INIT. Such a process can then connect to other MPI processes using the MPI\_COMM\_ACCEPT and MPI\_COMM\_CONNECT routines, or spawn other MPI processes. MPI does not mandate this behavior, but strongly encourages it where technically feasible.

*Advice to implementors.* To start MPI processes belonging to the same MPI\_COMM\_WORLD requires some special coordination. The processes must be started at the “same” time, they must have a mechanism to establish communication, etc. Either the user or the operating system must take special steps beyond simply starting processes.

When an application enters MPI\_INIT, clearly it must be able to determine if these special steps were taken. If a process enters MPI\_INIT and determines that no special steps were taken (i.e., it has not been given the information to form an MPI\_COMM\_WORLD with other processes) it succeeds and forms a singleton MPI program, that is, one in which MPI\_COMM\_WORLD has size 1.

In some implementations, MPI may not be able to function without an “MPI environment.” For example, MPI may require that daemons be running or MPI may not be able to work at all on the front-end of an MPP. In this case, an MPI implementation may either

1. Create the environment (e.g., start a daemon) or
2. Raise an error if it cannot create the environment and the environment has not been started independently.

A high-quality implementation will try to create a singleton MPI process and not raise an error.

*(End of advice to implementors.)*

### 10.5.3 MPI\_APPNUM

There is a predefined attribute MPI\_APPNUM of MPI\_COMM\_WORLD. In Fortran, the attribute is an integer value. In C, the attribute is a pointer to an integer value. If a process was spawned with MPI\_COMM\_SPAWN\_MULTIPLE, MPI\_APPNUM is the command number that generated the current process. Numbering starts from zero. If a process was spawned with MPI\_COMM\_SPAWN, it will have MPI\_APPNUM equal to zero.

Additionally, if the process was not started by a spawn call, but by an implementation-specific startup mechanism that can handle multiple process specifications, MPI\_APPNUM should be set to the number of the corresponding process specification. In particular, if it is started with

```
mpiexec spec0 [: spec1 : spec2 : ...]
```

MPI\_APPNUM should be set to the number of the corresponding specification.

If an application was not spawned with MPI\_COMM\_SPAWN or MPI\_COMM\_SPAWN\_MULTIPLE, and MPI\_APPNUM doesn’t make sense in the context of the implementation-specific startup mechanism, MPI\_APPNUM is not set.

MPI implementations may optionally provide a mechanism to override the value of `MPI_APPNUM` through the `info` argument. MPI reserves the following key for all `SPAWN` calls.

**appnum** Value contains an integer that overrides the default value for `MPI_APPNUM` in the child.

*Rationale.* When a single application is started, it is able to figure out how many processes there are by looking at the size of `MPI_COMM_WORLD`. An application consisting of multiple SPMD sub-applications has no way to find out how many sub-applications there are and to which sub-application the process belongs. While there are ways to figure it out in special cases, there is no general mechanism. `MPI_APPNUM` provides such a general mechanism. (*End of rationale.*)

#### 10.5.4 Releasing Connections

Before a client and server connect, they are independent MPI applications. An error in one does not affect the other. After establishing a connection with `MPI_COMM_CONNECT` and `MPI_COMM_ACCEPT`, an error in one may affect the other. It is desirable for a client and server to be able to disconnect, so that an error in one will not affect the other. Similarly, it might be desirable for a parent and child to disconnect, so that errors in the child do not affect the parent, or vice-versa.

- Two processes are **connected** if there is a communication path (direct or indirect) between them. More precisely:
  1. Two processes are connected if
    - (a) they both belong to the same communicator (inter- or intra-, including `MPI_COMM_WORLD`) *or*
    - (b) they have previously belonged to a communicator that was freed with `MPI_COMM_FREE` instead of `MPI_COMM_DISCONNECT` *or*
    - (c) they both belong to the group of the same window or filehandle.
  2. If A is connected to B and B to C, then A is connected to C.
- Two processes are **disconnected** (also **independent**) if they are not connected.
- By the above definitions, connectivity is a transitive property, and divides the universe of MPI processes into disconnected (independent) sets (equivalence classes) of processes.
- Processes which are connected, but don't share the same `MPI_COMM_WORLD` may become disconnected (independent) if the communication path between them is broken by using `MPI_COMM_DISCONNECT`.

The following additional rules apply to MPI routines in other chapters:

- `MPI_FINALIZE` is collective over a set of connected processes.
- `MPI_ABORT` does not abort independent processes. It may abort all processes in the caller's `MPI_COMM_WORLD` (ignoring its `comm` argument). Additionally, it may abort connected processes as well, though it makes a "best attempt" to abort only the processes in `comm`.

- If a process terminates without calling `MPI_FINALIZE`, independent processes are not affected but the effect on connected processes is not defined.

`MPI_COMM_DISCONNECT(comm)`

INOUT      `comm`                                  communicator (handle)

`int MPI_Comm_disconnect(MPI_Comm *comm)`

`MPI_COMM_DISCONNECT(COMM, IERROR)`

INTEGER `COMM`, `IERROR`

`{void MPI::Comm::Disconnect() (binding deprecated, see Section 15.2) }`

This function waits for all pending communication on `comm` to complete internally, deallocates the communicator object, and sets the handle to `MPI_COMM_NULL`. It is a collective operation.

It may not be called with the communicator `MPI_COMM_WORLD` or `MPI_COMM_SELF`.

`MPI_COMM_DISCONNECT` may be called only if all communication is complete and matched, so that buffered data can be delivered to its destination. This requirement is the same as for `MPI_FINALIZE`.

`MPI_COMM_DISCONNECT` has the same action as `MPI_COMM_FREE`, except that it waits for pending communication to finish internally and enables the guarantee about the behavior of disconnected processes.

*Advice to users.* To disconnect two processes you may need to call `MPI_COMM_DISCONNECT`, `MPI_WIN_FREE` and `MPI_FILE_CLOSE` to remove all communication paths between the two processes. Notes that it may be necessary to disconnect several communicators (or to free several windows or files) before two processes are completely independent. (*End of advice to users.*)

*Rationale.* It would be nice to be able to use `MPI_COMM_FREE` instead, but that function explicitly does not wait for pending communication to complete. (*End of rationale.*)

### 10.5.5 Another Way to Establish MPI Communication

`MPI_COMM_JOIN(fd, intercomm)`

IN              `fd`                                  socket file descriptor

OUT            `intercomm`                          new intercommunicator (handle)

`int MPI_Comm_join(int fd, MPI_Comm *intercomm)`

`MPI_COMM_JOIN(FD, INTERCOMM, IERROR)`

INTEGER `FD`, `INTERCOMM`, `IERROR`

`{static MPI::Intercomm MPI::Comm::Join(const int fd) (binding deprecated, see`

ticket150.  
ticket150.

*Section 15.2) }*

MPI\_COMM\_JOIN is intended for MPI implementations that exist in an environment supporting the Berkeley Socket interface [33, 37]. Implementations that exist in an environment not supporting Berkeley Sockets should provide the entry point for MPI\_COMM\_JOIN and should return MPI\_COMM\_NULL.

This call creates an intercommunicator from the union of two MPI processes which are connected by a socket. MPI\_COMM\_JOIN should normally succeed if the local and remote processes have access to the same implementation-defined MPI communication universe.

*Advice to users.* An MPI implementation may require a specific communication medium for MPI communication, such as a shared memory segment or a special switch. In this case, it may not be possible for two processes to successfully join even if there is a socket connecting them and they are using the same MPI implementation. (*End of advice to users.*)

*Advice to implementors.* A high-quality implementation will attempt to establish communication over a slow medium if its preferred one is not available. If implementations do not do this, they must document why they cannot do MPI communication over the medium used by the socket (especially if the socket is a TCP connection). (*End of advice to implementors.*)

fd is a file descriptor representing a socket of type SOCK\_STREAM (a two-way reliable byte-stream connection). **Nonblocking** I/O and asynchronous notification via SIGIO must not be enabled for the socket. The socket must be in a connected state. The socket must be quiescent when MPI\_COMM\_JOIN is called (see below). It is the responsibility of the application to create the socket using standard socket API calls.

MPI\_COMM\_JOIN must be called by the process at each end of the socket. It does not return until both processes have called MPI\_COMM\_JOIN. The two processes are referred to as the local and remote processes.

MPI uses the socket to bootstrap creation of the intercommunicator, and for nothing else. Upon return from MPI\_COMM\_JOIN, the file descriptor will be open and quiescent (see below).

If MPI is unable to create an intercommunicator, but is able to leave the socket in its original state, with no pending communication, it succeeds and sets intercomm to MPI\_COMM\_NULL.

The socket must be quiescent before MPI\_COMM\_JOIN is called and after MPI\_COMM\_JOIN returns. More specifically, on entry to MPI\_COMM\_JOIN, a read on the socket will not read any data that was written to the socket before the remote process called MPI\_COMM\_JOIN. On exit from MPI\_COMM\_JOIN, a read will not read any data that was written to the socket before the remote process returned from MPI\_COMM\_JOIN. It is the responsibility of the application to ensure the first condition, and the responsibility of the MPI implementation to ensure the second. In a multithreaded application, the application must ensure that one thread does not access the socket while another is calling MPI\_COMM\_JOIN, or call MPI\_COMM\_JOIN concurrently.

*Advice to implementors.* MPI is free to use any available communication path(s) for MPI messages in the new communicator; the socket is only used for the initial handshaking. (*End of advice to implementors.*)

MPI\_COMM\_JOIN uses non-MPI communication to do its work. The interaction of non-MPI communication with pending MPI communication is not defined. Therefore, the result of calling MPI\_COMM\_JOIN on two connected processes (see Section 10.5.4 on page 348 for the definition of connected) is undefined.

The returned communicator may be used to establish MPI communication with additional processes, through the usual MPI communicator creation mechanisms.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48



# Chapter 11

## One-Sided Communications

### 11.1 Introduction

Remote Memory Access (RMA) extends the communication mechanisms of MPI by allowing one process to specify all communication parameters, both for the sending side and for the receiving side. This mode of communication facilitates the coding of some applications with dynamically changing data access patterns where the data distribution is fixed or slowly changing. In such a case, each process can compute what data it needs to access or update at other processes. However, processes may not know which data in their own memory need to be accessed or updated by remote processes, and may not even know the identity of these processes. Thus, the transfer parameters are all available only on one side. Regular send/receive communication requires matching operations by sender and receiver. In order to issue the matching operations, an application needs to distribute the transfer parameters. This may require all processes to participate in a time consuming global computation, or to periodically poll for potential communication requests to receive and act upon. The use of RMA communication mechanisms avoids the need for global computations or explicit polling. A generic example of this nature is the execution of an assignment of the form  $A = B(\text{map})$ , where  $\text{map}$  is a permutation vector, and  $A$ ,  $B$  and  $\text{map}$  are distributed in the same manner.

Message-passing communication achieves two effects: *communication* of data from sender to receiver; and *synchronization* of sender with receiver. The RMA design separates these two functions. Three communication calls are provided: `MPI_PUT` (remote write), `MPI_GET` (remote read) and `MPI_ACCUMULATE` (remote update). A larger number of synchronization calls are provided that support different synchronization styles. The design is similar to that of weakly coherent memory systems: correct ordering of memory accesses has to be imposed by the user, using synchronization calls; the implementation can delay communication operations until the synchronization calls occur, for efficiency.

The design of the RMA functions allows implementors to take advantage, in many cases, of fast communication mechanisms provided by various platforms, such as coherent or noncoherent shared memory, DMA engines, hardware-supported put/get operations, communication coprocessors, etc. The most frequently used RMA communication mechanisms can be layered on top of message-passing. However, support for asynchronous communication agents (handlers, threads, etc.) is needed, for certain RMA functions, in a distributed memory environment.

We shall denote by **origin** the process that performs the call, and by **target** the

process in which the memory is accessed. Thus, in a put operation, source=origin and destination=target; in a get operation, source=target and destination=origin.

## 11.2 Initialization

### 11.2.1 Window Creation

The initialization operation allows each process in an intracommunicator group to specify, in a collective operation, a “window” in its memory that is made accessible to accesses by remote processes. The call returns an opaque object that represents the group of processes that own and access the set of windows, and the attributes of each window, as specified by the initialization call.

`MPI_WIN_CREATE(base, size, disp_unit, info, comm, win)`

IN	base	initial address of window (choice)
IN	size	size of window in bytes ( <b>non-negative</b> integer)
IN	disp_unit	local unit size for displacements, in bytes (positive integer)
IN	info	info argument (handle)
IN	comm	communicator (handle)
OUT	win	window object returned by the call (handle)

```
int MPI_Win_create(void *base, MPI_Aint size, int disp_unit, MPI_Info info,
                  MPI_Comm comm, MPI_Win *win)
```

```
MPI_WIN_CREATE(BASE, SIZE, DISP_UNIT, INFO, COMM, WIN, IERROR)
```

```
<type> BASE(*)
```

```
INTEGER(KIND=MPI_ADDRESS_KIND) SIZE
```

```
INTEGER DISP_UNIT, INFO, COMM, WIN, IERROR
```

```
{static MPI::Win MPI::Win::Create(const void* base, MPI::Aint size, int
                                disp_unit, const MPI::Info& info, const MPI::Intracomm& comm)
    (binding deprecated, see Section 15.2) }
```

This is a collective call executed by all processes in the group of `comm`. It returns a window object that can be used by these processes to perform RMA operations. Each process specifies a window of existing memory that it exposes to RMA accesses by the processes in the group of `comm`. The window consists of `size` bytes, starting at address `base`. A process may elect to expose no memory by specifying `size = 0`.

The displacement unit argument is provided to facilitate address arithmetic in RMA operations: the target displacement argument of an RMA operation is scaled by the factor `disp_unit` specified by the target process, at window creation.

*Rationale.* The window size is specified using an address sized integer, so as to allow windows that span more than 4 GB of address space. (Even if the physical memory size is less than 4 GB, the address range may be larger than 4 GB, if addresses are not contiguous.) (*End of rationale.*)

*Advice to users.* Common choices for `disp_unit` are 1 (no scaling), and (in C syntax) `sizeof(type)`, for a window that consists of an array of elements of type `type`. The later choice will allow one to use array indices in RMA calls, and have those scaled correctly to byte displacements, even in a heterogeneous environment. (*End of advice to users.*)

The `info` argument provides optimization hints to the runtime about the expected usage pattern of the window. The following info key is predefined:

`no_locks` — if set to true, then the implementation may assume that the local window is never locked (by a call to `MPI_WIN_LOCK`). This implies that this window is not used for 3-party communication, and RMA can be implemented with no (less) asynchronous agent activity at this process.

The various processes in the group of `comm` may specify completely different target windows, in location, size, displacement units and info arguments. As long as all the get, put and accumulate accesses to a particular process fit their specific target window this should pose no problem. The same area in memory may appear in multiple windows, each associated with a different window object. However, concurrent communications to distinct, overlapping windows may lead to erroneous results.

*Advice to users.* A window can be created in any part of the process memory. However, on some systems, the performance of windows in memory allocated by `MPI_ALLOC_MEM` (Section 8.2, page 290) will be better. Also, on some systems, performance is improved when window boundaries are aligned at “natural” boundaries (word, double-word, cache line, page frame, etc.). (*End of advice to users.*)

*Advice to implementors.* In cases where RMA operations use different mechanisms in different memory areas (e.g., load/store in a shared memory segment, and an asynchronous handler in private memory), the `MPI_WIN_CREATE` call needs to figure out which type of memory is used for the window. To do so, MPI maintains, internally, the list of memory segments allocated by `MPI_ALLOC_MEM`, or by other, implementation specific, mechanisms, together with information on the type of memory segment allocated. When a call to `MPI_WIN_CREATE` occurs, then MPI checks which segment contains each window, and decides, accordingly, which mechanism to use for RMA operations.

[ Vendors may provide additional, implementation-specific mechanisms to allow “good” memory to be used for static variables. ] Vendors may provide additional, implementation-specific mechanisms to allocate or to specify memory regions that are preferable for use in one-sided communication. In particular, such mechanisms can be used to place static variables into such preferred regions.

Implementors should document any performance impact of window alignment. (*End of advice to implementors.*)

`MPI_WIN_FREE(win)`

INOUT      win                      window object (handle)

```
1 int MPI_Win_free(MPI_Win *win)
```

```
2 MPI_WIN_FREE(WIN, IERROR)
```

```
3 INTEGER WIN, IERROR
```

```
4 {void MPI::Win::Free() (binding deprecated, see Section 15.2) }
```

Frees the window object `win` and returns a null handle (equal to `MPI_WIN_NULL`). This is a collective call executed by all processes in the group associated with `win`. `MPI_WIN_FREE(win)` can be invoked by a process only after it has completed its involvement in RMA communications on window `win`: i.e., the process has called `MPI_WIN_FENCE`, or called `MPI_WIN_WAIT` to match a previous call to `MPI_WIN_POST` or called `MPI_WIN_COMPLETE` to match a previous call to `MPI_WIN_START` or called `MPI_WIN_UNLOCK` to match a previous call to `MPI_WIN_LOCK`. When the call returns, the window memory can be freed.

*Advice to implementors.* `MPI_WIN_FREE` requires a barrier synchronization: no process can return from free until all processes in the group of `win` called free. This, to ensure that no process will attempt to access a remote window (e.g., with lock/unlock) after it was freed. (*End of advice to implementors.*)

### 11.2.2 Window Attributes

The following three attributes are cached with a window, when the window is created.

<code>MPI_WIN_BASE</code>	window base address.
<code>MPI_WIN_SIZE</code>	window size, in bytes.
<code>MPI_WIN_DISP_UNIT</code>	displacement unit associated with the window.

In C, calls to `MPI_Win_get_attr(win, MPI_WIN_BASE, &base, &flag)`, `MPI_Win_get_attr(win, MPI_WIN_SIZE, &size, &flag)` and `MPI_Win_get_attr(win, MPI_WIN_DISP_UNIT, &disp_unit, &flag)` will return in `base` a pointer to the start of the window `win`, and will return in `size` and `disp_unit` pointers to the size and displacement unit of the window, respectively. And similarly, in C++.

In Fortran, calls to `MPI_WIN_GET_ATTR(win, MPI_WIN_BASE, base, flag, ierror)`, `MPI_WIN_GET_ATTR(win, MPI_WIN_SIZE, size, flag, ierror)` and `MPI_WIN_GET_ATTR(win, MPI_WIN_DISP_UNIT, disp_unit, flag, ierror)` will return in `base`, `size` and `disp_unit` the (integer representation of) the base address, the size and the displacement unit of the window `win`, respectively. (The window attribute access functions are defined in Section 6.7.3, page 246.)

The other “window attribute,” namely the group of processes attached to the window, can be retrieved using the call below.

```
42 MPI_WIN_GET_GROUP(win, group)
```

IN	<code>win</code>	window object (handle)
OUT	<code>group</code>	group of processes which share access to the window (handle)

```
48 int MPI_Win_get_group(MPI_Win win, MPI_Group *group)
```

```
MPI_WIN_GET_GROUP(WIN, GROUP, IERROR)
```

```
INTEGER WIN, GROUP, IERROR
```

```
{MPI::Group MPI::Win::Get_group() const (binding deprecated, see Section 15.2) }
```

MPI\_WIN\_GET\_GROUP returns a duplicate of the group of the communicator used to create the window. associated with win. The group is returned in group.

## 11.3 Communication Calls

MPI supports three RMA communication calls: MPI\_PUT transfers data from the caller memory (origin) to the target memory; MPI\_GET transfers data from the target memory to the caller memory; and MPI\_ACCUMULATE updates locations in the target memory, e.g. by adding to these locations values sent from the caller memory. These operations are *nonblocking*: the call initiates the transfer, but the transfer may continue after the call returns. The transfer is completed, both at the origin and at the target, when a subsequent *synchronization* call is issued by the caller on the involved window object. These synchronization calls are described in Section 11.4, page 366.

The local communication buffer of an RMA call should not be updated, and the local communication buffer of a get call should not be accessed after the RMA call, until the subsequent synchronization call completes.

*Rationale.* The rule above is more lenient than for message-passing, where we do not allow two concurrent sends, with overlapping send buffers. Here, we allow two concurrent puts with overlapping send buffers. The reasons for this relaxation are

1. Users do not like that restriction, which is not very natural (it prohibits concurrent reads).
2. Weakening the rule does not prevent efficient implementation, as far as we know.
3. Weakening the rule is important for performance of RMA: we want to associate one synchronization call with as many RMA operations is possible. If puts from overlapping buffers cannot be concurrent, then we need to needlessly add synchronization points in the code.

*(End of rationale.)*

It is erroneous to have concurrent conflicting accesses to the same memory location in a window; if a location is updated by a put or accumulate operation, then this location cannot be accessed by a load or another RMA operation until the updating operation has completed at the target. There is one exception to this rule; namely, the same location can be updated by several concurrent accumulate calls, the outcome being as if these updates occurred in some order. In addition, a window cannot concurrently be updated by a put or accumulate operation and by a local store operation. This, even if these two updates access different locations in the window. The last restriction enables more efficient implementations of RMA operations on many systems. These restrictions are described in more detail in Section 11.7, page 382.

The calls use general datatype arguments to specify communication buffers at the origin and at the target. Thus, a transfer operation may also gather data at the source and scatter

it at the destination. However, all arguments specifying both communication buffers are provided by the caller.

For all three calls, the target process may be identical with the origin process; i.e., a process may use an RMA operation to move data in its memory.

*Rationale.* The choice of supporting “self-communication” is the same as for message-passing. It simplifies some coding, and is very useful with accumulate operations, to allow atomic updates of local variables. (*End of rationale.*)

MPI\_PROC\_NULL is a valid target rank in the MPI RMA calls MPI\_ACCUMULATE, MPI\_GET, and MPI\_PUT. The effect is the same as for MPI\_PROC\_NULL in MPI point-to-point communication. After any RMA operation with rank MPI\_PROC\_NULL, it is still necessary to finish the RMA epoch with the synchronization method that started the epoch.

### 11.3.1 Put

The execution of a put operation is similar to the execution of a send by the origin process and a matching receive by the target process. The obvious difference is that all arguments are provided by one call — the call executed by the origin process.

MPI\_PUT(origin\_addr, origin\_count, origin\_datatype, target\_rank, target\_disp, target\_count, target\_datatype, win)

IN	origin_addr	initial address of origin buffer (choice)
IN	origin_count	number of entries in origin buffer ( <b>non-negative</b> integer)
IN	origin_datatype	datatype of each entry in origin buffer (handle)
IN	target_rank	rank of target ( <b>non-negative</b> integer)
IN	target_disp	displacement from start of window to target buffer ( <b>non-negative</b> integer)
IN	target_count	number of entries in target buffer ( <b>non-negative</b> integer)
IN	target_datatype	datatype of each entry in target buffer (handle)
IN	win	window object used for communication (handle)

```
int MPI_Put(void *origin_addr, int origin_count, MPI_Datatype
            origin_datatype, int target_rank, MPI_Aint target_disp, int
            target_count, MPI_Datatype target_datatype, MPI_Win win)
```

```
MPI_PUT(ORIGIN_ADDR, ORIGIN_COUNT, ORIGIN_DATATYPE, TARGET_RANK,
        TARGET_DISP, TARGET_COUNT, TARGET_DATATYPE, WIN, IERROR)
<type> ORIGIN_ADDR(*)
INTEGER(KIND=MPI_ADDRESS_KIND) TARGET_DISP
INTEGER ORIGIN_COUNT, ORIGIN_DATATYPE, TARGET_RANK, TARGET_COUNT,
TARGET_DATATYPE, WIN, IERROR
```

```

{void MPI::Win::Put(const void* origin_addr, int origin_count, const
    MPI::Datatype& origin_datatype, int target_rank, MPI::Aint
    target_disp, int target_count, const MPI::Datatype&
    target_datatype) const (binding deprecated, see Section 15.2) }

```

Transfers `origin_count` successive entries of the type specified by the `origin_datatype`, starting at address `origin_addr` on the origin node to the target node specified by the `win`, `target_rank` pair. The data are written in the target buffer at address `target_addr = window_base + target_disp × disp_unit`, where `window_base` and `disp_unit` are the base address and window displacement unit specified at window initialization, by the target process.

The target buffer is specified by the arguments `target_count` and `target_datatype`.

The data transfer is the same as that which would occur if the origin process executed a send operation with arguments `origin_addr`, `origin_count`, `origin_datatype`, `target_rank`, `tag`, `comm`, and the target process executed a receive operation with arguments `target_addr`, `target_count`, `target_datatype`, `source`, `tag`, `comm`, where `target_addr` is the target buffer address computed as explained above, and `comm` is a communicator for the group of `win`.

The communication must satisfy the same constraints as for a similar message-passing communication. The `target_datatype` may not specify overlapping entries in the target buffer. The message sent must fit, without truncation, in the target buffer. Furthermore, the target buffer must fit in the target window.

The `target_datatype` argument is a handle to a datatype object defined at the origin process. However, this object is interpreted at the target process: the outcome is as if the target datatype object was defined at the target process, by the same sequence of calls used to define it at the origin process. The target datatype must contain only relative displacements, not absolute addresses. The same holds for `get` and `accumulate`.

*Advice to users.* The `target_datatype` argument is a handle to a datatype object that is defined at the origin process, even though it defines a data layout in the target process memory. This causes no problems in a homogeneous environment, or in a heterogeneous environment, if only portable datatypes are used (portable datatypes are defined in Section 2.4, page 11).

The performance of a `put` transfer can be significantly affected, on some systems, from the choice of window location and the shape and location of the origin and target buffer: transfers to a target window in memory allocated by `MPI_ALLOC_MEM` may be much faster on shared memory systems; transfers from contiguous buffers will be faster on most, if not all, systems; the alignment of the communication buffers may also impact performance. (*End of advice to users.*)

*Advice to implementors.* A high-quality implementation will attempt to prevent remote accesses to memory outside the window that was exposed by the process. This, both for debugging purposes, and for protection with client-server codes that use RMA. I.e., a high-quality implementation will check, if possible, window bounds on each RMA call, and raise an MPI exception at the origin call if an out-of-bound situation occurred. Note that the condition can be checked at the origin. Of course, the added safety achieved by such checks has to be weighed against the added cost of such checks. (*End of advice to implementors.*)

## 11.3.2 Get

MPI\_GET(origin\_addr, origin\_count, origin\_datatype, target\_rank, target\_disp, target\_count, target\_datatype, win)

OUT	origin_addr	initial address of origin buffer (choice)
IN	origin_count	number of entries in origin buffer ( <b>non-negative</b> integer)
IN	origin_datatype	datatype of each entry in origin buffer (handle)
IN	target_rank	rank of target ( <b>non-negative</b> integer)
IN	target_disp	displacement from window start to the beginning of the target buffer ( <b>non-negative</b> integer)
IN	target_count	number of entries in target buffer ( <b>non-negative</b> integer)
IN	target_datatype	datatype of each entry in target buffer (handle)
IN	win	window object used for communication (handle)

```
int MPI_Get(void *origin_addr, int origin_count, MPI_Datatype
            origin_datatype, int target_rank, MPI_Aint target_disp, int
            target_count, MPI_Datatype target_datatype, MPI_Win win)
```

```
MPI_GET(ORIGIN_ADDR, ORIGIN_COUNT, ORIGIN_DATATYPE, TARGET_RANK,
        TARGET_DISP, TARGET_COUNT, TARGET_DATATYPE, WIN, IERROR)
<type> ORIGIN_ADDR(*)
INTEGER(KIND=MPI_ADDRESS_KIND) TARGET_DISP
INTEGER ORIGIN_COUNT, ORIGIN_DATATYPE, TARGET_RANK, TARGET_COUNT,
TARGET_DATATYPE, WIN, IERROR
```

```
{void MPI::Win::Get(void *origin_addr, int origin_count, const
                    MPI::Datatype& origin_datatype, int target_rank, MPI::Aint
                    target_disp, int target_count, const MPI::Datatype&
                    target_datatype) const (binding deprecated, see Section 15.2) }
```

Similar to MPI\_PUT, except that the direction of data transfer is reversed. Data are copied from the target memory to the origin. The origin\_datatype may not specify overlapping entries in the origin buffer. The target buffer must be contained within the target window, and the copied data must fit, without truncation, in the origin buffer.

## 11.3.3 Examples

**Example 11.1** We show how to implement the generic indirect assignment  $A = B(\text{map})$ , where  $A$ ,  $B$  and  $\text{map}$  have the same distribution, and  $\text{map}$  is a permutation. To simplify, we assume a block distribution with equal size blocks.

```
SUBROUTINE MAPVALS(A, B, map, m, comm, p)
USE MPI
INTEGER m, map(m), comm, p
```



```

REAL A(m), B(m)
1
2
INTEGER otype(p), oindex(m),    & ! used to construct origin datatypes
3
    ttype(p), tindex(m),        & ! used to construct target datatypes
4
    count(p), total(p),         &
5
    win, ierr
6
INTEGER (KIND=MPI_ADDRESS_KIND) lowerbound, sizeofreal
7
8
! This part does the work that depends on the locations of B.
9
! Can be reused while this does not change
10
11
CALL MPI_TYPE_GET_EXTENT(MPI_REAL, lowerbound, sizeofreal, ierr)
12
CALL MPI_WIN_CREATE(B, m*sizeofreal, sizeofreal, MPI_INFO_NULL,    &
13
    comm, win, ierr)
14
15
! This part does the work that depends on the value of map and
16
! the locations of the arrays.
17
! Can be reused while these do not change
18
19
! Compute number of entries to be received from each process
20
21
DO i=1,p
22
    count(i) = 0
23
END DO
24
DO i=1,m
25
    j = map(i)/m+1
26
    count(j) = count(j)+1
27
END DO
28
29
total(1) = 0
30
DO i=2,p
31
    total(i) = total(i-1) + count(i-1)
32
END DO
33
34
DO i=1,p
35
    count(i) = 0
36
END DO
37
38
! compute origin and target indices of entries.
39
! entry i at current process is received from location
40
! k at process (j-1), where map(i) = (j-1)*m + (k-1),
41
! j = 1..p and k = 1..m
42
43
DO i=1,m
44
    j = map(i)/m+1
45
    k = MOD(map(i),m)+1
46
    count(j) = count(j)+1
47
    oindex(total(j) + count(j)) = i
48

```

```

1      tindex(total(j) + count(j)) = k
2  END DO
3
4      ! create origin and target datatypes for each get operation
5  DO i=1,p
6      CALL MPI_TYPE_CREATE_INDEXED_BLOCK(count(i), 1, oindex(total(i)+1), &
7                                          MPI_REAL, otype(i), ierr)
8      CALL MPI_TYPE_COMMIT(otype(i), ierr)
9      CALL MPI_TYPE_CREATE_INDEXED_BLOCK(count(i), 1, tindex(total(i)+1), &
10                                         MPI_REAL, ttype(i), ierr)
11     CALL MPI_TYPE_COMMIT(ttype(i), ierr)
12 END DO
13
14 ! this part does the assignment itself
15 CALL MPI_WIN_FENCE(0, win, ierr)
16 DO i=1,p
17     CALL MPI_GET(A, 1, otype(i), i-1, 0, 1, ttype(i), win, ierr)
18 END DO
19 CALL MPI_WIN_FENCE(0, win, ierr)
20
21 CALL MPI_WIN_FREE(win, ierr)
22 DO i=1,p
23     CALL MPI_TYPE_FREE(otype(i), ierr)
24     CALL MPI_TYPE_FREE(ttype(i), ierr)
25 END DO
26 RETURN
27 END

```

ticket97. **Example 11.2** A simpler version can be written that does not require that a datatype be built for the target buffer. But, one then needs a separate get call for each entry, as illustrated below. This code is much simpler, but usually much less efficient, for large arrays.

```

32      [ MPI-2.1 round-two - changed EXTENT to GET_EXTENT
33
34      %SUBROUTINE MAPVALS(A, B, map, m, comm, p)
35      %USE MPI
36      %INTEGER m, map(m), comm, p
37      %REAL A(m), B(m)
38      %INTEGER win, ierr
39      %INTEGER (KIND=MPI_ADDRESS_KIND) lowerbound, sizeofreal
40      %
41      %CALL MPI_TYPE_GET_EXTENT(MPI_REAL, lowerbound, sizeofreal, ierr)
42      %CALL MPI_WIN_CREATE(B, m*sizeofreal, sizeofreal, MPI_INFO_NULL, &
43                          %      comm, win, ierr)
44      %
45      %CALL MPI_WIN_FENCE(0, win, ierr)
46      %DO i=1,m
47      %    j = map(i)/p
48      %    k = MOD(map(i),p)

```

```

% CALL MPI_GET(A(i), 1, MPI_REAL, j, k, 1, MPI_REAL, win, ierr)
%END DO
%CALL MPI_WIN_FENCE(0, win, ierr)
%CALL MPI_WIN_FREE(win, ierr)
%RETURN
%END
%

MPI-2.1 round-two ]

SUBROUTINE MAPVALS(A, B, map, m, comm, p)
USE MPI
INTEGER m, map(m), comm, p
REAL A(m), B(m)
INTEGER win, ierr
INTEGER (KIND=MPI_ADDRESS_KIND) lowerbound, sizeofreal

CALL MPI_TYPE_GET_EXTENT(MPI_REAL, lowerbound, sizeofreal, ierr)
CALL MPI_WIN_CREATE(B, m*sizeofreal, sizeofreal, MPI_INFO_NULL, &
                    comm, win, ierr)

CALL MPI_WIN_FENCE(0, win, ierr)
DO i=1,m
  j = map(i)/m
  k = MOD(map(i),m)
  CALL MPI_GET(A(i), 1, MPI_REAL, j, k, 1, MPI_REAL, win, ierr)
END DO
CALL MPI_WIN_FENCE(0, win, ierr)
CALL MPI_WIN_FREE(win, ierr)
RETURN
END

```

#### 11.3.4 Accumulate Functions

It is often useful in a put operation to combine the data moved to the target process with the data that resides at that process, rather than replacing the data there. This will allow, for example, the accumulation of a sum by having all involved processes add their contribution to the sum variable in the memory of one process.

```

1 MPI_ACCUMULATE(origin_addr, origin_count, origin_datatype, target_rank, target_disp, tar-
2 get_count, target_datatype, op, win)

```

3	IN	origin_addr	initial address of buffer (choice)	
4				
5	IN	origin_count	number of entries in buffer ( <b>non-negative</b> integer)	ticket74.
6	IN	origin_datatype	datatype of each buffer entry (handle)	
7	IN	target_rank	rank of target ( <b>non-negative</b> integer)	ticket74.
8				
9	IN	target_disp	displacement from start of window to beginning of tar- get buffer ( <b>non-negative</b> integer)	ticket74.
10				
ticket74. 11	IN	target_count	number of entries in target buffer ( <b>non-negative</b> inte- ger)	
12				
13	IN	target_datatype	datatype of each entry in target buffer (handle)	
14				
15	IN	op	reduce operation (handle)	
16	IN	win	window object (handle)	
17				

```

18 int MPI_Accumulate(void *origin_addr, int origin_count,
19                   MPI_Datatype origin_datatype, int target_rank,
20                   MPI_Aint target_disp, int target_count,
21                   MPI_Datatype target_datatype, MPI_Op op, MPI_Win win)
22
23 MPI_ACCUMULATE(ORIGIN_ADDR, ORIGIN_COUNT, ORIGIN_DATATYPE, TARGET_RANK,
24               TARGET_DISP, TARGET_COUNT, TARGET_DATATYPE, OP, WIN, IERROR)
25 <type> ORIGIN_ADDR(*)
26 INTEGER(KIND=MPI_ADDRESS_KIND) TARGET_DISP
27 INTEGER ORIGIN_COUNT, ORIGIN_DATATYPE, TARGET_RANK, TARGET_COUNT,
28 TARGET_DATATYPE, OP, WIN, IERROR

```

```

ticket150. 29 {void MPI::Win::Accumulate(const void* origin_addr, int origin_count, const
30 MPI::Datatype& origin_datatype, int target_rank, MPI::Aint
31 target_disp, int target_count, const MPI::Datatype&
ticket150. 32 target_datatype, const MPI::Op& op) const (binding deprecated, see
33 Section 15.2) }
34

```

Accumulate the contents of the origin buffer (as defined by `origin_addr`, `origin_count` and `origin_datatype`) to the buffer specified by arguments `target_count` and `target_datatype`, at offset `target_disp`, in the target window specified by `target_rank` and `win`, using the operation `op`. This is like `MPI_PUT` except that data is combined into the target area instead of overwriting it.

Any of the predefined operations for `MPI_REDUCE` can be used. User-defined functions cannot be used. For example, if `op` is `MPI_SUM`, each element of the origin buffer is added to the corresponding element in the target, replacing the former value in the target.

Each datatype argument must be a predefined datatype or a derived datatype, where all basic components are of the same predefined datatype. Both datatype arguments must be constructed from the same predefined datatype. The operation `op` applies to elements of that predefined type. `target_datatype` must not specify overlapping entries, and the target buffer must fit in the target window.

A new predefined operation, `MPI_REPLACE`, is defined. It corresponds to the associative function  $f(a, b) = b$ ; i.e., the current value in the target memory is replaced by the value supplied by the origin.

[ MPI-2.1 Ballots 1-4 `MPI_REPLACE`, like the other predefined operations, is defined only for the predefined MPI datatypes.

*Rationale.* The rationale for this is that, for consistency, `MPI_REPLACE` should have the same limitations as the other operations. Extending it to all datatypes doesn't provide any real benefit. (*End of rationale.*)

MPI-2.1 Ballots 1-4 ]

`MPI_REPLACE` can be used only in `MPI_ACCUMULATE`, not in collective reduction operations, such as `MPI_REDUCE` and others.

*Advice to users.* `MPI_PUT` is a special case of `MPI_ACCUMULATE`, with the operation `MPI_REPLACE`. Note, however, that `MPI_PUT` and `MPI_ACCUMULATE` have different constraints on concurrent updates. (*End of advice to users.*)

**Example 11.3** We want to compute  $B(j) = \sum_{\text{map}(i)=j} A(i)$ . The arrays `A`, `B` and `map` are distributed in the same manner. We write the simple version.

[ MPI-2.1 round-two - changed `EXTENT` to `GET_EXTENT`

```
%SUBROUTINE SUM(A, B, map, m, comm, p)
%USE MPI
%INTEGER m, map(m), comm, p, win, ierr
%REAL A(m), B(m)
%INTEGER (KIND=MPI_ADDRESS_KIND) lowerbound, sizeofreal
%
%CALL MPI_TYPE_GET_EXTENT(MPI_REAL, lowerbound, sizeofreal, ierr)
%CALL MPI_WIN_CREATE(B, m*sizeofreal, sizeofreal, MPI_INFO_NULL, &
%
%comm, win, ierr)
%
%CALL MPI_WIN_FENCE(0, win, ierr)
%DO i=1,m
%  j = map(i)/p
%  k = MOD(map(i),p)
%  CALL MPI_ACCUMULATE(A(i), 1, MPI_REAL, j, k, 1, MPI_REAL, &
%
%MPI_SUM, win, ierr)
%END DO
%CALL MPI_WIN_FENCE(0, win, ierr)
%
%CALL MPI_WIN_FREE(win, ierr)
%RETURN
%END
%
```

MPI-2.1 round-two ]

SUBROUTINE SUM(A, B, map, m, comm, p)

```

1  USE MPI
2  INTEGER m, map(m), comm, p, win, ierr
3  REAL A(m), B(m)
4  INTEGER (KIND=MPI_ADDRESS_KIND) lowerbound, sizeofreal
5
6  CALL MPI_TYPE_GET_EXTENT(MPI_REAL, lowerbound, sizeofreal, ierr)
7  CALL MPI_WIN_CREATE(B, m*sizeofreal, sizeofreal, MPI_INFO_NULL, &
8                      comm, win, ierr)
9
10 CALL MPI_WIN_FENCE(0, win, ierr)
11 DO i=1,m
12   j = map(i)/m
13   k = MOD(map(i),m)
14   CALL MPI_ACCUMULATE(A(i), 1, MPI_REAL, j, k, 1, MPI_REAL, &
15                      MPI_SUM, win, ierr)
16 END DO
17 CALL MPI_WIN_FENCE(0, win, ierr)
18
19 CALL MPI_WIN_FREE(win, ierr)
20 RETURN
21 END

```

This code is identical to the code in Example 11.2, page 362, except that a call to `get` has been replaced by a call to `accumulate`. (Note that, if `map` is one-to-one, then the code computes  $B = A(\text{map}^{-1})$ , which is the reverse assignment to the one computed in that previous example.) In a similar manner, we can replace in Example 11.1, page 360, the call to `get` by a call to `accumulate`, thus performing the computation with only one communication between any two processes.

## 11.4 Synchronization Calls

RMA communications fall in two categories:

- **active target** communication, where data is moved from the memory of one process to the memory of another, and both are explicitly involved in the communication. This communication pattern is similar to message passing, except that all the data transfer arguments are provided by one process, and the second process only participates in the synchronization.
- **passive target** communication, where data is moved from the memory of one process to the memory of another, and only the origin process is explicitly involved in the transfer. Thus, two origin processes may communicate by accessing the same location in a target window. The process that owns the target window may be distinct from the two communicating processes, in which case it does not participate explicitly in the communication. This communication paradigm is closest to a shared memory model, where shared data can be accessed by all processes, irrespective of location.

RMA communication calls with argument `win` must occur at a process only within an **access epoch** for `win`. Such an epoch starts with an RMA synchronization call on

win; it proceeds with zero or more RMA communication calls (MPI\_PUT, MPI\_GET or MPI\_ACCUMULATE) on win; it completes with another synchronization call on win. This allows users to amortize one synchronization with multiple data transfers and provide implementors more flexibility in the implementation of RMA operations.

Distinct access epochs for win at the same process must be disjoint. On the other hand, epochs pertaining to different win arguments may overlap. Local operations or other MPI calls may also occur during an epoch.

In active target communication, a target window can be accessed by RMA operations only within an **exposure epoch**. Such an epoch is started and completed by RMA synchronization calls executed by the target process. Distinct exposure epochs at a process on the same window must be disjoint, but such an exposure epoch may overlap with exposure epochs on other windows or with access epochs for the same or other win arguments. There is a one-to-one matching between access epochs at origin processes and exposure epochs on target processes: RMA operations issued by an origin process for a target window will access that target window during the same exposure epoch if and only if they were issued during the same access epoch.

In passive target communication the target process does not execute RMA synchronization calls, and there is no concept of an exposure epoch.

MPI provides three synchronization mechanisms:

1. The MPI\_WIN\_FENCE collective synchronization call supports a simple synchronization pattern that is often used in parallel computations: namely a loosely-synchronous model, where global computation phases alternate with global communication phases. This mechanism is most useful for loosely synchronous algorithms where the graph of communicating processes changes very frequently, or where each process communicates with many others.

This call is used for active target communication. An access epoch at an origin process or an exposure epoch at a target process are started and completed by calls to MPI\_WIN\_FENCE. A process can access windows at all processes in the group of win during such an access epoch, and the local window can be accessed by all processes in the group of win during such an exposure epoch.

2. The four functions MPI\_WIN\_START, MPI\_WIN\_COMPLETE, MPI\_WIN\_POST and MPI\_WIN\_WAIT can be used to restrict synchronization to the minimum: only pairs of communicating processes synchronize, and they do so only when a synchronization is needed to order correctly RMA accesses to a window with respect to local accesses to that same window. This mechanism may be more efficient when each process communicates with few (logical) neighbors, and the communication graph is fixed or changes infrequently.

These calls are used for active target communication. An access epoch is started at the origin process by a call to MPI\_WIN\_START and is terminated by a call to MPI\_WIN\_COMPLETE. The start call has a group argument that specifies the group of target processes for that epoch. An exposure epoch is started at the target process by a call to MPI\_WIN\_POST and is completed by a call to MPI\_WIN\_WAIT. The post call has a group argument that specifies the set of origin processes for that epoch.

3. Finally, shared and exclusive locks are provided by the two functions MPI\_WIN\_LOCK and MPI\_WIN\_UNLOCK. Lock synchronization is useful for MPI applications that

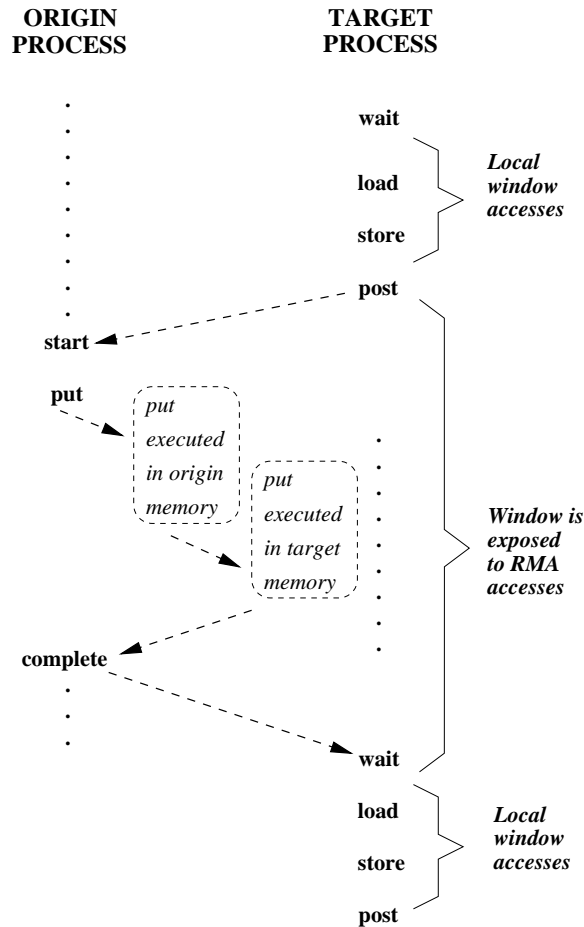


Figure 11.1: Active target communication. Dashed arrows represent synchronizations (ordering of events).

emulate a shared memory model via MPI calls; e.g., in a “billboard” model, where processes can, at random times, access or update different parts of the billboard.

These two calls provide passive target communication. An access epoch is started by a call to `MPI_WIN_LOCK` and terminated by a call to `MPI_WIN_UNLOCK`. Only one target window can be accessed during that epoch with `win`.

Figure 11.1 illustrates the general synchronization pattern for active target communication. The synchronization between **post** and **start** ensures that the **put** call of the origin process does not start until the target process exposes the window (with the **post** call); the target process will expose the window only after preceding local accesses to the window have completed. The synchronization between **complete** and **wait** ensures that the **put** call of the origin process completes before the window is unexposed (with the **wait** call). The target process will execute following local accesses to the target window only after the **wait** returned.

Figure 11.1 shows operations occurring in the natural temporal order implied by the synchronizations: the **post** occurs before the matching **start**, and **complete** occurs before the matching **wait**. However, such **strong** synchronization is more than needed for correct ordering of window accesses. The semantics of MPI calls allow **weak** synchronization, as



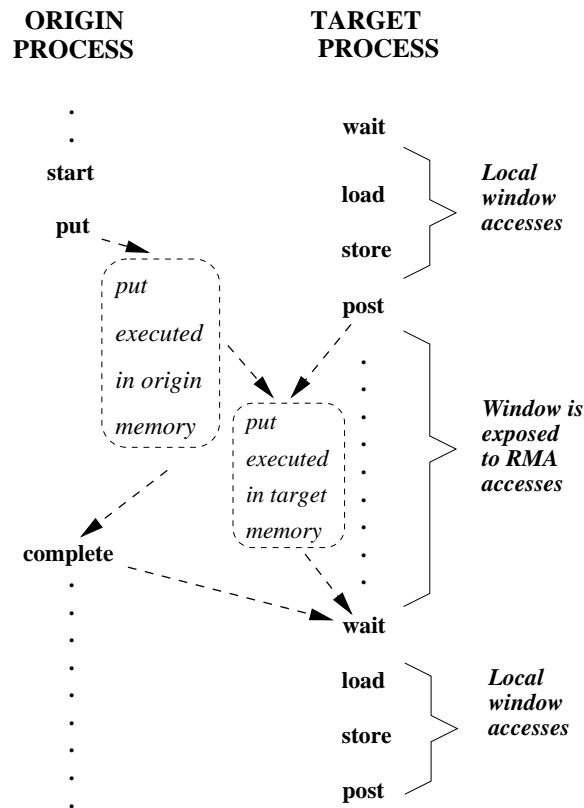


Figure 11.2: Active target communication, with weak synchronization. Dashed arrows represent synchronizations (ordering of events)

illustrated in Figure 11.2. The access to the target window is delayed until the window is exposed, after the **post**. However the **start** may complete earlier; the **put** and **complete** may also terminate earlier, if **put** data is buffered by the implementation. The synchronization calls order correctly window accesses, but do not necessarily synchronize other operations. This weaker synchronization semantic allows for more efficient implementations.

Figure 11.3 illustrates the general synchronization pattern for passive target communication. The first origin process communicates data to the second origin process, through the memory of the target process; the target process is not explicitly involved in the communication. The **lock** and **unlock** calls ensure that the two RMA accesses do not occur concurrently. However, they do *not* ensure that the **put** by origin 1 will precede the **get** by origin 2.

#### 11.4.1 Fence

`MPI_WIN_FENCE(assert, win)`

IN	assert	program assertion (integer)
IN	win	window object (handle)

`int MPI_Win_fence(int assert, MPI_Win win)`

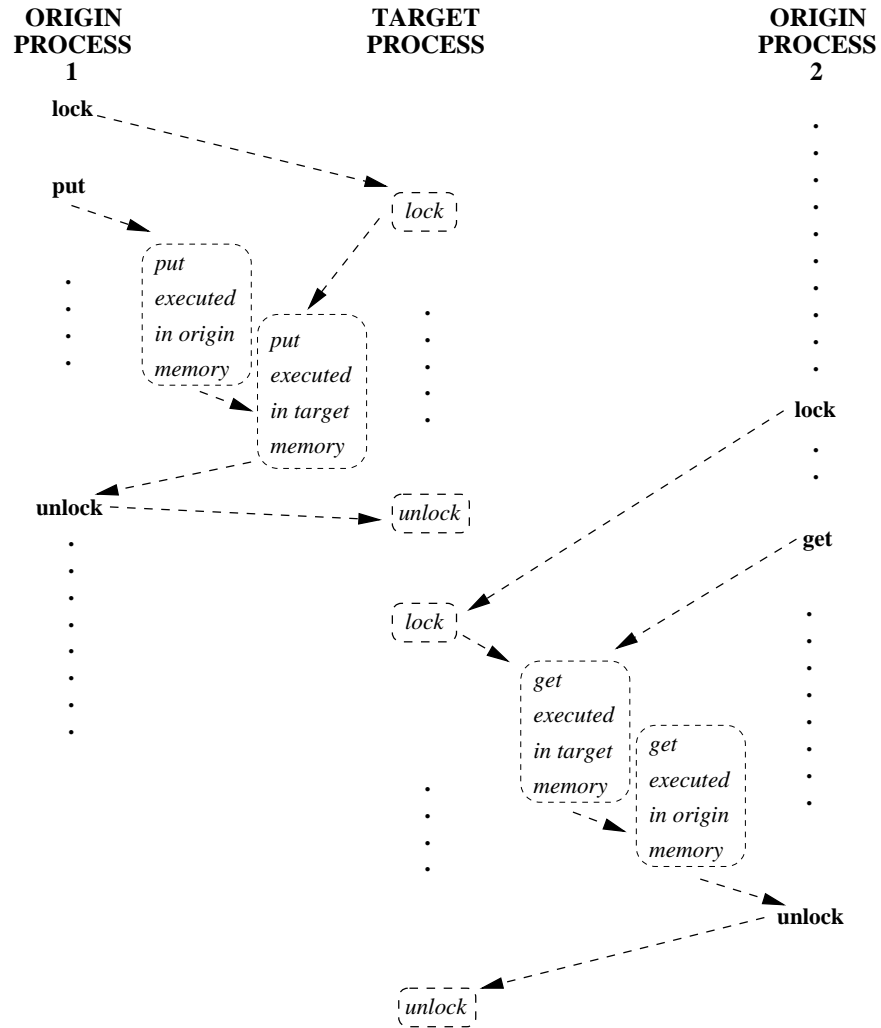


Figure 11.3: Passive target communication. Dashed arrows represent synchronizations (ordering of events).

```
MPI_WIN_FENCE(ASSERT, WIN, IERROR)
```

```
    INTEGER ASSERT, WIN, IERROR
```

```
{void MPI::Win::Fence(int assert) const (binding deprecated, see Section 15.2) }
```

The MPI call MPI\_WIN\_FENCE(assert, win) synchronizes RMA calls on win. The call is collective on the group of win. All RMA operations on win originating at a given process and started before the fence call will complete at that process before the fence call returns. They will be completed at their target before the fence call returns at the target. RMA operations on win started by a process after the fence call returns will access their target window only after MPI\_WIN\_FENCE has been called by the target process.

The call completes an RMA access epoch if it was preceded by another fence call and the local process issued RMA communication calls on win between these two calls. The call completes an RMA exposure epoch if it was preceded by another fence call and the local window was the target of RMA accesses between these two calls. The call starts an RMA access epoch if it is followed by another fence call and by RMA communication calls issued between these two fence calls. The call starts an exposure epoch if it is followed by another fence call and the local window is the target of RMA accesses between these two fence calls. Thus, the fence call is equivalent to calls to a subset of **post**, **start**, **complete**, **wait**.

A fence call usually entails a barrier synchronization: a process completes a call to MPI\_WIN\_FENCE only after all other processes in the group entered their matching call. However, a call to MPI\_WIN\_FENCE that is known not to end any epoch (in particular, a call with assert = MPI\_MODE\_NOPRECEDE) does not necessarily act as a barrier.

The assert argument is used to provide assertions on the context of the call that may be used for various optimizations. This is described in Section 11.4.4. A value of assert = 0 is always valid.

*Advice to users.* Calls to MPI\_WIN\_FENCE should both precede and follow calls to put, get or accumulate that are synchronized with fence calls. (*End of advice to users.*)

#### 11.4.2 General Active Target Synchronization

```
MPI_WIN_START(group, assert, win)
```

```
    IN          group          group of target processes (handle)
```

```
    IN          assert         program assertion (integer)
```

```
    IN          win            window object (handle)
```

```
int MPI_Win_start(MPI_Group group, int assert, MPI_Win win)
```

```
MPI_WIN_START(GROUP, ASSERT, WIN, IERROR)
```

```
    INTEGER GROUP, ASSERT, WIN, IERROR
```

```
{void MPI::Win::Start(const MPI::Group& group, int assert) const (binding deprecated, see Section 15.2) }
```

Starts an RMA access epoch for win. RMA calls issued on win during this epoch must access only windows at processes in group. Each process in group must issue a matching

call to `MPI_WIN_POST`. RMA accesses to each target window will be delayed, if necessary, until the target process executed the matching call to `MPI_WIN_POST`. `MPI_WIN_START` is allowed to block until the corresponding `MPI_WIN_POST` calls are executed, but is not required to.

The `assert` argument is used to provide assertions on the context of the call that may be used for various optimizations. This is described in Section 11.4.4. A value of `assert = 0` is always valid.

`MPI_WIN_COMPLETE(win)`

IN            win                                    window object (handle)

`int MPI_Win_complete(MPI_Win win)`

`MPI_WIN_COMPLETE(WIN, IERROR)`

INTEGER WIN, IERROR

`{void MPI::Win::Complete() const (binding deprecated, see Section 15.2) }`

Completes an RMA access epoch on `win` started by a call to `MPI_WIN_START`. All RMA communication calls issued on `win` during this epoch will have completed at the origin when the call returns.

`MPI_WIN_COMPLETE` enforces completion of preceding RMA calls at the origin, but not at the target. A put or accumulate call may not have completed at the target when it has completed at the origin.

Consider the sequence of calls in the example below.

**Example 11.4** `MPI_Win_start(group, flag, win);`  
`MPI_Put(...,win);`  
`MPI_Win_complete(win);`

The call to `MPI_WIN_COMPLETE` does not return until the put call has completed at the origin; and the target window will be accessed by the put operation only after the call to `MPI_WIN_START` has matched a call to `MPI_WIN_POST` by the target process. This still leaves much choice to implementors. The call to `MPI_WIN_START` can block until the matching call to `MPI_WIN_POST` occurs at all target processes. One can also have implementations where the call to `MPI_WIN_START` is nonblocking, but the call to `MPI_PUT` blocks until the matching call to `MPI_WIN_POST` occurred; or implementations where the first two calls are nonblocking, but the call to `MPI_WIN_COMPLETE` blocks until the call to `MPI_WIN_POST` occurred; or even implementations where all three calls can complete before any target process called `MPI_WIN_POST` — the data put must be buffered, in this last case, so as to allow the put to complete at the origin ahead of its completion at the target. However, once the call to `MPI_WIN_POST` is issued, the sequence above must complete, without further dependencies.

MPI\_WIN\_POST(group, assert, win)

IN	group	group of origin processes (handle)
IN	assert	program assertion (integer)
IN	win	window object (handle)

int MPI\_Win\_post(MPI\_Group group, int assert, MPI\_Win win)

MPI\_WIN\_POST(GROUP, ASSERT, WIN, IERROR)

INTEGER GROUP, ASSERT, WIN, IERROR

*{void MPI::Win::Post(const MPI::Group& group, int assert) const (binding deprecated, see Section 15.2) }*

Starts an RMA exposure epoch for the local window associated with win. Only processes in group should access the window with RMA calls on win during this epoch. Each process in group must issue a matching call to MPI\_WIN\_START. MPI\_WIN\_POST does not block.

MPI\_WIN\_WAIT(win)

IN	win	window object (handle)
----	-----	------------------------

int MPI\_Win\_wait(MPI\_Win win)

MPI\_WIN\_WAIT(WIN, IERROR)

INTEGER WIN, IERROR

*{void MPI::Win::Wait() const (binding deprecated, see Section 15.2) }*

Completes an RMA exposure epoch started by a call to MPI\_WIN\_POST on win. This call matches calls to MPI\_WIN\_COMPLETE(win) issued by each of the origin processes that were granted access to the window during this epoch. The call to MPI\_WIN\_WAIT will block until all matching calls to MPI\_WIN\_COMPLETE have occurred. This guarantees that all these origin processes have completed their RMA accesses to the local window. When the call returns, all these RMA accesses will have completed at the target window.

Figure 11.4 illustrates the use of these four functions. Process 0 puts data in the windows of processes 1 and 2 and process 3 puts data in the window of process 2. Each start call lists the ranks of the processes whose windows will be accessed; each post call lists the ranks of the processes that access the local window. The figure illustrates a possible timing for the events, assuming strong synchronization; in a weak synchronization, the start, put or complete calls may occur ahead of the matching post calls.

MPI\_WIN\_TEST(win, flag)

IN	win	window object (handle)
OUT	flag	success flag (logical)

int MPI\_Win\_test(MPI\_Win win, int \*flag)

MPI\_WIN\_TEST(WIN, FLAG, IERROR)

ticket150.  
ticket150.

ticket150.  
ticket150.

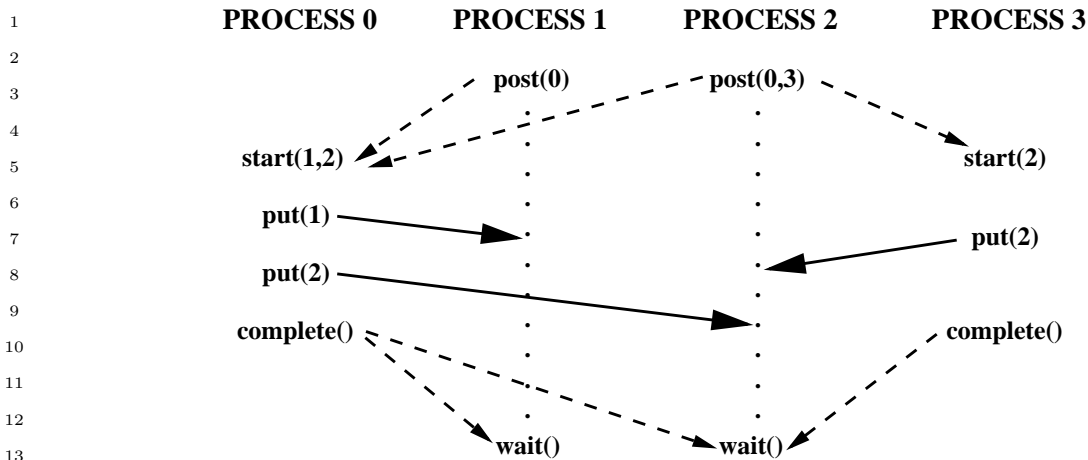


Figure 11.4: Active target communication. Dashed arrows represent synchronizations and solid arrows represent data transfer.

```
INTEGER WIN, IERROR
LOGICAL FLAG
```

```
{bool MPI::Win::Test() const (binding deprecated, see Section 15.2) }
```

This is the nonblocking version of `MPI_WIN_WAIT`. [It returns `flag = true` if `MPI_WIN_WAIT` would return, `flag = false`, otherwise. ]It returns `flag = true` if all accesses to the local window by the group to which it was exposed by the corresponding `MPI_WIN_POST` call have been completed as signalled by matching `MPI_WIN_COMPLETE` calls, and `flag = false` otherwise. In the former case `MPI_WIN_WAIT` would have returned immediately. The effect of return of `MPI_WIN_TEST` with `flag = true` is the same as the effect of a return of `MPI_WIN_WAIT`. If `flag = false` is returned, then the call has no visible effect.

`MPI_WIN_TEST` should be invoked only where `MPI_WIN_WAIT` can be invoked. Once the call has returned `flag = true`, it must not be invoked anew, until the window is posted anew.

Assume that window `win` is associated with a “hidden” communicator `wincomm`, used for communication by the processes of `win`. The rules for matching of post and start calls and for matching complete and wait call can be derived from the rules for matching sends and receives, by considering the following (partial) model implementation.

**`MPI_WIN_POST(group,0,win)`** initiate a nonblocking send with tag `tag0` to each process in `group`, using `wincomm`. No need to wait for the completion of these sends.

**`MPI_WIN_START(group,0,win)`** initiate a nonblocking receive with tag `tag0` from each process in `group`, using `wincomm`. An RMA access to a window in target process `i` is delayed until the receive from `i` is completed.

**`MPI_WIN_COMPLETE(win)`** initiate a nonblocking send with tag `tag1` to each process in the group of the preceding start call. No need to wait for the completion of these sends.

**`MPI_WIN_WAIT(win)`** initiate a nonblocking receive with tag `tag1` from each process in the group of the preceding post call. Wait for the completion of all receives.

No races can occur in a correct program: each of the sends matches a unique receive, and vice-versa.

*Rationale.* The design for general active target synchronization requires the user to provide complete information on the communication pattern, at each end of a communication link: each origin specifies a list of targets, and each target specifies a list of origins. This provides maximum flexibility (hence, efficiency) for the implementor: each synchronization can be initiated by either side, since each “knows” the identity of the other. This also provides maximum protection from possible races. On the other hand, the design requires more information than RMA needs, in general: in general, it is sufficient for the origin to know the rank of the target, but not vice versa. Users that want more “anonymous” communication will be required to use the fence or lock mechanisms. (*End of rationale.*)

*Advice to users.* Assume a communication pattern that is represented by a directed graph  $G = \langle V, E \rangle$ , where  $V = \{0, \dots, n-1\}$  and  $ij \in E$  if origin process  $i$  accesses the window at target process  $j$ . Then each process  $i$  issues a call to `MPI_WIN_POST(ingroupi, ...)`, followed by a call to `MPI_WIN_START(outgroupi, ...)`, where  $outgroup_i = \{j : ij \in E\}$  and  $ingroup_i = \{j : ji \in E\}$ . A call is a noop, and can be skipped, if the group argument is empty. After the communications calls, each process that issued a start will issue a complete. Finally, each process that issued a post will issue a wait.

Note that each process may call with a group argument that has different members. (*End of advice to users.*)

### 11.4.3 Lock

`MPI_WIN_LOCK(lock_type, rank, assert, win)`

IN	lock_type	either <code>MPI_LOCK_EXCLUSIVE</code> or <code>MPI_LOCK_SHARED</code> (state)
IN	rank	rank of locked window ( <b>non-negative</b> integer)
IN	assert	program assertion (integer)
IN	win	window object (handle)

`int MPI_Win_lock(int lock_type, int rank, int assert, MPI_Win win)`

`MPI_WIN_LOCK(LOCK_TYPE, RANK, ASSERT, WIN, IERROR)`

`INTEGER LOCK_TYPE, RANK, ASSERT, WIN, IERROR`

`{void MPI::Win::Lock(int lock_type, int rank, int assert) const` (*binding deprecated, see Section 15.2*) `}`

Starts an RMA access epoch. Only the window at the process with rank `rank` can be accessed by RMA operations on `win` during that epoch.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

ticket74.

ticket150.

ticket150.

```
1 MPI_WIN_UNLOCK(rank, win)
```

```
ticket74. 2 IN rank rank of window (non-negative integer)
```

```
3 IN win window object (handle)
```

```
5
6 int MPI_Win_unlock(int rank, MPI_Win win)
```

```
7 MPI_WIN_UNLOCK(RANK, WIN, IERROR)
```

```
8 INTEGER RANK, WIN, IERROR
```

```
ticket150. 9 {void MPI::Win::Unlock(int rank) const (binding deprecated, see Section 15.2) }
```

```
ticket150. 10
11
12 Completes an RMA access epoch started by a call to MPI_WIN_LOCK(...,win). RMA
13 operations issued during this period will have completed both at the origin and at the target
14 when the call returns.
```

```
15 Locks are used to protect accesses to the locked target window effected by RMA calls
16 issued between the lock and unlock call, and to protect local load/store accesses to a locked
17 local window executed between the lock and unlock call. Accesses that are protected by
18 an exclusive lock will not be concurrent at the window site with other accesses to the same
19 window that are lock protected. Accesses that are protected by a shared lock will not be
20 concurrent at the window site with accesses protected by an exclusive lock to the same
21 window.
```

```
22 It is erroneous to have a window locked and exposed (in an exposure epoch) concur-
23 rently. I.e., a process may not call MPI_WIN_LOCK to lock a target window if the target
24 process has called MPI_WIN_POST and has not yet called MPI_WIN_WAIT; it is erroneous
25 to call MPI_WIN_POST while the local window is locked.
```

```
26
27 Rationale. An alternative is to require MPI to enforce mutual exclusion between
28 exposure epochs and locking periods. But this would entail additional overheads
29 when locks or active target synchronization do not interact in support of those rare
30 interactions between the two mechanisms. The programming style that we encourage
31 here is that a set of windows is used with only one synchronization mechanism at
32 a time, with shifts from one mechanism to another being rare and involving global
33 synchronization. (End of rationale.)
```

```
34
35 Advice to users. Users need to use explicit synchronization code in order to enforce
36 mutual exclusion between locking periods and exposure epochs on a window. (End of
37 advice to users.)
```

```
38 Implementors may restrict the use of RMA communication that is synchronized by lock
39 calls to windows in memory allocated by MPI_ALLOC_MEM (Section 8.2, page 290). Locks
40 can be used portably only in such memory.
```

```
41
42 Rationale. The implementation of passive target communication when memory is
43 not shared requires an asynchronous agent. Such an agent can be implemented more
44 easily, and can achieve better performance, if restricted to specially allocated memory.
45 It can be avoided altogether if shared memory is used. It seems natural to impose
46 restrictions that allows one to use shared memory for 3-rd party communication in
47 shared memory machines.
```



The downside of this decision is that passive target communication cannot be used without taking advantage of nonstandard Fortran features: namely, the availability of C-like pointers; these are not supported by some Fortran compilers (g77 and Windows/NT compilers, at the time of writing). Also, passive target communication cannot be portably targeted to `COMMON` blocks, or other statically declared Fortran arrays. (*End of rationale.*)

Consider the sequence of calls in the example below.

#### Example 11.5

```
MPI_Win_lock(MPI_LOCK_EXCLUSIVE, rank, assert, win)
MPI_Put(..., rank, ..., win)
MPI_Win_unlock(rank, win)
```

The call to `MPI_WIN_UNLOCK` will not return until the put transfer has completed at the origin and at the target. This still leaves much freedom to implementors. The call to `MPI_WIN_LOCK` may block until an exclusive lock on the window is acquired; or, the call to `MPI_WIN_LOCK` may not block, while the call to `MPI_PUT` blocks until a lock is acquired; or, the first two calls may not block, while `MPI_WIN_UNLOCK` blocks until a lock is acquired — the update of the target window is then postponed until the call to `MPI_WIN_UNLOCK` occurs. However, if the call to `MPI_WIN_LOCK` is used to lock a local window, then the call must block until the lock is acquired, since the lock may protect local load/store accesses to the window issued after the lock call returns.

#### 11.4.4 Assertions

The `assert` argument in the calls `MPI_WIN_POST`, `MPI_WIN_START`, `MPI_WIN_FENCE` and `MPI_WIN_LOCK` is used to provide assertions on the context of the call that may be used to optimize performance. The `assert` argument does not change program semantics if it provides correct information on the program — it is erroneous to provide incorrect information. Users may always provide `assert = 0` to indicate a general case, where no guarantees are made.

*Advice to users.* Many implementations may not take advantage of the information in `assert`; some of the information is relevant only for noncoherent, shared memory machines. Users should consult their implementation manual to find which information is useful on each system. On the other hand, applications that provide correct assertions whenever applicable are portable and will take advantage of assertion specific optimizations, whenever available. (*End of advice to users.*)

*Advice to implementors.* Implementations can always ignore the `assert` argument. Implementors should document which `assert` values are significant on their implementation. (*End of advice to implementors.*)

`assert` is the bit-vector OR of zero or more of the following integer constants: `MPI_MODE_NOCHECK`, `MPI_MODE_NOSTORE`, `MPI_MODE_NOPUT`, `MPI_MODE_NOPRECEDE` and `MPI_MODE_NOSUCCEED`. The significant options are listed below, for each call.

*Advice to users.* C/C++ users can use bit vector or (|) to combine these constants; Fortran 90 users can use the bit-vector IOR intrinsic. Fortran 77 users can use (non-portably) bit vector IOR on systems that support it. Alternatively, Fortran users can portably use integer addition to OR the constants (each constant should appear at most once in the addition!). (*End of advice to users.*)

## **MPI\_WIN\_START:**

**MPI\_MODE\_NOCHECK** — the matching calls to **MPI\_WIN\_POST** have already completed on all target processes when the call to **MPI\_WIN\_START** is made. The **nocheck** option can be specified in a start call if and only if it is specified in each matching post call. This is similar to the optimization of “ready-send” that may save a handshake when the handshake is implicit in the code. (However, ready-send is matched by a regular receive, whereas both start and post must specify the **nocheck** option.)

## **MPI\_WIN\_POST:**

**MPI\_MODE\_NOCHECK** — the matching calls to **MPI\_WIN\_START** have not yet occurred on any origin processes when the call to **MPI\_WIN\_POST** is made. The **nocheck** option can be specified by a post call if and only if it is specified by each matching start call.

**MPI\_MODE\_NOSTORE** — the local window was not updated by local stores (or local get or receive calls) since last synchronization. This may avoid the need for cache synchronization at the post call.

**MPI\_MODE\_NOPUT** — the local window will not be updated by put or accumulate calls after the post call, until the ensuing (wait) synchronization. This may avoid the need for cache synchronization at the wait call.

## **MPI\_WIN\_FENCE:**

**MPI\_MODE\_NOSTORE** — the local window was not updated by local stores (or local get or receive calls) since last synchronization.

**MPI\_MODE\_NOPUT** — the local window will not be updated by put or accumulate calls after the fence call, until the ensuing (fence) synchronization.

**MPI\_MODE\_NOPRECEDE** — the fence does not complete any sequence of locally issued RMA calls. If this assertion is given by any process in the window group, then it must be given by all processes in the group.

**MPI\_MODE\_NOSUCCEED** — the fence does not start any sequence of locally issued RMA calls. If the assertion is given by any process in the window group, then it must be given by all processes in the group.

## **MPI\_WIN\_LOCK:**

**MPI\_MODE\_NOCHECK** — no other process holds, or will attempt to acquire a conflicting lock, while the caller holds the window lock. This is useful when mutual exclusion is achieved by other means, but the coherence operations that may be attached to the lock and unlock calls are still required.

*Advice to users.* Note that the `nostore` and `noprecede` flags provide information on what happened *before* the call; the `noput` and `nosucceed` flags provide information on what will happen *after* the call. (*End of advice to users.*)

#### 11.4.5 Miscellaneous Clarifications

Once an RMA routine completes, it is safe to free any opaque objects passed as argument to that routine. For example, the `datatype` argument of a `MPI_PUT` call can be freed as soon as the call returns, even though the communication may not be complete.

As in message-passing, datatypes must be committed before they can be used in RMA communication.

## 11.5 Examples

**Example 11.6** The following example shows a generic loosely synchronous, iterative code, using fence synchronization. The window at each process consists of array `A`, which contains the origin and target buffers of the put calls.

```
...
while(!converged(A)){
    update(A);
    MPI_Win_fence(MPI_MODE_NOPRECEDE, win);
    for(i=0; i < toneighbors; i++)
        MPI_Put(&frombuf[i], 1, fromtype[i], toneighbor[i],
                todisp[i], 1, totype[i], win);
    MPI_Win_fence((MPI_MODE_NOSTORE | MPI_MODE_NOSUCCEED), win);
}
```

The same code could be written with `get`, rather than `put`. Note that, during the communication phase, each window is concurrently read (as origin buffer of puts) and written (as target buffer of puts). This is OK, provided that there is no overlap between the target buffer of a put and another communication buffer.

**Example 11.7** Same generic example, with more computation/communication overlap. We assume that the update phase is broken in two subphases: the first, where the “boundary,” which is involved in communication, is updated, and the second, where the “core,” which neither use nor provide communicated data, is updated.

```
...
while(!converged(A)){
    update_boundary(A);
    MPI_Win_fence((MPI_MODE_NOPUT | MPI_MODE_NOPRECEDE), win);
    for(i=0; i < fromneighbors; i++)
        MPI_Get(&tobuf[i], 1, totype[i], fromneighbor[i],
                fromdisp[i], 1, fromtype[i], win);
    update_core(A);
    MPI_Win_fence(MPI_MODE_NOSUCCEED, win);
}
```

The get communication can be concurrent with the core update, since they do not access the same locations, and the local update of the origin buffer by the get call can be concurrent with the local update of the core by the `update_core` call. In order to get similar overlap with put communication we would need to use separate windows for the core and for the boundary. This is required because we do not allow local stores to be concurrent with puts on the same, or on overlapping, windows.

**Example 11.8** Same code as in Example 11.6, rewritten using post-start-complete-wait.

```

...
while(!converged(A)){
    update(A);
    MPI_Win_post(fromgroup, 0, win);
    MPI_Win_start(togroup, 0, win);
    for(i=0; i < toneighbors; i++)
        MPI_Put(&frombuf[i], 1, fromtype[i], toneighbor[i],
                todisp[i], 1, totype[i], win);
    MPI_Win_complete(win);
    MPI_Win_wait(win);
}

```

**Example 11.9** Same example, with split phases, as in Example 11.7.

```

...
while(!converged(A)){
    update_boundary(A);
    MPI_Win_post(togroup, MPI_MODE_NOPUT, win);
    MPI_Win_start(fromgroup, 0, win);
    for(i=0; i < fromneighbors; i++)
        MPI_Get(&tobuf[i], 1, totype[i], fromneighbor[i],
                fromdisp[i], 1, fromtype[i], win);
    update_core(A);
    MPI_Win_complete(win);
    MPI_Win_wait(win);
}

```

**Example 11.10** A checkerboard, or double buffer communication pattern, that allows more computation/communication overlap. Array `A0` is updated using values of array `A1`, and vice versa. We assume that communication is symmetric: if process A gets data from process B, then process B gets data from process A. Window `wini` consists of array `Ai`.

```

...
if (!converged(A0,A1))
    MPI_Win_post(neighbors, (MPI_MODE_NOCHECK | MPI_MODE_NOPUT), win0);
MPI_Barrier(comm0);
/* the barrier is needed because the start call inside the
loop uses the nocheck option */
while(!converged(A0, A1)){
    /* communication on A0 and computation on A1 */

```

```

update2(A1, A0); /* local update of A1 that depends on A0 (and A1) */
MPI_Win_start(neighbors, MPI_MODE_NOCHECK, win0);
for(i=0; i < neighbors; i++)
    MPI_Get(&tobuf0[i], 1, totype0[i], neighbor[i],
           fromdisp0[i], 1, fromtype0[i], win0);
update1(A1); /* local update of A1 that is
              concurrent with communication that updates A0 */
MPI_Win_post(neighbors, (MPI_MODE_NOCHECK | MPI_MODE_NOPUT), win1);
MPI_Win_complete(win0);
MPI_Win_wait(win0);

/* communication on A1 and computation on A0 */
update2(A0, A1); /* local update of A0 that depends on A1 (and A0)*/
MPI_Win_start(neighbors, MPI_MODE_NOCHECK, win1);
for(i=0; i < neighbors; i++)
    MPI_Get(&tobuf1[i], 1, totype1[i], neighbor[i],
           fromdisp1[i], 1, fromtype1[i], win1);
update1(A0); /* local update of A0 that depends on A0 only,
              concurrent with communication that updates A1 */
if (!converged(A0,A1))
    MPI_Win_post(neighbors, (MPI_MODE_NOCHECK | MPI_MODE_NOPUT), win0);
MPI_Win_complete(win1);
MPI_Win_wait(win1);
}

```

A process posts the local window associated with `win0` before it completes RMA accesses to the remote windows associated with `win1`. When the `wait(win1)` call returns, then all neighbors of the calling process have posted the windows associated with `win0`. Conversely, when the `wait(win0)` call returns, then all neighbors of the calling process have posted the windows associated with `win1`. Therefore, the `nocheck` option can be used with the calls to `MPI_WIN_START`.

Put calls can be used, instead of get calls, if the area of array `A0` (resp. `A1`) used by the `update(A1, A0)` (resp. `update(A0, A1)`) call is disjoint from the area modified by the RMA communication. On some systems, a put call may be more efficient than a get call, as it requires information exchange only in one direction.

## 11.6 Error Handling

### 11.6.1 Error Handlers

Errors occurring during calls to `MPI_WIN_CREATE(...,comm,...)` cause the error handler currently associated with `comm` to be invoked. All other RMA calls have an input `win` argument. When an error occurs during such a call, the error handler currently associated with `win` is invoked.

The default error handler associated with `win` is `MPI_ERRORS_FATAL`. Users may change this default by explicitly associating a new error handler with `win` (see Section 8.3, page 292).

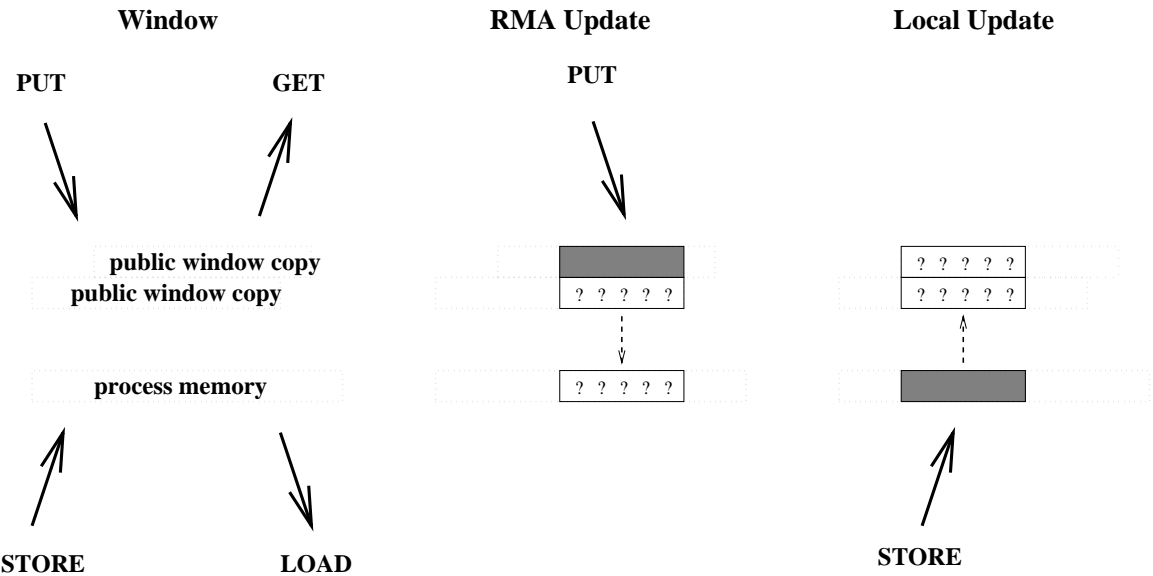


Figure 11.5: Schematic description of window

### 11.6.2 Error Classes

The following error classes for one-sided communication are defined

<code>MPI_ERR_WIN</code>	invalid win argument
<code>MPI_ERR_BASE</code>	invalid base argument
<code>MPI_ERR_SIZE</code>	invalid size argument
<code>MPI_ERR_DISP</code>	invalid disp argument
<code>MPI_ERR_LOCKTYPE</code>	invalid locktype argument
<code>MPI_ERR_ASSERT</code>	invalid assert argument
<code>MPI_ERR_RMA_CONFLICT</code>	conflicting accesses to window
<code>MPI_ERR_RMA_SYNC</code>	wrong synchronization of RMA calls

Table 11.1: Error classes in one-sided communication routines

## 11.7 Semantics and Correctness

The semantics of RMA operations is best understood by assuming that the system maintains a separate *public* copy of each window, in addition to the original location in process memory (the *private* window copy). There is only one instance of each variable in process memory, but a distinct *public* copy of the variable for each window that contains it. A load accesses the instance in process memory (this includes MPI sends). A store accesses and updates the instance in process memory (this includes MPI receives), but the update may affect other public copies of the same locations. A get on a window accesses the public copy of that window. A put or accumulate on a window accesses and updates the public copy of that window, but the update may affect the private copy of the same locations in process memory, and public copies of other overlapping windows. This is illustrated in Figure 11.5.

The following rules specify the latest time at which an operation must complete at the origin or the target. The update performed by a get call in the origin process memory is visible when the get operation is complete at the origin (or earlier); the update performed by a put or accumulate call in the public copy of the target window is visible when the put or accumulate has completed at the target (or earlier). The rules also specify the latest time at which an update of one window copy becomes visible in another overlapping copy.

1. An RMA operation is completed at the origin by the ensuing call to `MPI_WIN_COMPLETE`, `MPI_WIN_FENCE` or `MPI_WIN_UNLOCK` that synchronizes this access at the origin.
2. If an RMA operation is completed at the origin by a call to `MPI_WIN_FENCE` then the operation is completed at the target by the matching call to `MPI_WIN_FENCE` by the target process.
3. If an RMA operation is completed at the origin by a call to `MPI_WIN_COMPLETE` then the operation is completed at the target by the matching call to `MPI_WIN_WAIT` by the target process.
4. If an RMA operation is completed at the origin by a call to `MPI_WIN_UNLOCK` then the operation is completed at the target by that same call to `MPI_WIN_UNLOCK`.
5. An update of a location in a private window copy in process memory becomes visible in the public window copy at latest when an ensuing call to `MPI_WIN_POST`, `MPI_WIN_FENCE`, or `MPI_WIN_UNLOCK` is executed on that window by the window owner.
6. An update by a put or accumulate call to a public window copy becomes visible in the private copy in process memory at latest when an ensuing call to `MPI_WIN_WAIT`, `MPI_WIN_FENCE`, or `MPI_WIN_LOCK` is executed on that window by the window owner.

The `MPI_WIN_FENCE` or `MPI_WIN_WAIT` call that completes the transfer from public copy to private copy (6) is the same call that completes the put or accumulate operation in the window copy (2, 3). If a put or accumulate access was synchronized with a lock, then the update of the public window copy is complete as soon as the updating process executed `MPI_WIN_UNLOCK`. On the other hand, the update of private copy in the process memory may be delayed until the target process executes a synchronization call on that window (6). Thus, updates to process memory can always be delayed until the process executes a suitable synchronization call. Updates to a public window copy can also be delayed until the window owner executes a synchronization call, if fences or post-start-complete-wait synchronization is used. Only when lock synchronization is used does it becomes necessary to update the public window copy, even if the window owner does not execute any related synchronization call.

The rules above also define, by implication, when an update to a public window copy becomes visible in another overlapping public window copy. Consider, for example, two overlapping windows, `win1` and `win2`. A call to `MPI_WIN_FENCE(0, win1)` by the window owner makes visible in the process memory previous updates to window `win1` by remote processes. A subsequent call to `MPI_WIN_FENCE(0, win2)` makes these updates visible in the public copy of `win2`.

A correct program must obey the following rules.

1. A location in a window must not be accessed locally once an update to that location has started, until the update becomes visible in the private window copy in process memory.
2. A location in a window must not be accessed as a target of an RMA operation once an update to that location has started, until the update becomes visible in the public window copy. There is one exception to this rule, in the case where the same variable is updated by two concurrent accumulates that use the same operation, with the same predefined datatype, on the same window.
3. A put or accumulate must not access a target window once a local update or a put or accumulate update to another (overlapping) target window have started on a location in the target window, until the update becomes visible in the public copy of the window. Conversely, a local update in process memory to a location in a window must not start once a put or accumulate update to that target window has started, until the put or accumulate update becomes visible in process memory. In both cases, the restriction applies to operations even if they access disjoint locations in the window.

A program is erroneous if it violates these rules.

*Rationale.* The last constraint on correct RMA accesses may seem unduly restrictive, as it forbids concurrent accesses to nonoverlapping locations in a window. The reason for this constraint is that, on some architectures, explicit coherence restoring operations may be needed at synchronization points. A different operation may be needed for locations that were locally updated by stores and for locations that were remotely updated by put or accumulate operations. Without this constraint, the MPI library will have to track precisely which locations in a window were updated by a put or accumulate call. The additional overhead of maintaining such information is considered prohibitive. (*End of rationale.*)

*Advice to users.* A user can write correct programs by following the following rules:

**fence:** During each period between fence calls, each window is either updated by put or accumulate calls, or updated by local stores, but not both. Locations updated by put or accumulate calls should not be accessed during the same period (with the exception of concurrent updates to the same location by accumulate calls). Locations accessed by get calls should not be updated during the same period.

**post-start-complete-wait:** A window should not be updated locally while being posted, if it is being updated by put or accumulate calls. Locations updated by put or accumulate calls should not be accessed while the window is posted (with the exception of concurrent updates to the same location by accumulate calls). Locations accessed by get calls should not be updated while the window is posted.

With the post-start synchronization, the target process can tell the origin process that its window is now ready for RMA access; with the complete-wait synchronization, the origin process can tell the target process that it has finished its RMA accesses to the window.



**lock:** Updates to the window are protected by exclusive locks if they may conflict. Nonconflicting accesses (such as read-only accesses or accumulate accesses) are protected by shared locks, both for local accesses and for RMA accesses.

**changing window or synchronization mode:** One can change synchronization mode, or change the window used to access a location that belongs to two overlapping windows, when the process memory and the window copy are guaranteed to have the same values. This is true after a local call to `MPI_WIN_FENCE`, if RMA accesses to the window are synchronized with fences; after a local call to `MPI_WIN_WAIT`, if the accesses are synchronized with post-start-complete-wait; after the call at the origin (local or remote) to `MPI_WIN_UNLOCK` if the accesses are synchronized with locks.

In addition, a process should not access the local buffer of a get operation until the operation is complete, and should not update the local buffer of a put or accumulate operation until that operation is complete.

The RMA synchronization operations define when updates are guaranteed to become visible in public and private windows. Updates may become visible earlier, but such behavior is implementation dependent. (*End of advice to users.*)

The semantics are illustrated by the following examples:

### Example 11.11 Rule 5:

```

Process A:
            window location X

            MPI_Win_lock(EXCLUSIVE,B)
            store X /* local update to private copy of B */
            MPI_Win_unlock(B)
            /* now visible in public window copy */

MPI_Barrier

MPI_Barrier

MPI_Win_lock(EXCLUSIVE,B)
MPI_Get(X) /* ok, read from public window */
MPI_Win_unlock(B)

```

### Example 11.12 Rule 6:

```

Process A:
MPI_Win_lock(EXCLUSIVE,B)
MPI_Put(X) /* update to public window */
MPI_Win_unlock(B)
MPI_Barrier

Process B:
window location X
MPI_Barrier
MPI_Win_lock(EXCLUSIVE,B)

```

```

1          /* now visible in private copy of B */
2          load X
3          MPI_Win_unlock(B)

```

Note that the private copy of X has not necessarily been updated after the barrier, so omitting the lock-unlock at process B may lead to the load returning an obsolete value.

**Example 11.13** The rules do *not* guarantee that process A in the following sequence will see the value of X as updated by the local store by B before the lock.

<pre> 10      Process A: 11 12 13 14 15      MPI_Barrier 16 17      MPI_Win_lock(SHARED,B) 18      MPI_Get(X) /* X may not be in public window copy */ 19      MPI_Win_unlock(B) 20 21 22 </pre>	<pre>         Process B:         window location X          store X /* update to private copy of B */         MPI_Win_lock(SHARED,B)         MPI_Barrier          MPI_Win_unlock(B)         /* update on X now visible in public window */ </pre>
--	---

**Example 11.14** In the following sequence

<pre> 25      Process A: 26      window location X 27      window location Y 28 29      store Y 30      MPI_Win_post(A,B) /* Y visible in public window */ 31      MPI_Win_start(A) 32 33      store X /* update to private window */ 34 35      MPI_Win_complete 36      MPI_Win_wait 37      /* update on X may not yet visible in public window */ 38 39      MPI_Barrier 40 41 </pre>	<pre>         Process B:          MPI_Win_start(A)          MPI_Win_complete          MPI_Win_lock(EXCLUSIVE,A)         MPI_Get(X) /* may return an obsolete value */         MPI_Get(Y)         MPI_Win_unlock(A) </pre>
---	---

it is *not* guaranteed that process B reads the value of X as per the local update by process A, because neither MPI\_WIN\_WAIT nor MPI\_WIN\_COMPLETE calls by process A ensure visibility in the public window copy. To allow B to read the value of X stored by A the

local store must be replaced by a local MPI\_PUT that updates the public window copy. Note that by this replacement X may become visible in the private copy in process memory of A only after the MPI\_WIN\_WAIT call in process A. The update on Y made before the MPI\_WIN\_POST call is visible in the public window after the MPI\_WIN\_POST call and therefore correctly gotten by process B. The MPI\_GET(Y) call could be moved to the epoch started by the MPI\_WIN\_START operation, and process B would still get the value stored by A.

**Example 11.15** Finally, in the following sequence

Process A:	Process B:
	window location X
MPI_Win_lock(EXCLUSIVE,B)	
MPI_Put(X) /* update to public window */	
MPI_Win_unlock(B)	
MPI_Barrier	MPI_Barrier
	MPI_Win_post(B)
	MPI_Win_start(B)
	load X /* access to private window */
	/* may return an obsolete value */
	MPI_Win_complete
	MPI_Win_wait

rules (5,6) do *not* guarantee that the private copy of X at B has been updated before the load takes place. To ensure that the value put by process A is read, the local load must be replaced with a local MPI\_GET operation, or must be placed after the call to MPI\_WIN\_WAIT.

### 11.7.1 Atomicity

The outcome of concurrent accumulates to the same location, with the same operation and predefined datatype, is as if the accumulates were done at that location in some serial order. On the other hand, if two locations are both updated by two accumulate calls, then the updates may occur in reverse order at the two locations. Thus, there is no guarantee that the entire call to MPI\_ACCUMULATE is executed atomically. The effect of this lack of atomicity is limited: The previous correctness conditions imply that a location updated by a call to MPI\_ACCUMULATE, cannot be accessed by load or an RMA call other than accumulate, until the MPI\_ACCUMULATE call has completed (at the target). Different interleavings can lead to different results only to the extent that computer arithmetics are not truly associative or commutative.

### 11.7.2 Progress

One-sided communication has the same progress requirements as point-to-point communication: once a communication is enabled, then it is guaranteed to complete. RMA calls

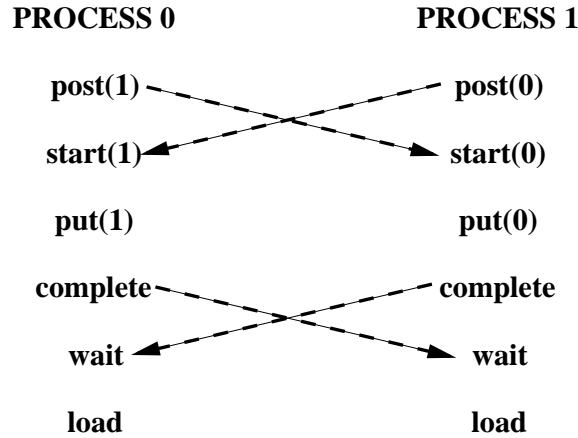


Figure 11.6: Symmetric communication

must have local semantics, except when required for synchronization with other RMA calls.

There is some fuzziness in the definition of the time when a RMA communication becomes enabled. This fuzziness provides to the implementor more flexibility than with point-to-point communication. Access to a target window becomes enabled once the corresponding synchronization (such as `MPI_WIN_FENCE` or `MPI_WIN_POST`) has executed. On the origin process, an RMA communication may become enabled as soon as the corresponding put, get or accumulate call has executed, or as late as when the ensuing synchronization call is issued. Once the communication is enabled both at the origin and at the target, the communication must complete.

Consider the code fragment in Example 11.4, on page 372. Some of the calls may block if the target window is not posted. However, if the target window is posted, then the code fragment must complete. The data transfer may start as soon as the put call occurs, but may be delayed until the ensuing complete call occurs.

Consider the code fragment in Example 11.5, on page 377. Some of the calls may block if another process holds a conflicting lock. However, if no conflicting lock is held, then the code fragment must complete.

Consider the code illustrated in Figure 11.6. Each process updates the window of the other process using a put operation, then accesses its own window. The post calls are nonblocking, and should complete. Once the post calls occur, RMA access to the windows is enabled, so that each process should complete the sequence of calls start-put-complete. Once these are done, the wait calls should complete at both processes. Thus, this communication should not deadlock, irrespective of the amount of data transferred.

Assume, in the last example, that the order of the post and start calls is reversed, at each process. Then, the code may deadlock, as each process may block on the start call, waiting for the matching post to occur. Similarly, the program will deadlock, if the order of the complete and wait calls is reversed, at each process.

The following two examples illustrate the fact that the synchronization between complete and wait is not symmetric: the wait call blocks until the complete executes, but not vice-versa. Consider the code illustrated in Figure 11.7. This code will deadlock: the wait of process 1 blocks until process 0 calls complete, and the receive of process 0 blocks until process 1 calls send. Consider, on the other hand, the code illustrated in Figure 11.8. This code will not deadlock. Once process 1 calls post, then the sequence start, put, complete

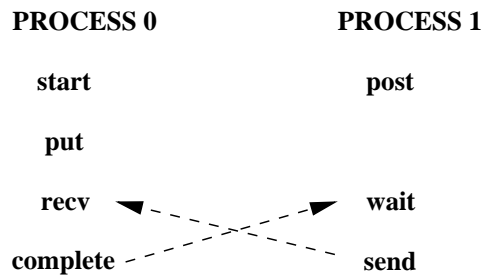


Figure 11.7: Deadlock situation

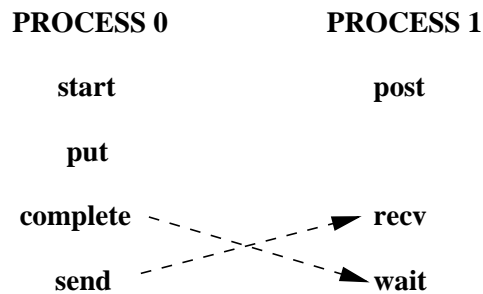


Figure 11.8: No deadlock

on process 0 can proceed to completion. Process 0 will reach the send call, allowing the receive call of process 1 to complete.

*Rationale.* MPI implementations must guarantee that a process makes progress on all enabled communications it participates in, while blocked on an MPI call. This is true for send-receive communication and applies to RMA communication as well. Thus, in the example in Figure 11.8, the put and complete calls of process 0 should complete while process 1 is blocked on the receive call. This may require the involvement of process 1, e.g., to transfer the data put, while it is blocked on the receive call.

A similar issue is whether such progress must occur while a process is busy computing, or blocked in a non-MPI call. Suppose that in the last example the send-receive pair is replaced by a write-to-socket/read-from-socket pair. Then MPI does not specify whether deadlock is avoided. Suppose that the blocking receive of process 1 is replaced by a very long compute loop. Then, according to one interpretation of the MPI standard, process 0 must return from the complete call after a bounded delay, even if process 1 does not reach any MPI call in this period of time. According to another interpretation, the complete call may block until process 1 reaches the wait call, or reaches another MPI call. The qualitative behavior is the same, under both interpretations, unless a process is caught in an infinite compute loop, in which case the difference may not matter. However, the quantitative expectations are different. Different MPI implementations reflect these different interpretations. While this ambiguity is unfortunate, it does not seem to affect many real codes. The MPI forum decided not to decide which interpretation of the standard is the correct one, since the issue is very contentious, and a decision would have much impact on implementors but less impact on users. (*End of rationale.*)

### 11.7.3 Registers and Compiler Optimizations

*Advice to users.* All the material in this section is an advice to users. (*End of advice to users.*)

A coherence problem exists between variables kept in registers and the memory value of these variables. An RMA call may access a variable in memory (or cache), while the up-to-date value of this variable is in register. A get will not return the latest variable value, and a put may be overwritten when the register is stored back in memory.

The problem is illustrated by the following code:

Source of Process 1	Source of Process 2	Executed in Process 2
bbbb = 777	buff = 999	reg_A:=999
call MPI_WIN_FENCE	call MPI_WIN_FENCE	
call MPI_PUT(bbbb into buff of process 2)		stop appl.thread
		buff:=777 in PUT handler
		continue appl.thread
call MPI_WIN_FENCE	call MPI_WIN_FENCE	
	ccc = buff	ccc:=reg_A

In this example, variable `buff` is allocated in the register `reg_A` and therefore `ccc` will have the old value of `buff` and not the new value 777.

This problem, which also afflicts in some cases send/receive communication, is discussed more at length in Section 16.2.2.

MPI implementations will avoid this problem for standard conforming C programs. Many Fortran compilers will avoid this problem, without disabling compiler optimizations. However, in order to avoid register coherence problems in a completely portable manner, users should restrict their use of RMA windows to variables stored in `COMMON` blocks, or to variables that were declared `VOLATILE` (while `VOLATILE` is not a standard Fortran declaration, it is supported by many Fortran compilers). Details and an additional solution are discussed in Section 16.2.2, “A Problem with Register Optimization,” on page 503. See also, “Problems Due to Data Copying and Sequence Association,” on page 501, for additional Fortran problems.

# Chapter 12

## External Interfaces

### 12.1 Introduction

This chapter begins with calls used to create **generalized requests**, which allow users to create new nonblocking operations with an interface similar to what is present in MPI. This can be used to layer new functionality on top of MPI. Next, Section 12.3 deals with setting the information found in **status**. This is needed for generalized requests.

The chapter continues, in Section 12.4, with a discussion of how threads are to be handled in MPI. Although thread compliance is not required, the standard specifies how threads are to work if they are provided.

### 12.2 Generalized Requests

The goal of generalized requests is to allow users to define new nonblocking operations. Such an outstanding nonblocking operation is represented by a (generalized) request. A fundamental property of nonblocking operations is that progress toward the completion of this operation occurs asynchronously, i.e., concurrently with normal program execution. Typically, this requires execution of code concurrently with the execution of the user code, e.g., in a separate thread or in a signal handler. Operating systems provide a variety of mechanisms in support of concurrent execution. MPI does not attempt to standardize or replace these mechanisms: it is assumed programmers who wish to define new asynchronous operations will use the mechanisms provided by the underlying operating system. Thus, the calls in this section only provide a means for defining the effect of MPI calls such as `MPI_WAIT` or `MPI_CANCEL` when they apply to generalized requests, and for signaling to MPI the completion of a generalized operation.

*Rationale.* It is tempting to also define an MPI standard mechanism for achieving concurrent execution of user-defined nonblocking operations. However, it is very difficult to define such a mechanism without consideration of the specific mechanisms used in the operating system. The Forum feels that concurrency mechanisms are a proper part of the underlying operating system and should not be standardized by MPI; the MPI standard should only deal with the interaction of such mechanisms with MPI. (*End of rationale.*)

For a regular request, the operation associated with the request is performed by the MPI implementation, and the operation completes without intervention by the application.





in Fortran

```
SUBROUTINE GREQUEST_QUERY_FUNCTION(EXTRA_STATE, STATUS, IERROR)
    INTEGER STATUS(MPI_STATUS_SIZE), IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE
```

and in C++

```
{typedef int MPI::Grequest::Query_function(void* extra_state,
    MPI::Status& status); (binding deprecated, see Section 15.2) }
```

`query_fn` function computes the status that should be returned for the generalized request. The status also includes information about successful/unsuccessful cancellation of the request (result to be returned by `MPI_TEST_CANCELLED`).

`query_fn` callback is invoked by the `MPI_{WAIT|TEST}{ANY|SOME|ALL}` call that completed the generalized request associated with this callback. The callback function is also invoked by calls to `MPI_REQUEST_GET_STATUS`, if the request is complete when the call occurs. In both cases, the callback is passed a reference to the corresponding status variable passed by the user to the MPI call; the status set by the callback function is returned by the MPI call. If the user provided `MPI_STATUS_IGNORE` or `MPI_STATUSES_IGNORE` to the MPI function that causes `query_fn` to be called, then MPI will pass a valid status object to `query_fn`, and this status will be ignored upon return of the callback function. Note that `query_fn` is invoked only after `MPI_GREQUEST_COMPLETE` is called on the request; it may be invoked several times for the same generalized request, e.g., if the user calls `MPI_REQUEST_GET_STATUS` several times for this request. Note also that a call to `MPI_{WAIT|TEST}{SOME|ALL}` may cause multiple invocations of `query_fn` callback functions, one for each generalized request that is completed by the MPI call. The order of these invocations is not specified by MPI.

In C, the free function is

```
typedef int MPI_Grequest_free_function(void *extra_state);
```

and in Fortran

```
SUBROUTINE GREQUEST_FREE_FUNCTION(EXTRA_STATE, IERROR)
    INTEGER IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE
```

and in C++

```
{typedef int MPI::Grequest::Free_function(void* extra_state); (binding
    deprecated, see Section 15.2) }
```

`free_fn` function is invoked to clean up user-allocated resources when the generalized request is freed.

`free_fn` callback is invoked by the `MPI_{WAIT|TEST}{ANY|SOME|ALL}` call that completed the generalized request associated with this callback. `free_fn` is invoked after the call to `query_fn` for the same request. However, if the MPI call completed multiple generalized requests, the order in which `free_fn` callback functions are invoked is not specified by MPI.

`free_fn` callback is also invoked for generalized requests that are freed by a call to `MPI_REQUEST_FREE` (no call to `WAIT_{WAIT|TEST}{ANY|SOME|ALL}` will occur for such a request). In this case, the callback function will be called either in the MPI call `MPI_REQUEST_FREE(request)`, or in the MPI call `MPI_GREQUEST_COMPLETE(request)`,

whichever happens last, i.e., in this case the actual freeing code is executed as soon as both calls `MPI_REQUEST_FREE` and `MPI_GREQUEST_COMPLETE` have occurred. The request is not deallocated until after `free_fn` completes. Note that `free_fn` will be invoked only once per request by a correct program.

*Advice to users.* Calling `MPI_REQUEST_FREE(request)` will cause the request handle to be set to `MPI_REQUEST_NULL`. This handle to the generalized request is no longer valid. However, user copies of this handle are valid until after `free_fn` completes since MPI does not deallocate the object until then. Since `free_fn` is not called until after `MPI_GREQUEST_COMPLETE`, the user copy of the handle can be used to make this call. Users should note that MPI will deallocate the object after `free_fn` executes. At this point, user copies of the request handle no longer point to a valid request. MPI will not set user copies to `MPI_REQUEST_NULL` in this case, so it is up to the user to avoid accessing this stale handle. This is a special case where MPI defers deallocating the object until a later time that is known by the user. (*End of advice to users.*)

In C, the cancel function is

```
typedef int MPI_Grequest_cancel_function(void *extra_state, int complete);
```

in Fortran

```
SUBROUTINE GREQUEST_CANCEL_FUNCTION(EXTRA_STATE, COMPLETE, IERROR)
  INTEGER IERROR
  INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE
  LOGICAL COMPLETE
```

and in C++

```
{typedef int MPI::Grequest::Cancel_function(void* extra_state,
      bool complete); (binding deprecated, see Section 15.2) }
```

`cancel_fn` function is invoked to start the cancelation of a generalized request. It is called by `MPI_CANCEL(request)`. MPI passes to the callback function `complete=true` if `MPI_GREQUEST_COMPLETE` was already called on the request, and `complete=false` otherwise.

All callback functions return an error code. The code is passed back and dealt with as appropriate for the error code by the MPI function that invoked the callback function. For example, if error codes are returned then the error code returned by the callback function will be returned by the MPI function that invoked the callback function. In the case of an `MPI_{WAIT|TEST}_{ANY}` call that invokes both `query_fn` and `free_fn`, the MPI call will return the error code returned by the last callback, namely `free_fn`. If one or more of the requests in a call to `MPI_{WAIT|TEST}_{SOME|ALL}` failed, then the MPI call will return `MPI_ERR_IN_STATUS`. In such a case, if the MPI call was passed an array of statuses, then MPI will return in each of the statuses that correspond to a completed generalized request the error code returned by the corresponding invocation of its `free_fn` callback function. However, if the MPI function was passed `MPI_STATUSES_IGNORE`, then the individual error codes returned by each callback functions will be lost.

*Advice to users.* `query_fn` must **not** set the error field of `status` since `query_fn` may be called by `MPI_WAIT` or `MPI_TEST`, in which case the error field of `status` should

not change. The MPI library knows the “context” in which `query_fn` is invoked and can decide correctly when to put in the error field of status the returned error code. *(End of advice to users.)*

MPI\_GREQUEST\_COMPLETE(request)

INOUT	request	generalized request (handle)
IN	request	request
OUT	response	response

```
int MPI_Grequest_complete(MPI_Request request)
```

MPI\_GREQUEST\_COMPLETE(REQUEST, IERROR)

INTEGER REQUEST, IERROR

```
{void MPI::Grequest::Complete() (binding deprecated, see Section 15.2) }
```

The call informs MPI that the operations represented by the generalized request `request` are complete (see definitions in Section 2.4). A call to `MPI_WAIT(request, status)` will return and a call to `MPI_TEST(request, flag, status)` will return `flag=true` only after a call to `MPI_GREQUEST_COMPLETE` has declared that these operations are complete.

MPI imposes no restrictions on the code executed by the callback functions. However, new nonblocking operations should be defined so that the general semantic rules about MPI calls such as `MPI_TEST`, `MPI_REQUEST_FREE`, or `MPI_CANCEL` still hold. For example, all these calls are supposed to be local and nonblocking. Therefore, the callback functions `query_fn`, `free_fn`, or `cancel_fn` should invoke blocking MPI communication calls only if the context is such that these calls are guaranteed to return in finite time. Once `MPI_CANCEL` is invoked, the cancelled operation should complete in finite time, irrespective of the state of other processes (the operation has acquired “local” semantics). It should either succeed, or fail without side-effects. The user should guarantee these same properties for newly defined operations.

*Advice to implementors.* A call to MPI\_GREQUEST\_COMPLETE may unblock a blocked user process/thread. The MPI library should ensure that the blocked user computation will resume. (*End of advice to implementors.*)

### 12.2.1 Examples

**Example 12.1** This example shows the code for a user-defined reduce operation on an `int` using a binary tree: each non-root node receives two messages, sums them, and sends them up. We assume that no status is returned and that the operation cannot be cancelled.

```
typedef struct {
    MPI_Comm comm;
    int tag;
    int root;
    int valin;
    int *valout;
    MPI_Request request;
} ARGS;
```

```

1
2 int myreduce(MPI_Comm comm, int tag, int root,
3             int valin, int *valout, MPI_Request *request)
4 {
5     ARGS *args;
6     pthread_t thread;
7
8     /* start request */
9     MPI_Grequest_start(query_fn, free_fn, cancel_fn, NULL, request);
10
11     args = (ARGS*)malloc(sizeof(ARGS));
12     args->comm = comm;
13     args->tag = tag;
14     args->root = root;
15     args->valin = valin;
16     args->valout = valout;
17     args->request = *request;
18
19     /* spawn thread to handle request */
20     /* The availability of the pthread_create call is system dependent */
21     pthread_create(&thread, NULL, reduce_thread, args);
22
23     return MPI_SUCCESS;
24 }
25
26 /* thread code */
27 void* reduce_thread(void *ptr)
28 {
29     int lchild, rchild, parent, lval, rval, val;
30     MPI_Request req[2];
31     ARGS *args;
32
33     args = (ARGS*)ptr;
34
35     /* compute left,right child and parent in tree; set
36        to MPI_PROC_NULL if does not exist */
37     /* code not shown */
38     ...
39
40     MPI_Irecv(&lval, 1, MPI_INT, lchild, args->tag, args->comm, &req[0]);
41     MPI_Irecv(&rval, 1, MPI_INT, rchild, args->tag, args->comm, &req[1]);
42     MPI_Waitall(2, req, MPI_STATUSES_IGNORE);
43     val = lval + args->valin + rval;
44     MPI_Send(&val, 1, MPI_INT, parent, args->tag, args->comm );
45     if (parent == MPI_PROC_NULL) *(args->valout) = val;
46     MPI_Grequest_complete((args->request));
47     free(ptr);
48     return(NULL);

```

```

}
1
2
int query_fn(void *extra_state, MPI_Status *status)
3
4
{
5
6     /* always send just one int */
7     MPI_Status_set_elements(status, MPI_INT, 1);
8     /* can never cancel so always true */
9     MPI_Status_set_cancelled(status, 0);
10    /* choose not to return a value for this */
11    status->MPI_SOURCE = MPI_UNDEFINED;
12    /* tag has no meaning for this generalized request */
13    status->MPI_TAG = MPI_UNDEFINED;
14    /* this generalized request never fails */
15    return MPI_SUCCESS;
16
17
18    int free_fn(void *extra_state)
19
20    {
21
22        /* this generalized request does not need to do any freeing */
23        /* as a result it never fails here */
24        return MPI_SUCCESS;
25
26
27    int cancel_fn(void *extra_state, int complete)
28
29    {
30
31        /* This generalized request does not support cancelling.
32         * Abort if not already done. If done then treat as if cancel failed.*/
33        if (!complete) {
34            fprintf(stderr,
35                "Cannot cancel generalized request - aborting program\n");
36            MPI_Abort(MPI_COMM_WORLD, 99);
37        }
38        return MPI_SUCCESS;
39    }
40
41
42
43
44
45
46
47
48

```

## 12.3 Associating Information with Status

MPI supports several different types of requests besides those for point-to-point operations. These range from MPI calls for I/O to generalized requests. It is desirable to allow these calls use the same request mechanism. This allows one to wait or test on different types of requests. However, `MPI_{TEST|WAIT}{ANY|SOME|ALL}` returns a status with information about the request. With the generalization of requests, one needs to define what information will be returned in the status object.

Each MPI call fills in the appropriate fields in the status object. Any unused fields will have undefined values. A call to `MPI_{TEST|WAIT}{ANY|SOME|ALL}` can modify any of

the fields in the status object. Specifically, it can modify fields that are undefined. The fields with meaningful value for a given request are defined in the sections with the new request.

Generalized requests raise additional considerations. Here, the user provides the functions to deal with the request. Unlike other MPI calls, the user needs to provide the information to be returned in status. The status argument is provided directly to the callback function where the status needs to be set. Users can directly set the values in 3 of the 5 status values. The count and cancel fields are opaque. To overcome this, these calls are provided:

`MPI_STATUS_SET_ELEMENTS(status, datatype, count)`

INOUT	status	status with which to associate count (Status)
IN	datatype	datatype associated with count (handle)
IN	count	number of elements to associate with status (integer)

```
int MPI_Status_set_elements(MPI_Status *status, MPI_Datatype datatype,
                           int count)
```

```
MPI_STATUS_SET_ELEMENTS(STATUS, DATATYPE, COUNT, IERROR)
```

```
INTEGER STATUS(MPI_STATUS_SIZE), DATATYPE, COUNT, IERROR
```

```
{void MPI::Status::Set_elements(const MPI::Datatype& datatype, int count)
  (binding deprecated, see Section 15.2) }
```

This call modifies the opaque part of status so that a call to `MPI_GET_ELEMENTS` will return count. `MPI_GET_COUNT` will return a compatible value.

*Rationale.* The number of elements is set instead of the count because the former can deal with a nonintegral number of datatypes. (*End of rationale.*)

A subsequent call to `MPI_GET_COUNT(status, datatype, count)` or to `MPI_GET_ELEMENTS(status, datatype, count)` must use a datatype argument that has the same type signature as the datatype argument that was used in the call to `MPI_STATUS_SET_ELEMENTS`.

*Rationale.* This is similar to the restriction that holds when count is set by a receive operation: in that case, the calls to `MPI_GET_COUNT` and `MPI_GET_ELEMENTS` must use a datatype with the same signature as the datatype used in the receive call. (*End of rationale.*)

`MPI_STATUS_SET_CANCELLED(status, flag)`

INOUT	status	status with which to associate cancel flag (Status)
IN	flag	if true indicates request was cancelled (logical)

```
int MPI_Status_set_cancelled(MPI_Status *status, int flag)
```

```

MPI_STATUS_SET_CANCELLED(STATUS, FLAG, IERROR)
    INTEGER STATUS(MPI_STATUS_SIZE), IERROR
    LOGICAL FLAG

```

```

{void MPI::Status::Set_cancelled(bool flag) (binding deprecated, see Section 15.2)
}

```

If flag is set to true then a subsequent call to MPI\_TEST\_CANCELLED(status, flag) will also return flag = true, otherwise it will return false.

*Advice to users.* Users are advised not to reuse the status fields for values other than those for which they were intended. Doing so may lead to unexpected results when using the status object. For example, calling MPI\_GET\_ELEMENTS may cause an error if the value is out of range or it may be impossible to detect such an error. The extra\_state argument provided with a generalized request can be used to return information that does not logically belong in status. Furthermore, modifying the values in a status set internally by MPI, e.g., MPI\_RECV, may lead to unpredictable results and is strongly discouraged. (*End of advice to users.*)

## 12.4 MPI and Threads

This section specifies the interaction between MPI calls and threads. The section lists minimal requirements for **thread compliant** MPI implementations and defines functions that can be used for initializing the thread environment. MPI may be implemented in environments where threads are not supported or perform poorly. Therefore, it is not required that all MPI implementations fulfill all the requirements specified in this section.

This section generally assumes a thread package similar to POSIX threads [29], but the syntax and semantics of thread calls are not specified here — these are beyond the scope of this document.

### 12.4.1 General

In a thread-compliant implementation, an MPI process is a process that may be multi-threaded. Each thread can issue MPI calls; however, threads are not separately addressable: a rank in a send or receive call identifies a process, not a thread. A message sent to a process can be received by any thread in this process.

*Rationale.* This model corresponds to the POSIX model of interprocess communication: the fact that a process is multi-threaded, rather than single-threaded, does not affect the external interface of this process. MPI implementations where MPI ‘processes’ are POSIX threads inside a single POSIX process are not thread-compliant by this definition (indeed, their “processes” are single-threaded). (*End of rationale.*)

*Advice to users.* It is the user’s responsibility to prevent races when threads within the same application post conflicting communication calls. The user can make sure that two threads in the same process will not issue conflicting communication calls by using distinct communicators at each thread. (*End of advice to users.*)

The two main requirements for a thread-compliant implementation are listed below.

1. All MPI calls are *thread-safe*, i.e., two concurrently running threads may make MPI calls and the outcome will be as if the calls executed in some order, even if their execution is interleaved.
2. Blocking MPI calls will block the calling thread only, allowing another thread to execute, if available. The calling thread will be blocked until the event on which it is waiting occurs. Once the blocked communication is enabled and can proceed, then the call will complete and the thread will be marked runnable, within a finite time. A blocked thread will not prevent progress of other runnable threads on the same process, and will not prevent them from executing MPI calls.

**Example 12.2** Process 0 consists of two threads. The first thread executes a blocking send call `MPI_Send(buff1, count, type, 0, 0, comm)`, whereas the second thread executes a blocking receive call `MPI_Recv(buff2, count, type, 0, 0, comm, &status)`, i.e., the first thread sends a message that is received by the second thread. This communication should always succeed. According to the first requirement, the execution will correspond to some interleaving of the two calls. According to the second requirement, a call can only block the calling thread and cannot prevent progress of the other thread. If the send call went ahead of the receive call, then the sending thread may block, but this will not prevent the receiving thread from executing. Thus, the receive call will occur. Once both calls occur, the communication is enabled and both calls will complete. On the other hand, a single-threaded process that posts a send, followed by a matching receive, may deadlock. The progress requirement for multithreaded implementations is stronger, as a blocked call cannot prevent progress in other threads.

*Advice to implementors.* MPI calls can be made thread-safe by executing only one at a time, e.g., by protecting MPI code with one process-global lock. However, blocked operations cannot hold the lock, as this would prevent progress of other threads in the process. The lock is held only for the duration of an atomic, locally-completing suboperation such as posting a send or completing a send, and is released in between. Finer locks can provide more concurrency, at the expense of higher locking overheads. Concurrency can also be achieved by having some of the MPI protocol executed by separate server threads. (*End of advice to implementors.*)

## 12.4.2 Clarifications

**Initialization and Completion** The call to `MPI_FINALIZE` should occur on the same thread that initialized MPI. We call this thread the **main thread**. The call should occur only after all the process threads have completed their MPI calls, and have no pending communications or I/O operations.

*Rationale.* This constraint simplifies implementation. (*End of rationale.*)

**Multiple threads completing the same request.** A program where two threads block, waiting on the same request, is erroneous. Similarly, the same request cannot appear in the array of requests of two concurrent `MPI_{WAIT|TEST}_{ANY|SOME|ALL}` calls. In MPI, a request can only be completed once. Any combination of wait or test which violates this rule is erroneous.



*Rationale.* This is consistent with the view that a multithreaded execution corresponds to an interleaving of the MPI calls. In a single threaded implementation, once a wait is posted on a request the request handle will be nullified before it is possible to post a second wait on the same handle. With threads, an `MPI_WAIT{ANY|SOME|ALL}` may be blocked without having nullified its request(s) so it becomes the user's responsibility to avoid using the same request in an `MPI_WAIT` on another thread. This constraint also simplifies implementation, as only one thread will be blocked on any communication or I/O event. (*End of rationale.*)

**Probe** A receive call that uses source and tag values returned by a preceding call to `MPI_PROBE` or `MPI_IProbe` will receive the message matched by the probe call only if there was no other matching receive after the probe and before that receive. In a multithreaded environment, it is up to the user to enforce this condition using suitable mutual exclusion logic. This can be enforced by making sure that each communicator is used by only one thread on each process.

**Collective calls** Matching of collective calls on a communicator, window, or file handle is done according to the order in which the calls are issued at each process. If concurrent threads issue such calls on the same communicator, window or file handle, it is up to the user to make sure the calls are correctly ordered, using interthread synchronization.

*Advice to users.* With three concurrent threads in each MPI process of a communicator `comm`, it is allowed that thread A in each MPI process calls a collective operation on `comm`, thread B calls a file operation on an existing filehandle that was formerly opened on `comm`, and thread C invokes one-sided operations on an existing window handle that was also formerly created on `comm`. (*End of advice to users.*)

*Rationale.* As already specified in `MPI_FILE_OPEN` and `MPI_WIN_CREATE`, a file handle and a window handle inherit only the group of processes of the underlying communicator, but not the communicator itself. Accesses to communicators, window handles and file handles cannot affect one another. (*End of rationale.*)

*Advice to implementors.* Advice to implementors. If the implementation of file or window operations internally uses MPI communication then a duplicated communicator may be cached on the file or window object. (*End of advice to implementors.*)

**Exception handlers** An exception handler does not necessarily execute in the context of the thread that made the exception-raising MPI call; the exception handler may be executed by a thread that is distinct from the thread that will return the error code.

*Rationale.* The MPI implementation may be multithreaded, so that part of the communication protocol may execute on a thread that is distinct from the thread that made the MPI call. The design allows the exception handler to be executed on the thread where the exception occurred. (*End of rationale.*)

**Interaction with signals and cancellations** The outcome is undefined if a thread that executes an MPI call is cancelled (by another thread), or if a thread catches a signal while executing an MPI call. However, a thread of an MPI process may terminate, and may catch signals or be cancelled by another thread when not executing MPI calls.

*Rationale.* Few C library functions are signal safe, and many have cancellation points — points where the thread executing them may be cancelled. The above restriction simplifies implementation (no need for the MPI library to be “async-cancel-safe” or “async-signal-safe.”) (*End of rationale.*)

*Advice to users.* Users can catch signals in separate, non-MPI threads (e.g., by masking signals on MPI calling threads, and unmasking them in one or more non-MPI threads). A good programming practice is to have a distinct thread blocked in a call to `sigwait` for each user expected signal that may occur. Users must not catch signals used by the MPI implementation; as each MPI implementation is required to document the signals used internally, users can avoid these signals. (*End of advice to users.*)

*Advice to implementors.* The MPI library should not invoke library calls that are not thread safe, if multiple threads execute. (*End of advice to implementors.*)

### 12.4.3 Initialization

The following function may be used to initialize MPI, and initialize the MPI thread environment, instead of `MPI_INIT`.

`MPI_INIT_THREAD(required, provided)`

IN	required	desired level of thread support (integer)
OUT	provided	provided level of thread support (integer)

```
int MPI_Init_thread(int *argc, char *((*argv)[]), int required,
                   int *provided)
```

```
MPI_INIT_THREAD(REQUIRED, PROVIDED, IERROR)
INTEGER REQUIRED, PROVIDED, IERROR
```

```
{int MPI::Init_thread(int& argc, char**& argv, int required) (binding
deprecatd, see Section 15.2) }
```

```
{int MPI::Init_thread(int required) (binding deprecatd, see Section 15.2) }
```

*Advice to users.* In C and C++, the passing of `argc` and `argv` is optional. In C, this is accomplished by passing the appropriate null pointer. In C++, this is accomplished with two separate bindings to cover these two cases. This is as with `MPI_INIT` as discussed in Section 8.7. (*End of advice to users.*)

This call initializes MPI in the same way that a call to `MPI_INIT` would. In addition, it initializes the thread environment. The argument `required` is used to specify the desired level of thread support. The possible values are listed in increasing order of thread support.

**MPI\_THREAD\_SINGLE** Only one thread will execute.

**MPI\_THREAD\_FUNNELED** The process may be multi-threaded, but the application must ensure that only the main thread makes MPI calls (for the definition of main thread, see `MPI_IS_THREAD_MAIN` on page 404).

**MPI\_THREAD\_SERIALIZED** The process may be multi-threaded, and multiple threads may make MPI calls, but only one at a time: MPI calls are not made concurrently from two distinct threads (all MPI calls are “serialized”).

**MPI\_THREAD\_MULTIPLE** Multiple threads may call MPI, with no restrictions.

These values are monotonic; i.e., `MPI_THREAD_SINGLE < MPI_THREAD_FUNNELED < MPI_THREAD_SERIALIZED < MPI_THREAD_MULTIPLE`.

Different processes in `MPI_COMM_WORLD` may require different levels of thread support.

The call returns in `provided` information about the actual level of thread support that will be provided by MPI. It can be one of the four values listed above.

The level(s) of thread support that can be provided by `MPI_INIT_THREAD` will depend on the implementation, and may depend on information provided by the user before the program started to execute (e.g., with arguments to `mpiexec`). If possible, the call will return `provided = required`. Failing this, the call will return the least supported level such that `provided > required` (thus providing a stronger level of support than required by the user). Finally, if the user requirement cannot be satisfied, then the call will return in `provided` the highest supported level.

A **thread compliant** MPI implementation will be able to return `provided = MPI_THREAD_MULTIPLE`. Such an implementation may always return `provided = MPI_THREAD_MULTIPLE`, irrespective of the value of `required`. At the other extreme, an MPI library that is not thread compliant may always return `provided = MPI_THREAD_SINGLE`, irrespective of the value of `required`.

A call to `MPI_INIT` has the same effect as a call to `MPI_INIT_THREAD` with a `required = MPI_THREAD_SINGLE`.

Vendors may provide (implementation dependent) means to specify the level(s) of thread support available when the MPI program is started, e.g., with arguments to `mpiexec`. This will affect the outcome of calls to `MPI_INIT` and `MPI_INIT_THREAD`. Suppose, for example, that an MPI program has been started so that only `MPI_THREAD_MULTIPLE` is available. Then `MPI_INIT_THREAD` will return `provided = MPI_THREAD_MULTIPLE`, irrespective of the value of `required`; a call to `MPI_INIT` will also initialize the MPI thread support level to `MPI_THREAD_MULTIPLE`. Suppose, on the other hand, that an MPI program has been started so that all four levels of thread support are available. Then, a call to `MPI_INIT_THREAD` will return `provided = required`; on the other hand, a call to `MPI_INIT` will initialize the MPI thread support level to `MPI_THREAD_SINGLE`.

*Rationale.* Various optimizations are possible when MPI code is executed single-threaded, or is executed on multiple threads, but not concurrently: mutual exclusion code may be omitted. Furthermore, if only one thread executes, then the MPI library can use library functions that are not thread safe, without risking conflicts with user threads. Also, the model of one communication thread, multiple computation threads fits many applications well, e.g., if the process code is a sequential Fortran/C/C++ program with MPI calls that has been parallelized by a compiler for execution on an SMP node, in a cluster of SMPs, then the process computation is multi-threaded, but MPI calls will likely execute on a single thread.

The design accommodates a static specification of the thread support level, for environments that require static binding of libraries, and for compatibility for current multi-threaded MPI codes. (*End of rationale.*)

*Advice to implementors.* If `provided` is not `MPI_THREAD_SINGLE` then the MPI library should not invoke C/ C++/Fortran library calls that are not thread safe, e.g., in an environment where `malloc` is not thread safe, then `malloc` should not be used by the MPI library.

Some implementors may want to use different MPI libraries for different levels of thread support. They can do so using dynamic linking and selecting which library will be linked when `MPI_INIT_THREAD` is invoked. If this is not possible, then optimizations for lower levels of thread support will occur only when the level of thread support required is specified at link time. (*End of advice to implementors.*)

The following function can be used to query the current level of thread support.

`MPI_QUERY_THREAD(provided)`

OUT      `provided`      provided level of thread support (integer)

`int MPI_Query_thread(int *provided)`

`MPI_QUERY_THREAD(PROVIDED, IERROR)`

INTEGER `PROVIDED`, `IERROR`

`{int MPI::Query_thread() (binding deprecated, see Section 15.2) }`

The call returns in `provided` the current level of thread support. This will be the value returned in `provided` by `MPI_INIT_THREAD`, if MPI was initialized by a call to `MPI_INIT_THREAD()`.

`MPI_IS_THREAD_MAIN(flag)`

OUT      `flag`      true if calling thread is main thread, false otherwise  
(logical)

`int MPI_Is_thread_main(int *flag)`

`MPI_IS_THREAD_MAIN(FLAG, IERROR)`

LOGICAL `FLAG`

INTEGER `IERROR`

`{bool MPI::Is_thread_main() (binding deprecated, see Section 15.2) }`

This function can be called by a thread to find out whether it is the main thread (the thread that called `MPI_INIT` or `MPI_INIT_THREAD`).

All routines listed in this section must be supported by all MPI implementations.

*Rationale.* MPI libraries are required to provide these calls even if they do not support threads, so that portable code that contains invocations to these functions be able to link correctly. `MPI_INIT` continues to be supported so as to provide compatibility with current MPI codes. (*End of rationale.*)

*Advice to users.* It is possible to spawn threads before MPI is initialized, but no MPI call other than `MPI_INITIALIZED` should be executed by these threads, until

MPI\_INIT\_THREAD is invoked by one thread (which, thereby, becomes the main thread). In particular, it is possible to enter the MPI execution with a multi-threaded process.

The level of thread support provided is a global property of the MPI process that can be specified only once, when MPI is initialized on that process (or before). Portable third party libraries have to be written so as to accommodate any provided level of thread support. Otherwise, their usage will be restricted to specific level(s) of thread support. If such a library can run only with specific level(s) of thread support, e.g., only with MPI\_THREAD\_MULTIPLE, then MPI\_QUERY\_THREAD can be used to check whether the user initialized MPI to the correct level of thread support and, if not, raise an exception. (*End of advice to users.*)

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

# Chapter 13

## I/O

### 13.1 Introduction

POSIX provides a model of a widely portable file system, but the portability and optimization needed for parallel I/O cannot be achieved with the POSIX interface.

The significant optimizations required for efficiency (e.g., grouping [35], collective buffering [6, 13, 36, 39, 46], and disk-directed I/O [31]) can only be implemented if the parallel I/O system provides a high-level interface supporting partitioning of file data among processes and a collective interface supporting complete transfers of global data structures between process memories and files. In addition, further efficiencies can be gained via support for asynchronous I/O, strided accesses, and control over physical file layout on storage devices (disks). The I/O environment described in this chapter provides these facilities.

Instead of defining I/O access modes to express the common patterns for accessing a shared file (broadcast, reduction, scatter, gather), we chose another approach in which data partitioning is expressed using derived datatypes. Compared to a limited set of predefined access patterns, this approach has the advantage of added flexibility and expressiveness.

#### 13.1.1 Definitions

**file** An MPI file is an ordered collection of typed data items. MPI supports random or sequential access to any integral set of these items. A file is opened collectively by a group of processes. All collective I/O calls on a file are collective over this group.

**displacement** A file *displacement* is an absolute byte position relative to the beginning of a file. The displacement defines the location where a *view* begins. Note that a “file displacement” is distinct from a “typemap displacement.”

**etype** An *etype* (*elementary* datatype) is the unit of data access and positioning. It can be any MPI predefined or derived datatype. Derived etypes can be constructed using any of the MPI datatype constructor routines, provided all resulting typemap displacements are **non-negative** and monotonically nondecreasing. Data access is performed in etype units, reading or writing whole data items of type etype. Offsets are expressed as a count of etypes; file pointers point to the beginning of etypes. Depending on context, the term “etype” is used to describe one of three aspects of an elementary datatype: a particular MPI type, a data item of that type, or the extent of that type.

ticket74.





**file size and end of file** The *size* of an MPI file is measured in bytes from the beginning of the file. A newly created file has a size of zero bytes. Using the size as an absolute displacement gives the position of the byte immediately following the last byte in the file. For any given view, the *end of file* is the offset of the first etype accessible in the current view starting after the last byte in the file.

**file pointer** A *file pointer* is an implicit offset maintained by MPI. “Individual file pointers” are file pointers that are local to each process that opened the file. A “shared file pointer” is a file pointer that is shared by the group of processes that opened the file.

**file handle** A *file handle* is an opaque object created by `MPI_FILE_OPEN` and freed by `MPI_FILE_CLOSE`. All operations on an open file reference the file through the file handle.

## 13.2 File Manipulation

### 13.2.1 Opening a File

`MPI_FILE_OPEN(comm, filename, amode, info, fh)`

IN	comm	communicator (handle)
IN	filename	name of file to open (string)
IN	amode	file access mode (integer)
IN	info	info object (handle)
OUT	fh	new file handle (handle)

```
int MPI_File_open(MPI_Comm comm, char *filename, int amode, MPI_Info info,
                  MPI_File *fh)
```

```
MPI_FILE_OPEN(COMM, FILENAME, AMODE, INFO, FH, IERROR)
CHARACTER*(*) FILENAME
INTEGER COMM, AMODE, INFO, FH, IERROR
```

```
{static MPI::File MPI::File::Open(const MPI::Intracomm& comm,
    const char* filename, int amode, const MPI::Info& info)
    (binding deprecated, see Section 15.2) }
```

`MPI_FILE_OPEN` opens the file identified by the file name `filename` on all processes in the `comm` communicator group. `MPI_FILE_OPEN` is a collective routine: all processes must provide the same value for `amode`, and all processes must provide `filenames` that reference the same file. (Values for `info` may vary.) `comm` must be an intracommunicator; it is erroneous to pass an intercommunicator to `MPI_FILE_OPEN`. Errors in `MPI_FILE_OPEN` are raised using the default file error handler (see Section 13.7, page 465). A process can open a file independently of other processes by using the `MPI_COMM_SELF` communicator. The file handle returned, `fh`, can be subsequently used to access the file until the file is closed using `MPI_FILE_CLOSE`. Before calling `MPI_FINALIZE`, the user is required to close (via `MPI_FILE_CLOSE`) all files that were opened with `MPI_FILE_OPEN`. Note that the

communicator `comm` is unaffected by `MPI_FILE_OPEN` and continues to be usable in all MPI routines (e.g., `MPI_SEND`). Furthermore, the use of `comm` will not interfere with I/O behavior.

The format for specifying the file name in the `filename` argument is implementation dependent and must be documented by the implementation.

*Advice to implementors.* An implementation may require that `filename` include a string or strings specifying additional information about the file. Examples include the type of filesystem (e.g., a prefix of `ufs:`), a remote hostname (e.g., a prefix of `machine.univ.edu:`), or a file password (e.g., a suffix of `/PASSWORD=SECRET`). (*End of advice to implementors.*)

*Advice to users.* On some implementations of MPI, the file namespace may not be identical from all processes of all applications. For example, `"/tmp/foo"` may denote different files on different processes, or a single file may have many names, dependent on process location. The user is responsible for ensuring that a single file is referenced by the `filename` argument, as it may be impossible for an implementation to detect this type of namespace error. (*End of advice to users.*)

Initially, all processes view the file as a linear byte stream, and each process views data in its own native representation (no data representation conversion is performed). (POSIX files are linear byte streams in the native representation.) The file view can be changed via the `MPI_FILE_SET_VIEW` routine.

The following access modes are supported (specified in `amode`, a bit vector OR of the following integer constants):

- `MPI_MODE_RDONLY` — read only,
- `MPI_MODE_RDWR` — reading and writing,
- `MPI_MODE_WRONLY` — write only,
- `MPI_MODE_CREATE` — create the file if it does not exist,
- `MPI_MODE_EXCL` — error if creating file that already exists,
- `MPI_MODE_DELETE_ON_CLOSE` — delete file on close,
- `MPI_MODE_UNIQUE_OPEN` — file will not be concurrently opened elsewhere,
- `MPI_MODE_SEQUENTIAL` — file will only be accessed sequentially,
- `MPI_MODE_APPEND` — set initial position of all file pointers to end of file.

*Advice to users.* C/C++ users can use bit vector OR (`|`) to combine these constants; Fortran 90 users can use the bit vector `IOR` intrinsic. Fortran 77 users can use (non-portably) bit vector `IOR` on systems that support it. Alternatively, Fortran users can portably use integer addition to OR the constants (each constant should appear at most once in the addition.). (*End of advice to users.*)

*Advice to implementors.* The values of these constants must be defined such that the bitwise OR and the sum of any distinct set of these constants is equivalent. (*End of advice to implementors.*)

The modes `MPI_MODE_RDONLY`, `MPI_MODE_RDWR`, `MPI_MODE_WRONLY`, `MPI_MODE_CREATE`, and `MPI_MODE_EXCL` have identical semantics to their POSIX counterparts [29]. Exactly one of `MPI_MODE_RDONLY`, `MPI_MODE_RDWR`, or `MPI_MODE_WRONLY`, must be specified. It is erroneous to specify `MPI_MODE_CREATE` or `MPI_MODE_EXCL` in conjunction with `MPI_MODE_RDONLY`; it is erroneous to specify `MPI_MODE_SEQUENTIAL` together with `MPI_MODE_RDWR`.

The `MPI_MODE_DELETE_ON_CLOSE` mode causes the file to be deleted (equivalent to performing an `MPI_FILE_DELETE`) when the file is closed.

The `MPI_MODE_UNIQUE_OPEN` mode allows an implementation to optimize access by eliminating the overhead of file locking. It is erroneous to open a file in this mode unless the file will not be concurrently opened elsewhere.

*Advice to users.* For `MPI_MODE_UNIQUE_OPEN`, *not opened elsewhere* includes both inside and outside the MPI environment. In particular, one needs to be aware of potential external events which may open files (e.g., automated backup facilities). When `MPI_MODE_UNIQUE_OPEN` is specified, the user is responsible for ensuring that no such external events take place. (*End of advice to users.*)

The `MPI_MODE_SEQUENTIAL` mode allows an implementation to optimize access to some sequential devices (tapes and network streams). It is erroneous to attempt nonsequential access to a file that has been opened in this mode.

Specifying `MPI_MODE_APPEND` only guarantees that all shared and individual file pointers are positioned at the initial end of file when `MPI_FILE_OPEN` returns. Subsequent positioning of file pointers is application dependent. In particular, the implementation does not ensure that all writes are appended.

Errors related to the access mode are raised in the class `MPI_ERR_AMODE`.

The `info` argument is used to provide information regarding file access patterns and file system specifics (see Section 13.2.8, page 416). The constant `MPI_INFO_NULL` can be used when no info needs to be specified.

*Advice to users.* Some file attributes are inherently implementation dependent (e.g., file permissions). These attributes must be set using either the `info` argument or facilities outside the scope of MPI. (*End of advice to users.*)

Files are opened by default using nonatomic mode file consistency semantics (see Section 13.6.1, page 455). The more stringent atomic mode consistency semantics, required for atomicity of conflicting accesses, can be set using `MPI_FILE_SET_ATOMICITY`.

### 13.2.2 Closing a File

## MPI\_FILE\_CLOSE(fh)

INOUT	fh	file handle (handle)
-------	----	----------------------

```
int MPI_File_close(MPI_File *fh)
```

MPI\_FILE\_CLOSE(FH, IERROR)

INTEGER FH, IERROR

```
1 {void MPI::File::Close() (binding deprecated, see Section 15.2) }
```

ticket150.

```
2
3 MPI_FILE_CLOSE first synchronizes file state (equivalent to performing an
4 MPI_FILE_SYNC), then closes the file associated with fh. The file is deleted if it was
5 opened with access mode MPI_MODE_DELETE_ON_CLOSE (equivalent to performing an
6 MPI_FILE_DELETE). MPI_FILE_CLOSE is a collective routine.
```

```
7
8 Advice to users. If the file is deleted on close, and there are other processes currently
9 accessing the file, the status of the file and the behavior of future accesses by these
10 processes are implementation dependent. (End of advice to users.)
```

```
11
12 The user is responsible for ensuring that all outstanding nonblocking requests and
13 split collective operations associated with fh made by a process have completed before that
14 process calls MPI_FILE_CLOSE.
```

```
15 The MPI_FILE_CLOSE routine deallocates the file handle object and sets fh to
16 MPI_FILE_NULL.
```

### 17 13.2.3 Deleting a File

```
18
19
20 MPI_FILE_DELETE(filename, info)
```

```
22 IN filename name of file to delete (string)
23 IN info info object (handle)
```

```
25
26 int MPI_File_delete(char *filename, MPI_Info info)
```

```
27 MPI_FILE_DELETE(FILENAME, INFO, IERROR)
```

```
28 CHARACTER*(*) FILENAME
29 INTEGER INFO, IERROR
```

```
30 {static void MPI::File::Delete(const char* filename, const MPI::Info& info)
31 (binding deprecated, see Section 15.2) }
```

```
32
33 MPI_FILE_DELETE deletes the file identified by the file name filename. If the file does
34 not exist, MPI_FILE_DELETE raises an error in the class MPI_ERR_NO_SUCH_FILE.
```

```
35 The info argument can be used to provide information regarding file system specifics
36 (see Section 13.2.8, page 416). The constant MPI_INFO_NULL refers to the null info, and
37 can be used when no info needs to be specified.
```

```
38 If a process currently has the file open, the behavior of any access to the file (as well
39 as the behavior of any outstanding accesses) is implementation dependent. In addition,
40 whether an open file is deleted or not is also implementation dependent. If the file is not
41 deleted, an error in the class MPI_ERR_FILE_IN_USE or MPI_ERR_ACCESS will be raised.
42 Errors are raised using the default error handler (see Section 13.7, page 465).
```

## 13.2.4 Resizing a File

`MPI_FILE_SET_SIZE(fh, size)`

INOUT	fh	file handle (handle)
IN	size	size to truncate or expand file (integer)

`int MPI_File_set_size(MPI_File fh, MPI_Offset size)`

`MPI_FILE_SET_SIZE(FH, SIZE, IERROR)`

INTEGER FH, IERROR

INTEGER(KIND=MPI\_OFFSET\_KIND) SIZE

```
{void MPI::File::Set_size(MPI::Offset size) (binding deprecated, see Section 15.2)
}
```

`MPI_FILE_SET_SIZE` resizes the file associated with the file handle `fh`. `size` is measured in bytes from the beginning of the file. `MPI_FILE_SET_SIZE` is collective; all processes in the group must pass identical values for `size`.

If `size` is smaller than the current file size, the file is truncated at the position defined by `size`. The implementation is free to deallocate file blocks located beyond this position.

If `size` is larger than the current file size, the file size becomes `size`. Regions of the file that have been previously written are unaffected. The values of data in the new regions in the file (those locations with displacements between old file size and `size`) are undefined. It is implementation dependent whether the `MPI_FILE_SET_SIZE` routine allocates file space—use `MPI_FILE_PREALLOCATE` to force file space to be reserved.

`MPI_FILE_SET_SIZE` does not affect the individual file pointers or the shared file pointer. If `MPI_MODE_SEQUENTIAL` mode was specified when the file was opened, it is erroneous to call this routine.

*Advice to users.* It is possible for the file pointers to point beyond the end of file after a `MPI_FILE_SET_SIZE` operation truncates a file. This is legal, and equivalent to seeking beyond the current end of file. (*End of advice to users.*)

All nonblocking requests and split collective operations on `fh` must be completed before calling `MPI_FILE_SET_SIZE`. Otherwise, calling `MPI_FILE_SET_SIZE` is erroneous. As far as consistency semantics are concerned, `MPI_FILE_SET_SIZE` is a write operation that conflicts with operations that access bytes at displacements between the old and new file sizes (see Section 13.6.1, page 455).

## 13.2.5 Preallocating Space for a File

`MPI_FILE_PREALLOCATE(fh, size)`

INOUT	fh	file handle (handle)
IN	size	size to preallocate file (integer)

```
1 int MPI_File_preallocate(MPI_File fh, MPI_Offset size)
```

```
2 MPI_FILE_PREALLOCATE(FH, SIZE, IERROR)
```

```
3     INTEGER FH, IERROR
```

```
4     INTEGER(KIND=MPI_OFFSET_KIND) SIZE
```

```
5 {void MPI::File::Preallocate(MPI::Offset size) (binding deprecated, see  
6 Section 15.2) }
```

MPI\_FILE\_PREALLOCATE ensures that storage space is allocated for the first `size` bytes of the file associated with `fh`. MPI\_FILE\_PREALLOCATE is collective; all processes in the group must pass identical values for `size`. Regions of the file that have previously been written are unaffected. For newly allocated regions of the file, MPI\_FILE\_PREALLOCATE has the same effect as writing undefined data. If `size` is larger than the current file size, the file size increases to `size`. If `size` is less than or equal to the current file size, the file size is unchanged.

The treatment of file pointers, pending nonblocking accesses, and file consistency is the same as with MPI\_FILE\_SET\_SIZE. If MPI\_MODE\_SEQUENTIAL mode was specified when the file was opened, it is erroneous to call this routine.

*Advice to users.* In some implementations, file preallocation may be expensive. (*End of advice to users.*)

### 13.2.6 Querying the Size of a File

```
26 MPI_FILE_GET_SIZE(fh, size)
```

```
27     IN          fh                file handle (handle)
```

```
28     OUT         size              size of the file in bytes (integer)
```

```
31 int MPI_File_get_size(MPI_File fh, MPI_Offset *size)
```

```
32 MPI_FILE_GET_SIZE(FH, SIZE, IERROR)
```

```
33     INTEGER FH, IERROR
```

```
34     INTEGER(KIND=MPI_OFFSET_KIND) SIZE
```

```
35 {MPI::Offset MPI::File::Get_size() const (binding deprecated, see Section 15.2) }
```

MPI\_FILE\_GET\_SIZE returns, in `size`, the current size in bytes of the file associated with the file handle `fh`. As far as consistency semantics are concerned, MPI\_FILE\_GET\_SIZE is a data access operation (see Section 13.6.1, page 455).

## 13.2.7 Querying File Parameters

MPI\_FILE\_GET\_GROUP(fh, group)

IN	fh	file handle (handle)
OUT	group	group which opened the file (handle)

int MPI\_File\_get\_group(MPI\_File fh, MPI\_Group \*group)

MPI\_FILE\_GET\_GROUP(FH, GROUP, IERROR)  
 INTEGER FH, GROUP, IERROR

{MPI::Group MPI::File::Get\_group() const *(binding deprecated, see Section 15.2)* }

MPI\_FILE\_GET\_GROUP returns a duplicate of the group of the communicator used to open the file associated with fh. The group is returned in group. The user is responsible for freeing group.

MPI\_FILE\_GET\_AMODE(fh, amode)

IN	fh	file handle (handle)
OUT	amode	file access mode used to open the file (integer)

int MPI\_File\_get\_amode(MPI\_File fh, int \*amode)

MPI\_FILE\_GET\_AMODE(FH, AMODE, IERROR)  
 INTEGER FH, AMODE, IERROR

{int MPI::File::Get\_amode() const *(binding deprecated, see Section 15.2)* }

MPI\_FILE\_GET\_AMODE returns, in amode, the access mode of the file associated with fh.

**Example 13.1** In Fortran 77, decoding an amode bit vector will require a routine such as the following:

```

      SUBROUTINE BIT_QUERY(TEST_BIT, MAX_BIT, AMODE, BIT_FOUND)
      !
      !  TEST IF THE INPUT TEST_BIT IS SET IN THE INPUT AMODE
      !  IF SET, RETURN 1 IN BIT_FOUND, 0 OTHERWISE
      !
      INTEGER TEST_BIT, AMODE, BIT_FOUND, CP_AMODE, HIFOUND
      BIT_FOUND = 0
      CP_AMODE = AMODE
100  CONTINUE
      LBIT = 0
      HIFOUND = 0
      DO 20 L = MAX_BIT, 0, -1
          MATCHER = 2**L

```

```

1      IF (CP_AMODE .GE. MATCHER .AND. HIFOUND .EQ. 0) THEN
2          HIFOUND = 1
3          LBIT = MATCHER
4          CP_AMODE = CP_AMODE - MATCHER
5      END IF
6  20  CONTINUE
7      IF (HIFOUND .EQ. 1 .AND. LBIT .EQ. TEST_BIT) BIT_FOUND = 1
8      IF (BIT_FOUND .EQ. 0 .AND. HIFOUND .EQ. 1 .AND. &
9          CP_AMODE .GT. 0) GO TO 100
10     END

```

This routine could be called successively to decode `amode`, one bit at a time. For example, the following code fragment would check for `MPI_MODE_RDONLY`.

```

14     CALL BIT_QUERY(MPI_MODE_RDONLY, 30, AMODE, BIT_FOUND)
15     IF (BIT_FOUND .EQ. 1) THEN
16         PRINT *, ' FOUND READ-ONLY BIT IN AMODE=', AMODE
17     ELSE
18         PRINT *, ' READ-ONLY BIT NOT FOUND IN AMODE=', AMODE
19     END IF
20

```

### 13.2.8 File Info

Hints specified via info (see Section 9, page 317) allow a user to provide information such as file access patterns and file system specifics to direct optimization. Providing hints may enable an implementation to deliver increased I/O performance or minimize the use of system resources. However, hints do not change the semantics of any of the I/O interfaces. In other words, an implementation is free to ignore all hints. Hints are specified on a per file basis, in `MPI_FILE_OPEN`, `MPI_FILE_DELETE`, `MPI_FILE_SET_VIEW`, and `MPI_FILE_SET_INFO`, via the opaque info object. When an info object that specifies a subset of valid hints is passed to `MPI_FILE_SET_VIEW` or `MPI_FILE_SET_INFO`, there will be no effect on previously set or defaulted hints that the info does not specify.

*Advice to implementors.* It may happen that a program is coded with hints for one system, and later executes on another system that does not support these hints. In general, unsupported hints should simply be ignored. Needless to say, no hint can be mandatory. However, for each hint used by a specific implementation, a default value must be provided when the user does not specify a value for this hint. (*End of advice to implementors.*)

`MPI_FILE_SET_INFO(fh, info)`

INOUT	fh	file handle (handle)
IN	info	info object (handle)

`int MPI_File_set_info(MPI_File fh, MPI_Info info)`

`MPI_FILE_SET_INFO(FH, INFO, IERROR)`



INTEGER FH, INFO, IERROR

`{void MPI::File::Set_info(const MPI::Info& info) (binding deprecated, see  
Section 15.2) }`

`MPI_FILE_SET_INFO` sets new values for the hints of the file associated with `fh`. `MPI_FILE_SET_INFO` is a collective routine. The info object may be different on each process, but any info entries that an implementation requires to be the same on all processes must appear with the same value in each process's info object.

*Advice to users.* Many info items that an implementation can use when it creates or opens a file cannot easily be changed once the file has been created or opened. Thus, an implementation may ignore hints issued in this call that it would have accepted in an open call. (*End of advice to users.*)

`MPI_FILE_GET_INFO(fh, info_used)`

IN	fh	file handle (handle)
OUT	info_used	new info object (handle)

`int MPI_File_get_info(MPI_File fh, MPI_Info *info_used)`

`MPI_FILE_GET_INFO(FH, INFO_USED, IERROR)`

INTEGER FH, INFO\_USED, IERROR

`{MPI::Info MPI::File::Get_info() const (binding deprecated, see Section 15.2) }`

`MPI_FILE_GET_INFO` returns a new info object containing the hints of the file associated with `fh`. The current setting of all hints actually used by the system related to this open file is returned in `info_used`. If no such hints exist, a handle to a newly created info object is returned that contains no key/value pair. The user is responsible for freeing `info_used` via `MPI_INFO_FREE`.

*Advice to users.* The info object returned in `info_used` will contain all hints currently active for this file. This set of hints may be greater or smaller than the set of hints passed in to `MPI_FILE_OPEN`, `MPI_FILE_SET_VIEW`, and `MPI_FILE_SET_INFO`, as the system may not recognize some hints set by the user, and may recognize other hints that the user has not set. (*End of advice to users.*)

### Reserved File Hints

Some potentially useful hints (info key values) are outlined below. The following key values are reserved. An implementation is not required to interpret these key values, but if it does interpret the key value, it must provide the functionality described. (For more details on “info,” see Section 9, page 317.)

These hints mainly affect access patterns and the layout of data on parallel I/O devices. For each hint name introduced, we describe the purpose of the hint, and the type of the hint value. The “[**SAME**]” annotation specifies that the hint values provided by all participating processes must be identical; otherwise the program is erroneous. In addition, some hints are

context dependent, and are only used by an implementation at specific times (e.g., `file_perm` is only useful during file creation).

**access\_style (comma separated list of strings):** This hint specifies the manner in which the file will be accessed until the file is closed or until the `access_style` key value is altered. The hint value is a comma separated list of the following: `read_once`, `write_once`, `read_mostly`, `write_mostly`, `sequential`, `reverse_sequential`, and `random`.

**collective\_buffering (boolean) [SAME]:** This hint specifies whether the application may benefit from collective buffering. Collective buffering is an optimization performed on collective accesses. Accesses to the file are performed on behalf of all processes in the group by a number of target nodes. These target nodes coalesce small requests into large disk accesses. Legal values for this key are `true` and `false`. Collective buffering parameters are further directed via additional hints: `cb_block_size`, `cb_buffer_size`, and `cb_nodes`.

**cb\_block\_size (integer) [SAME]:** This hint specifies the block size to be used for collective buffering file access. *Target nodes* access data in chunks of this size. The chunks are distributed among target nodes in a round-robin (CYCLIC) pattern.

**cb\_buffer\_size (integer) [SAME]:** This hint specifies the total buffer space that can be used for collective buffering on each target node, usually a multiple of `cb_block_size`.

**cb\_nodes (integer) [SAME]:** This hint specifies the number of target nodes to be used for collective buffering.

**chunked (comma separated list of integers) [SAME]:** This hint specifies that the file consists of a multidimensional array that is often accessed by subarrays. The value for this hint is a comma separated list of array dimensions, starting from the most significant one (for an array stored in row-major order, as in C, the most significant dimension is the first one; for an array stored in column-major order, as in Fortran, the most significant dimension is the last one, and array dimensions should be reversed).

**chunked\_item (comma separated list of integers) [SAME]:** This hint specifies the size of each array entry, in bytes.

**chunked\_size (comma separated list of integers) [SAME]:** This hint specifies the dimensions of the subarrays. This is a comma separated list of array dimensions, starting from the most significant one.

**filename (string):** This hint specifies the file name used when the file was opened. If the implementation is capable of returning the file name of an open file, it will be returned using this key by `MPI_FILE_GET_INFO`. This key is ignored when passed to `MPI_FILE_OPEN`, `MPI_FILE_SET_VIEW`, `MPI_FILE_SET_INFO`, and `MPI_FILE_DELETE`.

**file\_perm (string) [SAME]:** This hint specifies the file permissions to use for file creation. Setting this hint is only useful when passed to `MPI_FILE_OPEN` with an `amode` that includes `MPI_MODE_CREATE`. The set of legal values for this key is implementation dependent.

**io\_node\_list (comma separated list of strings) [SAME]:** This hint specifies the list of I/O devices that should be used to store the file. This hint is most relevant when the file is created.

**nb\_proc (integer) [SAME]:** This hint specifies the number of parallel processes that will typically be assigned to run programs that access this file. This hint is most relevant when the file is created.

**num\_io\_nodes (integer) [SAME]:** This hint specifies the number of I/O devices in the system. This hint is most relevant when the file is created.

**striping\_factor (integer) [SAME]:** This hint specifies the number of I/O devices that the file should be striped across, and is relevant only when the file is created.

**striping\_unit (integer) [SAME]:** This hint specifies the suggested striping unit to be used for this file. The striping unit is the amount of consecutive data assigned to one I/O device before progressing to the next device, when striping across a number of devices. It is expressed in bytes. This hint is relevant only when the file is created.

### 13.3 File Views

**MPI\_FILE\_SET\_VIEW(fh, disp, etype, filetype, datarep, info)**

INOUT	fh	file handle (handle)
IN	disp	displacement (integer)
IN	etype	elementary datatype (handle)
IN	filetype	filetype (handle)
IN	datarep	data representation (string)
IN	info	info object (handle)

```
int MPI_File_set_view(MPI_File fh, MPI_Offset disp, MPI_Datatype etype,
                     MPI_Datatype filetype, char *datarep, MPI_Info info)
```

```
MPI_FILE_SET_VIEW(FH, DISP, ETYPE, FILETYPE, DATAREP, INFO, IERROR)
```

```
INTEGER FH, ETYPE, FILETYPE, INFO, IERROR
```

```
CHARACTER*(*) DATAREP
```

```
INTEGER(KIND=MPI_OFFSET_KIND) DISP
```

```
{void MPI::File::Set_view(MPI::Offset disp, const MPI::Datatype& etype,
                          const MPI::Datatype& filetype, const char* datarep,
                          const MPI::Info& info) (binding deprecated, see Section 15.2) }
```

The **MPI\_FILE\_SET\_VIEW** routine changes the process's view of the data in the file. The start of the view is set to **disp**; the type of data is set to **etype**; the distribution of data to processes is set to **filetype**; and the representation of data in the file is set to **datarep**. In addition, **MPI\_FILE\_SET\_VIEW** resets the individual file pointers and the shared file pointer to zero. **MPI\_FILE\_SET\_VIEW** is collective; the values for **datarep** and the extents

of `etype` in the file data representation must be identical on all processes in the group; values for `disp`, `filetype`, and `info` may vary. The datatypes passed in `etype` and `filetype` must be committed.

The `etype` always specifies the data layout in the file. If `etype` is a portable datatype (see Section 2.4, page 11), the extent of `etype` is computed by scaling any displacements in the datatype to match the file data representation. If `etype` is not a portable datatype, no scaling is done when computing the extent of `etype`. The user must be careful when using nonportable `etypes` in heterogeneous environments; see Section 13.5.1, page 448 for further details.

If `MPI_MODE_SEQUENTIAL` mode was specified when the file was opened, the special displacement `MPI_DISPLACEMENT_CURRENT` must be passed in `disp`. This sets the displacement to the current position of the shared file pointer. `MPI_DISPLACEMENT_CURRENT` is invalid unless the `amode` for the file has `MPI_MODE_SEQUENTIAL` set.

*Rationale.* For some sequential files, such as those corresponding to magnetic tapes or streaming network connections, the *displacement* may not be meaningful. `MPI_DISPLACEMENT_CURRENT` allows the view to be changed for these types of files. (*End of rationale.*)

*Advice to implementors.* It is expected that a call to `MPI_FILE_SET_VIEW` will immediately follow `MPI_FILE_OPEN` in numerous instances. A high-quality implementation will ensure that this behavior is efficient. (*End of advice to implementors.*)

The `disp` displacement argument specifies the position (absolute offset in bytes from the beginning of the file) where the view begins.

*Advice to users.* `disp` can be used to skip headers or when the file includes a sequence of data segments that are to be accessed in different patterns (see Figure 13.3). Separate views, each using a different displacement and `filetype`, can be used to access each segment.

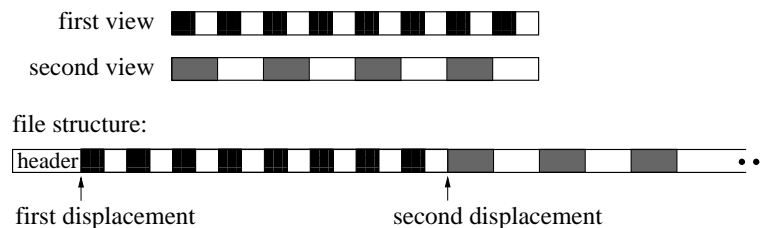


Figure 13.3: Displacements

(*End of advice to users.*)

An *etype* (*elementary* datatype) is the unit of data access and positioning. It can be any MPI predefined or derived datatype. Derived `etypes` can be constructed by using any of the MPI datatype constructor routines, provided all resulting typemap displacements are **non-negative** and monotonically nondecreasing. Data access is performed in `etype` units, reading or writing whole data items of type `etype`. Offsets are expressed as a count of `etypes`; file pointers point to the beginning of `etypes`.

*Advice to users.* In order to ensure interoperability in a heterogeneous environment, additional restrictions must be observed when constructing the **etype** (see Section 13.5, page 445). (*End of advice to users.*)

A filetype is either a single etype or a derived MPI datatype constructed from multiple instances of the same etype. In addition, the extent of any hole in the filetype must be a multiple of the etype’s extent. These displacements are not required to be distinct, but they cannot be negative, and they must be monotonically nondecreasing.

If the file is opened for writing, neither the **etype** nor the **filetype** is permitted to contain overlapping regions. This restriction is equivalent to the “datatype used in a receive cannot specify overlapping regions” restriction for communication. Note that **filetypes** from different processes may still overlap each other.

If **filetype** has holes in it, then the data in the holes is inaccessible to the calling process. However, the **disp**, **etype** and **filetype** arguments can be changed via future calls to **MPI\_FILE\_SET\_VIEW** to access a different part of the file.

It is erroneous to use absolute addresses in the construction of the **etype** and **filetype**.

The **info** argument is used to provide information regarding file access patterns and file system specifics to direct optimization (see Section 13.2.8, page 416). The constant **MPI\_INFO\_NULL** refers to the null info and can be used when no info needs to be specified.

The **datarep** argument is a string that specifies the representation of data in the file. See the file interoperability section (Section 13.5, page 445) for details and a discussion of valid values.

The user is responsible for ensuring that all nonblocking requests and split collective operations on **fh** have been completed before calling **MPI\_FILE\_SET\_VIEW**—otherwise, the call to **MPI\_FILE\_SET\_VIEW** is erroneous.

**MPI\_FILE\_GET\_VIEW**(**fh**, **disp**, **etype**, **filetype**, **datarep**)

IN	<b>fh</b>	file handle (handle)
OUT	<b>disp</b>	displacement (integer)
OUT	<b>etype</b>	elementary datatype (handle)
OUT	<b>filetype</b>	filetype (handle)
OUT	<b>datarep</b>	data representation (string)

```
int MPI_File_get_view(MPI_File fh, MPI_Offset *disp, MPI_Datatype *etype,
                     MPI_Datatype *filetype, char *datarep)
```

```
MPI_FILE_GET_VIEW(FH, DISP, ETYPE, FILETYPE, DATAREP, IERROR)
```

```
INTEGER FH, ETYPE, FILETYPE, IERROR
```

```
CHARACTER*(*) DATAREP
```

```
INTEGER(KIND=MPI_OFFSET_KIND) DISP
```

```
{void MPI::File::Get_view(MPI::Offset& disp, MPI::Datatype& etype,
                          MPI::Datatype& filetype, char* datarep) const (binding
                          deprecated, see Section 15.2) }
```

**MPI\_FILE\_GET\_VIEW** returns the process’s view of the data in the file. The current value of the displacement is returned in **disp**. The **etype** and **filetype** are new datatypes with

ticket150.

ticket150.

typemaps equal to the typemaps of the current etype and filetype, respectively.

The data representation is returned in `datarep`. The user is responsible for ensuring that `datarep` is large enough to hold the returned data representation string. The length of a data representation string is limited to the value of `MPI_MAX_DATAREP_STRING`.

In addition, if a portable datatype was used to set the current view, then the corresponding datatype returned by `MPI_FILE_GET_VIEW` is also a portable datatype. If `etype` or `filetype` are derived datatypes, the user is responsible for freeing them. The `etype` and `filetype` returned are both in a committed state.

## 13.4 Data Access

### 13.4.1 Data Access Routines

Data is moved between files and processes by issuing read and write calls. There are three orthogonal aspects to data access: positioning (explicit offset *vs.* implicit file pointer), synchronism (blocking *vs.* nonblocking and split collective), and coordination (noncollective *vs.* collective). The following combinations of these data access routines, including two types of file pointers (individual and shared) are provided in Table 13.1.

positioning	synchronism	coordination	
		<i>noncollective</i>	<i>collective</i>
<i>explicit offsets</i>	<i>blocking</i>	MPI_FILE_READ_AT MPI_FILE_WRITE_AT	MPI_FILE_READ_AT_ALL MPI_FILE_WRITE_AT_ALL
	<i>nonblocking &amp; split collective</i>	MPI_FILE_IREAD_AT MPI_FILE_IWRITE_AT	MPI_FILE_READ_AT_ALL_BEGIN MPI_FILE_READ_AT_ALL_END MPI_FILE_WRITE_AT_ALL_BEGIN MPI_FILE_WRITE_AT_ALL_END
<i>individual file pointers</i>	<i>blocking</i>	MPI_FILE_READ MPI_FILE_WRITE	MPI_FILE_READ_ALL MPI_FILE_WRITE_ALL
	<i>nonblocking &amp; split collective</i>	MPI_FILE_IREAD MPI_FILE_IWRITE	MPI_FILE_READ_ALL_BEGIN MPI_FILE_READ_ALL_END MPI_FILE_WRITE_ALL_BEGIN MPI_FILE_WRITE_ALL_END
<i>shared file pointer</i>	<i>blocking</i>	MPI_FILE_READ_SHARED MPI_FILE_WRITE_SHARED	MPI_FILE_READ_ORDERED MPI_FILE_WRITE_ORDERED
	<i>nonblocking &amp; split collective</i>	MPI_FILE_IREAD_SHARED MPI_FILE_IWRITE_SHARED	MPI_FILE_READ_ORDERED_BEGIN MPI_FILE_READ_ORDERED_END MPI_FILE_WRITE_ORDERED_BEGIN MPI_FILE_WRITE_ORDERED_END

Table 13.1: Data access routines

POSIX `read()/fread()` and `write()/fwrite()` are blocking, noncollective operations and use individual file pointers. The MPI equivalents are `MPI_FILE_READ` and `MPI_FILE_WRITE`.

Implementations of data access routines may buffer data to improve performance. This does not affect reads, as the data is always available in the user's buffer after a read operation completes. For writes, however, the `MPI_FILE_SYNC` routine provides the only guarantee that data has been transferred to the storage device.

## Positioning

MPI provides three types of positioning for data access routines: explicit offsets, individual file pointers, and shared file pointers. The different positioning methods may be mixed within the same program and do not affect each other.

The data access routines that accept explicit offsets contain `_AT` in their name (e.g., `MPI_FILE_WRITE_AT`). Explicit offset operations perform data access at the file position given directly as an argument—no file pointer is used nor updated. Note that this is not equivalent to an atomic seek-and-read or seek-and-write operation, as no “seek” is issued. Operations with explicit offsets are described in Section 13.4.2, page 425.

The names of the individual file pointer routines contain no positional qualifier (e.g., `MPI_FILE_WRITE`). Operations with individual file pointers are described in Section 13.4.3, page 428. The data access routines that use shared file pointers contain `_SHARED` or `_ORDERED` in their name (e.g., `MPI_FILE_WRITE_SHARED`). Operations with shared file pointers are described in Section 13.4.4, page 434.

The main semantic issues with MPI-maintained file pointers are how and when they are updated by I/O operations. In general, each I/O operation leaves the file pointer pointing to the next data item after the last one that is accessed by the operation. In a nonblocking or split collective operation, the pointer is updated by the call that initiates the I/O, possibly before the access completes.

More formally,

$$new\_file\_offset = old\_file\_offset + \frac{elements(datatype)}{elements(etype)} \times count$$

where *count* is the number of *datatype* items to be accessed, *elements(X)* is the number of predefined datatypes in the typemap of *X*, and *old\_file\_offset* is the value of the implicit offset before the call. The file position, *new\_file\_offset*, is in terms of a count of etypes relative to the current view.

## Synchronism

MPI supports blocking and nonblocking I/O routines.

A *blocking* I/O call will not return until the I/O request is completed.

A *nonblocking* I/O call initiates an I/O operation, but does not wait for it to complete. Given suitable hardware, this allows the transfer of data out/in the user’s buffer to proceed concurrently with computation. A separate *request complete* call (`MPI_WAIT`, `MPI_TEST`, or any of their variants) is needed to complete the I/O request, i.e., to confirm that the data has been read or written and that it is safe for the user to reuse the buffer. The nonblocking versions of the routines are named `MPI_FILE_IXXX`, where the *I* stands for immediate.

It is erroneous to access the local buffer of a nonblocking data access operation, or to use that buffer as the source or target of other communications, between the initiation and completion of the operation.

The split collective routines support a restricted form of “nonblocking” operations for collective data access (see Section 13.4.5, page 439).

## Coordination

Every noncollective data access routine `MPI_FILE_XXX` has a collective counterpart. For most routines, this counterpart is `MPI_FILE_XXX_ALL` or a pair of `MPI_FILE_XXX_BEGIN`



and `MPI_FILE_XXX_END`. The counterparts to the `MPI_FILE_XXX_SHARED` routines are `MPI_FILE_XXX_ORDERED`.

The completion of a noncollective call only depends on the activity of the calling process. However, the completion of a collective call (which must be called by all members of the process group) may depend on the activity of the other processes participating in the collective call. See Section 13.6.4, page 459, for rules on semantics of collective calls.

Collective operations may perform much better than their noncollective counterparts, as global data accesses have significant potential for automatic optimization.

## Data Access Conventions

Data is moved between files and processes by calling read and write routines. Read routines move data from a file into memory. Write routines move data from memory into a file. The file is designated by a file handle, `fh`. The location of the file data is specified by an offset into the current view. The data in memory is specified by a triple: `buf`, `count`, and `datatype`. Upon completion, the amount of data accessed by the calling process is returned in a `status`.

An offset designates the starting position in the file for an access. The offset is always in `etype` units relative to the current view. Explicit offset routines pass `offset` as an argument (negative values are erroneous). The file pointer routines use implicit offsets maintained by MPI.

A data access routine attempts to transfer (read or write) `count` data items of type `datatype` between the user's buffer `buf` and the file. The `datatype` passed to the routine must be a committed datatype. The layout of data in memory corresponding to `buf`, `count`, `datatype` is interpreted the same way as in MPI communication functions; see Section 3.2.2 on page 29 and Section 4.1.11 on page 105. The data is accessed from those parts of the file specified by the current view (Section 13.3, page 419). The type signature of `datatype` must match the type signature of some number of contiguous copies of the `etype` of the current view. As in a receive, it is erroneous to specify a `datatype` for reading that contains overlapping regions (areas of memory which would be stored into more than once).

The nonblocking data access routines indicate that MPI can start a data access and associate a request handle, `request`, with the I/O operation. Nonblocking operations are completed via `MPI_TEST`, `MPI_WAIT`, or any of their variants.

Data access operations, when completed, return the amount of data accessed in `status`.

*Advice to users.* To prevent problems with the argument copying and register optimization done by Fortran compilers, please note the hints in subsections “Problems Due to Data Copying and Sequence Association,” and “A Problem with Register Optimization” in Section 16.2.2, pages 501 and 503. (*End of advice to users.*)

For blocking routines, `status` is returned directly. For nonblocking routines and split collective routines, `status` is returned when the operation is completed. The number of `datatype` entries and predefined elements accessed by the calling process can be extracted from `status` by using `MPI_GET_COUNT` and `MPI_GET_ELEMENTS`, respectively. The interpretation of the `MPI_ERROR` field is the same as for other operations — normally undefined, but meaningful if an MPI routine returns `MPI_ERR_IN_STATUS`. The user can pass (in C and Fortran) `MPI_STATUS_IGNORE` in the `status` argument if the return value of this argument is not needed. In C++, the `status` argument is optional. The `status` can be passed to `MPI_TEST_CANCELLED` to determine if the operation was cancelled. All other fields of `status` are undefined.



When reading, a program can detect the end of file by noting that the amount of data read is less than the amount requested. Writing past the end of file increases the file size. The amount of data accessed will be the amount requested, unless an error is raised (or a read reaches the end of file).

### 13.4.2 Data Access with Explicit Offsets

If `MPI_MODE_SEQUENTIAL` mode was specified when the file was opened, it is erroneous to call the routines in this section.

`MPI_FILE_READ_AT(fh, offset, buf, count, datatype, status)`

IN	fh	file handle (handle)
IN	offset	file offset (integer)
OUT	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	status	status object (Status)

```
int MPI_File_read_at(MPI_File fh, MPI_Offset offset, void *buf, int count,
                    MPI_Datatype datatype, MPI_Status *status)
```

```
MPI_FILE_READ_AT(FH, OFFSET, BUF, COUNT, DATATYPE, STATUS, IERROR)
    <type> BUF(*)
    INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
    INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
```

```
{void MPI::File::Read_at(MPI::Offset offset, void* buf, int count,
    const MPI::Datatype& datatype, MPI::Status& status) (binding
    deprecated, see Section 15.2) }
```

```
{void MPI::File::Read_at(MPI::Offset offset, void* buf, int count,
    const MPI::Datatype& datatype) (binding deprecated, see
    Section 15.2) }
```

`MPI_FILE_READ_AT` reads a file beginning at the position specified by `offset`.

`MPI_FILE_READ_AT_ALL(fh, offset, buf, count, datatype, status)`

IN	fh	file handle (handle)
IN	offset	file offset (integer)
OUT	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	status	status object (Status)

```

1  int MPI_File_read_at_all(MPI_File fh, MPI_Offset offset, void *buf,
2      int count, MPI_Datatype datatype, MPI_Status *status)
3
4  MPI_FILE_READ_AT_ALL(FH, OFFSET, BUF, COUNT, DATATYPE, STATUS, IERROR)
5      <type> BUF(*)
6      INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
7      INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
8
9  {void MPI::File::Read_at_all(MPI::Offset offset, void* buf, int count,
10      const MPI::Datatype& datatype, MPI::Status& status) (binding
11      deprecated, see Section 15.2) }
12
13  {void MPI::File::Read_at_all(MPI::Offset offset, void* buf, int count,
14      const MPI::Datatype& datatype) (binding deprecated, see
15      Section 15.2) }
16
17  MPI_FILE_READ_AT_ALL is a collective version of the blocking MPI_FILE_READ_AT
18  interface.

```

```

19  MPI_FILE_WRITE_AT(fh, offset, buf, count, datatype, status)

```

INOUT	fh	file handle (handle)
IN	offset	file offset (integer)
IN	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	status	status object (Status)

```

20
21
22
23
24
25
26
27
28
29  int MPI_File_write_at(MPI_File fh, MPI_Offset offset, void *buf, int count,
30      MPI_Datatype datatype, MPI_Status *status)
31
32  MPI_FILE_WRITE_AT(FH, OFFSET, BUF, COUNT, DATATYPE, STATUS, IERROR)
33      <type> BUF(*)
34      INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
35      INTEGER(KIND=MPI_OFFSET_KIND) OFFSET

```

```

36  {void MPI::File::Write_at(MPI::Offset offset, const void* buf, int count,
37      const MPI::Datatype& datatype, MPI::Status& status) (binding
38      deprecated, see Section 15.2) }
39
40  {void MPI::File::Write_at(MPI::Offset offset, const void* buf, int count,
41      const MPI::Datatype& datatype) (binding deprecated, see
42      Section 15.2) }

```

```

43  MPI_FILE_WRITE_AT writes a file beginning at the position specified by offset.
44
45
46
47
48

```

MPI\_FILE\_WRITE\_AT\_ALL(fh, offset, buf, count, datatype, status)

INOUT	fh	file handle (handle)
IN	offset	file offset (integer)
IN	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	status	status object (Status)

```
int MPI_File_write_at_all(MPI_File fh, MPI_Offset offset, void *buf,
                        int count, MPI_Datatype datatype, MPI_Status *status)
```

```
MPI_FILE_WRITE_AT_ALL(FH, OFFSET, BUF, COUNT, DATATYPE, STATUS, IERROR)
    <type> BUF(*)
    INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
    INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
```

```
{void MPI::File::Write_at_all(MPI::Offset offset, const void* buf,
    int count, const MPI::Datatype& datatype, MPI::Status& status)
    (binding deprecated, see Section 15.2) }
```

```
{void MPI::File::Write_at_all(MPI::Offset offset, const void* buf,
    int count, const MPI::Datatype& datatype) (binding deprecated, see
    Section 15.2) }
```

MPI\_FILE\_WRITE\_AT\_ALL is a collective version of the blocking MPI\_FILE\_WRITE\_AT interface.

MPI\_FILE\_IREAD\_AT(fh, offset, buf, count, datatype, request)

IN	fh	file handle (handle)
IN	offset	file offset (integer)
OUT	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	request	request object (handle)

```
int MPI_File_iread_at(MPI_File fh, MPI_Offset offset, void *buf, int count,
                    MPI_Datatype datatype, MPI_Request *request)
```

```
MPI_FILE_IREAD_AT(FH, OFFSET, BUF, COUNT, DATATYPE, REQUEST, IERROR)
    <type> BUF(*)
    INTEGER FH, COUNT, DATATYPE, REQUEST, IERROR
    INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
```

```
{MPI::Request MPI::File::Iread_at(MPI::Offset offset, void* buf, int count,
    const MPI::Datatype& datatype) (binding deprecated, see
```

ticket150.

ticket150.

ticket150.

ticket150.

ticket150.

ticket150.

*Section 15.2) }*

MPI\_FILE\_IREAD\_AT is a nonblocking version of the MPI\_FILE\_READ\_AT interface.

MPI\_FILE\_IWRITE\_AT(fh, offset, buf, count, datatype, request)

INOUT	fh	file handle (handle)
IN	offset	file offset (integer)
IN	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	request	request object (handle)

```
int MPI_File_iwrite_at(MPI_File fh, MPI_Offset offset, void *buf,
                      int count, MPI_Datatype datatype, MPI_Request *request)
```

```
MPI_FILE_IWRITE_AT(FH, OFFSET, BUF, COUNT, DATATYPE, REQUEST, IERROR)
    <type> BUF(*)
    INTEGER FH, COUNT, DATATYPE, REQUEST, IERROR
    INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
```

```
{MPI::Request MPI::File::Iwrite_at(MPI::Offset offset, const void* buf,
    int count, const MPI::Datatype& datatype) (binding deprecated, see
    Section 15.2) }
```

MPI\_FILE\_IWRITE\_AT is a nonblocking version of the MPI\_FILE\_WRITE\_AT interface.

### 13.4.3 Data Access with Individual File Pointers

MPI maintains one individual file pointer per process per file handle. The current value of this pointer implicitly specifies the offset in the data access routines described in this section. These routines only use and update the individual file pointers maintained by MPI. The shared file pointer is not used nor updated.

The individual file pointer routines have the same semantics as the data access with explicit offset routines described in Section 13.4.2, page 425, with the following modification:

- the *offset* is defined to be the current value of the MPI-maintained individual file pointer.

After an individual file pointer operation is initiated, the individual file pointer is updated to point to the next etype after the last one that will be accessed. The file pointer is updated relative to the current view of the file.

If MPI\_MODE\_SEQUENTIAL mode was specified when the file was opened, it is erroneous to call the routines in this section, with the exception of MPI\_FILE\_GET\_BYTE\_OFFSET.

MPI\_FILE\_READ(fh, buf, count, datatype, status)

INOUT	fh	file handle (handle)
OUT	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	status	status object (Status)

```
int MPI_File_read(MPI_File fh, void *buf, int count, MPI_Datatype datatype,
                 MPI_Status *status)
```

```
MPI_FILE_READ(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)
```

```
<type> BUF(*)
```

```
INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
```

```
{void MPI::File::Read(void* buf, int count, const MPI::Datatype& datatype,
                     MPI::Status& status) (binding deprecated, see Section 15.2) }
```

```
{void MPI::File::Read(void* buf, int count, const MPI::Datatype& datatype)
(binding deprecated, see Section 15.2) }
```

MPI\_FILE\_READ reads a file using the individual file pointer.

**Example 13.2** The following Fortran code fragment is an example of reading a file until the end of file is reached:

```
!   Read a preexisting input file until all data has been read.
!   Call routine "process_input" if all requested data is read.
!   The Fortran 90 "exit" statement exits the loop.

integer    bufsize, numread, totprocessed, status(MPI_STATUS_SIZE)
parameter (bufsize=100)
real      localbuffer(bufsize)

call MPI_FILE_OPEN( MPI_COMM_WORLD, 'myoldfile', &
                   MPI_MODE_RDONLY, MPI_INFO_NULL, myfh, ierr )
call MPI_FILE_SET_VIEW( myfh, 0, MPI_REAL, MPI_REAL, 'native', &
                      MPI_INFO_NULL, ierr )

totprocessed = 0
do
  call MPI_FILE_READ( myfh, localbuffer, bufsize, MPI_REAL, &
                    status, ierr )
  call MPI_GET_COUNT( status, MPI_REAL, numread, ierr )
  call process_input( localbuffer, numread )
  totprocessed = totprocessed + numread
  if ( numread < bufsize ) exit
enddo

write(6,1001) numread, bufsize, totprocessed
```

```

1 1001 format( "No more data: read", I3, "and expected", I3, &
2         "Processed total of", I6, "before terminating job." )
3
4     call MPI_FILE_CLOSE( myfh, ierr )
5
6
7

```

```

8 MPI_FILE_READ_ALL(fh, buf, count, datatype, status)
9

```

INOUT	fh	file handle (handle)
OUT	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	status	status object (Status)

```

16 int MPI_File_read_all(MPI_File fh, void *buf, int count,
17         MPI_Datatype datatype, MPI_Status *status)
18

```

```

19 MPI_FILE_READ_ALL(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)
20

```

```

    <type> BUF(*)
21

```

```

    INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
22

```

```

23 {void MPI::File::Read_all(void* buf, int count,
24         const MPI::Datatype& datatype, MPI::Status& status) (binding
25         deprecated, see Section 15.2) }
26

```

```

27 {void MPI::File::Read_all(void* buf, int count,
28         const MPI::Datatype& datatype) (binding deprecated, see
29         Section 15.2) }
30

```

MPI\_FILE\_READ\_ALL is a collective version of the blocking MPI\_FILE\_READ interface.

```

32 MPI_FILE_WRITE(fh, buf, count, datatype, status)
33

```

INOUT	fh	file handle (handle)
IN	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	status	status object (Status)

```

41 int MPI_File_write(MPI_File fh, void *buf, int count,
42         MPI_Datatype datatype, MPI_Status *status)
43

```

```

44 MPI_FILE_WRITE(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)
45

```

```

    <type> BUF(*)
46

```

```

    INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
47

```

```

48 {void MPI::File::Write(const void* buf, int count,
49         const MPI::Datatype& datatype, MPI::Status& status) (binding

```

*deprecated, see Section 15.2) }*

```
{void MPI::File::Write(const void* buf, int count,
    const MPI::Datatype& datatype) (binding deprecated, see
    Section 15.2) }
```

MPI\_FILE\_WRITE writes a file using the individual file pointer.

MPI\_FILE\_WRITE\_ALL(fh, buf, count, datatype, status)

INOUT	fh	file handle (handle)
IN	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	status	status object (Status)

```
int MPI_File_write_all(MPI_File fh, void *buf, int count,
    MPI_Datatype datatype, MPI_Status *status)
```

```
MPI_FILE_WRITE_ALL(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)
```

```
<type> BUF(*)
```

```
INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
```

```
{void MPI::File::Write_all(const void* buf, int count,
    const MPI::Datatype& datatype, MPI::Status& status) (binding
    deprecated, see Section 15.2) }
```

```
{void MPI::File::Write_all(const void* buf, int count,
    const MPI::Datatype& datatype) (binding deprecated, see
    Section 15.2) }
```

MPI\_FILE\_WRITE\_ALL is a collective version of the blocking MPI\_FILE\_WRITE interface.

MPI\_FILE\_IREAD(fh, buf, count, datatype, request)

INOUT	fh	file handle (handle)
OUT	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	request	request object (handle)

```
int MPI_File_iread(MPI_File fh, void *buf, int count,
    MPI_Datatype datatype, MPI_Request *request)
```

```
MPI_FILE_IREAD(FH, BUF, COUNT, DATATYPE, REQUEST, IERROR)
```

```
<type> BUF(*)
```

```
INTEGER FH, COUNT, DATATYPE, REQUEST, IERROR
```

ticket150.

```

1  {MPI::Request MPI::File::Iread(void* buf, int count,
2      const MPI::Datatype& datatype) (binding deprecated, see
3      Section 15.2) }

```

MPI\_FILE\_IREAD is a nonblocking version of the MPI\_FILE\_READ interface.

**Example 13.3** The following Fortran code fragment illustrates file pointer update semantics:

```

10 !   Read the first twenty real words in a file into two local
11 !   buffers.  Note that when the first MPI_FILE_IREAD returns,
12 !   the file pointer has been updated to point to the
13 !   eleventh real word in the file.
14
15     integer    bufsize, req1, req2
16     integer, dimension(MPI_STATUS_SIZE) :: status1, status2
17     parameter (bufsize=10)
18     real       buf1(bufsize), buf2(bufsize)
19
20     call MPI_FILE_OPEN( MPI_COMM_WORLD, 'myoldfile', &
21                        MPI_MODE_RDONLY, MPI_INFO_NULL, myfh, ierr )
22     call MPI_FILE_SET_VIEW( myfh, 0, MPI_REAL, MPI_REAL, 'native', &
23                        MPI_INFO_NULL, ierr )
24     call MPI_FILE_IREAD( myfh, buf1, bufsize, MPI_REAL, &
25                        req1, ierr )
26     call MPI_FILE_IREAD( myfh, buf2, bufsize, MPI_REAL, &
27                        req2, ierr )
28
29     call MPI_WAIT( req1, status1, ierr )
30     call MPI_WAIT( req2, status2, ierr )
31
32     call MPI_FILE_CLOSE( myfh, ierr )

```

MPI\_FILE\_IWRITE(fh, buf, count, datatype, request)

INOUT	fh	file handle (handle)
IN	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	request	request object (handle)

```

44 int MPI_File_irewrite(MPI_File fh, void *buf, int count,
45                      MPI_Datatype datatype, MPI_Request *request)
46
47 MPI_FILE_IWRITE(FH, BUF, COUNT, DATATYPE, REQUEST, IERROR)
48 <type> BUF(*)

```

ticket150.



```

    INTEGER FH, COUNT, DATATYPE, REQUEST, IERROR
{MPI::Request MPI::File::Iwrite(const void* buf, int count,
    const MPI::Datatype& datatype) (binding deprecated, see
    Section 15.2) }
MPI_FILE_IWRITE is a nonblocking version of the MPI_FILE_WRITE interface.

MPI_FILE_SEEK(fh, offset, whence)
    INOUT    fh                file handle (handle)
    IN       offset            file offset (integer)
    IN       whence            update mode (state)

int MPI_File_seek(MPI_File fh, MPI_Offset offset, int whence)
MPI_FILE_SEEK(FH, OFFSET, WHENCE, IERROR)
    INTEGER FH, WHENCE, IERROR
    INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
{void MPI::File::Seek(MPI::Offset offset, int whence) (binding deprecated, see
    Section 15.2) }

    MPI_FILE_SEEK updates the individual file pointer according to whence, which has the
    following possible values:
    • MPI_SEEK_SET: the pointer is set to offset
    • MPI_SEEK_CUR: the pointer is set to the current pointer position plus offset
    • MPI_SEEK_END: the pointer is set to the end of file plus offset

    The offset can be negative, which allows seeking backwards. It is erroneous to seek to
    a negative position in the view.

MPI_FILE_GET_POSITION(fh, offset)
    IN       fh                file handle (handle)
    OUT      offset            offset of individual pointer (integer)

int MPI_File_get_position(MPI_File fh, MPI_Offset *offset)
MPI_FILE_GET_POSITION(FH, OFFSET, IERROR)
    INTEGER FH, IERROR
    INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
{MPI::Offset MPI::File::Get_position() const (binding deprecated, see
    Section 15.2) }

    MPI_FILE_GET_POSITION returns, in offset, the current position of the individual file
    pointer in etype units relative to the current view.

```

*Advice to users.* The `offset` can be used in a future call to `MPI_FILE_SEEK` using `whence = MPI_SEEK_SET` to return to the current position. To set the displacement to the current file pointer position, first convert `offset` into an absolute byte position using `MPI_FILE_GET_BYTE_OFFSET`, then call `MPI_FILE_SET_VIEW` with the resulting displacement. (*End of advice to users.*)

`MPI_FILE_GET_BYTE_OFFSET(fh, offset, disp)`

IN	fh	file handle (handle)
IN	offset	offset (integer)
OUT	disp	absolute byte position of offset (integer)

```
int MPI_File_get_byte_offset(MPI_File fh, MPI_Offset offset,
                             MPI_Offset *disp)
```

```
MPI_FILE_GET_BYTE_OFFSET(FH, OFFSET, DISP, IERROR)
```

```
INTEGER FH, IERROR
```

```
INTEGER(KIND=MPI_OFFSET_KIND) OFFSET, DISP
```

```
{MPI::Offset MPI::File::Get_byte_offset(const MPI::Offset disp) const
  (binding deprecated, see Section 15.2) }
```

`MPI_FILE_GET_BYTE_OFFSET` converts a view-relative offset into an absolute byte position. The absolute byte position (from the beginning of the file) of `offset` relative to the current view of `fh` is returned in `disp`.

#### 13.4.4 Data Access with Shared File Pointers

MPI maintains exactly one shared file pointer per collective `MPI_FILE_OPEN` (shared among processes in the communicator group). The current value of this pointer implicitly specifies the offset in the data access routines described in this section. These routines only use and update the shared file pointer maintained by MPI. The individual file pointers are not used nor updated.

The shared file pointer routines have the same semantics as the data access with explicit offset routines described in Section 13.4.2, page 425, with the following modifications:

- the `offset` is defined to be the current value of the MPI-maintained shared file pointer,
- the effect of multiple calls to shared file pointer routines is defined to behave as if the calls were serialized, and
- the use of shared file pointer routines is erroneous unless all processes use the same file view.

For the noncollective shared file pointer routines, the serialization ordering is not deterministic. The user needs to use other synchronization means to enforce a specific order.

After a shared file pointer operation is initiated, the shared file pointer is updated to point to the next etype after the last one that will be accessed. The file pointer is updated relative to the current view of the file.

## Noncollective Operations

MPI\_FILE\_READ\_SHARED(fh, buf, count, datatype, status)

INOUT	fh	file handle (handle)
OUT	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	status	status object (Status)

```
int MPI_File_read_shared(MPI_File fh, void *buf, int count,
                        MPI_Datatype datatype, MPI_Status *status)
```

```
MPI_FILE_READ_SHARED(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)
    <type> BUF(*)
    INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
```

```
{void MPI::File::Read_shared(void* buf, int count,
    const MPI::Datatype& datatype, MPI::Status& status) (binding
    deprecated, see Section 15.2) }
```

```
{void MPI::File::Read_shared(void* buf, int count,
    const MPI::Datatype& datatype) (binding deprecated, see
    Section 15.2) }
```

MPI\_FILE\_READ\_SHARED reads a file using the shared file pointer.

MPI\_FILE\_WRITE\_SHARED(fh, buf, count, datatype, status)

INOUT	fh	file handle (handle)
IN	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	status	status object (Status)

```
int MPI_File_write_shared(MPI_File fh, void *buf, int count,
                        MPI_Datatype datatype, MPI_Status *status)
```

```
MPI_FILE_WRITE_SHARED(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)
    <type> BUF(*)
    INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
```

```
{void MPI::File::Write_shared(const void* buf, int count,
    const MPI::Datatype& datatype, MPI::Status& status) (binding
    deprecated, see Section 15.2) }
```

```
{void MPI::File::Write_shared(const void* buf, int count,
    const MPI::Datatype& datatype) (binding deprecated, see
```

1                   *Section 15.2)* }

2           MPI\_FILE\_WRITE\_SHARED writes a file using the shared file pointer.

3

4

5   MPI\_FILE\_IREAD\_SHARED(fh, buf, count, datatype, request)

6       INOUT    fh                               file handle (handle)

7       OUT      buf                             initial address of buffer (choice)

8       IN       count                          number of elements in buffer (integer)

9       IN       datatype                       datatype of each buffer element (handle)

10      OUT      request                        request object (handle)

11

12

13

14   int MPI\_File\_iread\_shared(MPI\_File fh, void \*buf, int count,

15                   MPI\_Datatype datatype, MPI\_Request \*request)

16

17   MPI\_FILE\_IREAD\_SHARED(FH, BUF, COUNT, DATATYPE, REQUEST, IERROR)

18       <type> BUF(\*)

19       INTEGER FH, COUNT, DATATYPE, REQUEST, IERROR

ticket150.

20   {MPI::Request MPI::File::Iread\_shared(void\* buf, int count,

ticket150.

21       const MPI::Datatype& datatype) (*binding deprecated, see*

22                   *Section 15.2)* }

23

24           MPI\_FILE\_IREAD\_SHARED is a nonblocking version of the MPI\_FILE\_READ\_SHARED

25   interface.

26

27   MPI\_FILE\_IWRITE\_SHARED(fh, buf, count, datatype, request)

28       INOUT    fh                               file handle (handle)

29       IN       buf                             initial address of buffer (choice)

30       IN       count                          number of elements in buffer (integer)

31       IN       datatype                       datatype of each buffer element (handle)

32       OUT      request                        request object (handle)

33

34

35

36   int MPI\_File\_fwrite\_shared(MPI\_File fh, void \*buf, int count,

37                   MPI\_Datatype datatype, MPI\_Request \*request)

38

39   MPI\_FILE\_IWRITE\_SHARED(FH, BUF, COUNT, DATATYPE, REQUEST, IERROR)

40       <type> BUF(\*)

41       INTEGER FH, COUNT, DATATYPE, REQUEST, IERROR

ticket150.

42   {MPI::Request MPI::File::Iwrite\_shared(const void\* buf, int count,

ticket150.

43       const MPI::Datatype& datatype) (*binding deprecated, see*

44                   *Section 15.2)* }

45

46           MPI\_FILE\_IWRITE\_SHARED is a nonblocking version of the

47   MPI\_FILE\_WRITE\_SHARED interface.

48

## Collective Operations

The semantics of a collective access using a shared file pointer is that the accesses to the file will be in the order determined by the ranks of the processes within the group. For each process, the location in the file at which data is accessed is the position at which the shared file pointer would be after all processes whose ranks within the group less than that of this process had accessed their data. In addition, in order to prevent subsequent shared offset accesses by the same processes from interfering with this collective access, the call might return only after all the processes within the group have initiated their accesses. When the call returns, the shared file pointer points to the next etype accessible, according to the file view used by all processes, after the last etype requested.

*Advice to users.* There may be some programs in which all processes in the group need to access the file using the shared file pointer, but the program may not *require* that data be accessed in order of process rank. In such programs, using the shared ordered routines (e.g., `MPI_FILE_WRITE_ORDERED` rather than `MPI_FILE_WRITE_SHARED`) may enable an implementation to optimize access, improving performance. (*End of advice to users.*)

*Advice to implementors.* Accesses to the data requested by all processes do not have to be serialized. Once all processes have issued their requests, locations within the file for all accesses can be computed, and accesses can proceed independently from each other, possibly in parallel. (*End of advice to implementors.*)

`MPI_FILE_READ_ORDERED(fh, buf, count, datatype, status)`

INOUT	fh	file handle (handle)
OUT	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)
OUT	status	status object (Status)

```
int MPI_File_read_ordered(MPI_File fh, void *buf, int count,
                          MPI_Datatype datatype, MPI_Status *status)
```

```
MPI_FILE_READ_ORDERED(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)
    <type> BUF(*)
    INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
```

```
{void MPI::File::Read_ordered(void* buf, int count,
    const MPI::Datatype& datatype, MPI::Status& status) (binding
    deprecated, see Section 15.2) }
```

```
{void MPI::File::Read_ordered(void* buf, int count,
    const MPI::Datatype& datatype) (binding deprecated, see
    Section 15.2) }
```

`MPI_FILE_READ_ORDERED` is a collective version of the `MPI_FILE_READ_SHARED` interface.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

ticket150.

ticket150.

ticket150.

ticket150.

```
1 MPI_FILE_WRITE_ORDERED(fh, buf, count, datatype, status)
```

```
2     INOUT    fh                file handle (handle)
```

```
3     IN      buf                initial address of buffer (choice)
```

```
4     IN      count              number of elements in buffer (integer)
```

```
5     IN      datatype            datatype of each buffer element (handle)
```

```
6     OUT     status              status object (Status)
```

```
7
8
9
10 int MPI_File_write_ordered(MPI_File fh, void *buf, int count,
11                             MPI_Datatype datatype, MPI_Status *status)
```

```
12 MPI_FILE_WRITE_ORDERED(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)
13     <type> BUF(*)
14     INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
```

```
15 {void MPI::File::Write_ordered(const void* buf, int count,
16                               const MPI::Datatype& datatype, MPI::Status& status) (binding
deprecated, see Section 15.2) }
```

```
17
18
19 {void MPI::File::Write_ordered(const void* buf, int count,
20                               const MPI::Datatype& datatype) (binding deprecated, see
21                               Section 15.2) }
```

```
22
23 MPI_FILE_WRITE_ORDERED is a collective version of the MPI_FILE_WRITE_SHARED
24 interface.
```

## 25 Seek

```
26
27 If MPI_MODE_SEQUENTIAL mode was specified when the file was opened, it is erroneous
28 to call the following two routines (MPI_FILE_SEEK_SHARED and
29 MPI_FILE_GET_POSITION_SHARED).
```

```
30
31 MPI_FILE_SEEK_SHARED(fh, offset, whence)
```

```
32
33     INOUT    fh                file handle (handle)
```

```
34     IN      offset              file offset (integer)
```

```
35     IN      whence              update mode (state)
```

```
36
37
38 int MPI_File_seek_shared(MPI_File fh, MPI_Offset offset, int whence)
```

```
39 MPI_FILE_SEEK_SHARED(FH, OFFSET, WHENCE, IERROR)
40     INTEGER FH, WHENCE, IERROR
41     INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
```

```
42
43 {void MPI::File::Seek_shared(MPI::Offset offset, int whence) (binding
44                               deprecated, see Section 15.2) }
```

```
45
46 MPI_FILE_SEEK_SHARED updates the shared file pointer according to whence, which
47 has the following possible values:
```

```
48
```

- MPI\_SEEK\_SET: the pointer is set to offset
- MPI\_SEEK\_CUR: the pointer is set to the current pointer position plus offset
- MPI\_SEEK\_END: the pointer is set to the end of file plus offset

MPI\_FILE\_SEEK\_SHARED is collective; all the processes in the communicator group associated with the file handle `fh` must call MPI\_FILE\_SEEK\_SHARED with the same values for `offset` and `whence`.

The offset can be negative, which allows seeking backwards. It is erroneous to seek to a negative position in the view.

MPI\_FILE\_GET\_POSITION\_SHARED(`fh`, `offset`)

IN	<code>fh</code>	file handle (handle)
OUT	<code>offset</code>	offset of shared pointer (integer)

```
int MPI_File_get_position_shared(MPI_File fh, MPI_Offset *offset)
```

```
MPI_FILE_GET_POSITION_SHARED(FH, OFFSET, IERROR)
```

```
INTEGER FH, IERROR
```

```
INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
```

```
{MPI::Offset MPI::File::Get_position_shared() const (binding deprecated, see  
Section 15.2) }
```

MPI\_FILE\_GET\_POSITION\_SHARED returns, in `offset`, the current position of the shared file pointer in `etype` units relative to the current view.

*Advice to users.* The `offset` can be used in a future call to MPI\_FILE\_SEEK\_SHARED using `whence = MPI_SEEK_SET` to return to the current position. To set the displacement to the current file pointer position, first convert `offset` into an absolute byte position using MPI\_FILE\_GET\_BYTE\_OFFSET, then call MPI\_FILE\_SET\_VIEW with the resulting displacement. (*End of advice to users.*)

#### 13.4.5 Split Collective Data Access Routines

MPI provides a restricted form of “nonblocking collective” I/O operations for all data accesses using split collective data access routines. These routines are referred to as “split” collective routines because a single collective operation is split in two: a begin routine and an end routine. The begin routine begins the operation, much like a nonblocking data access (e.g., MPI\_FILE\_IREAD). The end routine completes the operation, much like the matching test or wait (e.g., MPI\_WAIT). As with nonblocking data access operations, the user must not use the buffer passed to a begin routine while the routine is outstanding; the operation must be completed with an end routine before it is safe to free buffers, etc.

Split collective data access operations on a file handle `fh` are subject to the semantic rules given below.

- On any MPI process, each file handle may have at most one active split collective operation at any time.

- Begin calls are collective over the group of processes that participated in the collective open and follow the ordering rules for collective calls.
- End calls are collective over the group of processes that participated in the collective open and follow the ordering rules for collective calls. Each end call matches the preceding begin call for the same collective operation. When an “end” call is made, exactly one unmatched “begin” call for the same operation must precede it.
- An implementation is free to implement any split collective data access routine using the corresponding blocking collective routine when either the begin call (e.g., `MPI_FILE_READ_ALL_BEGIN`) or the end call (e.g., `MPI_FILE_READ_ALL_END`) is issued. The begin and end calls are provided to allow the user and MPI implementation to optimize the collective operation.
- Split collective operations do not match the corresponding regular collective operation. For example, in a single collective read operation, an `MPI_FILE_READ_ALL` on one process does not match an `MPI_FILE_READ_ALL_BEGIN`/`MPI_FILE_READ_ALL_END` pair on another process.
- Split collective routines must specify a buffer in both the begin and end routines. By specifying the buffer that receives data in the end routine, we can avoid many (though not all) of the problems described in “A Problem with Register Optimization,” Section 16.2.2, page 503.
- No collective I/O operations are permitted on a file handle concurrently with a split collective access on that file handle (i.e., between the begin and end of the access). That is

```

MPI_File_read_all_begin(fh, ...);
...
MPI_File_read_all(fh, ...);
...
MPI_File_read_all_end(fh, ...);

```

is erroneous.

- In a multithreaded implementation, any split collective begin and end operation called by a process must be called from the same thread. This restriction is made to simplify the implementation in the multithreaded case. (Note that we have already disallowed having two threads begin a split collective operation on the same file handle since only one split collective operation can be active on a file handle at any time.)

The arguments for these routines have the same meaning as for the equivalent collective versions (e.g., the argument definitions for `MPI_FILE_READ_ALL_BEGIN` and `MPI_FILE_READ_ALL_END` are equivalent to the arguments for `MPI_FILE_READ_ALL`). The begin routine (e.g., `MPI_FILE_READ_ALL_BEGIN`) begins a split collective operation that, when completed with the matching end routine (i.e., `MPI_FILE_READ_ALL_END`) produces the result as defined for the equivalent collective routine (i.e., `MPI_FILE_READ_ALL`).



For the purpose of consistency semantics (Section 13.6.1, page 455), a matched pair of split collective data access operations (e.g., MPI\_FILE\_READ\_ALL\_BEGIN and MPI\_FILE\_READ\_ALL\_END) compose a single data access.

MPI\_FILE\_READ\_AT\_ALL\_BEGIN(fh, offset, buf, count, datatype)

IN	fh	file handle (handle)
IN	offset	file offset (integer)
OUT	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)

```
int MPI_File_read_at_all_begin(MPI_File fh, MPI_Offset offset, void *buf,
                              int count, MPI_Datatype datatype)
```

```
MPI_FILE_READ_AT_ALL_BEGIN(FH, OFFSET, BUF, COUNT, DATATYPE, IERROR)
```

```
<type> BUF(*)
```

```
INTEGER FH, COUNT, DATATYPE, IERROR
```

```
INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
```

```
{void MPI::File::Read_at_all_begin(MPI::Offset offset, void* buf,
                                   int count, const MPI::Datatype& datatype) (binding deprecated, see
                                   Section 15.2) }
```

MPI\_FILE\_READ\_AT\_ALL\_END(fh, buf, status)

IN	fh	file handle (handle)
OUT	buf	initial address of buffer (choice)
OUT	status	status object (Status)

```
int MPI_File_read_at_all_end(MPI_File fh, void *buf, MPI_Status *status)
```

```
MPI_FILE_READ_AT_ALL_END(FH, BUF, STATUS, IERROR)
```

```
<type> BUF(*)
```

```
INTEGER FH, STATUS(MPI_STATUS_SIZE), IERROR
```

```
{void MPI::File::Read_at_all_end(void* buf, MPI::Status& status) (binding
                                   deprecated, see Section 15.2) }
```

```
{void MPI::File::Read_at_all_end(void* buf) (binding deprecated, see Section 15.2)
}
```

```

1 MPI_FILE_WRITE_AT_ALL_BEGIN(fh, offset, buf, count, datatype)
2     INOUT    fh                file handle (handle)
3
4     IN       offset            file offset (integer)
5
6     IN       buf               initial address of buffer (choice)
7
8     IN       count             number of elements in buffer (integer)
9
10    IN       datatype           datatype of each buffer element (handle)
11
12 int MPI_File_write_at_all_begin(MPI_File fh, MPI_Offset offset, void *buf,
13     int count, MPI_Datatype datatype)
14
15 MPI_FILE_WRITE_AT_ALL_BEGIN(FH, OFFSET, BUF, COUNT, DATATYPE, IERROR)
16     <type> BUF(*)
17     INTEGER FH, COUNT, DATATYPE, IERROR
18     INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
19
20 {void MPI::File::Write_at_all_begin(MPI::Offset offset, const void* buf,
21     int count, const MPI::Datatype& datatype) (binding deprecated, see
22     Section 15.2) }
23
24 MPI_FILE_WRITE_AT_ALL_END(fh, buf, status)
25
26     INOUT    fh                file handle (handle)
27
28     IN       buf               initial address of buffer (choice)
29
30     OUT      status            status object (Status)
31
32 int MPI_File_write_at_all_end(MPI_File fh, void *buf, MPI_Status *status)
33
34 MPI_FILE_WRITE_AT_ALL_END(FH, BUF, STATUS, IERROR)
35     <type> BUF(*)
36     INTEGER FH, STATUS(MPI_STATUS_SIZE), IERROR
37
38 {void MPI::File::Write_at_all_end(const void* buf, MPI::Status& status)
39     (binding deprecated, see Section 15.2) }
40
41 {void MPI::File::Write_at_all_end(const void* buf) (binding deprecated, see
42     Section 15.2) }
43
44 MPI_FILE_READ_ALL_BEGIN(fh, buf, count, datatype)
45
46     INOUT    fh                file handle (handle)
47
48     OUT      buf               initial address of buffer (choice)
49
50     IN       count             number of elements in buffer (integer)
51
52     IN       datatype           datatype of each buffer element (handle)

```

```

int MPI_File_read_all_begin(MPI_File fh, void *buf, int count,
    MPI_Datatype datatype)
MPI_FILE_READ_ALL_BEGIN(FH, BUF, COUNT, DATATYPE, IERROR)
    <type> BUF(*)
    INTEGER FH, COUNT, DATATYPE, IERROR
{void MPI::File::Read_all_begin(void* buf, int count,
    const MPI::Datatype& datatype) (binding deprecated, see
    Section 15.2) }

MPI_FILE_READ_ALL_END(fh, buf, status)
    INOUT    fh                file handle (handle)
    OUT      buf                initial address of buffer (choice)
    OUT      status             status object (Status)

int MPI_File_read_all_end(MPI_File fh, void *buf, MPI_Status *status)
MPI_FILE_READ_ALL_END(FH, BUF, STATUS, IERROR)
    <type> BUF(*)
    INTEGER FH, STATUS(MPI_STATUS_SIZE), IERROR
{void MPI::File::Read_all_end(void* buf, MPI::Status& status) (binding
    deprecated, see Section 15.2) }
{void MPI::File::Read_all_end(void* buf) (binding deprecated, see Section 15.2) }

MPI_FILE_WRITE_ALL_BEGIN(fh, buf, count, datatype)
    INOUT    fh                file handle (handle)
    IN      buf                initial address of buffer (choice)
    IN      count              number of elements in buffer (integer)
    IN      datatype           datatype of each buffer element (handle)

int MPI_File_write_all_begin(MPI_File fh, void *buf, int count,
    MPI_Datatype datatype)
MPI_FILE_WRITE_ALL_BEGIN(FH, BUF, COUNT, DATATYPE, IERROR)
    <type> BUF(*)
    INTEGER FH, COUNT, DATATYPE, IERROR
{void MPI::File::Write_all_begin(const void* buf, int count,
    const MPI::Datatype& datatype) (binding deprecated, see
    Section 15.2) }

```

```

1 MPI_FILE_WRITE_ALL_END(fh, buf, status)
2     INOUT    fh                file handle (handle)
3
4     IN       buf                initial address of buffer (choice)
5
6     OUT      status             status object (Status)
7
8 int MPI_File_write_all_end(MPI_File fh, void *buf, MPI_Status *status)
9 MPI_FILE_WRITE_ALL_END(FH, BUF, STATUS, IERROR)
10    <type> BUF(*)
11    INTEGER FH, STATUS(MPI_STATUS_SIZE), IERROR
12 {void MPI::File::Write_all_end(const void* buf, MPI::Status& status)
13     (binding deprecated, see Section 15.2) }
14
15 {void MPI::File::Write_all_end(const void* buf) (binding deprecated, see
16     Section 15.2) }
17
18
19 MPI_FILE_READ_ORDERED_BEGIN(fh, buf, count, datatype)
20     INOUT    fh                file handle (handle)
21
22     OUT      buf                initial address of buffer (choice)
23
24     IN       count              number of elements in buffer (integer)
25
26     IN       datatype            datatype of each buffer element (handle)
27
28 int MPI_File_read_ordered_begin(MPI_File fh, void *buf, int count,
29     MPI_Datatype datatype)
30 MPI_FILE_READ_ORDERED_BEGIN(FH, BUF, COUNT, DATATYPE, IERROR)
31    <type> BUF(*)
32    INTEGER FH, COUNT, DATATYPE, IERROR
33 {void MPI::File::Read_ordered_begin(void* buf, int count,
34     const MPI::Datatype& datatype) (binding deprecated, see
35     Section 15.2) }
36
37
38 MPI_FILE_READ_ORDERED_END(fh, buf, status)
39     INOUT    fh                file handle (handle)
40
41     OUT      buf                initial address of buffer (choice)
42
43     OUT      status             status object (Status)
44
45 int MPI_File_read_ordered_end(MPI_File fh, void *buf, MPI_Status *status)
46 MPI_FILE_READ_ORDERED_END(FH, BUF, STATUS, IERROR)
47    <type> BUF(*)
48    INTEGER FH, STATUS(MPI_STATUS_SIZE), IERROR

```

ticket150.

ticket150.

ticket150.

ticket150.

ticket150.

ticket150.

ticket150.

```
{void MPI::File::Read_ordered_end(void* buf, MPI::Status& status) (binding
depreciated, see Section 15.2) }
```

```
{void MPI::File::Read_ordered_end(void* buf) (binding depreciated, see
Section 15.2) }
```

```
MPI_FILE_WRITE_ORDERED_BEGIN(fh, buf, count, datatype)
```

INOUT	fh	file handle (handle)
IN	buf	initial address of buffer (choice)
IN	count	number of elements in buffer (integer)
IN	datatype	datatype of each buffer element (handle)

```
int MPI_File_write_ordered_begin(MPI_File fh, void *buf, int count,
MPI_Datatype datatype)
```

```
MPI_FILE_WRITE_ORDERED_BEGIN(FH, BUF, COUNT, DATATYPE, IERROR)
```

```
<type> BUF(*)
```

```
INTEGER FH, COUNT, DATATYPE, IERROR
```

```
{void MPI::File::Write_ordered_begin(const void* buf, int count,
const MPI::Datatype& datatype) (binding depreciated, see
Section 15.2) }
```

```
MPI_FILE_WRITE_ORDERED_END(fh, buf, status)
```

INOUT	fh	file handle (handle)
IN	buf	initial address of buffer (choice)
OUT	status	status object (Status)

```
int MPI_File_write_ordered_end(MPI_File fh, void *buf, MPI_Status *status)
```

```
MPI_FILE_WRITE_ORDERED_END(FH, BUF, STATUS, IERROR)
```

```
<type> BUF(*)
```

```
INTEGER FH, STATUS(MPI_STATUS_SIZE), IERROR
```

```
{void MPI::File::Write_ordered_end(const void* buf, MPI::Status& status)
(binding depreciated, see Section 15.2) }
```

```
{void MPI::File::Write_ordered_end(const void* buf) (binding depreciated, see
Section 15.2) }
```

## 13.5 File Interoperability

At the most basic level, file interoperability is the ability to read the information previously written to a file—not just the bits of data, but the actual information the bits represent.

MPI guarantees full interoperability within a single MPI environment, and supports increased interoperability outside that environment through the external data representation (Section 13.5.2, page 449) as well as the data conversion functions (Section 13.5.3, page 450).

Interoperability within a single MPI environment (which could be considered “operability”) ensures that file data written by one MPI process can be read by any other MPI process, subject to the consistency constraints (see Section 13.6.1, page 455), provided that it would have been possible to start the two processes simultaneously and have them reside in a single MPI\_COMM\_WORLD. Furthermore, both processes must see the same data values at every absolute byte offset in the file for which data was written.

This single environment file interoperability implies that file data is accessible regardless of the number of processes.

There are three aspects to file interoperability:

- transferring the bits,
- converting between different file structures, and
- converting between different machine representations.

The first two aspects of file interoperability are beyond the scope of this standard, as both are highly machine dependent. However, transferring the bits of a file into and out of the MPI environment (e.g., by writing a file to tape) is required to be supported by all MPI implementations. In particular, an implementation must specify how familiar operations similar to POSIX `cp`, `rm`, and `mv` can be performed on the file. Furthermore, it is expected that the facility provided maintains the correspondence between absolute byte offsets (e.g., after possible file structure conversion, the data bits at byte offset 102 in the MPI environment are at byte offset 102 outside the MPI environment). As an example, a simple off-line conversion utility that transfers and converts files between the native file system and the MPI environment would suffice, provided it maintained the offset coherence mentioned above. In a high-quality implementation of MPI, users will be able to manipulate MPI files using the same or similar tools that the native file system offers for manipulating its files.

The remaining aspect of file interoperability, converting between different machine representations, is supported by the typing information specified in the `etype` and `filetype`. This facility allows the information in files to be shared between any two applications, regardless of whether they use MPI, and regardless of the machine architectures on which they run.

MPI supports multiple data representations: “native,” “internal,” and “external32.” An implementation may support additional data representations. MPI also supports user-defined data representations (see Section 13.5.3, page 450). The “native” and “internal” data representations are implementation dependent, while the “external32” representation is common to all MPI implementations and facilitates file interoperability. The data representation is specified in the `datarep` argument to `MPI_FILE_SET_VIEW`.

*Advice to users.* MPI is not guaranteed to retain knowledge of what data representation was used when a file is written. Therefore, to correctly retrieve file data, an MPI application is responsible for specifying the same data representation as was used to create the file. (*End of advice to users.*)

**“native”** Data in this representation is stored in a file exactly as it is in memory. The advantage of this data representation is that data precision and I/O performance are not lost in type conversions with a purely homogeneous environment. The disadvantage is the loss of transparent interoperability within a heterogeneous MPI environment.

*Advice to users.* This data representation should only be used in a homogeneous MPI environment, or when the MPI application is capable of performing the data type conversions itself. (*End of advice to users.*)

*Advice to implementors.* When implementing read and write operations on top of MPI message-passing, the message data should be typed as `MPI_BYTE` to ensure that the message routines do not perform any type conversions on the data. (*End of advice to implementors.*)

**“internal”** This data representation can be used for I/O operations in a homogeneous or heterogeneous environment; the implementation will perform type conversions if necessary. The implementation is free to store data in any format of its choice, with the restriction that it will maintain constant extents for all predefined datatypes in any one file. The environment in which the resulting file can be reused is implementation-defined and must be documented by the implementation.

*Rationale.* This data representation allows the implementation to perform I/O efficiently in a heterogeneous environment, though with implementation-defined restrictions on how the file can be reused. (*End of rationale.*)

*Advice to implementors.* Since “external32” is a superset of the functionality provided by “internal,” an implementation may choose to implement “internal” as “external32.” (*End of advice to implementors.*)

**“external32”** This data representation states that read and write operations convert all data from and to the “external32” representation defined in Section 13.5.2, page 449. The data conversion rules for communication also apply to these conversions (see Section 3.3.2, page 25-27, of the MPI-1 document). The data on the storage medium is always in this canonical representation, and the data in memory is always in the local process’s native representation.

This data representation has several advantages. First, all processes reading the file in a heterogeneous MPI environment will automatically have the data converted to their respective native representations. Second, the file can be exported from one MPI environment and imported into any other MPI environment with the guarantee that the second environment will be able to read all the data in the file.

The disadvantage of this data representation is that data precision and I/O performance may be lost in data type conversions.

*Advice to implementors.* When implementing read and write operations on top of MPI message-passing, the message data should be converted to and from the “external32” representation in the client, and sent as type `MPI_BYTE`. This will avoid possible double data type conversions and the associated further loss of precision and performance. (*End of advice to implementors.*)

### 13.5.1 Datatypes for File Interoperability

If the file data representation is other than “native,” care must be taken in constructing etypes and filetypes. Any of the datatype constructor functions may be used; however, for those functions that accept displacements in bytes, the displacements must be specified in terms of their values in the file for the file data representation being used. MPI will interpret these byte displacements as is; no scaling will be done. The function `MPI_FILE_GET_TYPE_EXTENT` can be used to calculate the extents of datatypes in the file. For etypes and filetypes that are portable datatypes (see Section 2.4, page 11), MPI will scale any displacements in the datatypes to match the file data representation. Datatypes passed as arguments to read/write routines specify the data layout in memory; therefore, they must always be constructed using displacements corresponding to displacements in memory.

*Advice to users.* One can logically think of the file as if it were stored in the memory of a file server. The `etype` and `filetype` are interpreted as if they were defined at this file server, by the same sequence of calls used to define them at the calling process. If the data representation is “native”, then this logical file server runs on the same architecture as the calling process, so that these types define the same data layout on the file as they would define in the memory of the calling process. If the `etype` and `filetype` are portable datatypes, then the data layout defined in the file is the same as would be defined in the calling process memory, up to a scaling factor. The routine `MPI_FILE_GET_FILE_EXTENT` can be used to calculate this scaling factor. Thus, two equivalent, portable datatypes will define the same data layout in the file, even in a heterogeneous environment with “internal”, “external32”, or user defined data representations. Otherwise, the `etype` and `filetype` must be constructed so that their typemap and extent are the same on any architecture. This can be achieved if they have an explicit upper bound and lower bound (defined either using `MPI_LB` and `MPI_UB` markers, or using `MPI_TYPE_CREATE_RESIZED`). This condition must also be fulfilled by any datatype that is used in the construction of the `etype` and `filetype`, if this datatype is replicated contiguously, either explicitly, by a call to `MPI_TYPE_CONTIGUOUS`, or implicitly, by a blocklength argument that is greater than one. If an `etype` or `filetype` is not portable, and has a typemap or extent that is architecture dependent, then the data layout specified by it on a file is implementation dependent.

File data representations other than “native” may be different from corresponding data representations in memory. Therefore, for these file data representations, it is important not to use hardwired byte offsets for file positioning, including the initial displacement that specifies the view. When a portable datatype (see Section 2.4, page 11) is used in a data access operation, any holes in the datatype are scaled to match the data representation. However, note that this technique only works when all the processes that created the file view build their etypes from the same predefined datatypes. For example, if one process uses an `etype` built from `MPI_INT` and another uses an `etype` built from `MPI_FLOAT`, the resulting views may be nonportable because the relative sizes of these types may differ from one data representation to another. (*End of advice to users.*)

ticket148.



MPI\_FILE\_GET\_TYPE\_EXTENT(fh, datatype, extent)

IN	fh	file handle (handle)
IN	datatype	datatype (handle)
OUT	extent	datatype extent (integer)

```
int MPI_File_get_type_extent(MPI_File fh, MPI_Datatype datatype,
                             MPI_Aint *extent)
```

```
MPI_FILE_GET_TYPE_EXTENT(FH, DATATYPE, EXTENT, IERROR)
    INTEGER FH, DATATYPE, IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) EXTENT
```

```
{MPI::Aint MPI::File::Get_type_extent(const MPI::Datatype& datatype) const
    (binding deprecated, see Section 15.2) }
```

Returns the extent of datatype in the file fh. This extent will be the same for all processes accessing the file fh. If the current view uses a user-defined data representation (see Section 13.5.3, page 450), MPI uses the dtype\_file\_extent\_fn callback to calculate the extent.

*Advice to implementors.* In the case of user-defined data representations, the extent of a derived datatype can be calculated by first determining the extents of the predefined datatypes in this derived datatype using dtype\_file\_extent\_fn (see Section 13.5.3, page 450). (*End of advice to implementors.*)

### 13.5.2 External Data Representation: “external32”

All MPI implementations are required to support the data representation defined in this section. Support of optional datatypes (e.g., MPI\_INTEGER2) is not required.

All floating point values are in big-endian IEEE format [27] of the appropriate size. Floating point values are represented by one of three IEEE formats. These are the IEEE “Single,” “Double,” and “Double Extended” formats, requiring 4, 8 and 16 bytes of storage, respectively. For the IEEE “Double Extended” formats, MPI specifies a Format Width of 16 bytes, with 15 exponent bits, bias = +16383, 112 fraction bits, and an encoding analogous to the “Double” format. All integral values are in two’s complement big-endian format. Big-endian means most significant byte at lowest address byte. [For Fortran LOGICAL and C++ bool, 0 implies false and nonzero implies true. Fortran COMPLEX and DOUBLE COMPLEX are represented by a pair of floating point format values for the real and imaginary components. ]For C \_Bool, Fortran LOGICAL and C++ bool, 0 implies false and nonzero implies true. C float \_Complex, double \_Complex and long double \_Complex as well as Fortran COMPLEX and DOUBLE COMPLEX are represented by a pair of floating point format values for the real and imaginary components. Characters are in ISO 8859-1 format [28]. Wide characters (of type MPI\_WCHAR) are in Unicode format [47].

All signed numerals (e.g., MPI\_INT, MPI\_REAL) have the sign bit at the most significant bit. MPI\_COMPLEX and MPI\_DOUBLE\_COMPLEX have the sign bit of the real and imaginary parts at the most significant bit of each part.

According to IEEE specifications [27], the “NaN” (not a number) is system dependent. It should not be interpreted within MPI as anything other than “NaN.”

*Advice to implementors.* The MPI treatment of “NaN” is similar to the approach used in XDR (see <ftp://ds.internic.net/rfc/rfc1832.txt>). (*End of advice to implementors.*)

All data is byte aligned, regardless of type. All data items are stored contiguously in the file (if the file view is contiguous).

*Advice to implementors.* All bytes of `LOGICAL` and `bool` must be checked to determine the value. (*End of advice to implementors.*)

*Advice to users.* The type `MPI_PACKED` is treated as bytes and is not converted. The user should be aware that `MPI_PACK` has the option of placing a header in the beginning of the pack buffer. (*End of advice to users.*)

The size of the predefined datatypes returned from `MPI_TYPE_CREATE_F90_REAL`, `MPI_TYPE_CREATE_F90_COMPLEX`, and `MPI_TYPE_CREATE_F90_INTEGER` are defined in Section 16.2.5, page 511.

*Advice to implementors.* When converting a larger size integer to a smaller size integer, only the less significant bytes are moved. Care must be taken to preserve the sign bit value. This allows no conversion errors if the data range is within the range of the smaller size integer. (*End of advice to implementors.*)

Table 13.2 specifies the sizes of predefined datatypes in “external32” format.

### 13.5.3 User-Defined Data Representations

There are two situations that cannot be handled by the required representations:

1. a user wants to write a file in a representation unknown to the implementation, and
2. a user wants to read a file written in a representation unknown to the implementation.

User-defined data representations allow the user to insert a third party converter into the I/O stream to do the data representation conversion.

`MPI_REGISTER_DATAREP(datarep, read_conversion_fn, write_conversion_fn, dtype_file_extent_fn, extra_state)`

IN	<code>datarep</code>	data representation identifier (string)
IN	<code>read_conversion_fn</code>	function invoked to convert from file representation to native representation (function)
IN	<code>write_conversion_fn</code>	function invoked to convert from native representation to file representation (function)
IN	<code>dtype_file_extent_fn</code>	function invoked to get the extent of a datatype as represented in the file (function)
IN	<code>extra_state</code>	extra state

`int MPI_Register_datarep(char *datarep, MPI_Datarep_conversion_function *read_conversion_fn,`

[ticket18,57.]

Type	Length	Optional Type	Length
-----	-----	-----	-----
MPI_PACKED	1	MPI_INTEGER1	1
MPI_BYTE	1	MPI_INTEGER2	2
MPI_CHAR	1	MPI_INTEGER4	4
MPI_UNSIGNED_CHAR	1	MPI_INTEGER8	8
MPI_SIGNED_CHAR	1	MPI_INTEGER16	16
MPI_WCHAR	2		
MPI_SHORT	2	MPI_REAL2	2
MPI_UNSIGNED_SHORT	2	MPI_REAL4	4
MPI_INT	4	MPI_REAL8	8
MPI_UNSIGNED	4	MPI_REAL16	16
MPI_LONG	4		
MPI_UNSIGNED_LONG	4	MPI_COMPLEX4	2*2
MPI_LONG_LONG_INT	8	MPI_COMPLEX8	2*4
MPI_UNSIGNED_LONG_LONG	8	MPI_COMPLEX16	2*8
MPI_FLOAT	4	MPI_COMPLEX32	2*16
MPI_DOUBLE	8		
MPI_LONG_DOUBLE	16		
MPI_C_BOOL	4		
MPI_INT8_T	1		
MPI_INT16_T	2		
MPI_INT32_T	4		
MPI_INT64_T	8		
MPI_UINT8_T	1		
MPI_UINT16_T	2		
MPI_UINT32_T	4		
MPI_UINT64_T	8		
MPI_AINT	8		
MPI_OFFSET	8		
MPI_C_COMPLEX	2*4		
MPI_C_FLOAT_COMPLEX	2*4		
MPI_C_DOUBLE_COMPLEX	2*8		
MPI_C_LONG_DOUBLE_COMPLEX	2*16		
MPI_CHARACTER	1		
MPI_LOGICAL	4		
MPI_INTEGER	4		
MPI_REAL	4		
MPI_DOUBLE_PRECISION	8		
MPI_COMPLEX	2*4		
MPI_DOUBLE_COMPLEX	2*8		

Table 13.2: “external32” sizes of predefined datatypes

```

1      MPI_Datarep_conversion_function *write_conversion_fn,
2      MPI_Datarep_extent_function *dtype_file_extent_fn,
3      void *extra_state)
4
5  MPI_REGISTER_DATAREP(DATAREP, READ_CONVERSION_FN, WRITE_CONVERSION_FN,
6      DTYPE_FILE_EXTENT_FN, EXTRA_STATE, IERROR)
7      CHARACTER*(*) DATAREP
8      EXTERNAL READ_CONVERSION_FN, WRITE_CONVERSION_FN, DTYPE_FILE_EXTENT_FN
9      INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE
10     INTEGER IERROR

```

```

11 {void MPI::Register_datarep(const char* datarep,
12     MPI::Datarep_conversion_function* read_conversion_fn,
13     MPI::Datarep_conversion_function* write_conversion_fn,
14     MPI::Datarep_extent_function* dtype_file_extent_fn,
15     void* extra_state) (binding deprecated, see Section 15.2) }

```

The call associates `read_conversion_fn`, `write_conversion_fn`, and `dtype_file_extent_fn` with the data representation identifier `datarep`. `datarep` can then be used as an argument to `MPI_FILE_SET_VIEW`, causing subsequent data access operations to call the conversion functions to convert all data items accessed between file data representation and native representation. `MPI_REGISTER_DATAREP` is a local operation and only registers the data representation for the calling MPI process. If `datarep` is already defined, an error in the error class `MPI_ERR_DUP_DATAREP` is raised using the default file error handler (see Section 13.7, page 465). The length of a data representation string is limited to the value of `MPI_MAX_DATAREP_STRING`. `MPI_MAX_DATAREP_STRING` must have a value of at least 64. No routines are provided to delete data representations and free the associated resources; it is not expected that an application will generate them in significant numbers.

## Extent Callback

```

30 typedef int MPI_Datarep_extent_function(MPI_Datatype datatype,
31     MPI_Aint *file_extent, void *extra_state);
32
33 SUBROUTINE DATAREP_EXTENT_FUNCTION(DATATYPE, EXTENT, EXTRA_STATE, IERROR)
34     INTEGER DATATYPE, IERROR
35     INTEGER(KIND=MPI_ADDRESS_KIND) EXTENT, EXTRA_STATE

```

```

36 {typedef void MPI::Datarep_extent_function(const MPI::Datatype& datatype,
37     MPI::Aint& file_extent, void* extra_state); (binding deprecated,
38     see Section 15.2) }
39

```

The function `dtype_file_extent_fn` must return, in `file_extent`, the number of bytes required to store `datatype` in the file representation. The function is passed, in `extra_state`, the argument that was passed to the `MPI_REGISTER_DATAREP` call. MPI will only call this routine with predefined datatypes employed by the user.

## Datarep Conversion Functions

```

46 typedef int MPI_Datarep_conversion_function(void *userbuf,
47     MPI_Datatype datatype, int count, void *filebuf,
48

```

```

        MPI_Offset position, void *extra_state);
SUBROUTINE DATAREP_CONVERSION_FUNCTION(USERBUF, DATATYPE, COUNT, FILEBUF,
        POSITION, EXTRA_STATE, IERROR)
<TYPE> USERBUF(*), FILEBUF(*)
INTEGER COUNT, DATATYPE, IERROR
INTEGER(KIND=MPI_OFFSET_KIND) POSITION
INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE
{typedef void MPI::Datarep_conversion_function(void* userbuf,
        MPI::Datatype& datatype, int count, void* filebuf,
        MPI::Offset position, void* extra_state); (binding deprecated, see
        Section 15.2) }
```

The function `read_conversion_fn` must convert from file data representation to native representation. Before calling this routine, MPI allocates and fills `filebuf` with `count` contiguous data items. The type of each data item matches the corresponding entry for the predefined datatype in the type signature of `datatype`. The function is passed, in `extra_state`, the argument that was passed to the `MPI_REGISTER_DATAREP` call. The function must copy all `count` data items from `filebuf` to `userbuf` in the distribution described by `datatype`, converting each data item from file representation to native representation. `datatype` will be equivalent to the datatype that the user passed to the read function. If the size of `datatype` is less than the size of the `count` data items, the conversion function must treat `datatype` as being contiguously tiled over the `userbuf`. The conversion function must begin storing converted data at the location in `userbuf` specified by `position` into the (tiled) `datatype`.

*Advice to users.* Although the conversion functions have similarities to `MPI_PACK` and `MPI_UNPACK`, one should note the differences in the use of the arguments `count` and `position`. In the conversion functions, `count` is a count of data items (i.e., count of typemap entries of `datatype`), and `position` is an index into this typemap. In `MPI_PACK`, `incount` refers to the number of whole datatypes, and `position` is a number of bytes. (*End of advice to users.*)

*Advice to implementors.* A converted read operation could be implemented as follows:

1. Get file extent of all data items
2. Allocate a filebuf large enough to hold all count data items
3. Read data from file into filebuf
4. Call `read_conversion_fn` to convert data and place it into `userbuf`
5. Deallocate filebuf

(*End of advice to implementors.*)

If MPI cannot allocate a buffer large enough to hold all the data to be converted from a read operation, it may call the conversion function repeatedly using the same `datatype` and `userbuf`, and reading successive chunks of data to be converted in `filebuf`. For the first call (and in the case when all the data to be converted fits into `filebuf`), MPI will call the function with `position` set to zero. Data converted during this call will be stored in the

`userbuf` according to the first `count` data items in `datatype`. Then in subsequent calls to the conversion function, MPI will increment the value in `position` by the `count` of items converted in the previous call, and the `userbuf` pointer will be unchanged.

*Rationale.* Passing the conversion function a position and one datatype for the transfer allows the conversion function to decode the datatype only once and cache an internal representation of it on the datatype. Then on subsequent calls, the conversion function can use the `position` to quickly find its place in the datatype and continue storing converted data where it left off at the end of the previous call. (*End of rationale.*)

*Advice to users.* Although the conversion function may usefully cache an internal representation on the datatype, it should not cache any state information specific to an ongoing conversion operation, since it is possible for the same datatype to be used concurrently in multiple conversion operations. (*End of advice to users.*)

The function `write_conversion_fn` must convert from native representation to file data representation. Before calling this routine, MPI allocates `filebuf` of a size large enough to hold `count` contiguous data items. The type of each data item matches the corresponding entry for the predefined datatype in the type signature of `datatype`. The function must copy `count` data items from `userbuf` in the distribution described by `datatype`, to a contiguous distribution in `filebuf`, converting each data item from native representation to file representation. If the size of `datatype` is less than the size of `count` data items, the conversion function must treat `datatype` as being contiguously tiled over the `userbuf`.

The function must begin copying at the location in `userbuf` specified by `position` into the (tiled) `datatype`. `datatype` will be equivalent to the datatype that the user passed to the write function. The function is passed, in `extra_state`, the argument that was passed to the `MPI_REGISTER_DATAREP` call.

The predefined constant `MPI_CONVERSION_FN_NULL` may be used as either `write_conversion_fn` or `read_conversion_fn`. In that case, MPI will not attempt to invoke `write_conversion_fn` or `read_conversion_fn`, respectively, but will perform the requested data access using the native data representation.

An MPI implementation must ensure that all data accessed is converted, either by using a `filebuf` large enough to hold all the requested data items or else by making repeated calls to the conversion function with the same `datatype` argument and appropriate values for `position`.

An implementation will only invoke the callback routines in this section (`read_conversion_fn`, `write_conversion_fn`, and `dtype_file_extent_fn`) when one of the read or write routines in Section 13.4, page 422, or `MPI_FILE_GET_TYPE_EXTENT` is called by the user. `dtype_file_extent_fn` will only be passed predefined datatypes employed by the user. The conversion functions will only be passed datatypes equivalent to those that the user has passed to one of the routines noted above.

The conversion functions must be reentrant. User defined data representations are restricted to use byte alignment for all types. Furthermore, it is erroneous for the conversion functions to call any collective routines or to free `datatype`.

The conversion functions should return an error code. If the returned error code has a value other than `MPI_SUCCESS`, the implementation will raise an error in the class `MPI_ERR_CONVERSION`.

### 13.5.4 Matching Data Representations

It is the user’s responsibility to ensure that the data representation used to read data from a file is *compatible* with the data representation that was used to write that data to the file.

In general, using the same data representation name when writing and reading a file does not guarantee that the representation is compatible. Similarly, using different representation names on two different implementations may yield compatible representations.

Compatibility can be obtained when “external32” representation is used, although precision may be lost and the performance may be less than when “native” representation is used. Compatibility is guaranteed using “external32” provided at least one of the following conditions is met.

- The data access routines directly use types enumerated in Section 13.5.2, page 449, that are supported by all implementations participating in the I/O. The predefined type used to write a data item must also be used to read a data item.
- In the case of Fortran 90 programs, the programs participating in the data accesses obtain compatible datatypes using MPI routines that specify precision and/or range (Section 16.2.5, page 507).
- For any given data item, the programs participating in the data accesses use compatible predefined types to write and read the data item.

User-defined data representations may be used to provide an implementation compatibility with another implementation’s “native” or “internal” representation.

*Advice to users.* Section 16.2.5, page 507, defines routines that support the use of matching datatypes in heterogeneous environments and contains examples illustrating their use. (*End of advice to users.*)

## 13.6 Consistency and Semantics

### 13.6.1 File Consistency

Consistency semantics define the outcome of multiple accesses to a single file. All file accesses in MPI are relative to a specific file handle created from a collective open. MPI provides three levels of consistency: sequential consistency among all accesses using a single file handle, sequential consistency among all accesses using file handles created from a single collective open with atomic mode enabled, and user-imposed consistency among accesses other than the above. Sequential consistency means the behavior of a set of operations will be as if the operations were performed in some serial order consistent with program order; each access appears atomic, although the exact ordering of accesses is unspecified. User-imposed consistency may be obtained using program order and calls to `MPI_FILE_SYNC`.

Let  $FH_1$  be the set of file handles created from one particular collective open of the file  $FOO$ , and  $FH_2$  be the set of file handles created from a different collective open of  $FOO$ . Note that nothing restrictive is said about  $FH_1$  and  $FH_2$ : the sizes of  $FH_1$  and  $FH_2$  may be different, the groups of processes used for each open may or may not intersect, the file handles in  $FH_1$  may be destroyed before those in  $FH_2$  are created, etc. Consider the following three cases: a single file handle (e.g.,  $fh_1 \in FH_1$ ), two file handles created



from a single collective open (e.g.,  $fh_{1a} \in FH_1$  and  $fh_{1b} \in FH_1$ ), and two file handles from different collective opens (e.g.,  $fh_1 \in FH_1$  and  $fh_2 \in FH_2$ ).

For the purpose of consistency semantics, a matched pair (Section 13.4.5, page 439) of split collective data access operations (e.g., `MPI_FILE_READ_ALL_BEGIN` and `MPI_FILE_READ_ALL_END`) compose a single data access operation. Similarly, a non-blocking data access routine (e.g., `MPI_FILE_IREAD`) and the routine which completes the request (e.g., `MPI_WAIT`) also compose a single data access operation. For all cases below, these data access operations are subject to the same constraints as blocking data access operations.

*Advice to users.* For an `MPI_FILE_IREAD` and `MPI_WAIT` pair, the operation begins when `MPI_FILE_IREAD` is called and ends when `MPI_WAIT` returns. (*End of advice to users.*)

Assume that  $A_1$  and  $A_2$  are two data access operations. Let  $D_1$  ( $D_2$ ) be the set of absolute byte displacements of every byte accessed in  $A_1$  ( $A_2$ ). The two data accesses *overlap* if  $D_1 \cap D_2 \neq \emptyset$ . The two data accesses *conflict* if they overlap and at least one is a write access.

Let  $SEQ_{fh}$  be a sequence of file operations on a single file handle, bracketed by `MPI_FILE_SYNC`s on that file handle. (Both opening and closing a file implicitly perform an `MPI_FILE_SYNC`.)  $SEQ_{fh}$  is a “write sequence” if any of the data access operations in the sequence are writes or if any of the file manipulation operations in the sequence change the state of the file (e.g., `MPI_FILE_SET_SIZE` or `MPI_FILE_PREALLOCATE`). Given two sequences,  $SEQ_1$  and  $SEQ_2$ , we say they are not *concurrent* if one sequence is guaranteed to completely precede the other (temporally).

The requirements for guaranteeing sequential consistency among all accesses to a particular file are divided into the three cases given below. If any of these requirements are not met, then the value of all data in that file is implementation dependent.

**Case 1:**  $fh_1 \in FH_1$  All operations on  $fh_1$  are sequentially consistent if atomic mode is set. If nonatomic mode is set, then all operations on  $fh_1$  are sequentially consistent if they are either nonconcurrent, nonconflicting, or both.

**Case 2:**  $fh_{1a} \in FH_1$  and  $fh_{1b} \in FH_1$  Assume  $A_1$  is a data access operation using  $fh_{1a}$ , and  $A_2$  is a data access operation using  $fh_{1b}$ . If for any access  $A_1$ , there is no access  $A_2$  that conflicts with  $A_1$ , then MPI guarantees sequential consistency.

However, unlike POSIX semantics, the default MPI semantics for conflicting accesses do not guarantee sequential consistency. If  $A_1$  and  $A_2$  conflict, sequential consistency can be guaranteed by either enabling atomic mode via the `MPI_FILE_SET_ATOMICITY` routine, or meeting the condition described in Case 3 below.

**Case 3:**  $fh_1 \in FH_1$  and  $fh_2 \in FH_2$  Consider access to a single file using file handles from distinct collective opens. In order to guarantee sequential consistency, `MPI_FILE_SYNC` must be used (both opening and closing a file implicitly perform an `MPI_FILE_SYNC`).

Sequential consistency is guaranteed among accesses to a single file if for any write sequence  $SEQ_1$  to the file, there is no sequence  $SEQ_2$  to the file which is *concurrent* with  $SEQ_1$ . To guarantee sequential consistency when there are write sequences,



MPI\_FILE\_SYNC must be used together with a mechanism that guarantees nonconcurrency of the sequences.

See the examples in Section 13.6.10, page 461, for further clarification of some of these consistency semantics.

MPI\_FILE\_SET\_ATOMICITY(fh, flag)

INOUT	fh	file handle (handle)
IN	flag	true to set atomic mode, false to set nonatomic mode (logical)

int MPI\_File\_set\_atomicity(MPI\_File fh, int flag)

MPI\_FILE\_SET\_ATOMICITY(FH, FLAG, IERROR)

INTEGER FH, IERROR

LOGICAL FLAG

`{void MPI::File::Set_atomicity(bool flag) (binding deprecated, see Section 15.2) }`

Let  $FH$  be the set of file handles created by one collective open. The consistency semantics for data access operations using  $FH$  is set by collectively calling MPI\_FILE\_SET\_ATOMICITY on  $FH$ . MPI\_FILE\_SET\_ATOMICITY is collective; all processes in the group must pass identical values for fh and flag. If flag is true, atomic mode is set; if flag is false, nonatomic mode is set.

Changing the consistency semantics for an open file only affects new data accesses. All completed data accesses are guaranteed to abide by the consistency semantics in effect during their execution. Nonblocking data accesses and split collective operations that have not completed (e.g., via MPI\_WAIT) are only guaranteed to abide by nonatomic mode consistency semantics.

*Advice to implementors.* Since the semantics guaranteed by atomic mode are stronger than those guaranteed by nonatomic mode, an implementation is free to adhere to the more stringent atomic mode semantics for outstanding requests. (*End of advice to implementors.*)

MPI\_FILE\_GET\_ATOMICITY(fh, flag)

IN	fh	file handle (handle)
OUT	flag	true if atomic mode, false if nonatomic mode (logical)

int MPI\_File\_get\_atomicity(MPI\_File fh, int \*flag)

MPI\_FILE\_GET\_ATOMICITY(FH, FLAG, IERROR)

INTEGER FH, IERROR

LOGICAL FLAG

`{bool MPI::File::Get_atomicity() const (binding deprecated, see Section 15.2) }`

`MPI_FILE_GET_ATOMICITY` returns the current consistency semantics for data access operations on the set of file handles created by one collective open. If `flag` is true, atomic mode is enabled; if `flag` is false, nonatomic mode is enabled.

## MPI\_FILE\_SYNC(fh)

INOUT	fh	file handle (handle)
-------	----	----------------------

```
int MPI_File_sync(MPI_File fh)
```

MPI\_FILE\_SYNC(FH, IERROR)

INTEGER FH, IERROR

```
{void MPI::File::Sync() (binding deprecated, see Section 15.2)}
```

Calling `MPI_FILE_SYNC` with `fh` causes all previous writes to `fh` by the calling process to be transferred to the storage device. If other processes have made updates to the storage device, then all such updates become visible to subsequent reads of `fh` by the calling process. `MPI_FILE_SYNC` may be necessary to ensure sequential consistency in certain cases (see above).

MPI\_FILE\_SYNC is a collective operation.

The user is responsible for ensuring that all nonblocking requests and split collective operations on `fh` have been completed before calling `MPI_FILE_SYNC`—otherwise, the call to `MPI_FILE_SYNC` is erroneous.

### 13.6.2 Random Access vs. Sequential Files

MPI distinguishes ordinary random access files from sequential stream files, such as pipes and tape files. Sequential stream files must be opened with the `MPI_MODE_SEQUENTIAL` flag set in the `amode`. For these files, the only permitted data access operations are shared file pointer reads and writes. Filetypes and etypes with holes are erroneous. In addition, the notion of file pointer is not meaningful; therefore, calls to `MPI_FILE_SEEK_SHARED` and `MPI_FILE_GET_POSITION_SHARED` are erroneous, and the pointer update rules specified for the data access routines do not apply. The amount of data accessed by a data access operation will be the amount requested unless the end of file is reached or an error is raised.

*Rationale.* This implies that reading on a pipe will always wait until the requested amount of data is available or until the process writing to the pipe has issued an end of file. (*End of rationale.*)

Finally, for some sequential files, such as those corresponding to magnetic tapes or streaming network connections, writes to the file may be destructive. In other words, a write may act as a truncate (a `MPI_FILE_SET_SIZE` with `size` set to the current position) followed by the write.

### 13.6.3 Progress

The progress rules of MPI are both a promise to users and a set of constraints on implementors. In cases where the progress rules restrict possible implementation choices more than the interface specification alone, the progress rules take precedence.

All blocking routines must complete in finite time unless an exceptional condition (such as resource exhaustion) causes an error.

Nonblocking data access routines inherit the following progress rule from nonblocking point to point communication: a nonblocking write is equivalent to a nonblocking send for which a receive is eventually posted, and a nonblocking read is equivalent to a nonblocking receive for which a send is eventually posted.

Finally, an implementation is free to delay progress of collective routines until all processes in the group associated with the collective call have invoked the routine. Once all processes in the group have invoked the routine, the progress rule of the equivalent noncollective routine must be followed.

#### 13.6.4 Collective File Operations

Collective file operations are subject to the same restrictions as collective communication operations. For a complete discussion, please refer to the semantics set forth in Section 5.12 on page 188.

Collective file operations are collective over a dup of the communicator used to open the file—this duplicate communicator is implicitly specified via the file handle argument. Different processes can pass different values for other arguments of a collective routine unless specified otherwise.

#### 13.6.5 Type Matching

The type matching rules for I/O mimic the type matching rules for communication with one exception: if `etype` is `MPI_BYTE`, then this matches any `datatype` in a data access operation. In general, the `etype` of data items written must match the `etype` used to read the items, and for each data access operation, the current `etype` must also match the type declaration of the data access buffer.

*Advice to users.* In most cases, use of `MPI_BYTE` as a wild card will defeat the file interoperability features of MPI. File interoperability can only perform automatic conversion between heterogeneous data representations when the exact datatypes accessed are explicitly specified. (*End of advice to users.*)

#### 13.6.6 Miscellaneous Clarifications

Once an I/O routine completes, it is safe to free any opaque objects passed as arguments to that routine. For example, the `comm` and `info` used in an `MPI_FILE_OPEN`, or the `etype` and `filetype` used in an `MPI_FILE_SET_VIEW`, can be freed without affecting access to the file. Note that for nonblocking routines and split collective operations, the operation must be completed before it is safe to reuse data buffers passed as arguments.

As in communication, datatypes must be committed before they can be used in file manipulation or data access operations. For example, the `etype` and `filetype` must be committed before calling `MPI_FILE_SET_VIEW`, and the `datatype` must be committed before calling `MPI_FILE_READ` or `MPI_FILE_WRITE`.

#### 13.6.7 MPI\_Offset Type

`MPI_Offset` is an integer type of size sufficient to represent the size (in bytes) of the largest file supported by MPI. Displacements and offsets are always specified as values of type

MPI\_Offset.

In Fortran, the corresponding integer is an integer of kind `MPI_OFFSET_KIND`, defined in `mpif.h` and the `mpi` module.

In Fortran 77 environments that do not support `KIND` parameters, `MPI_Offset` arguments should be declared as an `INTEGER` of suitable size. The language interoperability implications for `MPI_Offset` are similar to those for addresses (see Section 16.3, page 515).

### 13.6.8 Logical vs. Physical File Layout

MPI specifies how the data should be laid out in a virtual file structure (the view), not how that file structure is to be stored on one or more disks. Specification of the physical file structure was avoided because it is expected that the mapping of files to disks will be system specific, and any specific control over file layout would therefore restrict program portability. However, there are still cases where some information may be necessary to optimize file layout. This information can be provided as *hints* specified via *info* when a file is created (see Section 13.2.8, page 416).

### 13.6.9 File Size

The size of a file may be increased by writing to the file after the current end of file. The size may also be changed by calling *MPI size changing* routines, such as `MPI_FILE_SET_SIZE`. A call to a size changing routine does not necessarily change the file size. For example, calling `MPI_FILE_PREALLOCATE` with a size less than the current size does not change the size.

Consider a set of bytes that has been written to a file since the most recent call to a size changing routine, or since `MPI_FILE_OPEN` if no such routine has been called. Let the *high byte* be the byte in that set with the largest displacement. The file size is the larger of

- One plus the displacement of the high byte.
- The size immediately after the size changing routine, or `MPI_FILE_OPEN`, returned.

When applying consistency semantics, calls to `MPI_FILE_SET_SIZE` and `MPI_FILE_PREALLOCATE` are considered writes to the file (which conflict with operations that access bytes at displacements between the old and new file sizes), and `MPI_FILE_GET_SIZE` is considered a read of the file (which overlaps with all accesses to the file).

*Advice to users.* Any sequence of operations containing the collective routines `MPI_FILE_SET_SIZE` and `MPI_FILE_PREALLOCATE` is a write sequence. As such, sequential consistency in nonatomic mode is not guaranteed unless the conditions in Section 13.6.1, page 455, are satisfied. (*End of advice to users.*)

File pointer update semantics (i.e., file pointers are updated by the amount accessed) are only guaranteed if file size changes are sequentially consistent.

*Advice to users.* Consider the following example. Given two operations made by separate processes to a file containing 100 bytes: an `MPI_FILE_READ` of 10 bytes and an `MPI_FILE_SET_SIZE` to 0 bytes. If the user does not enforce sequential consistency between these two operations, the file pointer may be updated by the amount requested (10 bytes) even if the amount accessed is zero bytes. (*End of advice to users.*)

## 13.6.10 Examples

The examples in this section illustrate the application of the MPI consistency and semantics guarantees. These address

- conflicting accesses on file handles obtained from a single collective open, and
- all accesses on file handles obtained from two separate collective opens.

The simplest way to achieve consistency for conflicting accesses is to obtain sequential consistency by setting atomic mode. For the code below, process 1 will read either 0 or 10 integers. If the latter, every element of **b** will be 5. If nonatomic mode is set, the results of the read are undefined.

```
/* Process 0 */
int i, a[10] ;
int TRUE = 1;

for ( i=0;i<10;i++)
    a[i] = 5 ;

MPI_File_open( MPI_COMM_WORLD, "workfile",
               MPI_MODE_RDWR | MPI_MODE_CREATE, MPI_INFO_NULL, &fh0 ) ;
MPI_File_set_view( fh0, 0, MPI_INT, MPI_INT, "native", MPI_INFO_NULL ) ;
MPI_File_set_atomicity( fh0, TRUE ) ;
MPI_File_write_at(fh0, 0, a, 10, MPI_INT, &status) ;
/* MPI_Barrier( MPI_COMM_WORLD ) ; */

/* Process 1 */
int b[10] ;
int TRUE = 1;
MPI_File_open( MPI_COMM_WORLD, "workfile",
               MPI_MODE_RDWR | MPI_MODE_CREATE, MPI_INFO_NULL, &fh1 ) ;
MPI_File_set_view( fh1, 0, MPI_INT, MPI_INT, "native", MPI_INFO_NULL ) ;
MPI_File_set_atomicity( fh1, TRUE ) ;
/* MPI_Barrier( MPI_COMM_WORLD ) ; */
MPI_File_read_at(fh1, 0, b, 10, MPI_INT, &status) ;
```

A user may guarantee that the write on process 0 precedes the read on process 1 by imposing temporal order with, for example, calls to `MPI_BARRIER`.

*Advice to users.* Routines other than `MPI_BARRIER` may be used to impose temporal order. In the example above, process 0 could use `MPI_SEND` to send a 0 byte message, received by process 1 using `MPI_RECV`. (*End of advice to users.*)

Alternatively, a user can impose consistency with nonatomic mode set:

```
/* Process 0 */
int i, a[10] ;
for ( i=0;i<10;i++)
    a[i] = 5 ;
```

```

1
2 MPI_File_open( MPI_COMM_WORLD, "workfile",
3               MPI_MODE_RDWR | MPI_MODE_CREATE, MPI_INFO_NULL, &fh0 ) ;
4 MPI_File_set_view( fh0, 0, MPI_INT, MPI_INT, "native", MPI_INFO_NULL ) ;
5 MPI_File_write_at(fh0, 0, a, 10, MPI_INT, &status ) ;
6 MPI_File_sync( fh0 ) ;
7 MPI_Barrier( MPI_COMM_WORLD ) ;
8 MPI_File_sync( fh0 ) ;
9
10 /* Process 1 */
11 int b[10] ;
12 MPI_File_open( MPI_COMM_WORLD, "workfile",
13               MPI_MODE_RDWR | MPI_MODE_CREATE, MPI_INFO_NULL, &fh1 ) ;
14 MPI_File_set_view( fh1, 0, MPI_INT, MPI_INT, "native", MPI_INFO_NULL ) ;
15 MPI_File_sync( fh1 ) ;
16 MPI_Barrier( MPI_COMM_WORLD ) ;
17 MPI_File_sync( fh1 ) ;
18 MPI_File_read_at(fh1, 0, b, 10, MPI_INT, &status ) ;
19

```

20 The “sync-barrier-sync” construct is required because:

- 21 • The barrier ensures that the write on process 0 occurs before the read on process 1.
- 22 • The first sync guarantees that the data written by all processes is transferred to the
- 23 storage device.
- 24 • The second sync guarantees that all data which has been transferred to the storage
- 25 device is visible to all processes. (This does not affect process 0 in this example.)

26 The following program represents an erroneous attempt to achieve consistency by elimin-  
 27 ating the apparently superfluous second “sync” call for each process.

```

28
29
30
31 /* ----- THIS EXAMPLE IS ERRONEOUS ----- */
32 /* Process 0 */
33 int i, a[10] ;
34 for ( i=0;i<10;i++)
35     a[i] = 5 ;
36
37 MPI_File_open( MPI_COMM_WORLD, "workfile",
38               MPI_MODE_RDWR | MPI_MODE_CREATE, MPI_INFO_NULL, &fh0 ) ;
39 MPI_File_set_view( fh0, 0, MPI_INT, MPI_INT, "native", MPI_INFO_NULL ) ;
40 MPI_File_write_at(fh0, 0, a, 10, MPI_INT, &status ) ;
41 MPI_File_sync( fh0 ) ;
42 MPI_Barrier( MPI_COMM_WORLD ) ;
43
44 /* Process 1 */
45 int b[10] ;
46 MPI_File_open( MPI_COMM_WORLD, "workfile",
47               MPI_MODE_RDWR | MPI_MODE_CREATE, MPI_INFO_NULL, &fh1 ) ;
48 MPI_File_set_view( fh1, 0, MPI_INT, MPI_INT, "native", MPI_INFO_NULL ) ;

```

```

MPI_Barrier( MPI_COMM_WORLD ) ;
MPI_File_sync( fh1 ) ;
MPI_File_read_at(fh1, 0, b, 10, MPI_INT, &status ) ;

/* ----- THIS EXAMPLE IS ERRONEOUS ----- */

```

The above program also violates the MPI rule against out-of-order collective operations and will deadlock for implementations in which MPI\_FILE\_SYNC blocks.

*Advice to users.* Some implementations may choose to implement MPI\_FILE\_SYNC as a temporally synchronizing function. When using such an implementation, the “sync-barrier-sync” construct above can be replaced by a single “sync.” The results of using such code with an implementation for which MPI\_FILE\_SYNC is not temporally synchronizing is undefined. (*End of advice to users.*)

### Asynchronous I/O

The behavior of asynchronous I/O operations is determined by applying the rules specified above for synchronous I/O operations.

The following examples all access a preexisting file “myfile.” Word 10 in myfile initially contains the integer 2. Each example writes and reads word 10.

First consider the following code fragment:

```

int a = 4, b, TRUE=1;
MPI_File_open( MPI_COMM_WORLD, "myfile",
               MPI_MODE_RDWR, MPI_INFO_NULL, &fh ) ;
MPI_File_set_view( fh, 0, MPI_INT, MPI_INT, "native", MPI_INFO_NULL ) ;
/* MPI_File_set_atomicity( fh, TRUE ) ; Use this to set atomic mode. */
MPI_File_irewrite_at(fh, 10, &a, 1, MPI_INT, &reqs[0]) ;
MPI_File_iread_at(fh, 10, &b, 1, MPI_INT, &reqs[1]) ;
MPI_Waitall(2, reqs, statuses) ;

```

For asynchronous data access operations, MPI specifies that the access occurs at any time between the call to the asynchronous data access routine and the return from the corresponding request complete routine. Thus, executing either the read before the write, or the write before the read is consistent with program order. If atomic mode is set, then MPI guarantees sequential consistency, and the program will read either 2 or 4 into b. If atomic mode is not set, then sequential consistency is not guaranteed and the program may read something other than 2 or 4 due to the conflicting data access.

Similarly, the following code fragment does not order file accesses:

```

int a = 4, b;
MPI_File_open( MPI_COMM_WORLD, "myfile",
               MPI_MODE_RDWR, MPI_INFO_NULL, &fh ) ;
MPI_File_set_view( fh, 0, MPI_INT, MPI_INT, "native", MPI_INFO_NULL ) ;
/* MPI_File_set_atomicity( fh, TRUE ) ; Use this to set atomic mode. */
MPI_File_irewrite_at(fh, 10, &a, 1, MPI_INT, &reqs[0]) ;
MPI_File_iread_at(fh, 10, &b, 1, MPI_INT, &reqs[1]) ;
MPI_Wait(&reqs[0], &status) ;
MPI_Wait(&reqs[1], &status) ;

```

If atomic mode is set, either 2 or 4 will be read into b. Again, MPI does not guarantee sequential consistency in nonatomic mode.

On the other hand, the following code fragment:

```
int a = 4, b;
MPI_File_open( MPI_COMM_WORLD, "myfile",
               MPI_MODE_RDWR, MPI_INFO_NULL, &fh ) ;
MPI_File_set_view( fh, 0, MPI_INT, MPI_INT, "native", MPI_INFO_NULL ) ;
MPI_File_iwrite_at(fh, 10, &a, 1, MPI_INT, &reqs[0]) ;
MPI_Wait(&reqs[0], &status) ;
MPI_File_iread_at(fh, 10, &b, 1, MPI_INT, &reqs[1]) ;
MPI_Wait(&reqs[1], &status) ;
```

defines the same ordering as:

```
int a = 4, b;
MPI_File_open( MPI_COMM_WORLD, "myfile",
               MPI_MODE_RDWR, MPI_INFO_NULL, &fh ) ;
MPI_File_set_view( fh, 0, MPI_INT, MPI_INT, "native", MPI_INFO_NULL ) ;
MPI_File_write_at(fh, 10, &a, 1, MPI_INT, &status) ;
MPI_File_read_at(fh, 10, &b, 1, MPI_INT, &status) ;
```

Since

- nonconcurrent operations on a single file handle are sequentially consistent, and
- the program fragments specify an order for the operations,

MPI guarantees that both program fragments will read the value 4 into b. There is no need to set atomic mode for this example.

Similar considerations apply to conflicting accesses of the form:

```
MPI_File_write_all_begin(fh,...) ;
MPI_File_iread(fh,...) ;
MPI_Wait(fh,...) ;
MPI_File_write_all_end(fh,...) ;
```

Recall that constraints governing consistency and semantics are not relevant to the following:

```
MPI_File_write_all_begin(fh,...) ;
MPI_File_read_all_begin(fh,...) ;
MPI_File_read_all_end(fh,...) ;
MPI_File_write_all_end(fh,...) ;
```

since split collective operations on the same file handle may not overlap (see Section 13.4.5, page 439).



## 13.7 I/O Error Handling

By default, communication errors are fatal—`MPI_ERRORS_ARE_FATAL` is the default error handler associated with `MPI_COMM_WORLD`. I/O errors are usually less catastrophic (e.g., “file not found”) than communication errors, and common practice is to catch these errors and continue executing. For this reason, MPI provides additional error facilities for I/O.

*Advice to users.* MPI does not specify the state of a computation after an erroneous MPI call has occurred. A high-quality implementation will support the I/O error handling facilities, allowing users to write programs using common practice for I/O. (*End of advice to users.*)

Like communicators, each file handle has an error handler associated with it. The MPI I/O error handling routines are defined in Section 8.3, page 292.

When MPI calls a user-defined error handler resulting from an error on a particular file handle, the first two arguments passed to the file error handler are the file handle and the error code. For I/O errors that are not associated with a valid file handle (e.g., in `MPI_FILE_OPEN` or `MPI_FILE_DELETE`), the first argument passed to the error handler is `MPI_FILE_NULL`,

I/O error handling differs from communication error handling in another important aspect. By default, the predefined error handler for file handles is `MPI_ERRORS_RETURN`. The default file error handler has two purposes: when a new file handle is created (by `MPI_FILE_OPEN`), the error handler for the new file handle is initially set to the default error handler, and I/O routines that have no valid file handle on which to raise an error (e.g., `MPI_FILE_OPEN` or `MPI_FILE_DELETE`) use the default file error handler. The default file error handler can be changed by specifying `MPI_FILE_NULL` as the `fh` argument to `MPI_FILE_SET_ERRHANDLER`. The current value of the default file error handler can be determined by passing `MPI_FILE_NULL` as the `fh` argument to `MPI_FILE_GET_ERRHANDLER`.

*Rationale.* For communication, the default error handler is inherited from `MPI_COMM_WORLD`. In I/O, there is no analogous “root” file handle from which default properties can be inherited. Rather than invent a new global file handle, the default file error handler is manipulated as if it were attached to `MPI_FILE_NULL`. (*End of rationale.*)

## 13.8 I/O Error Classes

The implementation dependent error codes returned by the I/O routines can be converted into the error classes defined in Table 13.3.

In addition, calls to routines in this chapter may raise errors in other MPI classes, such as `MPI_ERR_TYPE`.

## 13.9 Examples

### 13.9.1 Double Buffering with Split Collective I/O

This example shows how to overlap computation and output. The computation is performed by the function `compute_buffer()`.

MPI_ERR_FILE	Invalid file handle
MPI_ERR_NOT_SAME	Collective argument not identical on all processes, or collective routines called in a different order by different processes
MPI_ERR_AMODE	Error related to the <code>amode</code> passed to <code>MPI_FILE_OPEN</code>
MPI_ERR_UNSUPPORTED_DATAREP	Unsupported <code>datarep</code> passed to <code>MPI_FILE_SET_VIEW</code>
MPI_ERR_UNSUPPORTED_OPERATION	Unsupported operation, such as seeking on a file which supports sequential access only
MPI_ERR_NO_SUCH_FILE	File does not exist
MPI_ERR_FILE_EXISTS	File exists
MPI_ERR_BAD_FILE	Invalid file name (e.g., path name too long)
MPI_ERR_ACCESS	Permission denied
MPI_ERR_NO_SPACE	Not enough space
MPI_ERR_QUOTA	Quota exceeded
MPI_ERR_READ_ONLY	Read-only file or file system
MPI_ERR_FILE_IN_USE	File operation could not be completed, as the file is currently open by some process
MPI_ERR_DUP_DATAREP	Conversion functions could not be registered because a data representation identifier that was already defined was passed to <code>MPI_REGISTER_DATAREP</code>
MPI_ERR_CONVERSION	An error occurred in a user supplied data conversion function.
MPI_ERR_IO	Other I/O error

Table 13.3: I/O Error Classes

```

/*===== 1
* 2
* Function:          double_buffer 3
* 4
* Synopsis: 5
* void double_buffer( 6
*     MPI_File fh,          ** IN 7
*     MPI_Datatype buftype, ** IN 8
*     int bufcount         ** IN 9
* ) 10
* 11
* Description: 12
* Performs the steps to overlap computation with a collective write 13
* by using a double-buffering technique. 14
* 15
* Parameters: 16
* fh              previously opened MPI file handle 17
* buftype          MPI datatype for memory layout 18
*                 (Assumes a compatible view has been set on fh) 19
* bufcount        # buftype elements to transfer 20
*-----*/ 21
22

/* this macro switches which buffer "x" is pointing to */ 23
#define TOGGLE_PTR(x) (((x)==(buffer1)) ? (x=buffer2) : (x=buffer1)) 24
25

void double_buffer( MPI_File fh, MPI_Datatype buftype, int bufcount) 26
{ 27
28
    MPI_Status status;          /* status for MPI calls */ 29
    float *buffer1, *buffer2;   /* buffers to hold results */ 30
    float *compute_buf_ptr;     /* destination buffer */ 31
                                /* for computing */ 32
    float *write_buf_ptr;       /* source for writing */ 33
    int done;                   /* determines when to quit */ 34
25
    /* buffer initialization */ 36
    buffer1 = (float *) 37
                malloc(bufcount*sizeof(float)) ; 38
    buffer2 = (float *) 39
                malloc(bufcount*sizeof(float)) ; 40
    compute_buf_ptr = buffer1 ; /* initially point to buffer1 */ 41
    write_buf_ptr   = buffer1 ; /* initially point to buffer1 */ 42
43
44
    /* DOUBLE-BUFFER prolog: 45
     * compute buffer1; then initiate writing buffer1 to disk 46
     */ 47
    compute_buffer(compute_buf_ptr, bufcount, &done); 48

```

```

1  MPI_File_write_all_begin(fh, write_buf_ptr, bufcount, buftype);
2
3  /* DOUBLE-BUFFER steady state:
4   *   Overlap writing old results from buffer pointed to by write_buf_ptr
5   *   with computing new results into buffer pointed to by compute_buf_ptr.
6   *
7   *   There is always one write-buffer and one compute-buffer in use
8   *   during steady state.
9   */
10 while (!done) {
11     TOGGLE_PTR(compute_buf_ptr);
12     compute_buffer(compute_buf_ptr, bufcount, &done);
13     MPI_File_write_all_end(fh, write_buf_ptr, &status);
14     TOGGLE_PTR(write_buf_ptr);
15     MPI_File_write_all_begin(fh, write_buf_ptr, bufcount, buftype);
16 }
17
18 /* DOUBLE-BUFFER epilog:
19 *   wait for final write to complete.
20 */
21 MPI_File_write_all_end(fh, write_buf_ptr, &status);
22
23
24 /* buffer cleanup */
25 free(buffer1);
26 free(buffer2);
27 }

```

### 13.9.2 Subarray Filetype Constructor

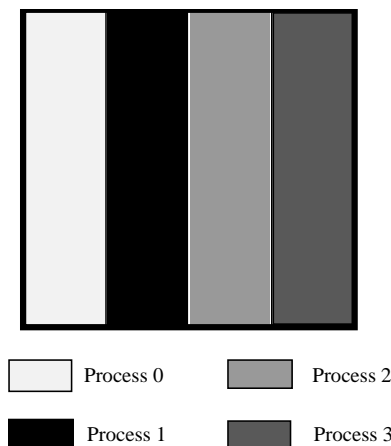


Figure 13.4: Example array file layout

Assume we are writing out a 100x100 2D array of double precision floating point numbers that is distributed among 4 processes such that each process has a block of 25 columns

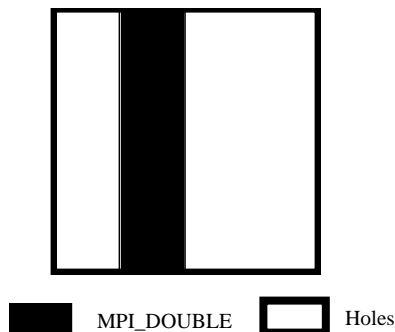


Figure 13.5: Example local array filetype for process 1

(e.g., process 0 has columns 0-24, process 1 has columns 25-49, etc.; see Figure 13.4). To create the filetypes for each process one could use the following C program (see Section 4.1.3 on page 91):

```
double subarray[100][25];
MPI_Datatype filetype;
int sizes[2], subsizes[2], starts[2];
int rank;

MPI_Comm_rank(MPI_COMM_WORLD, &rank);
sizes[0]=100; sizes[1]=100;
subsizes[0]=100; subsizes[1]=25;
starts[0]=0; starts[1]=rank*subsizes[1];

MPI_Type_create_subarray(2, sizes, subsizes, starts, MPI_ORDER_C,
                        MPI_DOUBLE, &filetype);
```

Or, equivalently in Fortran:

```
double precision subarray(100,25)
integer filetype, rank, ierror
integer sizes(2), subsizes(2), starts(2)

call MPI_COMM_RANK(MPI_COMM_WORLD, rank, ierror)
sizes(1)=100
sizes(2)=100
subsizes(1)=100
subsizes(2)=25
starts(1)=0
starts(2)=rank*subsizes(2)

call MPI_TYPE_CREATE_SUBARRAY(2, sizes, subsizes, starts, &
                             MPI_ORDER_FORTRAN, MPI_DOUBLE_PRECISION, &
                             filetype, ierror)
```

The generated filetype will then describe the portion of the file contained within the

process's subarray with holes for the space taken by the other processes. Figure 13.5 shows the filetype created for process 1.

# Chapter 14

## Profiling Interface

### 14.1 Requirements

To meet the MPI profiling interface, an implementation of the MPI functions *must*

1. provide a mechanism through which all of the MPI defined functions except those allowed as macros (See Section 2.6.5). This requires, in C and Fortran, an alternate entry point name, with the prefix `PMPI_` for each MPI function. The profiling interface in C++ is described in Section 16.1.10. For routines implemented as macros, it is still required that the `PMPI_` version be supplied and work as expected, but it is not possible to replace at link time the `MPI_` version with a user-defined version.
2. ensure that those MPI functions that are not replaced may still be linked into an executable image without causing name clashes.
3. document the implementation of different language bindings of the MPI interface if they are layered on top of each other, so that the profiler developer knows whether she must implement the profile interface for each binding, or can economise by implementing it only for the lowest level routines.
4. where the implementation of different language bindings is done through a layered approach (e.g. the Fortran binding is a set of “wrapper” functions that call the C implementation), ensure that these wrapper functions are separable from the rest of the library.

This separability is necessary to allow a separate profiling library to be correctly implemented, since (at least with Unix linker semantics) the profiling library must contain these wrapper functions if it is to perform as expected. This requirement allows the person who builds the profiling library to extract these functions from the original MPI library and add them into the profiling library without bringing along any other unnecessary code.

5. provide a no-op routine `MPI_PCONTROL` in the MPI library.

### 14.2 Discussion

The objective of the MPI profiling interface is to ensure that it is relatively easy for authors of profiling (and other similar) tools to interface their codes to MPI implementations on

different machines.

Since MPI is a machine independent standard with many different implementations, it is unreasonable to expect that the authors of profiling tools for MPI will have access to the source code that implements MPI on any particular machine. It is therefore necessary to provide a mechanism by which the implementors of such tools can collect whatever performance information they wish *without* access to the underlying implementation.

We believe that having such an interface is important if MPI is to be attractive to end users, since the availability of many different tools will be a significant factor in attracting users to the MPI standard.

The profiling interface is just that, an interface. It says *nothing* about the way in which it is used. There is therefore no attempt to lay down what information is collected through the interface, or how the collected information is saved, filtered, or displayed.

While the initial impetus for the development of this interface arose from the desire to permit the implementation of profiling tools, it is clear that an interface like that specified may also prove useful for other purposes, such as “internetworking” multiple MPI implementations. Since all that is defined is an interface, there is no objection to its being used wherever it is useful.

As the issues being addressed here are intimately tied up with the way in which executable images are built, which may differ greatly on different machines, the examples given below should be treated solely as one way of implementing the objective of the MPI profiling interface. The actual requirements made of an implementation are those detailed in the Requirements section above, the whole of the rest of this chapter is only present as justification and discussion of the logic for those requirements.

The examples below show one way in which an implementation could be constructed to meet the requirements on a Unix system (there are doubtless others that would be equally valid).

## 14.3 Logic of the Design

Provided that an MPI implementation meets the requirements above, it is possible for the implementor of the profiling system to intercept all of the MPI calls that are made by the user program. She can then collect whatever information she requires before calling the underlying MPI implementation (through its name shifted entry points) to achieve the desired effects.

### 14.3.1 Miscellaneous Control of Profiling

There is a clear requirement for the user code to be able to control the profiler dynamically at run time. This is normally used for (at least) the purposes of

- Enabling and disabling profiling depending on the state of the calculation.
- Flushing trace buffers at non-critical points in the calculation
- Adding user events to a trace file.

These requirements are met by use of the MPI\_PCONTROL.



MPI\_PCONTROL(level, ...)

IN            level                            Profiling level

int MPI\_Pcontrol(const int level, ...)

MPI\_PCONTROL(LEVEL)

INTEGER LEVEL[, ...]

```
{void MPI::Pcontrol(const int level, ...)  (binding deprecated, see Section 15.2)
}
```

MPI libraries themselves make no use of this routine, and simply return immediately to the user code. However the presence of calls to this routine allows a profiling package to be explicitly called by the user.

Since MPI has no control of the implementation of the profiling code, we are unable to specify precisely the semantics that will be provided by calls to MPI\_PCONTROL. This vagueness extends to the number of arguments to the function, and their datatypes.

However to provide some level of portability of user codes to different profiling libraries, we request the following meanings for certain values of level.

- level==0 Profiling is disabled.
- level==1 Profiling is enabled at a normal default level of detail.
- level==2 Profile buffers are flushed. (This may be a no-op in some profilers).
- All other values of level have profile library defined effects and additional arguments.

We also request that the default state after MPI\_INIT has been called is for profiling to be enabled at the normal default level. (i.e. as if MPI\_PCONTROL had just been called with the argument 1). This allows users to link with a profiling library and obtain profile output without having to modify their source code at all.

The provision of MPI\_PCONTROL as a no-op in the standard MPI library allows them to modify their source code to obtain more detailed profiling information, but still be able to link exactly the same code against the standard MPI library.

## 14.4 Examples

### 14.4.1 Profiler Implementation

Suppose that the profiler wishes to accumulate the total amount of data sent by the MPI\_SEND function, along with the total elapsed time spent in the function. This could trivially be achieved thus

```
static int totalBytes = 0;
static double totalTime = 0.0;

int MPI_Send(void* buffer, int count, MPI_Datatype datatype,
             int dest, int tag, MPI_Comm comm)
{
    double tstart = MPI_Wtime();      /* Pass on all the arguments */
```

ticket123.

ticket1.  
ticket150.  
ticket150.

```

1      int extent;
2      int result    = PMPI_Send(buffer,count,datatype,dest,tag,comm);
3
4      MPI_Type_size(datatype, &extent); /* Compute size */
5      totalBytes += count*extent;
6
7      totalTime += MPI_Wtime() - tstart;          /* and time          */
8
9      return result;
10 }
11
12

```

### 14.4.2 MPI Library Implementation

On a Unix system, in which the MPI library is implemented in C, then there are various possible options, of which two of the most obvious are presented here. Which is better depends on whether the linker and compiler support weak symbols.

#### Systems with Weak Symbols

If the compiler and linker support weak external symbols (e.g. Solaris 2.x, other system V.4 machines), then only a single library is required through the use of `#pragma weak` thus

```

23 #pragma weak MPI_Example = PMPI_Example
24
25 int PMPI_Example(/* appropriate args */)
26 {
27     /* Useful content */
28 }
29

```

The effect of this `#pragma` is to define the external symbol `MPI_Example` as a weak definition. This means that the linker will not complain if there is another definition of the symbol (for instance in the profiling library), however if no other definition exists, then the linker will use the weak definition.

#### Systems Without Weak Symbols

In the absence of weak symbols then one possible solution would be to use the C macro pre-processor thus

```

39 #ifdef PROFILELIB
40 #   ifdef __STDC__
41 #       define FUNCTION(name) P##name
42 #   else
43 #       define FUNCTION(name) P/**/name
44 #   endif
45 #else
46 #   define FUNCTION(name) name
47 #endif
48

```

Each of the user visible functions in the library would then be declared thus

```
int FUNCTION(MPI_Example)(/* appropriate args */)
{
    /* Useful content */
}
```

The same source file can then be compiled to produce both versions of the library, depending on the state of the `PROFILELIB` macro symbol.

It is required that the standard MPI library be built in such a way that the inclusion of MPI functions can be achieved one at a time. This is a somewhat unpleasant requirement, since it may mean that each external function has to be compiled from a separate file. However this is necessary so that the author of the profiling library need only define those MPI functions that she wishes to intercept, references to any others being fulfilled by the normal MPI library. Therefore the link step can look something like this

```
% cc ... -lmyprof -lpmpi -lmpi
```

Here `libmyprof.a` contains the profiler functions that intercept some of the MPI functions. `libpmpi.a` contains the “name shifted” MPI functions, and `libmpi.a` contains the normal definitions of the MPI functions.

### 14.4.3 Complications

#### Multiple Counting

Since parts of the MPI library may themselves be implemented using more basic MPI functions (e.g. a portable implementation of the collective operations implemented using point to point communications), there is potential for profiling functions to be called from within an MPI function that was called from a profiling function. This could lead to “double counting” of the time spent in the inner routine. Since this effect could actually be useful under some circumstances (e.g. it might allow one to answer the question “How much time is spent in the point to point routines when they’re called from collective functions ?”), we have decided not to enforce any restrictions on the author of the MPI library that would overcome this. Therefore the author of the profiling library should be aware of this problem, and guard against it herself. In a single threaded world this is easily achieved through use of a static variable in the profiling code that remembers if you are already inside a profiling routine. It becomes more complex in a multi-threaded environment (as does the meaning of the times recorded !)

#### Linker Oddities

The Unix linker traditionally operates in one pass : the effect of this is that functions from libraries are only included in the image if they are needed at the time the library is scanned. When combined with weak symbols, or multiple definitions of the same function, this can cause odd (and unexpected) effects.

Consider, for instance, an implementation of MPI in which the Fortran binding is achieved by using wrapper functions on top of the C implementation. The author of the profile library then assumes that it is reasonable only to provide profile functions for the C binding, since Fortran will eventually call these, and the cost of the wrappers is assumed

to be small. However, if the wrapper functions are not in the profiling library, then none of the profiled entry points will be undefined when the profiling library is called. Therefore none of the profiling code will be included in the image. When the standard MPI library is scanned, the Fortran wrappers will be resolved, and will also pull in the base versions of the MPI functions. The overall effect is that the code will link successfully, but will not be profiled.

To overcome this we must ensure that the Fortran wrapper functions are included in the profiling version of the library. We ensure that this is possible by requiring that these be separable from the rest of the base MPI library. This allows them to be aared out of the base library and into the profiling one.

## 14.5 Multiple Levels of Interception

The scheme given here does not directly support the nesting of profiling functions, since it provides only a single alternative name for each MPI function. Consideration was given to an implementation that would allow multiple levels of call interception, however we were unable to construct an implementation of this that did not have the following disadvantages

- assuming a particular implementation language.
- imposing a run time cost even when no profiling was taking place.

Since one of the objectives of MPI is to permit efficient, low latency implementations, and it is not the business of a standard to require a particular implementation language, we decided to accept the scheme outlined above.

Note, however, that it is possible to use the scheme above to implement a multi-level system, since the function called by the user may call many different profiling functions before calling the underlying MPI function.

Unfortunately such an implementation may require more cooperation between the different profiling libraries than is required for the single level implementation detailed above.

## Chapter 15

# Deprecated Functions

### 15.1 Deprecated since MPI-2.0

The following function is deprecated and is superseded by `MPI_TYPE_CREATE_HVECTOR` in MPI-2.0. The language independent definition and the C binding of the deprecated function is the same as of the new function, except of the function name. Only the Fortran language binding is different.

`MPI_TYPE_HVECTOR( count, blocklength, stride, oldtype, newtype)`

IN	count	number of blocks (non-negative integer)	ticket74.
IN	blocklength	number of elements in each block (non-negative integer)	ticket74.
IN	stride	number of bytes between start of each block (integer)	
IN	oldtype	old datatype (handle)	
OUT	newtype	new datatype (handle)	

```
int MPI_Type_hvector(int count, int blocklength, MPI_Aint stride,  
                    MPI_Datatype oldtype, MPI_Datatype *newtype)
```

```
MPI_TYPE_HVECTOR(COUNT, BLOCKLENGTH, STRIDE, OLDTYPE, NEWTYPE, IERROR)  
    INTEGER COUNT, BLOCKLENGTH, STRIDE, OLDTYPE, NEWTYPE, IERROR
```

The following function is deprecated and is superseded by `MPI_TYPE_CREATE_HINDEXED` in MPI-2.0. The language independent definition and the C binding of the deprecated function is the same as of the new function, except of the function name. Only the Fortran language binding is different.

```
1 MPI_TYPE_HINDEXED( count, array_of_blocklengths, array_of_displacements, oldtype, new-
2 type)
```

```
3     IN          count          number of blocks – also number of entries in
4                                array_of_displacements and array_of_blocklengths (non-
5                                negative integer)
6
```

ticket74.

```
7     IN          array_of_blocklengths  number of elements in each block (array of non-negative
8                                integers)
9
```

ticket74.

```
10    IN          array_of_displacements  byte displacement of each block (array of integer)
11
```

```
12    IN          oldtype                old datatype (handle)
13
```

```
14    OUT         newtype                new datatype (handle)
15
```

```
16 int MPI_Type_hindexed(int count, int *array_of_blocklengths,
17                        MPI_Aint *array_of_displacements, MPI_Datatype oldtype,
18                        MPI_Datatype *newtype)
19
```

```
20 MPI_TYPE_HINDEXED(COUNT, ARRAY_OF_BLOCKLENGTHS, ARRAY_OF_DISPLACEMENTS,
21                   OLDTYPE, NEWTYPE, IERROR)
22
23     INTEGER COUNT, ARRAY_OF_BLOCKLENGTHS(*), ARRAY_OF_DISPLACEMENTS(*),
24     OLDTYPE, NEWTYPE, IERROR
25
```

26 The following function is deprecated and is superseded by  
27 MPI\_TYPE\_CREATE\_STRUCT in MPI-2.0. The language independent definition and the C  
28 binding of the deprecated function is the same as of the new function, except of the function  
29 name. Only the Fortran language binding is different.

```
30 MPI_TYPE_STRUCT(count, array_of_blocklengths, array_of_displacements, array_of_types,
31 newtype)
```

```
32     IN          count          number of blocks (integer) (non-negative integer) –
33                                also number of entries in arrays array_of_types,
34                                array_of_displacements and array_of_blocklengths
35
```

```
36     IN          array_of_blocklength  number of elements in each block (array of non-negative
37                                integer)
38
```

```
39     IN          array_of_displacements  byte displacement of each block (array of integer)
40
```

```
41     IN          array_of_types         type of elements in each block (array of handles to
42                                datatype objects)
43
```

```
44     OUT         newtype                new datatype (handle)
45
```

```
46 int MPI_Type_struct(int count, int *array_of_blocklengths,
47                     MPI_Aint *array_of_displacements,
48                     MPI_Datatype *array_of_types, MPI_Datatype *newtype)
49
```

```
50 MPI_TYPE_STRUCT(COUNT, ARRAY_OF_BLOCKLENGTHS, ARRAY_OF_DISPLACEMENTS,
51                 ARRAY_OF_TYPES, NEWTYPE, IERROR)
52
53     INTEGER COUNT, ARRAY_OF_BLOCKLENGTHS(*), ARRAY_OF_DISPLACEMENTS(*),
54     ARRAY_OF_TYPES(*), NEWTYPE, IERROR
55
```

The following function is deprecated and is superseded by `MPI_GET_ADDRESS` in MPI-2.0. The language independent definition and the C binding of the deprecated function is the same as of the new function, except of the function name. Only the Fortran language binding is different.

`MPI_ADDRESS(location, address)`

IN	location	location in caller memory (choice)
OUT	address	address of location (integer)

`int MPI_Address(void* location, MPI_Aint *address)`

`MPI_ADDRESS(LOCATION, ADDRESS, IERROR)`

`<type> LOCATION(*)`

`INTEGER ADDRESS, IERROR`

The following functions are deprecated and are superseded by `MPI_TYPE_GET_EXTENT` in MPI-2.0.

`MPI_TYPE_EXTENT(datatype, extent)`

IN	datatype	datatype (handle)
OUT	extent	datatype extent (integer)

`int MPI_Type_extent(MPI_Datatype datatype, MPI_Aint *extent)`

`MPI_TYPE_EXTENT(DATATYPE, EXTENT, IERROR)`

`INTEGER DATATYPE, EXTENT, IERROR`

Returns the extent of a datatype, where extent is as defined on page 100.

The two functions below can be used for finding the lower bound and the upper bound of a datatype.

`MPI_TYPE_LB( datatype, displacement)`

IN	datatype	datatype (handle)
OUT	displacement	displacement of lower bound from origin, in bytes (integer)

`int MPI_Type_lb(MPI_Datatype datatype, MPI_Aint* displacement)`

`MPI_TYPE_LB( DATATYPE, DISPLACEMENT, IERROR)`

`INTEGER DATATYPE, DISPLACEMENT, IERROR`

```

1 MPI_TYPE_UB( datatype, displacement)
2     IN      datatype          datatype (handle)
3
4     OUT     displacement      displacement of upper bound from origin, in bytes (in-
5                                teger)
6

```

```

7 int MPI_Type_ub(MPI_Datatype datatype, MPI_Aint* displacement)
8

```

```

9 MPI_TYPE_UB( DATATYPE, DISPLACEMENT, IERROR)
10    INTEGER DATATYPE, DISPLACEMENT, IERROR
11

```

The following function is deprecated and is superseded by  
 MPI\_COMM\_CREATE\_KEYVAL in MPI-2.0. The language independent definition of the  
 deprecated function is the same as *[of the new function, except of the function name]that of  
 the new function, except for the function name and a different behavior in the C/Fortran  
 language interoperability, see Section 16.3.7 on page 523.* The language bindings are modi-  
 fied.

```

18 MPI_KEYVAL_CREATE(copy_fn, delete_fn, keyval, extra_state)
19
20     IN      copy_fn          Copy callback function for keyval
21
22     IN      delete_fn       Delete callback function for keyval
23
24     OUT     keyval          key value for future access (integer)
25
26     IN      extra_state     Extra state for callback functions
27
28
29 int MPI_Keyval_create(MPI_Copy_function *copy_fn, MPI_Delete_function
30                      *delete_fn, int *keyval, void* extra_state)
31
32 MPI_KEYVAL_CREATE(COPY_FN, DELETE_FN, KEYVAL, EXTRA_STATE, IERROR)
33    EXTERNAL COPY_FN, DELETE_FN
34    INTEGER KEYVAL, EXTRA_STATE, IERROR
35

```

The copy\_fn function is invoked when a communicator is duplicated by  
 MPI\_COMM\_DUP. copy\_fn should be of type MPI\_Copy\_function, which is defined as follows:

```

36 typedef int MPI_Copy_function(MPI_Comm oldcomm, int keyval,
37                               void *extra_state, void *attribute_val_in,
38                               void *attribute_val_out, int *flag)
39

```

A Fortran declaration for such a function is as follows:

```

40 SUBROUTINE COPY_FUNCTION(OLDCOMM, KEYVAL, EXTRA_STATE, ATTRIBUTE_VAL_IN,
41                          ATTRIBUTE_VAL_OUT, FLAG, IERR)
42    INTEGER OLDCOMM, KEYVAL, EXTRA_STATE, ATTRIBUTE_VAL_IN,
43    ATTRIBUTE_VAL_OUT, IERR
44    LOGICAL FLAG
45

```

copy\_fn may be specified as MPI\_NULL\_COPY\_FN or MPI\_DUP\_FN from either C or  
 FORTRAN; MPI\_NULL\_COPY\_FN is a function that does nothing other than returning  
 flag = 0 and MPI\_SUCCESS. MPI\_DUP\_FN is a simple-minded copy function that sets flag =



1, returns the value of `attribute_val_in` in `attribute_val_out`, and returns `MPI_SUCCESS`. Note that `MPI_NULL_COPY_FN` and `MPI_DUP_FN` are also deprecated.

Analogous to `copy_fn` is a callback deletion function, defined as follows. The `delete_fn` function is invoked when a communicator is deleted by `MPI_COMM_FREE` or when a call is made explicitly to `MPI_ATTR_DELETE`. `delete_fn` should be of type `MPI_Delete_function`, which is defined as follows:

```
typedef int MPI_Delete_function(MPI_Comm comm, int keyval,
void *attribute_val, void *extra_state);
```

A Fortran declaration for such a function is as follows:

```
SUBROUTINE DELETE_FUNCTION(COMM, KEYVAL, ATTRIBUTE_VAL, EXTRA_STATE, IERR)
  INTEGER COMM, KEYVAL, ATTRIBUTE_VAL, EXTRA_STATE, IERR
```

`delete_fn` may be specified as `MPI_NULL_DELETE_FN` from either C or FORTRAN; `MPI_NULL_DELETE_FN` is a function that does nothing, other than returning `MPI_SUCCESS`. Note that `MPI_NULL_DELETE_FN` is also deprecated.

The following function is deprecated and is superseded by `MPI_COMM_FREE_KEYVAL` in MPI-2.0. The language independent definition of the deprecated function is the same as of the new function, except of the function name. The language bindings are modified.

`MPI_KEYVAL_FREE(keyval)`

INOUT	keyval	Frees the integer key value (integer)
-------	--------	---------------------------------------

```
int MPI_Keyval_free(int *keyval)
```

```
MPI_KEYVAL_FREE(KEYVAL, IERROR)
  INTEGER KEYVAL, IERROR
```

The following function is deprecated and is superseded by `MPI_COMM_SET_ATTR` in MPI-2.0. The language independent definition of the deprecated function is the same as of the new function, except of the function name. The language bindings are modified.

`MPI_ATTR_PUT(comm, keyval, attribute_val)`

INOUT	comm	communicator to which attribute will be attached (handle)
IN	keyval	key value, as returned by <code>MPI_KEYVAL_CREATE</code> (integer)
IN	attribute_val	attribute value

```
int MPI_Attr_put(MPI_Comm comm, int keyval, void* attribute_val)
```

```
MPI_ATTR_PUT(COMM, KEYVAL, ATTRIBUTE_VAL, IERROR)
  INTEGER COMM, KEYVAL, ATTRIBUTE_VAL, IERROR
```

The following function is deprecated and is superseded by `MPI_COMM_GET_ATTR` in MPI-2.0. The language independent definition of the deprecated function is the same as of the new function, except of the function name. The language bindings are modified.

```

1 MPI_ATTR_GET(comm, keyval, attribute_val, flag)
2     IN      comm      communicator to which attribute is attached (handle)
3
4     IN      keyval     key value (integer)
5
6     OUT     attribute_val attribute value, unless flag = false
7
8     OUT     flag       true if an attribute value was extracted; false if no
                        attribute is associated with the key

```

```

9
10 int MPI_Attr_get(MPI_Comm comm, int keyval, void *attribute_val, int *flag)

```

```

11 MPI_ATTR_GET(COMM, KEYVAL, ATTRIBUTE_VAL, FLAG, IERROR)
12     INTEGER COMM, KEYVAL, ATTRIBUTE_VAL, IERROR
13     LOGICAL FLAG

```

The following function is deprecated and is superseded by `MPI_COMM_DELETE_ATTR` in MPI-2.0. The language independent definition of the deprecated function is the same as of the new function, except of the function name. The language bindings are modified.

```

19 MPI_ATTR_DELETE(comm, keyval)
20
21     INOUT    comm      communicator to which attribute is attached (handle)
22
23     IN      keyval     The key value of the deleted attribute (integer)

```

```

24 int MPI_Attr_delete(MPI_Comm comm, int keyval)

```

```

25
26 MPI_ATTR_DELETE(COMM, KEYVAL, IERROR)
27     INTEGER COMM, KEYVAL, IERROR

```

The following function is deprecated and is superseded by `MPI_COMM_CREATE_ERRHANDLER` in MPI-2.0. The language independent definition of the deprecated function is the same as of the new function, except of the function name. The language bindings are modified.

```

34 MPI_ERRHANDLER_CREATE( function, errhandler )
35
36     IN      function     user defined error handling procedure
37
38     OUT     errhandler    MPI error handler (handle)

```

```

39 int MPI_Errhandler_create(MPI_Handler_function *function,
40     MPI_Errhandler *errhandler)

```

```

41 MPI_ERRHANDLER_CREATE(FUNCTION, ERRHANDLER, IERROR)
42     EXTERNAL FUNCTION
43     INTEGER ERRHANDLER, IERROR

```

Register the user routine `function` for use as an MPI exception handler. Returns in `errhandler` a handle to the registered exception handler.

In the C language, the user routine should be a C function of type `MPI_Handler_function`, which is defined as:

```
typedef void (MPI_Handler_function)(MPI_Comm *, int *, ...);
```

The first argument is the communicator in use, the second is the error code to be returned.

In the Fortran language, the user routine should be of the form:

```
[
% SUBROUTINE HANDLER_FUNCTION(COMM, ERROR_CODE, ....)
%   INTEGER COMM, ERROR_CODE
%
]
```

```
SUBROUTINE HANDLER_FUNCTION(COMM, ERROR_CODE)
  INTEGER COMM, ERROR_CODE
```

The following function is deprecated and is superseded by `MPI_COMM_SET_ERRHANDLER` in MPI-2.0. The language independent definition of the deprecated function is the same as of the new function, except of the function name. The language bindings are modified.

```
MPI_ERRHANDLER_SET( comm, errhandler )
```

INOUT	comm	communicator to set the error handler for (handle)
IN	errhandler	new MPI error handler for communicator (handle)

```
int MPI_Errhandler_set(MPI_Comm comm, MPI_Errhandler errhandler)
```

```
MPI_ERRHANDLER_SET(COMM, ERRHANDLER, IERROR)
  INTEGER COMM, ERRHANDLER, IERROR
```

Associates the new error handler `errorhandler` with communicator `comm` at the calling process. Note that an error handler is always associated with the communicator.

The following function is deprecated and is superseded by `MPI_COMM_GET_ERRHANDLER` in MPI-2.0. The language independent definition of the deprecated function is the same as of the new function, except of the function name. The language bindings are modified.

```
MPI_ERRHANDLER_GET( comm, errhandler )
```

IN	comm	communicator to get the error handler from (handle)
OUT	errhandler	MPI error handler currently associated with communicator (handle)

```
int MPI_Errhandler_get(MPI_Comm comm, MPI_Errhandler *errhandler)
```

```
MPI_ERRHANDLER_GET(COMM, ERRHANDLER, IERROR)
  INTEGER COMM, ERRHANDLER, IERROR
```

Returns in `errhandler` (a handle to) the error handler that is currently associated with communicator `comm`.

## 15.2 Deprecated since MPI-2.2

The entire set of C++ language bindings have been deprecated.

*Rationale.* The C++ bindings add minimal functionality over the C bindings while incurring a significant amount of maintenance to the MPI specification. Since the C++ bindings are effectively a one-to-one mapping of the C bindings, it should be relatively easy to convert existing C++ MPI applications to use the MPI C bindings. Additionally, there are third party packages available that provide C++ class library functionality (i.e., C++-specific functionality layered on top of the MPI C bindings) that are likely more expressive and/or natural to C++ programmers and are not suitable for standardization in this specification. (*End of rationale.*)

The following function typedefs have been deprecated and are superseded by new names. Other than the typedef names, the function signatures are exactly the same; the names were updated to match conventions of other function typedef names.

Deprecated Name	New Name
<code>MPI_Comm_errhandler_fn</code>	<code>MPI_Comm_errhandler_function</code>
<code>MPI::Comm::Errhandler_fn</code>	<code>MPI::Comm::Errhandler_function</code>
<code>MPI_File_errhandler_fn</code>	<code>MPI_File_errhandler_function</code>
<code>MPI::File::Errhandler_fn</code>	<code>MPI::File::Errhandler_function</code>
<code>MPI_Win_errhandler_fn</code>	<code>MPI_Win_errhandler_function</code>
<code>MPI::Win::Errhandler_fn</code>	<code>MPI::Win::Errhandler_function</code>

# Chapter 16

## Language Bindings

### 16.1 C++

#### 16.1.1 Overview

The C++ language bindings have been deprecated.

There are some issues specific to C++ that must be considered in the design of an interface that go beyond the simple description of language bindings. In particular, in C++, we must be concerned with the design of objects and their interfaces, rather than just the design of a language-specific functional interface to MPI. Fortunately, the design of MPI was based on the notion of objects, so a natural set of classes is already part of MPI.

MPI-2 includes C++ bindings as part of its function specifications. In some cases, MPI-2 provides new names for the C bindings of MPI-1 functions. In this case, the C++ binding matches the new C name — there is no binding for the deprecated name.

#### 16.1.2 Design

The C++ language interface for MPI is designed according to the following criteria:

1. The C++ language interface consists of a small set of classes with a lightweight functional interface to MPI. The classes are based upon the fundamental MPI object types (e.g., communicator, group, etc.).
2. The MPI C++ language bindings provide a semantically correct interface to MPI.
3. To the greatest extent possible, the C++ bindings for MPI functions are member functions of MPI classes.

*Rationale.* Providing a lightweight set of MPI objects that correspond to the basic MPI types is the best fit to MPI's implicit object-based design; methods can be supplied for these objects to realize MPI functionality. The existing C bindings can be used in C++ programs, but much of the expressive power of the C++ language is forfeited. On the other hand, while a comprehensive class library would make user programming more elegant, such a library it is not suitable as a language binding for MPI since a binding must provide a direct and unambiguous mapping to the specified functionality of MPI. (*End of rationale.*)

### 16.1.3 C++ Classes for MPI

All MPI classes, constants, and functions are declared within the scope of an MPI `namespace`. Thus, instead of the `MPI_` prefix that is used in C and Fortran, MPI functions essentially have an `MPI::` prefix.

The members of the MPI namespace are those classes corresponding to objects implicitly used by MPI. An abbreviated definition of the MPI namespace and its member classes is as follows:

```
namespace MPI {
  class Comm {...};
  class Intracomm : public Comm {...};
  class Graphcomm : public Intracomm {...};
  [ticket33.] class Distgraphcomm : public Intracomm {...};
  class Cartcomm : public Intracomm {...};
  class Intercomm : public Comm {...};
  class Datatype {...};
  class Errhandler {...};
  class Exception {...};
  class File {...};
  class Group {...};
  class Info {...};
  class Op {...};
  class Request {...};
  class Prequest : public Request {...};
  class Grequest : public Request {...};
  class Status {...};
  class Win {...};
};
```

Note that there are a small number of derived classes, and that virtual inheritance is *not* used.

### 16.1.4 Class Member Functions for MPI

Besides the member functions which constitute the C++ language bindings for MPI, the C++ language interface has additional functions (as required by the C++ language). In particular, the C++ language interface must provide a constructor and destructor, an assignment operator, and comparison operators.

The complete set of C++ language bindings for MPI is presented in Annex [A.4](#). The bindings take advantage of some important C++ features, such as references and `const`. Declarations (which apply to all MPI member classes) for construction, destruction, copying, assignment, comparison, and mixed-language operability are also provided.

Except where indicated, all non-static member functions (except for constructors and the assignment operator) of MPI member classes are virtual functions.

*Rationale.* Providing virtual member functions is an important part of design for inheritance. Virtual functions can be bound at run-time, which allows users of libraries to re-define the behavior of objects already contained in a library. There is a small

performance penalty that must be paid (the virtual function must be looked up before it can be called). However, users concerned about this performance penalty can force compile-time function binding. (*End of rationale.*)

**Example 16.1** Example showing a derived MPI class.

```
class foo_comm : public MPI::Intracomm {
public:
    void Send(const void* buf, int count, const MPI::Datatype& type,
              int dest, int tag) const
    {
        // Class library functionality
        MPI::Intracomm::Send(buf, count, type, dest, tag);
        // More class library functionality
    }
};
```

*Advice to implementors.* Implementors must be careful to avoid unintended side effects from class libraries that use inheritance, especially in layered implementations. For example, if MPI\_BCAST is implemented by repeated calls to MPI\_SEND or MPI\_RECV, the behavior of MPI\_BCAST cannot be changed by derived communicator classes that might redefine MPI\_SEND or MPI\_RECV. The implementation of MPI\_BCAST must explicitly use the MPI\_SEND (or MPI\_RECV) of the base MPI::Comm class. (*End of advice to implementors.*)

### 16.1.5 Semantics

The semantics of the member functions constituting the C++ language binding for MPI are specified by the MPI function description itself. Here, we specify the semantics for those portions of the C++ language interface that are not part of the language binding. In this subsection, functions are prototyped using the type `MPI::<CLASS>` rather than listing each function for every MPI class; the word `<CLASS>` can be replaced with any valid MPI class name (e.g., `Group`), except as noted.

**Construction / Destruction** The default constructor and destructor are prototyped as follows:

```
{ MPI::<CLASS>() (binding deprecated, see Section 15.2) }
{ ~MPI::<CLASS>() (binding deprecated, see Section 15.2) }
```

In terms of construction and destruction, opaque MPI user level objects behave like handles. Default constructors for all MPI objects except `MPI::Status` create corresponding `MPI::*_NULL` handles. That is, when an MPI object is instantiated, comparing it with its corresponding `MPI::*_NULL` object will return `true`. The default constructors do not create new MPI opaque objects. Some classes have a member function `Create()` for this purpose.

**Example 16.2** In the following code fragment, the test will return `true` and the message will be sent to `cout`.

```

1 void foo()
2 {
3     MPI::Intracomm bar;
4
5     if (bar == MPI::COMM_NULL)
6         cout << "bar is MPI::COMM_NULL" << endl;
7 }

```

The destructor for each MPI user level object does *not* invoke the corresponding `MPI_*_FREE` function (if it exists).

*Rationale.* `MPI_*_FREE` functions are not automatically invoked for the following reasons:

1. Automatic destruction contradicts the shallow-copy semantics of the MPI classes.
2. The model put forth in MPI makes memory allocation and deallocation the responsibility of the user, not the implementation.
3. Calling `MPI_*_FREE` upon destruction could have unintended side effects, including triggering collective operations (this also affects the copy, assignment, and construction semantics). In the following example, we would want neither `foo_comm` nor `bar_comm` to automatically invoke `MPI_*_FREE` upon exit from the function.

```

23 void example_function()
24 {
25     MPI::Intracomm foo_comm(MPI::COMM_WORLD), bar_comm;
26     bar_comm = MPI::COMM_WORLD.Dup();
27     // rest of function
28 }

```

(*End of rationale.*)

**Copy / Assignment** The copy constructor and assignment operator are prototyped as follows:

```

32 { MPI::<CLASS>(const MPI::<CLASS>& data) (binding deprecated, see Section 15.2) }
33
34 { MPI::<CLASS>& MPI::<CLASS>::operator=(const MPI::<CLASS>& data) (binding
35 deprecated, see Section 15.2) }
36
37
38

```

In terms of copying and assignment, opaque MPI user level objects behave like handles. Copy constructors perform handle-based (shallow) copies. `MPI::Status` objects are exceptions to this rule. These objects perform deep copies for assignment and copy construction.

*Advice to implementors.* Each MPI user level object is likely to contain, by value or by reference, implementation-dependent state information. The assignment and copying of MPI object handles may simply copy this value (or reference). (*End of advice to implementors.*)

ticket150.  
ticket150.  
ticket150.  
ticket150.



**Example 16.3** Example using assignment operator. In this example, `MPI::Intracomm::Dup()` is *not* called for `foo_comm`. The object `foo_comm` is simply an alias for `MPI::COMM_WORLD`. But `bar_comm` is created with a call to `MPI::Intracomm::Dup()` and is therefore a different communicator than `foo_comm` (and thus different from `MPI::COMM_WORLD`). `baz_comm` becomes an alias for `bar_comm`. If one of `bar_comm` or `baz_comm` is freed with `MPI_COMM_FREE` it will be set to `MPI::COMM_NULL`. The state of the other handle will be undefined — it will be invalid, but not necessarily set to `MPI::COMM_NULL`.

```
MPI::Intracomm foo_comm, bar_comm, baz_comm;
```

```
foo_comm = MPI::COMM_WORLD;
bar_comm = MPI::COMM_WORLD.Dup();
baz_comm = bar_comm;
```

**Comparison** The comparison operators are prototyped as follows:

```
{bool MPI::<CLASS>::operator==(const MPI::<CLASS>& data) const (binding
                        deprecated, see Section 15.2) }
{bool MPI::<CLASS>::operator!=(const MPI::<CLASS>& data) const (binding
                        deprecated, see Section 15.2) }
```

The member function `operator==()` returns `true` only when the handles reference the same internal MPI object, `false` otherwise. `operator!=()` returns the boolean complement of `operator==()`. However, since the `Status` class is not a handle to an underlying MPI object, it does not make sense to compare `Status` instances. Therefore, the `operator==()` and `operator!=()` functions are not defined on the `Status` class.

**Constants** Constants are singleton objects and are declared `const`. Note that not all globally defined MPI objects are constant. For example, `MPI::COMM_WORLD` and `MPI::COMM_SELF` are not `const`.

### 16.1.6 C++ Datatypes

Table 16.1 lists all of the C++ predefined MPI datatypes and their corresponding C and C++ datatypes, Table 16.2 lists all of the Fortran predefined MPI datatypes and their corresponding Fortran 77 datatypes. Table 16.3 lists the C++ names for all other MPI datatypes.

`MPI::BYTE` and `MPI::PACKED` conform to the same restrictions as `MPI_BYTE` and `MPI_PACKED`, listed in Sections 3.2.2 on page 29 and Sections 4.2 on page 125, respectively.

The following table defines groups of MPI predefined datatypes:

C integer:	<code>MPI::INT</code> , <code>MPI::LONG</code> , <code>MPI::SHORT</code> , <code>MPI::UNSIGNED_SHORT</code> , <code>MPI::UNSIGNED</code> , <code>MPI::UNSIGNED_LONG</code> , <code>MPI::_LONG_LONG</code> , <code>MPI::UNSIGNED_LONG_LONG</code> , <code>MPI::SIGNED_CHAR</code> , <code>MPI::UNSIGNED_CHAR</code>
Fortran integer:	<code>MPI::INTEGER</code> and handles returned from

MPI datatype	C datatype	C++ datatype
MPI::CHAR	char	char
MPI::SHORT	signed short	signed short
MPI::INT	signed int	signed int
MPI::LONG	signed long	signed long
MPI::LONG_LONG	signed long long	signed long long
MPI::SIGNED_CHAR	signed char	signed char
MPI::UNSIGNED_CHAR	unsigned char	unsigned char
MPI::UNSIGNED_SHORT	unsigned short	unsigned short
MPI::UNSIGNED	unsigned int	unsigned int
MPI::UNSIGNED_LONG	unsigned long	unsigned long int
MPI::UNSIGNED_LONG_LONG	unsigned long long	unsigned long long
MPI::FLOAT	float	float
MPI::DOUBLE	double	double
MPI::LONG_DOUBLE	long double	long double
MPI::BOOL		bool
MPI::COMPLEX		Complex<float>
MPI::DOUBLE_COMPLEX		Complex<double>
MPI::LONG_DOUBLE_COMPLEX		Complex<long double>
MPI::WCHAR	wchar_t	wchar_t
MPI::BYTE		
MPI::PACKED		

Table 16.1: C++ names for the MPI C and C++ predefined datatypes, and their corresponding C/C++ datatypes.

MPI datatype	Fortran datatype
MPI::INTEGER	INTEGER
MPI::REAL	REAL
MPI::DOUBLE_PRECISION	DOUBLE PRECISION
MPI::F_COMPLEX	COMPLEX
MPI::LOGICAL	LOGICAL
MPI::CHARACTER	CHARACTER(1)
MPI::BYTE	
MPI::PACKED	

Table 16.2: C++ names for the MPI Fortran predefined datatypes, and their corresponding Fortran 77 datatypes.

MPI datatype	Description
MPI::FLOAT_INT	C/C++ reduction type
MPI::DOUBLE_INT	C/C++ reduction type
MPI::LONG_INT	C/C++ reduction type
MPI::TWOINT	C/C++ reduction type
MPI::SHORT_INT	C/C++ reduction type
MPI::LONG_DOUBLE_INT	C/C++ reduction type
MPI::TWOREAL	Fortran reduction type
MPI::TWODOUBLE_PRECISION	Fortran reduction type
MPI::TWOINTEGER	Fortran reduction type
MPI::F_DOUBLE_COMPLEX	Optional Fortran type
MPI::INTEGER1	Explicit size type
MPI::INTEGER2	Explicit size type
MPI::INTEGER4	Explicit size type
MPI::INTEGER8	Explicit size type
[ticket57.]MPI::INTEGER16	[ticket57.]Explicit size type
[ticket57.]MPI::REAL2	[ticket57.]Explicit size type
MPI::REAL4	Explicit size type
MPI::REAL8	Explicit size type
MPI::REAL16	Explicit size type
[ticket57.]MPI::F_COMPLEX4	[ticket57.]Explicit size type
[ticket57.]MPI::F_COMPLEX8	[ticket57.]Explicit size type
[ticket57.]MPI::F_COMPLEX16	[ticket57.]Explicit size type
[ticket57.]MPI::F_COMPLEX32	[ticket57.]Explicit size type

Table 16.3: C++ names for other MPI datatypes. Implementations may also define other optional types (e.g., MPI::INTEGER8).

1 MPI::Datatype::Create\_f90\_integer,  
 2 and if available: MPI::INTEGER1,  
 3 MPI::INTEGER2, MPI::INTEGER4,  
 4 MPI::INTEGER8, MPI::INTEGER16  
 5 Floating point: MPI::FLOAT, MPI::DOUBLE, MPI::REAL,  
 6 MPI::DOUBLE\_PRECISION,  
 ticket64. 7 MPI::LONG\_DOUBLE  
 8 and handles returned from  
 9 MPI::Datatype::Create\_f90\_real,  
 10 and if available: MPI::REAL2,  
 11 MPI::REAL4, MPI::REAL8, MPI::REAL16  
 12 Logical: MPI::LOGICAL, MPI::BOOL  
 13 Complex: MPI::F\_COMPLEX, MPI::COMPLEX,  
 14 MPI::F\_DOUBLE\_COMPLEX,  
 ticket64. 15 MPI::DOUBLE\_COMPLEX,  
 16 MPI::LONG\_DOUBLE\_COMPLEX  
 17 and handles returned from  
 18 MPI::Datatype::Create\_f90\_complex,  
 19 and if available: MPI::F\_DOUBLE\_COMPLEX,  
 20 MPI::F\_COMPLEX4, MPI::F\_COMPLEX8,  
 21 MPI::F\_COMPLEX16, MPI::F\_COMPLEX32  
 22 Byte: MPI::BYTE

Valid datatypes for each reduction operation are specified below in terms of the groups defined above.

Op	Allowed Types
MPI::MAX, MPI::MIN	C integer, Fortran integer, Floating point
MPI::SUM, MPI::PROD	C integer, Fortran integer, Floating point, Complex
MPI::LAND, MPI::LOR, MPI::LXOR	C integer, Logical
MPI::BAND, MPI::BOR, MPI::BXOR	C integer, Fortran integer, Byte

MPI::MINLOC and MPI::MAXLOC perform just as their C and Fortran counterparts; see Section 5.9.4 on page 171.

### 16.1.7 Communicators

The MPI::Comm class hierarchy makes explicit the different kinds of communicators implicitly defined by MPI and allows them to be strongly typed. Since the original design of MPI defined only one type of handle for all types of communicators, the following clarifications are provided for the C++ design.

ticket33. Types of communicators There are [five]six different types of communicators: MPI::Comm,  
 ticket33. MPI::Intercomm, MPI::Intracomm, MPI::Cartcomm, [and] MPI::Graphcomm, and  
 ticket33. MPI::Distgraphcomm. MPI::Comm is the abstract base communicator class, encapsulating  
 46 the functionality common to all MPI communicators. MPI::Intercomm and  
 ticket33. MPI::Intracomm are derived from MPI::Comm. MPI::Cartcomm[ and], MPI::Graphcomm,  
 ticket33. and MPI::Distgraphcomm are derived from MPI::Intracomm.

*Advice to users.* Initializing a derived class with an instance of a base class is not legal in C++. For instance, it is not legal to initialize a `Cartcomm` from an `Intracomm`. Moreover, because `MPI::Comm` is an abstract base class, it is non-instantiable, so that it is not possible to have an object of class `MPI::Comm`. However, it is possible to have a reference or a pointer to an `MPI::Comm`.

**Example 16.4** The following code is erroneous.

```
Intracomm intra = MPI::COMM_WORLD.Dup();
Cartcomm cart(intra);           // This is erroneous
```

*(End of advice to users.)*

`MPI::COMM_NULL` The specific type of `MPI::COMM_NULL` is implementation dependent. `MPI::COMM_NULL` must be able to be used in comparisons and initializations with all types of communicators. `MPI::COMM_NULL` must also be able to be passed to a function that expects a communicator argument in the parameter list (provided that `MPI::COMM_NULL` is an allowed value for the communicator argument).

*Rationale.* There are several possibilities for implementation of `MPI::COMM_NULL`. Specifying its required behavior, rather than its realization, provides maximum flexibility to implementors. *(End of rationale.)*

**Example 16.5** The following example demonstrates the behavior of assignment and comparison using `MPI::COMM_NULL`.

```
MPI::Intercomm comm;
comm = MPI::COMM_NULL;           // assign with COMM_NULL
if (comm == MPI::COMM_NULL)      // true
    cout << "comm is NULL" << endl;
if (MPI::COMM_NULL == comm)      // note -- a different function!
    cout << "comm is still NULL" << endl;
```

`Dup()` is not defined as a member function of `MPI::Comm`, but it is defined for the derived classes of `MPI::Comm`. `Dup()` is not virtual and it returns its OUT parameter by value.

`MPI::Comm::Clone()` The C++ language interface for MPI includes a new function `Clone()`. `MPI::Comm::Clone()` is a pure virtual function. For the derived communicator classes, `Clone()` behaves like `Dup()` except that it returns a new object by reference. The `Clone()` functions are prototyped as follows:

```
Comm& Comm::Clone() const = 0

Intracomm& Intracomm::Clone() const

Intercomm& Intercomm::Clone() const

Cartcomm& Cartcomm::Clone() const
```

```

1  Graphcomm& Graphcomm::Clone() const
2
3  Distgraphcomm& Distgraphcomm::Clone() const

```

ticket33.

*Rationale.* `Clone()` provides the “virtual dup” functionality that is expected by C++ programmers and library writers. Since `Clone()` returns a new object by reference, users are responsible for eventually deleting the object. A new name is introduced rather than changing the functionality of `Dup()`. (*End of rationale.*)

*Advice to implementors.* Within their class declarations, prototypes for `Clone()` and `Dup()` would look like the following:

```

12 namespace MPI {
13     class Comm {
14         virtual Comm& Clone() const = 0;
15     };
16     class Intracomm : public Comm {
17         Intracomm Dup() const { ... };
18         virtual Intracomm& Clone() const { ... };
19     };
20     class Intercomm : public Comm {
21         Intercomm Dup() const { ... };
22         virtual Intercomm& Clone() const { ... };
23     };
24     // Cartcomm[ticket33.][ and ], Graphcomm,
25     [ticket33.][ and Distgraphcomm are similarly defined
26 };
27

```

(*End of advice to implementors.*)

### 16.1.8 Exceptions

The C++ language interface for MPI includes the predefined error handler `MPI::ERRORS_THROW_EXCEPTIONS` for use with the `Set_errhandler()` member functions. `MPI::ERRORS_THROW_EXCEPTIONS` can only be set or retrieved by C++ functions. If a non-C++ program causes an error that invokes the `MPI::ERRORS_THROW_EXCEPTIONS` error handler, the exception will pass up the calling stack until C++ code can catch it. If there is no C++ code to catch it, the behavior is undefined. In a multi-threaded environment or if a non-[ ]blocking MPI call throws an exception while making progress in the background, the behavior is implementation dependent.

The error handler `MPI::ERRORS_THROW_EXCEPTIONS` causes an `MPI::Exception` to be thrown for any MPI result code other than `MPI::SUCCESS`. The public interface to `MPI::Exception` class is defined as follows:

```

44 namespace MPI {
45     class Exception {
46     public:
47
48         Exception(int error_code);

```

ticket44.

```

int Get_error_code() const;
int Get_error_class() const;
const char *Get_error_string() const;
};
};

```

*Advice to implementors.*

The exception will be thrown within the body of `MPI::ERRORS_THROW_EXCEPTIONS`. It is expected that control will be returned to the user when the exception is thrown. Some MPI functions specify certain return information in their parameters in the case of an error and `MPI_ERRORS_RETURN` is specified. The same type of return information must be provided when exceptions are thrown.

For example, `MPI_WAITALL` puts an error code for each request in the corresponding entry in the status array and returns `MPI_ERR_IN_STATUS`. When using `MPI::ERRORS_THROW_EXCEPTIONS`, it is expected that the error codes in the status array will be set appropriately before the exception is thrown.

*(End of advice to implementors.)*

### 16.1.9 Mixed-Language Operability

The C++ language interface provides functions listed below for mixed-language operability. These functions provide for a seamless transition between C and C++. For the case where the C++ class corresponding to `<CLASS>` has derived classes, functions are also provided for converting between the derived classes and the C `MPI_<CLASS>`.

```
MPI::<CLASS>& MPI::<CLASS>::operator=(const MPI_<CLASS>& data)
```

```
MPI::<CLASS>(const MPI_<CLASS>& data)
```

```
MPI::<CLASS>::operator MPI_<CLASS>() const
```

These functions are discussed in Section [16.3.4](#).

### 16.1.10 Profiling

This section specifies the requirements of a C++ profiling interface to MPI.

*Advice to implementors.* Since the main goal of profiling is to intercept function calls from user code, it is the implementor's decision how to layer the underlying implementation to allow function calls to be intercepted and profiled. If an implementation of the MPI C++ bindings is layered on top of MPI bindings in another language (such as C), or if the C++ bindings are layered on top of a profiling interface in another language, no extra profiling interface is necessary because the underlying MPI implementation already meets the MPI profiling interface requirements.

Native C++ MPI implementations that do not have access to other profiling interfaces must implement an interface that meets the requirements outlined in this section.

High-quality implementations can implement the interface outlined in this section in order to promote portable C++ profiling libraries. Implementors may wish to provide

an option whether to build the C++ profiling interface or not; C++ implementations that are already layered on top of bindings in another language or another profiling interface will have to insert a third layer to implement the C++ profiling interface. (*End of advice to implementors.*)

To meet the requirements of the C++ MPI profiling interface, an implementation of the MPI functions *must*:

1. Provide a mechanism through which all of the MPI defined functions may be accessed with a name shift. Thus all of the MPI functions (which normally start with the prefix “MPI::”) should also be accessible with the prefix “PMPI::.”
2. Ensure that those MPI functions which are not replaced may still be linked into an executable image without causing name clashes.
3. Document the implementation of different language bindings of the MPI interface if they are layered on top of each other, so that profiler developer knows whether they must implement the profile interface for each binding, or can economize by implementing it only for the lowest level routines.
4. Where the implementation of different language bindings is done through a layered approach (e.g., the C++ binding is a set of “wrapper” functions which call the C implementation), ensure that these wrapper functions are separable from the rest of the library.

This is necessary to allow a separate profiling library to be correctly implemented, since (at least with Unix linker semantics) the profiling library must contain these wrapper functions if it is to perform as expected. This requirement allows the author of the profiling library to extract these functions from the original MPI library and add them into the profiling library without bringing along any other unnecessary code.

5. Provide a no-op routine MPI::Pcontrol in the MPI library.

*Advice to implementors.* There are (at least) two apparent options for implementing the C++ profiling interface: inheritance or caching. An inheritance-based approach may not be attractive because it may require a virtual inheritance implementation of the communicator classes. Thus, it is most likely that implementors will cache PMPI objects on their corresponding MPI objects. The caching scheme is outlined below.

The “real” entry points to each routine can be provided within a `namespace PMPI`. The non-profiling version can then be provided within a `namespace MPI`.

Caching instances of PMPI objects in the MPI handles provides the “has a” relationship that is necessary to implement the profiling scheme.

Each instance of an MPI object simply “wraps up” an instance of a PMPI object. MPI objects can then perform profiling actions before invoking the corresponding function in their internal PMPI object.

The key to making the profiling work by simply re-linking programs is by having a header file that *declares* all the MPI functions. The functions must be *defined* elsewhere, and compiled into a library. MPI constants should be declared `extern` in the MPI namespace. For example, the following is an excerpt from a sample `mpi.h` file:



**Example 16.6** Sample `mpi.h` file.

```

namespace PMPI {
    class Comm {
    public:
        int Get_size() const;
    };
    // etc.
};

namespace MPI {
public:
    class Comm {
    public:
        int Get_size() const;

    private:
        PMPI::Comm pmpi_comm;
    };
};

```

Note that all constructors, the assignment operator, and the destructor in the `MPI` class will need to initialize/destroy the internal `PMPI` object as appropriate.

The definitions of the functions must be in separate object files; the `PMPI` class member functions and the non-profiling versions of the `MPI` class member functions can be compiled into `libmpi.a`, while the profiling versions can be compiled into `libpmpi.a`. Note that the `PMPI` class member functions and the `MPI` constants must be in different object files than the non-profiling `MPI` class member functions in the `libmpi.a` library to prevent multiple definitions of `MPI` class member function names when linking both `libmpi.a` and `libpmpi.a`. For example:

**Example 16.7** `pmapi.cc`, to be compiled into `libmpi.a`.

```

int PMPI::Comm::Get_size() const
{
    // Implementation of MPI_COMM_SIZE
}

```

**Example 16.8** `constants.cc`, to be compiled into `libmpi.a`.

```

const MPI::Intracomm MPI::COMM_WORLD;

```

**Example 16.9** `mpi_no_profile.cc`, to be compiled into `libmpi.a`.

```

1      int MPI::Comm::Get_size() const
2      {
3          return pmpi_comm.Get_size();
4      }

```

**Example 16.10** `mpi_profile.cc`, to be compiled into `libpmpi.a`.

```

8      int MPI::Comm::Get_size() const
9      {
10         // Do profiling stuff
11         int ret = pmpi_comm.Get_size();
12         // More profiling stuff
13         return ret;
14     }

```

*(End of advice to implementors.)*

## 16.2 Fortran Support

### 16.2.1 Overview

[Fortran 90 is the current international Fortran standard. MPI-2 Fortran bindings are Fortran 90 bindings that in most cases are “Fortran 77 friendly.” That is, with few exceptions (e.g., KIND-parameterized types, and the `mpi` module, both of which can be avoided) Fortran 77 compilers should be able to compile MPI programs.

*Rationale.* Fortran 90 contains numerous features designed to make it a more “modern” language than Fortran 77. It seems natural that MPI should be able to take advantage of these new features with a set of bindings tailored to Fortran 90. MPI does not (yet) use many of these features because of a number of technical difficulties.  
*(End of rationale.)*

MPI defines two levels of Fortran support, described in Sections 16.2.3 and 16.2.4. A third level of Fortran support is envisioned, but is deferred to future standardization efforts. In the rest of this section, “Fortran” shall refer to Fortran 90 (or its successor) unless qualified. ]

The Fortran MPI-2 language bindings have been designed to be compatible with the Fortran 90 standard (and later). These bindings are in most cases compatible with Fortran 77, implicit-style interfaces.

*Rationale.* Fortran 90 contains numerous features designed to make it a more “modern” language than Fortran 77. It seems natural that MPI should be able to take advantage of these new features with a set of bindings tailored to Fortran 90. MPI does not (yet) use many of these features because of a number of technical difficulties.  
*(End of rationale.)*

MPI defines two levels of Fortran support, described in Sections 16.2.3 and 16.2.4. In the rest of this section, “Fortran” and “Fortran 90” shall refer to “Fortran 90” and its successors, unless qualified.

1. **Basic Fortran Support** An implementation with this level of Fortran support provides the original Fortran bindings specified in MPI-1, with small additional requirements specified in Section 16.2.3.
2. **Extended Fortran Support** An implementation with this level of Fortran support provides Basic Fortran Support plus additional features that specifically support Fortran 90, as described in Section 16.2.4.

A compliant MPI-2 implementation providing a Fortran interface must provide Extended Fortran Support unless the target compiler does not support modules or KIND-parameterized types.

### 16.2.2 Problems With Fortran Bindings for MPI

This section discusses a number of problems that may arise when using MPI in a Fortran program. It is intended as advice to users, and clarifies how MPI interacts with Fortran. It does not add to the standard, but is intended to clarify the standard.

As noted in the original MPI specification, the interface violates the Fortran standard in several ways. While these cause few problems for Fortran 77 programs, they become more significant for Fortran 90 programs, so that users must exercise care when using new Fortran 90 features. The violations were originally adopted and have been retained because they are important for the usability of MPI. The rest of this section describes the potential problems in detail. It supersedes and replaces the discussion of Fortran bindings in the original MPI specification (for Fortran 90, not Fortran 77).

The following MPI features are inconsistent with Fortran 90.

1. An MPI subroutine with a choice argument may be called with different argument types.
2. An MPI subroutine with an assumed-size dummy argument may be passed an actual scalar argument.
3. Many MPI routines assume that actual arguments are passed by address and that arguments are not copied on entrance to or exit from the subroutine.
4. An MPI implementation may read or modify user data (e.g., communication buffers used by nonblocking communications) concurrently with a user program that is executing outside of MPI calls.
5. Several named “constants,” such as MPI\_BOTTOM, MPI\_IN\_PLACE, MPI\_STATUS\_IGNORE, MPI\_STATUSES\_IGNORE, MPI\_ERRCODES\_IGNORE, MPI\_UNWEIGHTED, MPI\_ARGV\_NULL, and MPI\_ARGVS\_NULL are not ordinary Fortran constants and require a special implementation. See Section 2.5.4 on page 14 for more information.
6. The memory allocation routine MPI\_ALLOC\_MEM can’t be usefully used in Fortran without a language extension that allows the allocated memory to be associated with a Fortran variable.

Additionally, MPI is inconsistent with Fortran 77 in a number of ways, as noted below.

- MPI identifiers exceed 6 characters.

ticket33.

ticket8.

- MPI identifiers may contain underscores after the first character.
- MPI requires an include file, `mpif.h`. On systems that do not support include files, the implementation should specify the values of named constants.
- Many routines in MPI have KIND-parameterized integers (e.g., `MPI_ADDRESS_KIND` and `MPI_OFFSET_KIND`) that hold address information. On systems that do not support Fortran 90-style parameterized types, `INTEGER*8` or `INTEGER` should be used instead.

MPI-1 contained several routines that take address-sized information as input or return address-sized information as output. In C such arguments were of type `MPI_Aint` and in Fortran of type `INTEGER`. On machines where integers are smaller than addresses, these routines can lose information. In MPI-2 the use of these functions has been deprecated and they have been replaced by routines taking `INTEGER` arguments of `KIND=MPI_ADDRESS_KIND`. A number of new MPI-2 functions also take `INTEGER` arguments of non-default `KIND`. See Section 2.6 on page 16 and Section 4.1.1 on page 83 for more information.

### Problems Due to Strong Typing

All MPI functions with choice arguments associate actual arguments of different Fortran datatypes with the same dummy argument. This is not allowed by Fortran 77, and in Fortran 90 is technically only allowed if the function is overloaded with a different function for each type. In C, the use of `void*` formal arguments avoids these problems.

The following code fragment is technically illegal and may generate a compile-time error.

```
integer i(5)
real    x(5)
...
call mpi_send(x, 5, MPI_REAL, ...)
call mpi_send(i, 5, MPI_INTEGER, ...)
```

In practice, it is rare for compilers to do more than issue a warning, though there is concern that Fortran 90 compilers are more likely to return errors.

It is also technically illegal in Fortran to pass a scalar actual argument to an array dummy argument. Thus the following code fragment may generate an error since the `buf` argument to `MPI_SEND` is declared as an assumed-size array `<type> buf(*)`.

```
integer a
call mpi_send(a, 1, MPI_INTEGER, ...)
```

*Advice to users.* In the event that you run into one of the problems related to type checking, you may be able to work around it by using a compiler flag, by compiling separately, or by using an MPI implementation with Extended Fortran Support as described in Section 16.2.4. An alternative that will usually work with variables local to a routine but not with arguments to a function or subroutine is to use the `EQUIVALENCE` statement to create another variable with a type accepted by the compiler. (*End of advice to users.*)

## Problems Due to Data Copying and Sequence Association

Implicit in MPI is the idea of a contiguous chunk of memory accessible through a linear address space. MPI copies data to and from this memory. An MPI program specifies the location of data by providing memory addresses and offsets. In the C language, sequence association rules plus pointers provide all the necessary low-level structure.

In Fortran 90, user data is not necessarily stored contiguously. For example, the array section `A(1:N:2)` involves only the elements of `A` with indices 1, 3, 5, ... . The same is true for a pointer array whose target is such a section. Most compilers ensure that an array that is a dummy argument is held in contiguous memory if it is declared with an explicit shape (e.g., `B(N)`) or is of assumed size (e.g., `B(*)`). If necessary, they do this by making a copy of the array into contiguous memory. Both Fortran 77 and Fortran 90 are carefully worded to allow such copying to occur, but few Fortran 77 compilers do it.<sup>1</sup>

Because MPI dummy buffer arguments are assumed-size arrays, this leads to a serious problem for a non-blocking call: the compiler copies the temporary array back on return but MPI continues to copy data to the memory that held it. For example, consider the following code fragment:

```
real a(100)
call MPI_IRECV(a(1:100:2), MPI_REAL, 50, ...)
```

Since the first dummy argument to `MPI_IRECV` is an assumed-size array (`<type> buf(*)`), the array section `a(1:100:2)` is copied to a temporary before being passed to `MPI_IRECV`, so that it is contiguous in memory. `MPI_IRECV` returns immediately, and data is copied from the temporary back into the array `a`. Sometime later, MPI may write to the address of the deallocated temporary. Copying is also a problem for `MPI_ISEND` since the temporary array may be deallocated before the data has all been sent from it.

Most Fortran 90 compilers do not make a copy if the actual argument is the whole of an explicit-shape or assumed-size array or is a ‘simple’ section such as `A(1:N)` of such an array. (We define ‘simple’ more fully in the next paragraph.) Also, many compilers treat allocatable arrays the same as they treat explicit-shape arrays in this regard (though we know of one that does not). However, the same is not true for assumed-shape and pointer arrays; since they may be discontinuous, copying is often done. It is this copying that causes problems for MPI as described in the previous paragraph.

Our formal definition of a ‘simple’ array section is

```
name ( [:,]... [<subscript>]:<subscript> [,<subscript>]... )
```

That is, there are zero or more dimensions that are selected in full, then one dimension selected without a stride, then zero or more dimensions that are selected with a simple subscript. Examples are

```
A(1:N), A(:,N), A(:,1:N,1), A(1:6,N), A(:, :, 1:N)
```

Because of Fortran’s column-major ordering, where the first index varies fastest, a simple section of a contiguous array will also be contiguous.<sup>2</sup>

<sup>1</sup>Technically, the Fortran standards are worded to allow non-contiguous storage of any array data.

<sup>2</sup>To keep the definition of ‘simple’ simple, we have chosen to require all but one of the section subscripts to be without bounds. A colon without bounds makes it obvious both to the compiler and to the reader that the whole of the dimension is selected. It would have been possible to allow cases where the whole dimension is selected with one or two bounds, but this means for the reader that the array declaration or most recent allocation has to be consulted and for the compiler that a run-time check may be required.

The same problem can occur with a scalar argument. Some compilers, even for Fortran 77, make a copy of some scalar dummy arguments within a called procedure. That this can cause a problem is illustrated by the example

```

call user1(a,rq)
call MPI_WAIT(rq,status,ierr)
write (*,*) a

subroutine user1(buf,request)
call MPI_IRECV(buf,...,request,...)
end

```

If `a` is copied, `MPI_IRECV` will alter the copy when it completes the communication and will not alter `a` itself.

Note that copying will almost certainly occur for an argument that is a non-trivial expression (one with at least one operator or function call), a section that does not select a contiguous part of its parent (e.g., `A(1:n:2)`), a pointer whose target is such a section, or an assumed-shape array that is (directly or indirectly) associated with such a section.

If there is a compiler option that inhibits copying of arguments, in either the calling or called procedure, this should be employed.

If a compiler makes copies in the calling procedure of arguments that are explicit-shape or assumed-size arrays, simple array sections of such arrays, or scalars, and if there is no compiler option to inhibit this, then the compiler cannot be used for applications that use `MPI_GET_ADDRESS`, or any non[-]blocking MPI routine. If a compiler copies scalar arguments in the called procedure and there is no compiler option to inhibit this, then this compiler cannot be used for applications that use memory references across subroutine calls as in the example above.

## Special Constants

[ MPI requires a number of special “constants” that cannot be implemented as normal Fortran constants, including `MPI_BOTTOM`, `MPI_STATUS_IGNORE`, `MPI_IN_PLACE`, `MPI_STATUSES_IGNORE` and `MPI_ERRCODES_IGNORE`. ] MPI requires a number of special “constants” that cannot be implemented as normal Fortran constants, e.g., `MPI_BOTTOM`. The complete list can be found in Section 2.5.4 on page 14. In C, these are implemented as constant pointers, usually as `NULL` and are used where the function prototype calls for a pointer to a variable, not the variable itself.

In Fortran the implementation of these special constants may require the use of language constructs that are outside the Fortran standard. Using special values for the constants (e.g., by defining them through `parameter` statements) is not possible because an implementation cannot distinguish these values from legal data. Typically these constants are implemented as predefined static variables (e.g., a variable in an MPI-declared `COMMON` block), relying on the fact that the target compiler passes data by address. Inside the subroutine, this address can be extracted by some mechanism outside the Fortran standard (e.g., by Fortran extensions or by implementing the function in C).

## Fortran 90 Derived Types

MPI does not explicitly support passing Fortran 90 derived types to choice dummy arguments. Indeed, for MPI implementations that provide explicit interfaces through the `mpi`

module a compiler will reject derived type actual arguments at compile time. Even when no explicit interfaces are given, users should be aware that Fortran 90 provides no guarantee of sequence association for derived types or arrays of derived types. For instance, an array of a derived type consisting of two elements may be implemented as an array of the first elements followed by an array of the second. Use of the `SEQUENCE` attribute may help here, somewhat.

The following code fragment shows one possible way to send a derived type in Fortran. The example assumes that all data is passed by address.

```

type mytype
  integer i
  real x
  double precision d
end type mytype

type(mytype) foo
integer blocklen(3), type(3)
integer(MPI_ADDRESS_KIND) disp(3), base

call MPI_GET_ADDRESS(foo%i, disp(1), ierr)
call MPI_GET_ADDRESS(foo%x, disp(2), ierr)
call MPI_GET_ADDRESS(foo%d, disp(3), ierr)

base = disp(1)
disp(1) = disp(1) - base
disp(2) = disp(2) - base
disp(3) = disp(3) - base

blocklen(1) = 1
blocklen(2) = 1
blocklen(3) = 1

type(1) = MPI_INTEGER
type(2) = MPI_REAL
type(3) = MPI_DOUBLE_PRECISION

call MPI_TYPE_CREATE_STRUCT(3, blocklen, disp, type, newtype, ierr)
call MPI_TYPE_COMMIT(newtype, ierr)

! unpleasant to send foo%i instead of foo, but it works for scalar
! entities of type mytype
call MPI_SEND(foo%i, 1, newtype, ...)

```

#### A Problem with Register Optimization

MPI provides operations that may be hidden from the user code and run concurrently with it, accessing the same memory as user code. Examples include the data transfer for an `MPI_IRECV`. The optimizer of a compiler will assume that it can recognize periods when a

copy of a variable can be kept in a register without reloading from or storing to memory. When the user code is working with a register copy of some variable while the hidden operation reads or writes the memory copy, problems occur. This section discusses register optimization pitfalls.

When a variable is local to a Fortran subroutine (i.e., not in a module or `COMMON block`), the compiler will assume that it cannot be modified by a called subroutine unless it is an actual argument of the call. In the most common linkage convention, the subroutine is expected to save and restore certain registers. Thus, the optimizer will assume that a register which held a valid copy of such a variable before the call will still hold a valid copy on return.

Normally users are not afflicted with this. But the user should pay attention to this section if in his/her program a buffer argument to an `MPI_SEND`, `MPI_RECV` etc., uses a name which hides the actual variables involved. `MPI_BOTTOM` with an `MPI_Datatype` containing absolute addresses is one example. Creating a datatype which uses one variable as an anchor and brings along others by using `MPI_GET_ADDRESS` to determine their offsets from the anchor is another. The anchor variable would be the only one mentioned in the call. Also attention must be paid if MPI operations are used that run in parallel with the user's application.

Example 16.11 shows what Fortran compilers are allowed to do.

#### Example 16.11 Fortran 90 register optimization.

<p>This source ...</p> <pre> call MPI_GET_ADDRESS(buf,bufaddr,                     ierror) call MPI_TYPE_CREATE_STRUCT(1,1,                     bufaddr,                     MPI_REAL,type,ierror) call MPI_TYPE_COMMIT(type,ierror) val_old = buf  call MPI_RECV(MPI_BOTTOM,1,type,...) val_new = buf </pre>	<p>can be compiled as:</p> <pre> call MPI_GET_ADDRESS(buf,...)  call MPI_TYPE_CREATE_STRUCT(...)  call MPI_TYPE_COMMIT(...)  register = buf val_old = register  call MPI_RECV(MPI_BOTTOM,...) val_new = register </pre>
---	---

The compiler does not invalidate the register because it cannot see that `MPI_RECV` changes the value of `buf`. The access of `buf` is hidden by the use of `MPI_GET_ADDRESS` and `MPI_BOTTOM`.

Example 16.12 shows extreme, but allowed, possibilities.

#### Example 16.12 Fortran 90 register optimization – extreme.

Source	compiled as	or compiled as
<code>call MPI_Irecv(buf,..req)</code>	<code>call MPI_Irecv(buf,..req)</code>	<code>call MPI_Irecv(buf,..req)</code>
	<code>register = buf</code>	<code>b1 = buf</code>
<code>call MPI_WAIT(req,..)</code>	<code>call MPI_WAIT(req,..)</code>	<code>call MPI_WAIT(req,..)</code>
<code>b1 = buf</code>	<code>b1 := register</code>	

`MPI_WAIT` on a concurrent thread modifies `buf` between the invocation of `MPI_Irecv`



and the finish of `MPI_WAIT`. But the compiler cannot see any possibility that `buf` can be changed after `MPI_IRECV` has returned, and may schedule the load of `buf` earlier than typed in the source. It has no reason to avoid using a register to hold `buf` across the call to `MPI_WAIT`. It also may reorder the instructions as in the case on the right.

To prevent instruction reordering or the allocation of a buffer in a register there are two possibilities in portable Fortran code:

- The compiler may be prevented from moving a reference to a buffer across a call to an MPI subroutine by surrounding the call by calls to an external subroutine with the buffer as an actual argument. Note that if the intent is declared in the external subroutine, it must be `OUT` or `INOUT`. The subroutine itself may have an empty body, but the compiler does not know this and has to assume that the buffer may be altered. For example, the above call of `MPI_RECV` might be replaced by

```
call DD(buf)
call MPI_RECV(MPI_BOTTOM,...)
call DD(buf)
```

with the separately compiled

```
subroutine DD(buf)
  integer buf
end
```

(assuming that `buf` has type `INTEGER`). The compiler may be similarly prevented from moving a reference to a variable across a call to an MPI subroutine.

In the case of a non[-]blocking call, as in the above call of `MPI_WAIT`, no reference to the buffer is permitted until it has been verified that the transfer has been completed. Therefore, in this case, the extra call ahead of the MPI call is not necessary, i.e., the call of `MPI_WAIT` in the example might be replaced by

```
call MPI_WAIT(req,...)
call DD(buf)
```

- An alternative is to put the buffer or variable into a module or a common block and access it through a `USE` or `COMMON` statement in each scope where it is referenced, defined or appears as an actual argument in a call to an MPI routine. The compiler will then have to assume that the MPI procedure (`MPI_RECV` in the above example) may alter the buffer or variable, provided that the compiler cannot analyze that the MPI procedure does not reference the module or common block.

[ In the longer term, the attribute `VOLATILE` is under consideration for Fortran 2000 and would give the buffer or variable the properties needed, but it would inhibit optimization of any code containing the buffer or variable. ] The `VOLATILE` attribute, available in later versions of Fortran, gives the buffer or variable the properties needed, but it may inhibit optimization of any code containing the buffer or variable.

In C, subroutines which modify variables that are not in the argument list will not cause register optimization problems. This is because taking pointers to storage objects by using

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27 ticket44.  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41 ticket8.  
42  
43  
44 ticket8.  
45  
46  
47  
48

the & operator and later referencing the objects by way of the pointer is an integral part of the language. A C compiler understands the implications, so that the problem should not occur, in general. However, some compilers do offer optional aggressive optimization levels which may not be safe.

### 16.2.3 Basic Fortran Support

Because Fortran 90 is (for all practical purposes) a superset of Fortran 77, Fortran 90 (and future) programs can use the original Fortran interface. The following additional requirements are added:

1. Implementations are required to provide the file `mpif.h`, as described in the original MPI-1 specification.
2. `mpif.h` must be valid and equivalent for both fixed- and free- source form.

*Advice to implementors.* To make `mpif.h` compatible with both fixed- and free-source forms, to allow automatic inclusion by preprocessors, and to allow extended fixed-form line length, it is recommended that requirement two be met by constructing `mpif.h` without any continuation lines. This should be possible because `mpif.h` contains only declarations, and because common block declarations can be split among several lines. To support Fortran 77 as well as Fortran 90, it may be necessary to eliminate all comments from `mpif.h`. (*End of advice to implementors.*)

### 16.2.4 Extended Fortran Support

Implementations with Extended Fortran support must provide:

1. An `mpi` module
2. A new set of functions to provide additional support for Fortran intrinsic numeric types, including parameterized types: `MPI_SIZEOF`, `MPI_TYPE_MATCH_SIZE`, `MPI_TYPE_CREATE_F90_INTEGER`, `MPI_TYPE_CREATE_F90_REAL` and `MPI_TYPE_CREATE_F90_COMPLEX`. Parameterized types are Fortran intrinsic types which are specified using `KIND` type parameters. These routines are described in detail in Section 16.2.5.

Additionally, high-quality implementations should provide a mechanism to prevent fatal type mismatch errors for MPI routines with choice arguments.

#### The `mpi` Module

An MPI implementation must provide a module named `mpi` that can be [USE]used in a Fortran 90 program. This module must:

- Define all named MPI constants
- Declare MPI functions that return a value.

An MPI implementation may provide in the `mpi` module other features that enhance the usability of MPI while maintaining adherence to the standard. For example, it may:

ticket103.

- Provide interfaces for all or for a subset of MPI routines.
- Provide INTENT information in these interface blocks.

*Advice to implementors.* The appropriate INTENT may be different from what is given in the MPI generic interface. Implementations must choose INTENT so that the function adheres to the MPI standard. (*End of advice to implementors.*)

*Rationale.* The intent given by the MPI generic interface is not precisely defined and does not in all cases correspond to the correct Fortran INTENT. For instance, receiving into a buffer specified by a datatype with absolute addresses may require associating MPI\_BOTTOM with a dummy OUT argument. Moreover, “constants” such as MPI\_BOTTOM and MPI\_STATUS\_IGNORE are not constants as defined by Fortran, but “special addresses” used in a nonstandard way. Finally, the MPI-1 generic intent is changed in several places by MPI-2. For instance, MPI\_IN\_PLACE changes the sense of an OUT argument to be INOUT. (*End of rationale.*)

Applications may use either the `mpi` module or the `mpif.h` include file. An implementation may require use of the module to prevent type mismatch errors (see below).

*Advice to users.* It is recommended to use the `mpi` module even if it is not necessary to use it to avoid type mismatch errors on a particular system. Using a module provides several potential advantages over using an include file. (*End of advice to users.*)

It must be possible to link together routines some of which USE `mpi` and others of which INCLUDE `mpif.h`.

### No Type Mismatch Problems for Subroutines with Choice Arguments

A high-quality MPI implementation should provide a mechanism to ensure that MPI choice arguments do not cause fatal compile-time or run-time errors due to type mismatch. An MPI implementation may require applications to use the `mpi` module, or require that it be compiled with a particular compiler flag, in order to avoid type mismatch problems.

*Advice to implementors.* In the case where the compiler does not generate errors, nothing needs to be done to the existing interface. In the case where the compiler may generate errors, a set of overloaded functions may be used. See the paper of M. Hennecke [26]. Even if the compiler does not generate errors, explicit interfaces for all routines would be useful for detecting errors in the argument list. Also, explicit interfaces which give INTENT information can reduce the amount of copying for BUF(\*) arguments. (*End of advice to implementors.*)

### 16.2.5 Additional Support for Fortran Numeric Intrinsic Types

The routines in this section are part of Extended Fortran Support described in Section 16.2.4.

MPI provides a small number of named datatypes that correspond to named intrinsic types supported by C and Fortran. These include MPI\_INTEGER, MPI\_REAL, MPI\_INT, MPI\_DOUBLE, etc., as well as the optional types MPI\_REAL4, MPI\_REAL8, etc. There is a one-to-one correspondence between language declarations and MPI types.

Fortran (starting with Fortran 90) provides so-called KIND-parameterized types. These types are declared using an intrinsic type (one of INTEGER, REAL, COMPLEX, LOGICAL and

CHARACTER) with an optional integer KIND parameter that selects from among one or more variants. The specific meaning of different KIND values themselves are implementation dependent and not specified by the language. Fortran provides the KIND selection functions `selected_real_kind` for REAL and `selected_int_kind` for INTEGER types that allow users to declare variables with a minimum precision or number of digits. These functions provide a portable way to declare KIND-parameterized REAL, COMPLEX and INTEGER variables in Fortran. This scheme is backward compatible with Fortran 77. REAL and INTEGER Fortran variables have a default KIND if none is specified. Fortran DOUBLE PRECISION variables are of intrinsic type REAL with a non-default KIND. The following two declarations are equivalent:

```
double precision x
real(KIND(0.0d0)) x
```

MPI provides two orthogonal methods to communicate using numeric intrinsic types. The first method can be used when variables have been declared in a portable way — using default KIND or using KIND parameters obtained with the `selected_int_kind` or `selected_real_kind` functions. With this method, MPI automatically selects the correct data size (e.g., 4 or 8 bytes) and provides representation conversion in heterogeneous environments. The second method gives the user complete control over communication by exposing machine representations.

### Parameterized Datatypes with Specified Precision and Exponent Range

MPI provides named datatypes corresponding to standard Fortran 77 numeric types — `MPI_INTEGER`, `MPI_COMPLEX`, `MPI_REAL`, `MPI_DOUBLE_PRECISION` and `MPI_DOUBLE_COMPLEX`. MPI automatically selects the correct data size and provides representation conversion in heterogeneous environments. The mechanism described in this section extends this model to support portable parameterized numeric types.

The model for supporting portable parameterized types is as follows. Real variables are declared (perhaps indirectly) using `selected_real_kind(p, r)` to determine the KIND parameter, where `p` is decimal digits of precision and `r` is an exponent range. Implicitly MPI maintains a two-dimensional array of predefined MPI datatypes `D(p, r)`. `D(p, r)` is defined for each value of `(p, r)` supported by the compiler, including pairs for which one value is unspecified. Attempting to access an element of the array with an index `(p, r)` not supported by the compiler is erroneous. MPI implicitly maintains a similar array of COMPLEX datatypes. For integers, there is a similar implicit array related to `selected_int_kind` and indexed by the requested number of digits `r`. Note that the predefined datatypes contained in these implicit arrays are not the same as the named MPI datatypes `MPI_REAL`, etc., but a new set.

*Advice to implementors.* The above description is for explanatory purposes only. It is not expected that implementations will have such internal arrays. (*End of advice to implementors.*)

*Advice to users.* `selected_real_kind()` maps a large number of `(p,r)` pairs to a much smaller number of KIND parameters supported by the compiler. KIND parameters

are not specified by the language and are not portable. From the language point of view intrinsic types of the same base type and KIND parameter are of the same type. In order to allow interoperability in a heterogeneous environment, MPI is more stringent. The corresponding MPI datatypes match if and only if they have the same (p,r) value (REAL and COMPLEX) or r value (INTEGER). Thus MPI has many more datatypes than there are fundamental language types. (*End of advice to users.*)

MPI\_TYPE\_CREATE\_F90\_REAL(p, r, newtype)

IN	p	precision, in decimal digits (integer)
IN	r	decimal exponent range (integer)
OUT	newtype	the requested MPI datatype (handle)

int MPI\_Type\_create\_f90\_real(int p, int r, MPI\_Datatype \*newtype)

MPI\_TYPE\_CREATE\_F90\_REAL(P, R, NEWTYPE, IERROR)

INTEGER P, R, NEWTYPE, IERROR

{static MPI::Datatype MPI::Datatype::Create\_f90\_real(int p, int r) (*binding deprecated, see Section 15.2*) }

This function returns a predefined MPI datatype that matches a REAL variable of KIND selected\_real\_kind(p, r). In the model described above it returns a handle for the element D(p, r). Either p or r may be omitted from calls to selected\_real\_kind(p, r) (but not both). Analogously, either p or r may be set to MPI\_UNDEFINED. In communication, an MPI datatype A returned by MPI\_TYPE\_CREATE\_F90\_REAL matches a datatype B if and only if B was returned by MPI\_TYPE\_CREATE\_F90\_REAL called with the same values for p and r or B is a duplicate of such a datatype. Restrictions on using the returned datatype with the “external32” data representation are given on page 511.

It is erroneous to supply values for p and r not supported by the compiler.

MPI\_TYPE\_CREATE\_F90\_COMPLEX(p, r, newtype)

IN	p	precision, in decimal digits (integer)
IN	r	decimal exponent range (integer)
OUT	newtype	the requested MPI datatype (handle)

int MPI\_Type\_create\_f90\_complex(int p, int r, MPI\_Datatype \*newtype)

MPI\_TYPE\_CREATE\_F90\_COMPLEX(P, R, NEWTYPE, IERROR)

INTEGER P, R, NEWTYPE, IERROR

{static MPI::Datatype MPI::Datatype::Create\_f90\_complex(int p, int r) (*binding deprecated, see Section 15.2*) }

This function returns a predefined MPI datatype that matches a COMPLEX variable of KIND selected\_real\_kind(p, r). Either p or r may be omitted from calls to selected\_real\_kind(p, r) (but not both). Analogously, either p or r may be set

to MPI\_UNDEFINED. Matching rules for datatypes created by this function are analogous to the matching rules for datatypes created by MPI\_TYPE\_CREATE\_F90\_REAL. Restrictions on using the returned datatype with the “external32” data representation are given on page 511.

It is erroneous to supply values for *p* and *r* not supported by the compiler.

```
MPI_TYPE_CREATE_F90_INTEGER(r, newtype)
```

IN	<i>r</i>	decimal exponent range, i.e., number of decimal digits (integer)
----	----------	---

OUT	<i>newtype</i>	the requested MPI datatype (handle)
-----	----------------	-------------------------------------

```
int MPI_Type_create_f90_integer(int r, MPI_Datatype *newtype)
```

```
MPI_TYPE_CREATE_F90_INTEGER(R, NEWTYPE, IERROR)
```

```
INTEGER R, NEWTYPE, IERROR
```

```
{static MPI::Datatype MPI::Datatype::Create_f90_integer(int r) (binding  
deprecated, see Section 15.2) }
```

This function returns a predefined MPI datatype that matches a `INTEGER` variable of `KIND selected_int_kind(r)`. Matching rules for datatypes created by this function are analogous to the matching rules for datatypes created by `MPI_TYPE_CREATE_F90_REAL`. Restrictions on using the returned datatype with the “external32” data representation are given on page 511.

It is erroneous to supply a value for *r* that is not supported by the compiler.

Example:

```
integer      longtype, quadtype
integer, parameter :: long = selected_int_kind(15)
integer(long) ii(10)
real(selected_real_kind(30)) x(10)
call MPI_TYPE_CREATE_F90_INTEGER(15, longtype, ierror)
call MPI_TYPE_CREATE_F90_REAL(30, MPI_UNDEFINED, quadtype, ierror)
...

call MPI_SEND(ii, 10, longtype, ...)
call MPI_SEND(x, 10, quadtype, ...)
```

*Advice to users.* The datatypes returned by the above functions are predefined datatypes. They cannot be freed; they do not need to be committed; they can be used with predefined reduction operations. There are two situations in which they behave differently syntactically, but not semantically, from the MPI named predefined datatypes.

1. `MPI_TYPE_GET_ENVELOPE` returns special combinators that allow a program to retrieve the values of *p* and *r*.
2. Because the datatypes are not named, they cannot be used as compile-time initializers or otherwise accessed before a call to one of the `MPI_TYPE_CREATE_F90_` routines.

If a variable was declared specifying a non-default KIND value that was not obtained with `selected_real_kind()` or `selected_int_kind()`, the only way to obtain a matching MPI datatype is to use the size-based mechanism described in the next section.

*(End of advice to users.)*

*Advice to implementors.* An application may often repeat a call to `MPI_TYPE_CREATE_F90_xxxx` with the same combination of (xxxx,p,r). The application is not allowed to free the returned predefined, unnamed datatype handles. To prevent the creation of a potentially huge amount of handles, a high quality MPI implementation should return the same datatype handle for the same (REAL/COMPLEX/INTEGER,p,r) combination. Checking for the combination (p,r) in the preceding call to `MPI_TYPE_CREATE_F90_xxxx` and using a hash-table to find formerly generated handles should limit the overhead of finding a previously generated datatype with same combination of (xxxx,p,r). *(End of advice to implementors.)*

*Rationale.* The `MPI_TYPE_CREATE_F90_REAL/COMPLEX/INTEGER` interface needs as input the original range and precision values to be able to define useful and compiler-independent external (Section 13.5.2 on page 449) or user-defined (Section 13.5.3 on page 450) data representations, and in order to be able to perform automatic and efficient data conversions in a heterogeneous environment. *(End of rationale.)*

We now specify how the datatypes described in this section behave when used with the “external32” external data representation described in Section 13.5.2 on page 449.

The external32 representation specifies data formats for integer and floating point values. Integer values are represented in two’s complement big-endian format. Floating point values are represented by one of three IEEE formats. These are the IEEE “Single,” “Double” and “Double Extended” formats, requiring 4, 8 and 16 bytes of storage, respectively. For the IEEE “Double Extended” formats, MPI specifies a Format Width of 16 bytes, with 15 exponent bits, bias = +10383, 112 fraction bits, and an encoding analogous to the “Double” format.

The external32 representations of the datatypes returned by `MPI_TYPE_CREATE_F90_REAL/COMPLEX/INTEGER` are given by the following rules.

For `MPI_TYPE_CREATE_F90_REAL`:

```

if      (p > 33) or (r > 4931) then  external32 representation
                                     is undefined
else if (p > 15) or (r > 307) then  external32_size = 16
else if (p > 6) or (r > 37) then   external32_size = 8
else                                external32_size = 4

```

For `MPI_TYPE_CREATE_F90_COMPLEX`: twice the size as for `MPI_TYPE_CREATE_F90_REAL`.

For `MPI_TYPE_CREATE_F90_INTEGER`:

```

if      (r > 38) then  external32 representation is undefined
else if (r > 18) then  external32_size = 16
else if (r > 9) then   external32_size = 8
else if (r > 4) then   external32_size = 4
else if (r > 2) then   external32_size = 2
else                  external32_size = 1

```

If the external32 representation of a datatype is undefined, the result of using the datatype directly or indirectly (i.e., as part of another datatype or through a duplicated datatype) in operations that require the external32 representation is undefined. These operations include `MPI_PACK_EXTERNAL`, `MPI_UNPACK_EXTERNAL` and many `MPI_FILE` functions, when the “external32” data representation is used. The ranges for which the external32 representation is undefined are reserved for future standardization.

### Support for Size-specific MPI Datatypes

MPI provides named datatypes corresponding to optional Fortran 77 numeric types that contain explicit byte lengths — `MPI_REAL4`, `MPI_INTEGER8`, etc. This section describes a mechanism that generalizes this model to support all Fortran numeric intrinsic types.

We assume that for each **typeclass** (integer, real, complex) and each word size there is a unique machine representation. For every pair (**typeclass**, **n**) supported by a compiler, MPI must provide a named size-specific datatype. The name of this datatype is of the form `MPI_<TYPE>n` in C and Fortran and of the form `MPI::<TYPE>n` in C++ where `<TYPE>` is one of `REAL`, `INTEGER` and `COMPLEX`, and **n** is the length in bytes of the machine representation. This datatype locally matches all variables of type (**typeclass**, **n**). The list of names for such types includes:

```
MPI_REAL4
MPI_REAL8
MPI_REAL16
MPI_COMPLEX8
MPI_COMPLEX16
MPI_COMPLEX32
MPI_INTEGER1
MPI_INTEGER2
MPI_INTEGER4
MPI_INTEGER8
MPI_INTEGER16
```

One datatype is required for each representation supported by the compiler. To be backward compatible with the interpretation of these types in MPI-1, we assume that the nonstandard declarations `REAL*n`, `INTEGER*n`, always create a variable whose representation is of size **n**. All these datatypes are predefined.

The following functions allow a user to obtain a size-specific MPI datatype for any intrinsic Fortran type.

```
MPI_SIZEOF(x, size)
```

IN	x	a Fortran variable of numeric intrinsic type (choice)
OUT	size	size of machine representation of that type (integer)

```
MPI_SIZEOF(X, SIZE, IERROR)
```

```
<type> X
INTEGER SIZE, IERROR
```



This function returns the size in bytes of the machine representation of the given variable. It is a generic Fortran routine and has a Fortran binding only.

*Advice to users.* This function is similar to the C and C++ `sizeof` operator but behaves slightly differently. If given an array argument, it returns the size of the base element, not the size of the whole array. (*End of advice to users.*)

*Rationale.* This function is not available in other languages because it would not be useful. (*End of rationale.*)

`MPI_TYPE_MATCH_SIZE(typeclass, size, type)`

IN	typeclass	generic type specifier (integer)
IN	size	size, in bytes, of representation (integer)
OUT	type	datatype with correct type, size (handle)

`int MPI_Type_match_size(int typeclass, int size, MPI_Datatype *type)`

`MPI_TYPE_MATCH_SIZE(TYPECLASS, SIZE, TYPE, IERROR)`

`INTEGER TYPECLASS, SIZE, TYPE, IERROR`

```
{static MPI::Datatype MPI::Datatype::Match_size(int typeclass, int size)
    (binding deprecated, see Section 15.2) }
```

`typeclass` is one of `MPI_TYPECLASS_REAL`, `MPI_TYPECLASS_INTEGER` and `MPI_TYPECLASS_COMPLEX`, corresponding to the desired **typeclass**. The function returns an MPI datatype matching a local variable of type (**typeclass**, **size**).

This function returns a reference (handle) to one of the predefined named datatypes, not a duplicate. This type cannot be freed. `MPI_TYPE_MATCH_SIZE` can be used to obtain a size-specific type that matches a Fortran numeric intrinsic type by first calling `MPI_SIZEOF` in order to compute the variable size, and then calling `MPI_TYPE_MATCH_SIZE` to find a suitable datatype. In C and C++, one can use the C function `sizeof()`, instead of `MPI_SIZEOF`. In addition, for variables of default kind the variable's size can be computed by a call to `MPI_TYPE_GET_EXTENT`, if the `typeclass` is known. It is erroneous to specify a size not supported by the compiler.

*Rationale.* This is a convenience function. Without it, it can be tedious to find the correct named type. See note to implementors below. (*End of rationale.*)

*Advice to implementors.* This function could be implemented as a series of tests.

```
int MPI_Type_match_size(int typeclass, int size, MPI_Datatype *rtype)
{
    switch(typeclass) {
        case MPI_TYPECLASS_REAL: switch(size) {
            case 4: *rtype = MPI_REAL4; return MPI_SUCCESS;
            case 8: *rtype = MPI_REAL8; return MPI_SUCCESS;
            default: error(...);
```

```

1      }
2      case MPI_TYPECLASS_INTEGER: switch(size) {
3          case 4: *rtype = MPI_INTEGER4; return MPI_SUCCESS;
4          case 8: *rtype = MPI_INTEGER8; return MPI_SUCCESS;
5          default: error(...);      }
6      ... etc. ...
7  }
8  }

```

(End of advice to implementors.)

## Communication With Size-specific Types

The usual type matching rules apply to size-specific datatypes: a value sent with datatype `MPI_<TYPE>n` can be received with this same datatype on another process. Most modern computers use 2's complement for integers and IEEE format for floating point. Thus, communication using these size-specific datatypes will not entail loss of precision or truncation errors.

*Advice to users.* Care is required when communicating in a heterogeneous environment. Consider the following code:

```

22  real(selected_real_kind(5)) x(100)
23  call MPI_SIZEOF(x, size, ierror)
24  call MPI_TYPE_MATCH_SIZE(MPI_TYPECLASS_REAL, size, xtype, ierror)
25  if (myrank .eq. 0) then
26      ... initialize x ...
27      call MPI_SEND(x, xtype, 100, 1, ...)
28  else if (myrank .eq. 1) then
29      call MPI_RECV(x, xtype, 100, 0, ...)
30  endif

```

This may not work in a heterogeneous environment if the value of `size` is not the same on process 1 and process 0. There should be no problem in a homogeneous environment. To communicate in a heterogeneous environment, there are at least four options. The first is to declare variables of default type and use the MPI datatypes for these types, e.g., declare a variable of type `REAL` and use `MPI_REAL`. The second is to use `selected_real_kind` or `selected_int_kind` and with the functions of the previous section. The third is to declare a variable that is known to be the same size on all architectures (e.g., `selected_real_kind(12)` on almost all compilers will result in an 8-byte representation). The fourth is to carefully check representation size before communication. This may require explicit conversion to a variable of size that can be communicated and handshaking between sender and receiver to agree on a size.

Note finally that using the “external32” representation for I/O requires explicit attention to the representation sizes. Consider the following code:

```

48  real(selected_real_kind(5)) x(100)

```

```

call MPI_SIZEOF(x, size, ierror)
call MPI_TYPE_MATCH_SIZE(MPI_TYPECLASS_REAL, size, xtype, ierror)

if (myrank .eq. 0) then
    call MPI_FILE_OPEN(MPI_COMM_SELF, 'foo',
                      MPI_MODE_CREATE+MPI_MODE_WRONLY,
                      MPI_INFO_NULL, fh, ierror)
    call MPI_FILE_SET_VIEW(fh, 0, xtype, xtype, 'external32',
                          MPI_INFO_NULL, ierror)
    call MPI_FILE_WRITE(fh, x, 100, xtype, status, ierror)
    call MPI_FILE_CLOSE(fh, ierror)
endif

call MPI_BARRIER(MPI_COMM_WORLD, ierror)

if (myrank .eq. 1) then
    call MPI_FILE_OPEN(MPI_COMM_SELF, 'foo', MPI_MODE_RDONLY,
                      MPI_INFO_NULL, fh, ierror)
    call MPI_FILE_SET_VIEW(fh, 0, xtype, xtype, 'external32',
                          MPI_INFO_NULL, ierror)
    call MPI_FILE_WRITE(fh, x, 100, xtype, status, ierror)
    call MPI_FILE_CLOSE(fh, ierror)
endif

```

If processes 0 and 1 are on different machines, this code may not work as expected if the size is different on the two machines. (*End of advice to users.*)

## 16.3 Language Interoperability

### 16.3.1 Introduction

It is not uncommon for library developers to use one language to develop an applications library that may be called by an application program written in a different language. MPI currently supports ISO (previously ANSI) C, C++, and Fortran bindings. It should be possible for applications in any of the supported languages to call MPI-related functions in another language.

Moreover, MPI allows the development of client-server code, with MPI communication used between a parallel client and a parallel server. It should be possible to code the server in one language and the clients in another language. To do so, communications should be possible between applications written in different languages.

There are several issues that need to be addressed in order to achieve interoperability.

**Initialization** We need to specify how the MPI environment is initialized for all languages.

**Interlanguage passing of MPI opaque objects** We need to specify how MPI object handles are passed between languages. We also need to specify what happens when an MPI object is accessed in one language, to retrieve information (e.g., attributes) set in another language.

**Interlanguage communication** We need to specify how messages sent in one language can be received in another language.

It is highly desirable that the solution for interlanguage interoperability be extendable to new languages, should MPI bindings be defined for such languages.

### 16.3.2 Assumptions

We assume that conventions exist for programs written in one language to call routines written in another language. These conventions specify how to link routines in different languages into one program, how to call functions in a different language, how to pass arguments between languages, and the correspondence between basic data types in different languages. In general, these conventions will be implementation dependent. Furthermore, not every basic datatype may have a matching type in other languages. For example, C/C++ character strings may not be compatible with Fortran `CHARACTER` variables. However, we assume that a Fortran `INTEGER`, as well as a (sequence associated) Fortran array of `INTEGER`s, can be passed to a C or C++ program. We also assume that Fortran, C, and C++ have address-sized integers. This does not mean that the default-size integers are the same size as default-sized pointers, but only that there is some way to hold (and pass) a C address in a Fortran integer. It is also assumed that `INTEGER(KIND=MPI_OFFSET_KIND)` can be passed from Fortran to C as `MPI_Offset`.

### 16.3.3 Initialization

A call to `MPI_INIT` or `MPI_INIT_THREAD`, from any language, initializes MPI for execution in all languages.

*Advice to users.* Certain implementations use the (inout) `argc`, `argv` arguments of the C/C++ version of `MPI_INIT` in order to propagate values for `argc` and `argv` to all executing processes. Use of the Fortran version of `MPI_INIT` to initialize MPI may result in a loss of this ability. (*End of advice to users.*)

The function `MPI_INITIALIZED` returns the same answer in all languages.

The function `MPI_FINALIZE` finalizes the MPI environments for all languages.

The function `MPI_FINALIZED` returns the same answer in all languages.

The function `MPI_ABORT` kills processes, irrespective of the language used by the caller or by the processes killed.

The MPI environment is initialized in the same manner for all languages by `MPI_INIT`. E.g., `MPI_COMM_WORLD` carries the same information regardless of language: same processes, same environmental attributes, same error handlers.

Information can be added to info objects in one language and retrieved in another.

*Advice to users.* The use of several languages in one MPI program may require the use of special options at compile and/or link time. (*End of advice to users.*)

*Advice to implementors.* Implementations may selectively link language specific MPI libraries only to codes that need them, so as not to increase the size of binaries for codes that use only one language. The MPI initialization code need perform initialization for a language only if that language library is loaded. (*End of advice to implementors.*)

## 16.3.4 Transfer of Handles

Handles are passed between Fortran and C or C++ by using an explicit C wrapper to convert Fortran handles to C handles. There is no direct access to C or C++ handles in Fortran. Handles are passed between C and C++ using overloaded C++ operators called from C++ code. There is no direct access to C++ objects from C.

The type definition `MPI_Fint` is provided in C/C++ for an integer of the size that matches a Fortran `INTEGER`; usually, `MPI_Fint` will be equivalent to `int`.

The following functions are provided in C to convert from a Fortran communicator handle (which is an integer) to a C communicator handle, and vice versa. See also Section 2.6.5 on page 22.

```
MPI_Comm MPI_Comm_f2c(MPI_Fint comm)
```

If `comm` is a valid Fortran handle to a communicator, then `MPI_Comm_f2c` returns a valid C handle to that same communicator; if `comm = MPI_COMM_NULL` (Fortran value), then `MPI_Comm_f2c` returns a null C handle; if `comm` is an invalid Fortran handle, then `MPI_Comm_f2c` returns an invalid C handle.

```
MPI_Fint MPI_Comm_c2f(MPI_Comm comm)
```

The function `MPI_Comm_c2f` translates a C communicator handle into a Fortran handle to the same communicator; it maps a null handle into a null handle and an invalid handle into an invalid handle.

Similar functions are provided for the other types of opaque objects.

```
MPI_Datatype MPI_Type_f2c(MPI_Fint datatype)
```

```
MPI_Fint MPI_Type_c2f(MPI_Datatype datatype)
```

```
MPI_Group MPI_Group_f2c(MPI_Fint group)
```

```
MPI_Fint MPI_Group_c2f(MPI_Group group)
```

```
MPI_Request MPI_Request_f2c(MPI_Fint request)
```

```
MPI_Fint MPI_Request_c2f(MPI_Request request)
```

```
MPI_File MPI_File_f2c(MPI_Fint file)
```

```
MPI_Fint MPI_File_c2f(MPI_File file)
```

```
MPI_Win MPI_Win_f2c(MPI_Fint win)
```

```
MPI_Fint MPI_Win_c2f(MPI_Win win)
```

```
MPI_Op MPI_Op_f2c(MPI_Fint op)
```

```
MPI_Fint MPI_Op_c2f(MPI_Op op)
```

```
MPI_Info MPI_Info_f2c(MPI_Fint info)
```

```
MPI_Fint MPI_Info_c2f(MPI_Info info)
```

```
MPI_Errhandler MPI_Errhandler_f2c(MPI_Fint errhandler)
```

```
MPI_Fint MPI_Errhandler_c2f(MPI_Errhandler errhandler)
```

**Example 16.13** The example below illustrates how the Fortran MPI function `MPI_TYPE_COMMIT` can be implemented by wrapping the C MPI function `MPI_Type_commit` with a C wrapper to do handle conversions. In this example a Fortran-C interface is assumed where a Fortran function is all upper case when referred to from C and arguments are passed by addresses.

```

1  ! FORTRAN PROCEDURE
2  SUBROUTINE MPI_TYPE_COMMIT( DATATYPE, IERR)
3  INTEGER DATATYPE, IERR
4  CALL MPI_X_TYPE_COMMIT(DATATYPE, IERR)
5  RETURN
6  END
7
8  /* C wrapper */
9
10 void MPI_X_TYPE_COMMIT( MPI_Fint *f_handle, MPI_Fint *ierr)
11 {
12     MPI_Datatype datatype;
13
14     datatype = MPI_Type_f2c( *f_handle);
15     *ierr = (MPI_Fint)MPI_Type_commit( &datatype);
16     *f_handle = MPI_Type_c2f(datatype);
17     return;
18 }

```

The same approach can be used for all other MPI functions. The call to `MPI_xxx_f2c` (resp. `MPI_xxx_c2f`) can be omitted when the handle is an OUT (resp. IN) argument, rather than INOUT.

*Rationale.* The design here provides a convenient solution for the prevalent case, where a C wrapper is used to allow Fortran code to call a C library, or C code to call a Fortran library. The use of C wrappers is much more likely than the use of Fortran wrappers, because it is much more likely that a variable of type `INTEGER` can be passed to C, than a C handle can be passed to Fortran.

Returning the converted value as a function value rather than through the argument list allows the generation of efficient inlined code when these functions are simple (e.g., the identity). The conversion function in the wrapper does not catch an invalid handle argument. Instead, an invalid handle is passed below to the library function, which, presumably, checks its input arguments. (*End of rationale.*)

**C and C++** The C++ language interface provides the functions listed below for mixed-language interoperability. The token `<CLASS>` is used below to indicate any valid MPI opaque handle name (e.g., `Group`), except where noted. For the case where the C++ class corresponding to `<CLASS>` has derived classes, functions are also provided for converting between the derived classes and the C `MPI_<CLASS>`.

The following function allows assignment from a C MPI handle to a C++ MPI handle.

```
MPI::<CLASS>& MPI::<CLASS>::operator=(const MPI_<CLASS>& data)
```

The constructor below creates a C++ MPI object from a C MPI handle. This allows the automatic promotion of a C MPI handle to a C++ MPI handle.

```
MPI::<CLASS>::<CLASS>(const MPI_<CLASS>& data)
```

**Example 16.14** In order for a C program to use a C++ library, the C++ library must export a C interface that provides appropriate conversions before invoking the underlying C++ library call. This example shows a C interface function that invokes a C++ library call with a C communicator; the communicator is automatically promoted to a C++ handle when the underlying C++ function is invoked.

```
// C++ library function prototype
void cpp_lib_call(MPI::Comm cpp_comm);

// Exported C function prototype
extern "C" {
    void c_interface(MPI_Comm c_comm);
}

void c_interface(MPI_Comm c_comm)
{
    // the MPI_Comm (c_comm) is automatically promoted to MPI::Comm
    cpp_lib_call(c_comm);
}
```

The following function allows conversion from C++ objects to C MPI handles. In this case, the casting operator is overloaded to provide the functionality.

```
MPI::<CLASS>::operator MPI_<CLASS>() const
```

**Example 16.15** A C library routine is called from a C++ program. The C library routine is prototyped to take an MPI\_Comm as an argument.

```
// C function prototype
extern "C" {
    void c_lib_call(MPI_Comm c_comm);
}

void cpp_function()
{
    // Create a C++ communicator, and initialize it with a dup of
    // MPI::COMM_WORLD
    MPI::Intracomm cpp_comm(MPI::COMM_WORLD.Dup());
    c_lib_call(cpp_comm);
}
```

*Rationale.* Providing conversion from C to C++ via constructors and from C++ to C via casting allows the compiler to make automatic conversions. Calling C from C++ becomes trivial, as does the provision of a C or Fortran interface to a C++ library. (*End of rationale.*)

*Advice to users.* Note that the casting and promotion operators return new handles by value. Using these new handles as INOUT parameters will affect the internal MPI object, but will *not* affect the original handle from which it was cast. (*End of advice to users.*)

It is important to note that all C++ objects [and their]with corresponding C handles can be used interchangeably by an application. For example, an application can cache an attribute on `MPI_COMM_WORLD` and later retrieve it from `MPI::COMM_WORLD`.

### 16.3.5 Status

The following two procedures are provided in C to convert from a Fortran status (which is an array of integers) to a C status (which is a structure), and vice versa. The conversion occurs on all the information in status, including that which is hidden. That is, no status information is lost in the conversion.

```
int MPI_Status_f2c(MPI_Fint *f_status, MPI_Status *c_status)
```

If `f_status` is a valid Fortran status, but not the Fortran value of `MPI_STATUS_IGNORE` or `MPI_STATUSES_IGNORE`, then `MPI_Status_f2c` returns in `c_status` a valid C status with the same content. If `f_status` is the Fortran value of `MPI_STATUS_IGNORE` or `MPI_STATUSES_IGNORE`, or if `f_status` is not a valid Fortran status, then the call is erroneous.

The C status has the same source, tag and error code values as the Fortran status, and returns the same answers when queried for count, elements, and cancellation. The conversion function may be called with a Fortran status argument that has an undefined error field, in which case the value of the error field in the C status argument is undefined.

Two global variables of type `MPI_Fint*`, `MPI_F_STATUS_IGNORE` and `MPI_F_STATUSES_IGNORE` are declared in `mpi.h`. They can be used to test, in C, whether `f_status` is the Fortran value of `MPI_STATUS_IGNORE` or `MPI_STATUSES_IGNORE`, respectively. These are global variables, not C constant expressions and cannot be used in places where C requires constant expressions. Their value is defined only between the calls to `MPI_INIT` and `MPI_FINALIZE` and should not be changed by user code.

To do the conversion in the other direction, we have the following:

```
int MPI_Status_c2f(MPI_Status *c_status, MPI_Fint *f_status)
```

This call converts a C status into a Fortran status, and has a behavior similar to `MPI_Status_f2c`. That is, the value of `c_status` must not be either `MPI_STATUS_IGNORE` or `MPI_STATUSES_IGNORE`.

*Advice to users.* There is not a separate conversion function for arrays of statuses, since one can simply loop through the array, converting each status. (*End of advice to users.*)

*Rationale.* The handling of `MPI_STATUS_IGNORE` is required in order to layer libraries with only a C wrapper: if the Fortran call has passed `MPI_STATUS_IGNORE`, then the C wrapper must handle this correctly. Note that this constant need not have the same value in Fortran and C. If `MPI_Status_f2c` were to handle `MPI_STATUS_IGNORE`, then the type of its result would have to be `MPI_Status**`, which was considered an inferior solution. (*End of rationale.*)



### 16.3.6 MPI Opaque Objects

Unless said otherwise, opaque objects are “the same” in all languages: they carry the same information, and have the same meaning in both languages. The mechanism described in the previous section can be used to pass references to MPI objects from language to language. An object created in one language can be accessed, modified or freed in another language.

We examine below in more detail, issues that arise for each type of MPI object.

#### Datatypes

Datatypes encode the same information in all languages. E.g., a datatype accessor like `MPI_TYPE_GET_EXTENT` will return the same information in all languages. If a datatype defined in one language is used for a communication call in another language, then the message sent will be identical to the message that would be sent from the first language: the same communication buffer is accessed, and the same representation conversion is performed, if needed. All predefined datatypes can be used in datatype constructors in any language. If a datatype is committed, it can be used for communication in any language.

The function `MPI_GET_ADDRESS` returns the same value in all languages. Note that we do not require that the constant `MPI_BOTTOM` have the same value in all languages (see [16.3.9](#), page 529).

#### Example 16.16

```
! FORTRAN CODE
REAL R(5)
INTEGER TYPE, IERR, AOBLN(1), AOTYPE(1)
INTEGER (KIND=MPI_ADDRESS_KIND) AODISP(1)

! create an absolute datatype for array R
AOBLN(1) = 5
CALL MPI_GET_ADDRESS( R, AODISP(1), IERR)
AOTYPE(1) = MPI_REAL
CALL MPI_TYPE_CREATE_STRUCT(1, AOBLN,AODISP,AOTYPE, TYPE, IERR)
CALL C_ROUTINE(TYPE)

/* C code */

void C_ROUTINE(MPI_Fint *ftype)
{
    int count = 5;
    int lens[2] = {1,1};
    MPI_Aint displs[2];
    MPI_Datatype types[2], newtype;

    /* create an absolute datatype for buffer that consists
    /*   of count, followed by R(5)

    MPI_Get_address(&count, &displs[0]);
```

```

1  displs[1] = 0;
2  types[0] = MPI_INT;
3  types[1] = MPI_Type_f2c(*fctype);
4  MPI_Type_create_struct(2, lens, displs, types, &newtype);
5  MPI_Type_commit(&newtype);
6
7  MPI_Send(MPI_BOTTOM, 1, newtype, 1, 0, MPI_COMM_WORLD);
8  /* the message sent contains an int count of 5, followed */
9  /* by the 5 REAL entries of the Fortran array R.          */
10 }

```

*Advice to implementors.* The following implementation can be used: MPI addresses, as returned by `MPI_GET_ADDRESS`, will have the same value in all languages. One obvious choice is that MPI addresses be identical to regular addresses. The address is stored in the datatype, when datatypes with absolute addresses are constructed. When a send or receive operation is performed, then addresses stored in a datatype are interpreted as displacements that are all augmented by a base address. This base address is (the address of) `buf`, or zero, if `buf = MPI_BOTTOM`. Thus, if `MPI_BOTTOM` is zero then a send or receive call with `buf = MPI_BOTTOM` is implemented exactly as a call with a regular buffer argument: in both cases the base address is `buf`. On the other hand, if `MPI_BOTTOM` is not zero, then the implementation has to be slightly different. A test is performed to check whether `buf = MPI_BOTTOM`. If true, then the base address is zero, otherwise it is `buf`. In particular, if `MPI_BOTTOM` does not have the same value in Fortran and C/C++, then an additional test for `buf = MPI_BOTTOM` is needed in at least one of the languages.

It may be desirable to use a value other than zero for `MPI_BOTTOM` even in C/C++, so as to distinguish it from a NULL pointer. If `MPI_BOTTOM = c` then one can still avoid the test `buf = MPI_BOTTOM`, by using the displacement from `MPI_BOTTOM`, i.e., the regular address - `c`, as the MPI address returned by `MPI_GET_ADDRESS` and stored in absolute datatypes. (*End of advice to implementors.*)

## Callback Functions

MPI calls may associate callback functions with MPI objects: error handlers are associated with communicators and files, attribute copy and delete functions are associated with attribute keys, reduce operations are associated with operation objects, etc. In a multilanguage environment, a function passed in an MPI call in one language may be invoked by an MPI call in another language. MPI implementations must make sure that such invocation will use the calling convention of the language the function is bound to.

*Advice to implementors.* Callback functions need to have a language tag. This tag is set when the callback function is passed in by the library function (which is presumably different for each language), and is used to generate the right calling sequence when the callback function is invoked. (*End of advice to implementors.*)

## Error Handlers

*Advice to implementors.* Error handlers, have, in C and C++, a “`stdargs`” argument list. It might be useful to provide to the handler information on the language

environment where the error occurred. (*End of advice to implementors.*)

## Reduce Operations

*Advice to users.* Reduce operations receive as one of their arguments the datatype of the operands. Thus, one can define “polymorphic” reduce operations that work for C, C++, and Fortran datatypes. (*End of advice to users.*)

## Addresses

Some of the datatype accessors and constructors have arguments of type `MPI_Aint` (in C) or `MPI::Aint` in C++, to hold addresses. The corresponding arguments, in Fortran, have type `INTEGER`. This causes Fortran and C/C++ to be incompatible, in an environment where addresses have 64 bits, but Fortran `INTEGER`s have 32 bits.

This is a problem, irrespective of interlanguage issues. Suppose that a Fortran process has an address space of  $\geq 4$  GB. What should be the value returned in Fortran by `MPI_ADDRESS`, for a variable with an address above  $2^{32}$ ? The design described here addresses this issue, while maintaining compatibility with current Fortran codes.

The constant `MPI_ADDRESS_KIND` is defined so that, in Fortran 90, `INTEGER(KIND=MPI_ADDRESS_KIND)` is an address sized integer type (typically, but not necessarily, the size of an `INTEGER(KIND=MPI_ADDRESS_KIND)` is 4 on 32 bit address machines and 8 on 64 bit address machines). Similarly, the constant `MPI_INTEGER_KIND` is defined so that `INTEGER(KIND=MPI_INTEGER_KIND)` is a default size `INTEGER`.

There are seven functions that have address arguments: `MPI_TYPE_HVECTOR`, `MPI_TYPE_HINDEXED`, `MPI_TYPE_STRUCT`, `MPI_ADDRESS`, `MPI_TYPE_EXTENT`, `MPI_TYPE_LB` and `MPI_TYPE_UB`.

Four new functions are provided to supplement the first four functions in this list. These functions are described in Section 4.1.1 on page 83. The remaining three functions are supplemented by the new function `MPI_TYPE_GET_EXTENT`, described in that same section. The new functions have the same functionality as the old functions in C/C++, or on Fortran systems where default `INTEGER`s are address sized. In Fortran, they accept arguments of type `INTEGER(KIND=MPI_ADDRESS_KIND)`, wherever arguments of type `MPI_Aint` and `MPI::Aint` are used in C and C++. On Fortran 77 systems that do not support the Fortran 90 `KIND` notation, and where addresses are 64 bits whereas default `INTEGER`s are 32 bits, these arguments will be of an appropriate integer type. The old functions will continue to be provided, for backward compatibility. However, users are encouraged to switch to the new functions, in Fortran, so as to avoid problems on systems with an address range  $> 2^{32}$ , and to provide compatibility across languages.

### 16.3.7 Attributes

Attribute keys can be allocated in one language and freed in another. Similarly, attribute values can be set in one language and accessed in another. To achieve this, attribute keys will be allocated in an integer range that is valid all languages. The same holds true for system-defined attribute values (such as `MPI_TAG_UB`, `MPI_WTIME_IS_GLOBAL`, etc.)

Attribute keys declared in one language are associated with copy and delete functions in that language (the functions provided by the `MPI_{TYPE,COMM,WIN}_CREATE_KEYVAL` call). When a communicator is duplicated, for each attribute, the corresponding copy

function is called, using the right calling convention for the language of that function; and similarly, for the delete callback function.

*Advice to implementors.* This requires that attributes be tagged either as “C,” “C++” or “Fortran,” and that the language tag be checked in order to use the right calling convention for the callback function. (*End of advice to implementors.*)

The attribute manipulation functions described in Section 6.7 on page 240 define attributes arguments to be of type `void*` in C, and of type `INTEGER`, in Fortran. On some systems, `INTEGER`s will have 32 bits, while C/C++ pointers will have 64 bits. This is a problem if communicator attributes are used to move information from a Fortran caller to a C/C++ callee, or vice-versa.

MPI [will store]behaves as if it stores, internally, address sized attributes. If Fortran `INTEGER`s are smaller, then the Fortran function `MPI_ATTR_GET` will return the least significant part of the attribute word; the Fortran function `MPI_ATTR_PUT` will set the least significant part of the attribute word, which will be sign extended to the entire word. (These two functions may be invoked explicitly by user code, or implicitly, by attribute copying callback functions.)

As for addresses, new functions are provided that manipulate Fortran address sized attributes, and have the same functionality as the old functions in C/C++. These functions are described in Section 6.7, page 240. Users are encouraged to use these new functions.

MPI supports two types of attributes: address-valued (pointer) attributes, and integer valued attributes. C and C++ attribute functions put and get address valued attributes. Fortran attribute functions put and get integer valued attributes. When an integer valued attribute is accessed from C or C++, then `MPI_xxx_get_attr` will return the address of (a pointer to) the integer valued attribute, which is a pointer to `MPI_Aint` if the attribute was stored with Fortran `MPI_xxx_SET_ATTR`, and a pointer to `int` if it was stored with the deprecated Fortran `MPI_ATTR_PUT`. When an address valued attribute is accessed from Fortran, then `MPI_xxx_GET_ATTR` will convert the address into an integer and return the result of this conversion. This conversion is lossless if new style attribute functions are used, and an integer of kind `MPI_ADDRESS_KIND` is returned. The conversion may cause truncation if deprecated attribute functions are used. In C, the deprecated routines `MPI_Attr_put` and `MPI_Attr_get` behave identical to `MPI_Comm_set_attr` and `MPI_Comm_get_attr`.

#### Example 16.17 A. C to Fortran

HEADER SKIP ENDHEADER mپییدوتیMergeFromBALLOTbegin43 MPI-2.1 Ballots 1-4 IF(val.NE.5) THEN CALL ERROR is substituted by IF(val.NE.address\_of\_i) THEN CALL ERROR mپییدوتیMergeFromBALLOTendII43 MPI-2.1 Ballots 1-4 This should be split into separate verbatim blocks for each language; non code ”e.g., ”C code”, should not be in verbatim.

```
%
% C code
%
%static int i = 5;
%void *p;
%p = &i;
```

```

%MPI_Comm_put_attr(..., p);
%....
%
% Fortran code
%
%INTEGER(kind = MPI_ADDRESS_KIND) val
%CALL MPI_COMM_GET_ATTR(...,val,...)
%IF(val.NE.address_of_i) THEN CALL ERROR
%
B. Fortran to C
HEADER SKIP ENDHEADER

%
% Fortran code
%
%INTEGER(kind=MPI_ADDRESS_KIND) val
%val = 55555
%CALL MPI_COMM_PUT_ATTR(...,val,ierr)
%
% C code
%
%int *p;
%MPI_Comm_get_attr(...,&p, ...);
%if (*p != 55555) error();
%
]

```

ticket55.

**Example 16.18** A. Setting an attribute value in C

```

int set_val = 3;
struct foo set_struct;

/* Set a value that is a pointer to an int */

MPI_Comm_set_attr(MPI_COMM_WORLD, keyval1, &set_val);
/* Set a value that is a pointer to a struct */
MPI_Comm_set_attr(MPI_COMM_WORLD, keyval2, &set_struct);
/* Set an integer value */
MPI_Comm_set_attr(MPI_COMM_WORLD, keyval3, (void *) 17);

B. Reading the attribute value in C

int flag, *get_val;
struct foo *get_struct;

/* Upon successful return, get_val == &set_val
   (and therefore *get_val == 3) */
MPI_Comm_get_attr(MPI_COMM_WORLD, keyval1, &get_val, &flag);

```

```

1  /* Upon successful return, get_struct == &set_struct */
2  MPI_Comm_get_attr(MPI_COMM_WORLD, keyval2, &get_struct, &flag);
3  /* Upon successful return, get_val == (void*) 17 */
4  /*      i.e., (MPI_Aint) get_val == 17 */
5  MPI_Comm_get_attr(MPI_COMM_WORLD, keyval3, &get_val, &flag);

```

C. Reading the attribute value with (deprecated) Fortran MPI-1 calls

```

9  LOGICAL FLAG
10 INTEGER IERR, GET_VAL, GET_STRUCT

12 ! Upon successful return, GET_VAL == &set_val, possibly truncated
13 CALL MPI_ATTR_GET(MPI_COMM_WORLD, KEYVAL1, GET_VAL, FLAG, IERR)
14 ! Upon successful return, GET_STRUCT == &set_struct, possibly truncated
15 CALL MPI_ATTR_GET(MPI_COMM_WORLD, KEYVAL2, GET_STRUCT, FLAG, IERR)
16 ! Upon successful return, GET_VAL == 17
17 CALL MPI_ATTR_GET(MPI_COMM_WORLD, KEYVAL3, GET_VAL, FLAG, IERR)

```

D. Reading the attribute value with Fortran MPI-2 calls

```

21 LOGICAL FLAG
22 INTEGER IERR
23 INTEGER (KIND=MPI_ADDRESS_KIND) GET_VAL, GET_STRUCT

25 ! Upon successful return, GET_VAL == &set_val
26 CALL MPI_COMM_GET_ATTR(MPI_COMM_WORLD, KEYVAL1, GET_VAL, FLAG, IERR)
27 ! Upon successful return, GET_STRUCT == &set_struct
28 CALL MPI_COMM_GET_ATTR(MPI_COMM_WORLD, KEYVAL2, GET_STRUCT, FLAG, IERR)
29 ! Upon successful return, GET_VAL == 17
30 CALL MPI_COMM_GET_ATTR(MPI_COMM_WORLD, KEYVAL3, GET_VAL, FLAG, IERR)

```

**Example 16.19** A. Setting an attribute value with the (deprecated) Fortran MPI-1 call

```

34 INTEGER IERR, VAL
35 VAL = 7
36 CALL MPI_ATTR_PUT(MPI_COMM_WORLD, KEYVAL, VAL, IERR)

```

B. Reading the attribute value in C

```

40 int flag;
41 int *value;

43 /* Upon successful return, value points to internal MPI storage and
44    *value == (int) 7 */
45 MPI_Comm_get_attr(MPI_COMM_WORLD, keyval, &value, &flag);

```

C. Reading the attribute value with (deprecated) Fortran MPI-1 calls

```

LOGICAL FLAG
INTEGER IERR, VALUE

! Upon successful return, VALUE == 7
CALL MPI_ATTR_GET(MPI_COMM_WORLD, KEYVAL, VALUE, FLAG, IERR)

```

D. Reading the attribute value with Fortran MPI-2 calls

```

LOGICAL FLAG
INTEGER IERR
INTEGER (KIND=MPI_ADDRESS_KIND) VALUE

! Upon successful return, VALUE == 7 (sign extended)
CALL MPI_COMM_GET_ATTR(MPI_COMM_WORLD, KEYVAL, VALUE, FLAG, IERR)

```

**Example 16.20** A. Setting an attribute value via a Fortran MPI-2 call

```

INTEGER IERR
INTEGER(KIND=MPI_ADDRESS_KIND) VALUE1
INTEGER(KIND=MPI_ADDRESS_KIND) VALUE2
VALUE1 = 42
VALUE2 = INT(2, KIND=MPI_ADDRESS_KIND) ** 40

CALL MPI_COMM_SET_ATTR(MPI_COMM_WORLD, KEYVAL1, VALUE1, IERR)
CALL MPI_COMM_SET_ATTR(MPI_COMM_WORLD, KEYVAL2, VALUE2, IERR)

```

B. Reading the attribute value in C

```

int flag;
MPI_Aint *value1, *value2;

/* Upon successful return, value1 points to internal MPI storage and
   *value1 == 42 */
MPI_Comm_get_attr(MPI_COMM_WORLD, keyval1, &value1, &flag);
/* Upon successful return, value2 points to internal MPI storage and
   *value2 == 2^40 */
MPI_Comm_get_attr(MPI_COMM_WORLD, keyval2, &value2, &flag);

```

C. Reading the attribute value with (deprecated) Fortran MPI-1 calls

```

LOGICAL FLAG
INTEGER IERR, VALUE1, VALUE2

! Upon successful return, VALUE1 == 42
CALL MPI_ATTR_GET(MPI_COMM_WORLD, KEYVAL1, VALUE1, FLAG, IERR)
! Upon successful return, VALUE2 == 2^40, or 0 if truncation
! needed (i.e., the least significant part of the attribute word)
CALL MPI_ATTR_GET(MPI_COMM_WORLD, KEYVAL2, VALUE2, FLAG, IERR)

```

### D. Reading the attribute value with Fortran MPI-2 calls

```

LOGICAL FLAG
INTEGER IERR
INTEGER (KIND=MPI_ADDRESS_KIND) VALUE1, VALUE2

! Upon successful return, VALUE1 == 42
CALL MPI_COMM_GET_ATTR(MPI_COMM_WORLD, KEYVAL1, VALUE1, FLAG, IERR)
! Upon successful return, VALUE2 == 2^40
CALL MPI_COMM_GET_ATTR(MPI_COMM_WORLD, KEYVAL2, VALUE2, FLAG, IERR)

```

The predefined MPI attributes can be integer valued or address valued. Predefined integer valued attributes, such as MPI\_TAG\_UB, behave as if they were put by a [Fortran call]call to the deprecated Fortran routine MPI\_ATTR\_PUT, i.e., in Fortran, MPI\_COMM\_GET\_ATTR(MPI\_COMM\_WORLD, MPI\_TAG\_UB, val, flag, ierr) will return in val the upper bound for tag value; in C, MPI\_Comm\_get\_attr(MPI\_COMM\_WORLD, MPI\_TAG\_UB, &p, &flag) will return in p a pointer to an int containing the upper bound for tag value.

Address valued predefined attributes, such as MPI\_WIN\_BASE behave as if they were put by a C call, i.e., in Fortran, MPI\_WIN\_GET\_ATTR(win, MPI\_WIN\_BASE, val, flag, ierror) will return in val the base address of the window, converted to an integer. In C, MPI\_Win\_get\_attr(win, MPI\_WIN\_BASE, &p, &flag) will return in p a pointer to the window base, cast to (void \*).

*Rationale.* The design is consistent with the behavior specified for predefined attributes, and ensures that no information is lost when attributes are passed from language to language. Because the language interoperability for predefined attributes was defined based on MPI\_ATTR\_PUT, this definition is kept for compatibility reasons although the routine itself is now deprecated. (End of rationale.)

*Advice to implementors.* Implementations should tag attributes either as [address attributes or as integer attributes, according to whether they were set in C or in Fortran.](1) address attributes, (2) as INTEGER(KIND=MPI\_ADDRESS\_KIND) attributes or (3) as INTEGER attributes, according to whether they were set in (1) C (with MPI\_Attr\_put or MPI\_Xxx\_set\_attr), (2) in Fortran with MPI\_XXX\_SET\_ATTR or (3) with the deprecated Fortran routine MPI\_ATTR\_PUT. Thus, the right choice can be made when the attribute is retrieved. (End of advice to implementors.)

### 16.3.8 Extra State

Extra-state should not be modified by the copy or delete callback functions. (This is obvious from the C binding, but not obvious from the Fortran binding). However, these functions may update state that is indirectly accessed via extra-state. E.g., in C, extra-state can be a pointer to a data structure that is modified by the copy or callback functions; in Fortran, extra-state can be an index into an entry in a COMMON array that is modified by the copy or callback functions. In a multithreaded environment, users should be aware that distinct threads may invoke the same callback function concurrently: if this function modifies state associated with extra-state, then mutual exclusion code must be used to protect updates and accesses to the shared state.



## 16.3.9 Constants

MPI constants have the same value in all languages, unless specified otherwise. This does not apply to constant handles (MPI\_INT, MPI\_COMM\_WORLD, MPI\_ERRORS\_RETURN, MPI\_SUM, etc.) These handles need to be converted, as explained in Section 16.3.4. Constants that specify maximum lengths of strings (see Section A.1.1 for a listing) have a value one less in Fortran than C/C++ since in C/C++ the length includes the null terminating character. Thus, these constants represent the amount of space which must be allocated to hold the largest possible such string, rather than the maximum number of printable characters the string could contain.

*Advice to users.* This definition means that it is safe in C/C++ to allocate a buffer to receive a string using a declaration like

```
char name [MPI_MAX_OBJECT_NAME];
```

(*End of advice to users.*)

Also constant “addresses,” i.e., special values for reference arguments that are not handles, such as MPI\_BOTTOM or MPI\_STATUS\_IGNORE may have different values in different languages.

*Rationale.* The current MPI standard specifies that MPI\_BOTTOM can be used in initialization expressions in C, but not in Fortran. Since Fortran does not normally support call by value, then MPI\_BOTTOM must be in Fortran the name of a predefined static variable, e.g., a variable in an MPI declared COMMON block. On the other hand, in C, it is natural to take MPI\_BOTTOM = 0 (Caveat: Defining MPI\_BOTTOM = 0 implies that NULL pointer cannot be distinguished from MPI\_BOTTOM; it may be that MPI\_BOTTOM = 1 is better ...) Requiring that the Fortran and C values be the same will complicate the initialization process. (*End of rationale.*)

## 16.3.10 Interlanguage Communication

The type matching rules for communications in MPI are not changed: the datatype specification for each item sent should match, in type signature, the datatype specification used to receive this item (unless one of the types is MPI\_PACKED). Also, the type of a message item should match the type declaration for the corresponding communication buffer location, unless the type is MPI\_BYTE or MPI\_PACKED. Interlanguage communication is allowed if it complies with these rules.

**Example 16.21** In the example below, a Fortran array is sent from Fortran and received in C.

```
! FORTRAN CODE
REAL R(5)
INTEGER TYPE, IERR, MYRANK, AOBLEN(1), AOTYPE(1)
INTEGER (KIND=MPI_ADDRESS_KIND) AODISP(1)
```

```
! create an absolute datatype for array R
```

```

1  AOBLLEN(1) = 5
2  CALL MPI_GET_ADDRESS( R, AODISP(1), IERR)
3  AOTYPE(1) = MPI_REAL
4  CALL MPI_TYPE_CREATE_STRUCT(1, AOBLLEN,AODISP,AOTYPE, TYPE, IERR)
5  CALL MPI_TYPE_COMMIT(TYPE, IERR)
6
7  CALL MPI_COMM_RANK( MPI_COMM_WORLD, MYRANK, IERR)
8  IF (MYRANK.EQ.0) THEN
9      CALL MPI_SEND( MPI_BOTTOM, 1, TYPE, 1, 0, MPI_COMM_WORLD, IERR)
10 ELSE
11     CALL C_ROUTINE(TYPE)
12 END IF
13
14
15 /* C code */
16
17 void C_ROUTINE(MPI_Fint *fhandle)
18 {
19     MPI_Datatype type;
20     MPI_Status status;
21
22     type = MPI_Type_f2c(*fhandle);
23
24     MPI_Recv( MPI_BOTTOM, 1, type, 0, 0, MPI_COMM_WORLD, &status);
25 }

```

MPI implementors may weaken these type matching rules, and allow messages to be sent with Fortran types and received with C types, and vice versa, when those types match. I.e., if the Fortran type `INTEGER` is identical to the C type `int`, then an MPI implementation may allow data to be sent with datatype `MPI_INTEGER` and be received with datatype `MPI_INT`. However, such code is not portable.

# Annex A

## Language Bindings Summary

In this section we summarize the specific bindings for C, Fortran, and C++. First we present the constants, type definitions, info values and keys. Then we present the routine prototypes separately for each binding. Listings are alphabetical within chapter.

### A.1 Defined Values and Handles

#### A.1.1 Defined Constants

The C and Fortran name is listed in the left column and the C++ name is listed in the middle or right column. Constants with the type `const int` may also be implemented as literal integer constants substituted by the preprocessor.

Return Codes	
[ticket107.]C type: <code>const int</code> (or unnamed <code>enum</code> )	C++ type: <code>const int</code>
[ticket107.]Fortran type: <code>INTEGER</code>	(or unnamed <code>enum</code> )
MPI_SUCCESS	MPI::SUCCESS
MPI_ERR_BUFFER	MPI::ERR_BUFFER
MPI_ERR_COUNT	MPI::ERR_COUNT
MPI_ERR_TYPE	MPI::ERR_TYPE
MPI_ERR_TAG	MPI::ERR_TAG
MPI_ERR_COMM	MPI::ERR_COMM
MPI_ERR_RANK	MPI::ERR_RANK
MPI_ERR_REQUEST	MPI::ERR_REQUEST
MPI_ERR_ROOT	MPI::ERR_ROOT
MPI_ERR_GROUP	MPI::ERR_GROUP
MPI_ERR_OP	MPI::ERR_OP
MPI_ERR_TOPOLOGY	MPI::ERR_TOPOLOGY
MPI_ERR_DIMS	MPI::ERR_DIMS
MPI_ERR_ARG	MPI::ERR_ARG
MPI_ERR_UNKNOWN	MPI::ERR_UNKNOWN
MPI_ERR_TRUNCATE	MPI::ERR_TRUNCATE
MPI_ERR_OTHER	MPI::ERR_OTHER
MPI_ERR_INTERN	MPI::ERR_INTERN
MPI_ERR_PENDING	MPI::ERR_PENDING

(Continued on next page)

## Return Codes (continued)

MPI_ERR_IN_STATUS	MPI::ERR_IN_STATUS
MPI_ERR_ACCESS	MPI::ERR_ACCESS
MPI_ERR_AMODE	MPI::ERR_AMODE
MPI_ERR_ASSERT	MPI::ERR_ASSERT
MPI_ERR_BAD_FILE	MPI::ERR_BAD_FILE
MPI_ERR_BASE	MPI::ERR_BASE
MPI_ERR_CONVERSION	MPI::ERR_CONVERSION
MPI_ERR_DISP	MPI::ERR_DISP
MPI_ERR_DUP_DATAREP	MPI::ERR_DUP_DATAREP
MPI_ERR_FILE_EXISTS	MPI::ERR_FILE_EXISTS
MPI_ERR_FILE_IN_USE	MPI::ERR_FILE_IN_USE
MPI_ERR_FILE	MPI::ERR_FILE
MPI_ERR_INFO_KEY	MPI::ERR_INFO_VALUE
MPI_ERR_INFO_NOKEY	MPI::ERR_INFO_NOKEY
MPI_ERR_INFO_VALUE	MPI::ERR_INFO_KEY
MPI_ERR_INFO	MPI::ERR_INFO
MPI_ERR_IO	MPI::ERR_IO
MPI_ERR_KEYVAL	MPI::ERR_KEYVAL
MPI_ERR_LOCKTYPE	MPI::ERR_LOCKTYPE
MPI_ERR_NAME	MPI::ERR_NAME
MPI_ERR_NO_MEM	MPI::ERR_NO_MEM
MPI_ERR_NOT_SAME	MPI::ERR_NOT_SAME
MPI_ERR_NO_SPACE	MPI::ERR_NO_SPACE
MPI_ERR_NO_SUCH_FILE	MPI::ERR_NO_SUCH_FILE
MPI_ERR_PORT	MPI::ERR_PORT
MPI_ERR_QUOTA	MPI::ERR_QUOTA
MPI_ERR_READ_ONLY	MPI::ERR_READ_ONLY
MPI_ERR_RMA_CONFLICT	MPI::ERR_RMA_CONFLICT
MPI_ERR_RMA_SYNC	MPI::ERR_RMA_SYNC
MPI_ERR_SERVICE	MPI::ERR_SERVICE
MPI_ERR_SIZE	MPI::ERR_SIZE
MPI_ERR_SPAWN	MPI::ERR_SPAWN
MPI_ERR_UNSUPPORTED_DATAREP	MPI::ERR_UNSUPPORTED_DATAREP
MPI_ERR_UNSUPPORTED_OPERATION	MPI::ERR_UNSUPPORTED_OPERATION
MPI_ERR_WIN	MPI::ERR_WIN
MPI_ERR_LASTCODE	MPI::ERR_LASTCODE

**[ticket107.]Buffer Address Constants**

[ticket107.]C type: <b>void * const</b>	[ticket107.]C++ type:
[ticket107.]Fortran type: (predefined memory location)	[ticket107.] <b>void * const</b>
MPI_BOTTOM	MPI::BOTTOM
MPI_IN_PLACE	MPI::IN_PLACE

## Assorted Constants

[ticket107.]C type: <b>const int</b> (or unnamed enum)	[ticket107.]C++ type:
[ticket107.]Fortran type: <b>INTEGER</b>	[ticket107.] <b>const int</b> (or unnamed enum)
MPI_PROC_NULL	MPI::PROC_NULL
MPI_ANY_SOURCE	MPI::ANY_SOURCE
MPI_ANY_TAG	MPI::ANY_TAG
MPI_UNDEFINED	MPI::UNDEFINED
MPI_BSEND_OVERHEAD	MPI::BSEND_OVERHEAD
MPI_KEYVAL_INVALID	MPI::KEYVAL_INVALID
MPI_LOCK_EXCLUSIVE	MPI::LOCK_EXCLUSIVE
MPI_LOCK_SHARED	MPI::LOCK_SHARED
MPI_ROOT	MPI::ROOT

## Status size and reserved index values (Fortran only)

[ticket107.]Fortran type: <b>INTEGER</b>	
MPI_STATUS_SIZE	Not defined for C++
MPI_SOURCE	Not defined for C++
MPI_TAG	Not defined for C++
MPI_ERROR	Not defined for C++

## Variable Address Size (Fortran only)

[ticket107.]Fortran type: <b>INTEGER</b>	
MPI_ADDRESS_KIND	Not defined for C++
MPI_INTEGER_KIND	Not defined for C++
MPI_OFFSET_KIND	Not defined for C++

## Error-handling specifiers

[ticket107.]C type: <b>MPI_Errhandler</b>	C++ type: <b>MPI::Errhandler</b>
[ticket107.]Fortran type: <b>INTEGER</b>	
MPI_ERRORS_ARE_FATAL	MPI::ERRORS_ARE_FATAL
MPI_ERRORS_RETURN	MPI::ERRORS_RETURN
	MPI::ERRORS_THROW_EXCEPTIONS

## Maximum Sizes for Strings

[ticket107.]C type: <b>const int</b> (or unnamed enum)	[ticket107.]C++ type:
[ticket107.]Fortran type: <b>INTEGER</b>	[ticket107.] <b>const int</b> (or unnamed enum)
MPI_MAX_PROCESSOR_NAME	MPI::MAX_PROCESSOR_NAME
MPI_MAX_ERROR_STRING	MPI::MAX_ERROR_STRING
MPI_MAX_DATAREP_STRING	MPI::MAX_DATAREP_STRING
MPI_MAX_INFO_KEY	MPI::MAX_INFO_KEY
MPI_MAX_INFO_VAL	MPI::MAX_INFO_VAL
MPI_MAX_OBJECT_NAME	MPI::MAX_OBJECT_NAME
MPI_MAX_PORT_NAME	MPI::MAX_PORT_NAME

1	Named Predefined Datatypes		C/C++ types
2	[ticket107.]C type: <b>MPI_Datatype</b>		C++ type: <b>MPI::Datatype</b>
3	[ticket107.]Fortran type: <b>INTEGER</b>		
4	[ticket63.] <b>MPI_CHAR</b>		<b>char</b>
5			(treated as printable
6			[ticket18+63.]character)
7			<b>signed short int</b>
8	<b>MPI_SHORT</b>		<b>signed int</b>
9	<b>MPI_INT</b>		<b>signed long</b>
10	<b>MPI_LONG</b>		<b>signed long long</b>
11	<b>MPI_LONG_LONG_INT</b>		<b>long long (synonym)</b>
12	<b>MPI_LONG_LONG</b>		<b>signed char</b>
13	<b>MPI_SIGNED_CHAR</b>		(treated as integral value)
14			<b>unsigned char</b>
15	<b>MPI_UNSIGNED_CHAR</b>		(treated as integral value)
16			<b>unsigned short</b>
17	<b>MPI_UNSIGNED_SHORT</b>		<b>unsigned int</b>
18	<b>MPI_UNSIGNED</b>		<b>unsigned long</b>
19	<b>MPI_UNSIGNED_LONG</b>		<b>unsigned long long</b>
20	<b>MPI_UNSIGNED_LONG_LONG</b>		<b>float</b>
21	<b>MPI_FLOAT</b>		<b>double</b>
22	<b>MPI_DOUBLE</b>		<b>long double</b>
23	<b>MPI_LONG_DOUBLE</b>		<b>wchar_t</b>
24	<b>MPI_WCHAR</b>		(defined in <stddef.h>)
25			(treated as printable
26			[ticket18+63.]character)
27			<b>[ticket18.]_Bool</b>
28	[ticket18.] <b>MPI_C_BOOL</b>		<b>[ticket18.]int8_t</b>
29	[ticket18.] <b>MPI_INT8_T</b>		<b>[ticket18.]int16_t</b>
30	[ticket18.] <b>MPI_INT16_T</b>		<b>[ticket18.]int32_t</b>
31	[ticket18.] <b>MPI_INT32_T</b>		<b>[ticket18.]int64_t</b>
32	[ticket18.] <b>MPI_INT64_T</b>		<b>[ticket18.]uint8_t</b>
33	[ticket18.] <b>MPI_UINT8_T</b>		<b>[ticket18.]uint16_t</b>
34	[ticket18.] <b>MPI_UINT16_T</b>		<b>[ticket18.]uint32_t</b>
35	[ticket18.] <b>MPI_UINT32_T</b>		<b>[ticket18.]uint64_t</b>
36	[ticket18.] <b>MPI_UINT64_T</b>		<b>[ticket18.]MPI_Aint</b>
37	[ticket18.] <b>MPI_AINT</b>		<b>[ticket18.]MPI_Offset</b>
38	[ticket18.] <b>MPI_OFFSET</b>		<b>[ticket18.]float _Complex</b>
39	[ticket18.] <b>MPI_C_COMPLEX</b>		<b>[ticket18.]float _Complex</b>
40	[ticket18.] <b>MPI_C_FLOAT_COMPLEX</b>		<b>[ticket18.]double _Complex</b>
41	[ticket18.] <b>MPI_C_DOUBLE_COMPLEX</b>		<b>[ticket18.]long double _C</b>
42	[ticket18.] <b>MPI_C_LONG_DOUBLE_COMPLEX</b>		(any C/C++ type)
43	<b>MPI_BYTE</b>		(any C/C++ type)
44	<b>MPI_PACKED</b>		

ticket4.

[

### C and C++ (no Fortran) Named Predefined Datatypes | Fortran types

MPI-2.1 Review 33.d'

MPI\_Fint

MPI::Fint

INTEGER

MPI-2.1 Review 33.d'

]

Named Predefined Datatypes		Fortran types
[ticket107.]C type: <b>MPI_Datatype</b>	C++ type: MPI::Datatype	
[ticket107.]Fortran type: <b>INTEGER</b>		
MPI_INTEGER	MPI::INTEGER	INTEGER
MPI_REAL	MPI::REAL	REAL
MPI_DOUBLE_PRECISION	MPI::DOUBLE_PRECISION	DOUBLE PRECISION
MPI_COMPLEX	MPI::F_COMPLEX	COMPLEX
MPI_LOGICAL	MPI::LOGICAL	LOGICAL
MPI_CHARACTER	MPI::CHARACTER	CHARACTER(1)
[ticket18.] <b>MPI_AINT</b>	[ticket18.](use C datatype handle)	[ticket18.] <b>INTEGER (KIND=MPI_ADDRESS)</b>
[ticket18.] <b>MPI_OFFSET</b>	[ticket18.](use C datatype handle)	[ticket18.] <b>INTEGER (KIND=MPI_OFFSET)</b>
MPI_BYTE	MPI::BYTE	(any Fortran type)
MPI_PACKED	MPI::PACKED	(any Fortran type)

C++-Only Named Predefined Datatypes	C++ types
C++ type: MPI::Datatype	
MPI::BOOL	bool
MPI::COMPLEX	Complex<float>
MPI::DOUBLE_COMPLEX	Complex<double>
MPI::LONG_DOUBLE_COMPLEX	Complex<long double>

Optional datatypes (Fortran)		Fortran types
[ticket107.]C type: <b>MPI_Datatype</b>	C++ type: MPI::Datatype	
[ticket107.]Fortran type: <b>INTEGER</b>		
MPI_DOUBLE_COMPLEX	[ticket40.] <b>MPI::F_DOUBLE_COMPLEX</b>	DOUBLE COMPLEX
MPI_INTEGER1	MPI::INTEGER1	INTEGER*1
MPI_INTEGER2	MPI::INTEGER2	INTEGER*8
MPI_INTEGER4	MPI::INTEGER4	INTEGER*4
MPI_INTEGER8	MPI::INTEGER8	INTEGER*8
[ticket57.] <b>MPI_INTEGER16</b>		[ticket57.] <b>INTEGER*16</b>
MPI_REAL2	MPI::REAL2	REAL*2
MPI_REAL4	MPI::REAL4	REAL*4
MPI_REAL8	MPI::REAL8	REAL*8
[ticket57.] <b>MPI_REAL16</b>		[ticket57.] <b>REAL*16</b>
[ticket57.] <b>MPI_COMPLEX4</b>		[ticket57.] <b>COMPLEX*4</b>
[ticket57.] <b>MPI_COMPLEX8</b>		[ticket57.] <b>COMPLEX*8</b>
[ticket57.] <b>MPI_COMPLEX16</b>		[ticket57.] <b>COMPLEX*16</b>
[ticket57.] <b>MPI_COMPLEX32</b>		[ticket57.] <b>COMPLEX*32</b>

**Datatypes for reduction functions (C and C++)**

[ticket107.]C type: <b>MPI_Datatype</b>	C++ type: <b>MPI::Datatype</b>
[ticket107.]Fortran type: <b>INTEGER</b>	
MPI_FLOAT_INT	MPI::FLOAT_INT
MPI_DOUBLE_INT	MPI::DOUBLE_INT
MPI_LONG_INT	MPI::LONG_INT
MPI_2INT	MPI::TWOINT
MPI_SHORT_INT	MPI::SHORT_INT
MPI_LONG_DOUBLE_INT	MPI::LONG_DOUBLE_INT

**Datatypes for reduction functions (Fortran)**

[ticket107.]C type: <b>MPI_Datatype</b>	C++ type: <b>MPI::Datatype</b>
[ticket107.]Fortran type: <b>INTEGER</b>	
MPI_2REAL	MPI::TWOREAL
MPI_2DOUBLE_PRECISION	MPI::TWODOUBLE_PRECISION
MPI_2INTEGER	MPI::TWOINTEGER

**Special datatypes for constructing derived datatypes**

[ticket107.]C type: <b>MPI_Datatype</b>	C++ type: <b>MPI::Datatype</b>
[ticket107.]Fortran type: <b>INTEGER</b>	
MPI_UB	MPI::UB
MPI_LB	MPI::LB

**Reserved communicators**

[ticket107.]C type: <b>MPI_Comm</b>	C++ type: <b>MPI::Intracomm</b>
[ticket107.]Fortran type: <b>INTEGER</b>	
MPI_COMM_WORLD	MPI::COMM_WORLD
MPI_COMM_SELF	MPI::COMM_SELF

**Results of communicator and group comparisons**

[ticket107.]C type: <b>const int</b> (or unnamed <b>enum</b> )	C++ type: <b>const int</b> (or unnamed <b>enum</b> )
[ticket107.]Fortran type: <b>INTEGER</b>	
MPI_IDENT	MPI::IDENT
MPI_CONGRUENT	MPI::CONGRUENT
MPI_SIMILAR	MPI::SIMILAR
MPI_UNEQUAL	MPI::UNEQUAL

**Environmental inquiry keys**

[ticket107.]C type: <b>const int</b> (or unnamed <b>enum</b> )	C++ type: <b>const int</b> (or unnamed <b>enum</b> )
[ticket107.]Fortran type: <b>INTEGER</b>	
MPI_TAG_UB	MPI::TAG_UB
MPI_IO	MPI::IO
MPI_HOST	MPI::HOST
MPI_WTIME_IS_GLOBAL	MPI::WTIME_IS_GLOBAL



**Collective Operations**

[ticket107.]C type: <b>MPI_Op</b>	C++ type: <b>const MPI::Op</b>
[ticket107.]Fortran type: <b>INTEGER</b>	
MPI_MAX	MPI::MAX
MPI_MIN	MPI::MIN
MPI_SUM	MPI::SUM
MPI_PROD	MPI::PROD
MPI_MAXLOC	MPI::MAXLOC
MPI_MINLOC	MPI::MINLOC
MPI_BAND	MPI::BAND
MPI_BOR	MPI::BOR
MPI_BXOR	MPI::BXOR
MPI_LAND	MPI::LAND
MPI_LOR	MPI::LOR
MPI_LXOR	MPI::LXOR
MPI_REPLACE	MPI::REPLACE

**Null Handles**

C/Fortran name	C++ name
[ticket107.]C type / Fortran type	C++ type
MPI_GROUP_NULL	MPI::GROUP_NULL
[ticket107.] <b>MPI_Group</b> / <b>INTEGER</b>	<b>const MPI::Group</b>
MPI_COMM_NULL	MPI::COMM_NULL
[ticket107.] <b>MPI_Comm</b> / <b>INTEGER</b>	<sup>1)</sup>
MPI_DATATYPE_NULL	MPI::DATATYPE_NULL
[ticket107.] <b>MPI_Datatype</b> / <b>INTEGER</b>	<b>const MPI::Datatype</b>
MPI_REQUEST_NULL	MPI::REQUEST_NULL
[ticket107.] <b>MPI_Request</b> / <b>INTEGER</b>	<b>const MPI::Request</b>
MPI_OP_NULL	MPI::OP_NULL
[ticket107.] <b>MPI_Op</b> / <b>INTEGER</b>	<b>const MPI::Op</b>
MPI_ERRHANDLER_NULL	MPI::ERRHANDLER_NULL
[ticket107.] <b>MPI_Errhandler</b> / <b>INTEGER</b>	<b>const MPI::Errhandler</b>
MPI_FILE_NULL	MPI::FILE_NULL
[ticket107.] <b>MPI_File</b> / <b>INTEGER</b>	
MPI_INFO_NULL	MPI::INFO_NULL
[ticket107.] <b>MPI_Info</b> / <b>INTEGER</b>	[ticket107.] <b>const MPI::Info</b>
MPI_WIN_NULL	MPI::WIN_NULL
[ticket107.] <b>MPI_Win</b> / <b>INTEGER</b>	

<sup>1)</sup> C++ type: See Section 16.1.7 on page 492 regarding class hierarchy and the specific type of MPI::COMM\_NULL

**Empty group**

[ticket107.]C type: <b>MPI_Group</b>	C++ type: <b>const MPI::Group</b>
[ticket107.]Fortran type: <b>INTEGER</b>	
MPI_GROUP_EMPTY	MPI::GROUP_EMPTY

## Topologies

[ticket107.]C type: <b>const int</b> (or unnamed <b>enum</b> )	C++ type: <b>const int</b>
[ticket107.]Fortran type: <b>INTEGER</b>	(or unnamed <b>enum</b> )
MPI_GRAPH	MPI::GRAPH
MPI_CART	MPI::CART
[ticket33.]MPI_DIST_GRAPH	[ticket33.]MPI::DIST_GRAPH

ticket107.

## Predefined functions

C/Fortran name	C++ name
C type / Fortran type	C++ type
MPI_COMM_NULL_COPY_FN	MPI_COMM_NULL_COPY_FN
MPI_Comm_copy_attr_function	same as in C <sup>1</sup> )
/ COMM_COPY_ATTR_FN	
MPI_COMM_DUP_FN	MPI_COMM_DUP_FN
MPI_Comm_copy_attr_function	same as in C <sup>1</sup> )
/ COMM_COPY_ATTR_FN	
MPI_COMM_NULL_DELETE_FN	MPI_COMM_NULL_DELETE_FN
MPI_Comm_delete_attr_function	same as in C <sup>1</sup> )
/ COMM_DELETE_ATTR_FN	
MPI_WIN_NULL_COPY_FN	MPI_WIN_NULL_COPY_FN
MPI_Win_copy_attr_function	same as in C <sup>1</sup> )
/ WIN_COPY_ATTR_FN	
MPI_WIN_DUP_FN	MPI_WIN_DUP_FN
MPI_Win_copy_attr_function	same as in C <sup>1</sup> )
/ WIN_COPY_ATTR_FN	
MPI_WIN_NULL_DELETE_FN	MPI_WIN_NULL_DELETE_FN
MPI_Win_delete_attr_function	same as in C <sup>1</sup> )
/ WIN_DELETE_ATTR_FN	
MPI_TYPE_NULL_COPY_FN	MPI_TYPE_NULL_COPY_FN
MPI_Type_copy_attr_function	same as in C <sup>1</sup> )
/ TYPE_COPY_ATTR_FN	
MPI_TYPE_DUP_FN	MPI_TYPE_DUP_FN
MPI_Type_copy_attr_function	same as in C <sup>1</sup> )
/ TYPE_COPY_ATTR_FN	
MPI_TYPE_NULL_DELETE_FN	MPI_TYPE_NULL_DELETE_FN
MPI_Type_delete_attr_function	same as in C <sup>1</sup> )
/ TYPE_DELETE_ATTR_FN	

<sup>1</sup> See the advice to implementors on MPI\_COMM\_NULL\_COPY\_FN, ... in Section 6.7.2 on page 241

**[ticket107.][Predefined]Deprecated predefined functions**

C/Fortran name	C++ name
[ticket107.]C type / Fortran type	C++ type
MPI_NULL_COPY_FN	MPI::NULL_COPY_FN
[ticket107.]MPI_Copy_function / COPY_FUNCTION	MPI::Copy_function
MPI_DUP_FN	MPI::DUP_FN
[ticket107.]MPI_Copy_function / COPY_FUNCTION	MPI::Copy_function
MPI_NULL_DELETE_FN	MPI::NULL_DELETE_FN
[ticket107.]MPI_Delete_function / DELETE_FUNCTION	MPI::Delete_function

**Predefined Attribute Keys**

[ticket107.]C type: <b>const int</b> (or unnamed enum)	[ticket107.]C++ type:
[ticket107.]Fortran type: <b>INTEGER</b>	[ticket107.] <b>const int</b> (or unnamed enum)
MPI_APPNUM	MPI::APPNUM
MPI_LASTUSED_CODE	MPI::LASTUSED_CODE
MPI_UNIVERSE_SIZE	MPI::UNIVERSE_SIZE
MPI_WIN_BASE	MPI::WIN_BASE
MPI_WIN_DISP_UNIT	MPI::WIN_DISP_UNIT
MPI_WIN_SIZE	MPI::WIN_SIZE

**Mode Constants**

[ticket107.]C type: <b>const int</b> (or unnamed enum)	[ticket107.]C++ type:
[ticket107.]Fortran type: <b>INTEGER</b>	[ticket107.] <b>const int</b> (or unnamed enum)
MPI_MODE_APPEND	MPI::MODE_APPEND
MPI_MODE_CREATE	MPI::MODE_CREATE
MPI_MODE_DELETE_ON_CLOSE	MPI::MODE_DELETE_ON_CLOSE
MPI_MODE_EXCL	MPI::MODE_EXCL
MPI_MODE_NOCHECK	MPI::MODE_NOCHECK
MPI_MODE_NOPRECEDE	MPI::MODE_NOPRECEDE
MPI_MODE_NOPUT	MPI::MODE_NOPUT
MPI_MODE_NOSTORE	MPI::MODE_NOSTORE
MPI_MODE_NOSUCCEED	MPI::MODE_NOSUCCEED
MPI_MODE_RDONLY	MPI::MODE_RDONLY
MPI_MODE_RDWR	MPI::MODE_RDWR
MPI_MODE_SEQUENTIAL	MPI::MODE_SEQUENTIAL
MPI_MODE_UNIQUE_OPEN	MPI::MODE_UNIQUE_OPEN
MPI_MODE_WRONLY	MPI::MODE_WRONLY

## Datatype Decoding Constants

[ticket107.]C type: <code>const int</code> (or unnamed <code>enum</code> )	[ticket107.]C++ type:
[ticket107.]Fortran type: <code>INTEGER</code>	[ticket107.] <code>const int</code> (or unnamed <code>enum</code> )
MPI_COMBINER_CONTIGUOUS	MPI::COMBINER_CONTIGUOUS
MPI_COMBINER_DARRAY	MPI::COMBINER_DARRAY
MPI_COMBINER_DUP	MPI::COMBINER_DUP
MPI_COMBINER_F90_COMPLEX	MPI::COMBINER_F90_COMPLEX
MPI_COMBINER_F90_INTEGER	MPI::COMBINER_F90_INTEGER
MPI_COMBINER_F90_REAL	MPI::COMBINER_F90_REAL
MPI_COMBINER_HINDEXED_INTEGER	MPI::COMBINER_HINDEXED_INTEGER
MPI_COMBINER_HINDEXED	MPI::COMBINER_HINDEXED
MPI_COMBINER_HVECTOR_INTEGER	MPI::COMBINER_HVECTOR_INTEGER
MPI_COMBINER_HVECTOR	MPI::COMBINER_HVECTOR
MPI_COMBINER_INDEXED_BLOCK	MPI::COMBINER_INDEXED_BLOCK
MPI_COMBINER_INDEXED	MPI::COMBINER_INDEXED
MPI_COMBINER_NAMED	MPI::COMBINER_NAMED
MPI_COMBINER_RESIZED	MPI::COMBINER_RESIZED
MPI_COMBINER_STRUCT_INTEGER	MPI::COMBINER_STRUCT_INTEGER
MPI_COMBINER_STRUCT	MPI::COMBINER_STRUCT
MPI_COMBINER_SUBARRAY	MPI::COMBINER_SUBARRAY
MPI_COMBINER_VECTOR	MPI::COMBINER_VECTOR

## Threads Constants

[ticket107.]C type: <code>const int</code> (or unnamed <code>enum</code> )	[ticket107.]C++ type:
[ticket107.]Fortran type: <code>INTEGER</code>	[ticket107.] <code>const int</code> (or unnamed <code>enum</code> )
MPI_THREAD_FUNNELED	MPI::THREAD_FUNNELED
MPI_THREAD_MULTIPLE	MPI::THREAD_MULTIPLE
MPI_THREAD_SERIALIZED	MPI::THREAD_SERIALIZED
MPI_THREAD_SINGLE	MPI::THREAD_SINGLE

## File Operation Constants, Part 1

[ticket107.]C type: <code>const MPI_Offset</code> (or unnamed <code>enum</code> )	[ticket107.]C++ type:
[ticket107.]Fortran type: <code>INTEGER (KIND=MPI_OFFSET_KIND)</code>	[ticket107.] <code>const MPI::Offset</code> (or unnamed <code>enum</code> )
MPI_DISPLACEMENT_CURRENT	MPI::DISPLACEMENT_CURRENT

## File Operation Constants, Part 2

[ticket107.]C type: <b>const int</b> (or unnamed <b>enum</b> )	[ticket107.]C++ type:
[ticket107.]Fortran type: <b>INTEGER</b>	[ticket107.] <b>const int</b> (or unnamed <b>enum</b> )
MPI_DISTRIBUTE_BLOCK	MPI::DISTRIBUTE_BLOCK
MPI_DISTRIBUTE_CYCLIC	MPI::DISTRIBUTE_CYCLIC
MPI_DISTRIBUTE_DFLT_DARG	MPI::DISTRIBUTE_DFLT_DARG
MPI_DISTRIBUTE_NONE	MPI::DISTRIBUTE_NONE
MPI_ORDER_C	MPI::ORDER_C
MPI_ORDER_FORTRAN	MPI::ORDER_FORTRAN
MPI_SEEK_CUR	MPI::SEEK_CUR
MPI_SEEK_END	MPI::SEEK_END
MPI_SEEK_SET	MPI::SEEK_SET

## F90 Datatype Matching Constants

[ticket107.]C type: <b>const int</b> (or unnamed <b>enum</b> )	[ticket107.]C++ type:
[ticket107.]Fortran type: <b>INTEGER</b>	[ticket107.] <b>const int</b> (or unnamed <b>enum</b> )
MPI_TYPECLASS_COMPLEX	MPI::TYPECLASS_COMPLEX
MPI_TYPECLASS_INTEGER	MPI::TYPECLASS_INTEGER
MPI_TYPECLASS_REAL	MPI::TYPECLASS_REAL

[ ticket107.

## Handles to Assorted Structures in C and C++ (no Fortran)

MPI_File	MPI::File
MPI_Info	MPI::Info
MPI_Win	MPI::Win

]

## Constants Specifying Empty or Ignored Input

[ticket107.]C/Fortran name	[ticket107.]C++ name
[ticket107.]C type / Fortran type	[ticket107.]C++ type
MPI_ARGVS_NULL	MPI::ARGVS_NULL
[ticket107.] <b>char***</b> / 2-dim. array of <b>CHARACTER*(*)</b>	[ticket107.] <b>const char ***</b>
MPI_ARGV_NULL	MPI::ARGV_NULL
[ticket107.] <b>char**</b> / array of <b>CHARACTER*(*)</b>	[ticket107.] <b>const char **</b>
MPI_ERRCODES_IGNORE	Not defined for C++
[ticket107.] <b>int*</b> / <b>INTEGER</b> array	
MPI_STATUSES_IGNORE	Not defined for C++
[ticket107.] <b>MPI_Status*</b> / <b>INTEGER</b> , <b>DIMENSION(MPI_STATUS_SIZE,*)</b>	
MPI_STATUS_IGNORE	Not defined for C++
[ticket107.] <b>MPI_Status*</b> / <b>INTEGER</b> , <b>DIMENSION(MPI_STATUS_SIZE)</b>	
[ticket33.] <b>MPI_UNWEIGHTED</b>	[ticket33.]Not defined for C++

**C Constants Specifying Ignored Input (no C++ or Fortran)**[ticket107.]C type: **MPI\_Fint\***

MPI\_F\_STATUSES\_IGNORE

MPI\_F\_STATUS\_IGNORE

**C and C++ preprocessor Constants and Fortran Parameters**[ticket107.]C/C++ type: **const int** (or unnamed **enum**)[ticket107.]Fortran type: **INTEGER**

MPI\_SUBVERSION

MPI\_VERSION

**A.1.2 Types**

The following are defined C type definitions, included in the file `mpi.h`.

/\* C opaque types \*/

MPI\_Aint

MPI\_Fint

MPI\_Offset

MPI\_Status

/\* C handles to assorted structures \*/

MPI\_Comm

MPI\_Datatype

MPI\_Errhandler

MPI\_File

MPI\_Group

MPI\_Info

MPI\_Op

MPI\_Request

MPI\_Win

// C++ opaque types (all within the MPI namespace)

MPI::Aint

MPI::Offset

MPI::Status

// C++ handles to assorted structures (classes,

// all within the MPI namespace)

MPI::Comm

MPI::Intracomm

MPI::Graphcomm

ticket33. MPI::Distgraphcomm

MPI::Cartcomm

MPI::Intercomm

MPI::Datatype

MPI::Errhandler

MPI::Exception

MPI::File	1
MPI::Group	2
MPI::Info	3
MPI::Op	4
MPI::Request	5
MPI::Prerequest	6
MPI::Grequest	7
MPI::Win	8

### A.1.3 Prototype definitions

The following are defined C typedefs for user-defined functions, also included in the file `mpi.h`.

```

/* prototypes for user-defined functions */
typedef void MPI_User_function(void *invec, void *inoutvec, int *len,
                               MPI_Datatype *datatype);

typedef int MPI_Comm_copy_attr_function(MPI_Comm oldcomm,
                                         int comm_keyval, void *extra_state, void *attribute_val_in,
                                         void *attribute_val_out, int*flag);
typedef int MPI_Comm_delete_attr_function(MPI_Comm comm,
                                         int comm_keyval, void *attribute_val, void *extra_state);

typedef int MPI_Win_copy_attr_function(MPI_Win oldwin, int win_keyval,
                                         void *extra_state, void *attribute_val_in,
                                         void *attribute_val_out, int *flag);
typedef int MPI_Win_delete_attr_function(MPI_Win win, int win_keyval,
                                         void *attribute_val, void *extra_state);

typedef int MPI_Type_copy_attr_function(MPI_Datatype oldtype,
                                         int type_keyval, void *extra_state,
                                         void *attribute_val_in, void *attribute_val_out, int *flag);
typedef int MPI_Type_delete_attr_function(MPI_Datatype type,
                                         int type_keyval, void *attribute_val, void *extra_state);

typedef void MPI_Comm_errhandler_[ticket7.][fn]function(MPI_Comm *, int *, ...);
typedef void MPI_Win_errhandler_[ticket7.][fn]function(MPI_Win *, int *, ...);
typedef void MPI_File_errhandler_[ticket7.][fn]function(MPI_File *, int *, ...);

typedef int MPI_Grequest_query_function(void *extra_state,
                                         MPI_Status *status);
typedef int MPI_Grequest_free_function(void *extra_state);
typedef int MPI_Grequest_cancel_function(void *extra_state, int complete);

typedef int MPI_Datarep_extent_function(MPI_Datatype datatype,
                                         MPI_Aint *file_extent, void *extra_state);

```

```

1  typedef int MPI_Datarep_conversion_function(void *userbuf,
2      MPI_Datatype datatype, int count, void *filebuf,
3      MPI_Offset position, void *extra_state);
4

```

For Fortran, here are examples of how each of the user-defined subroutines should be declared.

The user-function argument to MPI\_OP\_CREATE should be declared like this:

```

8  SUBROUTINE USER_FUNCTION(INVEC, INOUTVEC, LEN, TYPE)
9      <type> INVEC(LEN), INOUTVEC(LEN)
10     INTEGER LEN, TYPE
11

```

ticket142. The copy and delete function arguments to [MPI\_COMM\_KEYVAL\_CREATE] MPI\_COMM\_CREATE\_KEYVAL should be declared like these:

```

15  SUBROUTINE COMM_COPY_ATTR_FN(OLDCOMM, COMM_KEYVAL, EXTRA_STATE,
16      ATTRIBUTE_VAL_IN, ATTRIBUTE_VAL_OUT, FLAG, IERROR)
17     INTEGER OLDCOMM, COMM_KEYVAL, IERROR
18     INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE, ATTRIBUTE_VAL_IN,
19         ATTRIBUTE_VAL_OUT
20     LOGICAL FLAG
21
22  SUBROUTINE COMM_DELETE_ATTR_FN(COMM, COMM_KEYVAL, ATTRIBUTE_VAL,
23      EXTRA_STATE, IERROR)
24     INTEGER COMM, COMM_KEYVAL, IERROR
25     INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL, EXTRA_STATE
26

```

ticket142. The copy and delete function arguments to [MPI\_WIN\_KEYVAL\_CREATE] MPI\_WIN\_CREATE\_KEYVAL should be declared like these:

```

30  SUBROUTINE WIN_COPY_ATTR_FN(OLDWIN, WIN_KEYVAL, EXTRA_STATE,
31      ATTRIBUTE_VAL_IN, ATTRIBUTE_VAL_OUT, FLAG, IERROR)
32     INTEGER OLDWIN, WIN_KEYVAL, IERROR
33     INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE, ATTRIBUTE_VAL_IN,
34         ATTRIBUTE_VAL_OUT
35     LOGICAL FLAG
36
37  SUBROUTINE WIN_DELETE_ATTR_FN(WIN, WIN_KEYVAL, ATTRIBUTE_VAL,
38      EXTRA_STATE, IERROR)
39     INTEGER WIN, WIN_KEYVAL, IERROR
40     INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL, EXTRA_STATE
41

```

ticket142. The copy and delete function arguments to [MPI\_TYPE\_KEYVAL\_CREATE] MPI\_TYPE\_CREATE\_KEYVAL should be declared like these:

```

44  SUBROUTINE TYPE_COPY_ATTR_FN(OLDTYPE, TYPE_KEYVAL, EXTRA_STATE,
45      ATTRIBUTE_VAL_IN, ATTRIBUTE_VAL_OUT, FLAG, IERROR)
46     INTEGER OLDTYPE, TYPE_KEYVAL, IERROR
47     INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE,
48

```



```

        ATTRIBUTE_VAL_IN, ATTRIBUTE_VAL_OUT
LOGICAL FLAG

SUBROUTINE TYPE_DELETE_ATTR_FN(TYPE, TYPE_KEYVAL, ATTRIBUTE_VAL,
        EXTRA_STATE, IERROR)
INTEGER TYPE, TYPE_KEYVAL, IERROR
INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL, EXTRA_STATE

    The handler-function argument to MPI_COMM_CREATE_ERRHANDLER should be de-
    clared like this:

SUBROUTINE COMM_ERRHANDLER_[ticket7.][FN]FUNCTION(COMM, ERROR_CODE[ticket1.][, ..])
    INTEGER COMM, ERROR_CODE

    The handler-function argument to MPI_WIN_CREATE_ERRHANDLER should be de-
    clared like this:

SUBROUTINE WIN_ERRHANDLER_[ticket7.][FN]FUNCTION(WIN, ERROR_CODE[ticket1.][, ..])
    INTEGER WIN, ERROR_CODE

    The handler-function argument to MPI_FILE_CREATE_ERRHANDLER should be de-
    clared like this:

SUBROUTINE FILE_ERRHANDLER_[ticket7.][FN]FUNCTION(FILE, ERROR_CODE[ticket1.][, ..])
    INTEGER FILE, ERROR_CODE

    The query, free, and cancel function arguments to MPI_GREQUEST_START should be
    declared like these:

SUBROUTINE GREQUEST_QUERY_FUNCTION(EXTRA_STATE, STATUS, IERROR)
    INTEGER STATUS(MPI_STATUS_SIZE), IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE

SUBROUTINE GREQUEST_FREE_FUNCTION(EXTRA_STATE, IERROR)
    INTEGER IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE

SUBROUTINE GREQUEST_CANCEL_FUNCTION(EXTRA_STATE, COMPLETE, IERROR)
    INTEGER IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE
    LOGICAL COMPLETE

    The extend and conversion function arguments to MPI_REGISTER_DATAREP should
    be declared like these:

SUBROUTINE DATAREP_EXTENT_FUNCTION(DATATYPE, EXTENT, EXTRA_STATE, IERROR)
    INTEGER DATATYPE, IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) EXTENT, EXTRA_STATE

```

```

1  SUBROUTINE DATAREP_CONVERSION_FUNCTION(USERBUF, DATATYPE, COUNT, FILEBUF,
2      POSITION, EXTRA_STATE, IERROR)
3      <TYPE> USERBUF(*), FILEBUF(*)
4      INTEGER COUNT, DATATYPE, IERROR
5      INTEGER(KIND=MPI_OFFSET_KIND) POSITION
6      INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE

```

The following are defined C++ typedefs, also included in the file `mpi.h`.

```

9
10 namespace MPI {
11     typedef void User_function(const void* invec, void *inoutvec,
12         int len, const Datatype& datatype);
13
14     typedef int Comm::Copy_attr_function(const Comm& oldcomm,
15         int comm_keyval, void* extra_state, void* attribute_val_in,
16         void* attribute_val_out, bool& flag);
17     typedef int Comm::Delete_attr_function(Comm& comm, int
18         comm_keyval, void* attribute_val, void* extra_state);
19
20     typedef int Win::Copy_attr_function(const Win& oldwin,
21         int win_keyval, void* extra_state, void* attribute_val_in,
22         void* attribute_val_out, bool& flag);
23     typedef int Win::Delete_attr_function(Win& win, int
24         win_keyval, void* attribute_val, void* extra_state);
25
26     typedef int Datatype::Copy_attr_function(const Datatype& oldtype,
27         int type_keyval, void* extra_state,
28         const void* attribute_val_in, void* attribute_val_out,
29         bool& flag);
30     typedef int Datatype::Delete_attr_function(Datatype& type,
31         int type_keyval, void* attribute_val, void* extra_state);
32
33     typedef void Comm::Errhandler_[ticket7.] [fn]function(Comm &, int *, ...);
34     typedef void Win::Errhandler_[ticket7.] [fn]function(Win &, int *, ...);
35     typedef void File::Errhandler_[ticket7.] [fn]function(File &, int *, ...);
36
37     typedef int Grequest::Query_function(void* extra_state, Status& status);
38     typedef int Grequest::Free_function(void* extra_state);
39     typedef int Grequest::Cancel_function(void* extra_state, bool complete);
40
41     typedef void Datarep_extent_function(const Datatype& datatype,
42         Aint& file_extent, void* extra_state);
43     typedef void Datarep_conversion_function(void* userbuf,
44         Datatype& datatype, int count, void* filebuf,
45         Offset position, void* extra_state);
46 }

```

## A.1.4 Deprecated prototype definitions

The following are defined C typedefs for deprecated user-defined functions, also included in the file `mpi.h`.

```
/* prototypes for user-defined functions */
typedef int MPI_Copy_function(MPI_Comm oldcomm, int keyval,
                             void *extra_state, void *attribute_val_in,
                             void *attribute_val_out, int *flag);
typedef int MPI_Delete_function(MPI_Comm comm, int keyval,
                               void *attribute_val, void *extra_state);
typedef void MPI_Handler_function(MPI_Comm *, int *, ...);
```

The following are deprecated Fortran user-defined callback subroutine prototypes. The deprecated copy and delete function arguments to `MPI_KEYVAL_CREATE` should be declared like these:

```
SUBROUTINE COPY_FUNCTION(OLDCOMM, KEYVAL, EXTRA_STATE,
                        ATTRIBUTE_VAL_IN, ATTRIBUTE_VAL_OUT, FLAG, IERR)
    INTEGER OLDCOMM, KEYVAL, EXTRA_STATE, ATTRIBUTE_VAL_IN,
           ATTRIBUTE_VAL_OUT, IERR
    LOGICAL FLAG

SUBROUTINE DELETE_FUNCTION(COMM, KEYVAL, ATTRIBUTE_VAL, EXTRA_STATE, IERR)
    INTEGER COMM, KEYVAL, ATTRIBUTE_VAL, EXTRA_STATE, IERR
```

The deprecated handler-function for error handlers should be declared like this:

```
SUBROUTINE HANDLER_FUNCTION(COMM, ERROR_CODE[ticket1.] [, .....])
    INTEGER COMM, ERROR_CODE
```

## A.1.5 Info Keys

access\_style  
appnum  
arch  
cb\_block\_size  
cb\_buffer\_size  
cb\_nodes  
chunked\_item  
chunked\_size  
chunked  
collective\_buffering  
file\_perm  
filename  
file  
host  
io\_node\_list  
ip\_address  
ip\_port

nb\_proc  
no\_locks  
num\_io\_nodes  
path  
soft  
striping\_factor  
striping\_unit  
wdir

#### A.1.6 Info Values

false  
random  
read\_mostly  
read\_once  
reverse\_sequential  
sequential  
true  
write\_mostly  
write\_once

## A.2 C Bindings

### A.2.1 Point-to-Point Communication C Bindings

```

int MPI_Bsend_init(void* buf, int count, MPI_Datatype datatype, int dest,
                  int tag, MPI_Comm comm, MPI_Request *request)

int MPI_Bsend(void* buf, int count, MPI_Datatype datatype, int dest,
              int tag, MPI_Comm comm)

int MPI_Buffer_attach(void* buffer, int size)

int MPI_Buffer_detach(void* buffer_addr, int* size)

int MPI_Cancel(MPI_Request *request)

int MPI_Get_count(MPI_Status *status, MPI_Datatype datatype, int *count)

int MPI_Ibsend(void* buf, int count, MPI_Datatype datatype, int dest,
              int tag, MPI_Comm comm, MPI_Request *request)

int MPI_Iprobe(int source, int tag, MPI_Comm comm, int *flag,
              MPI_Status *status)

int MPI_Irecv(void* buf, int count, MPI_Datatype datatype, int source,
              int tag, MPI_Comm comm, MPI_Request *request)

int MPI_Irsend(void* buf, int count, MPI_Datatype datatype, int dest,
              int tag, MPI_Comm comm, MPI_Request *request)

int MPI_Isend(void* buf, int count, MPI_Datatype datatype, int dest,
              int tag, MPI_Comm comm, MPI_Request *request)

int MPI_Issend(void* buf, int count, MPI_Datatype datatype, int dest,
              int tag, MPI_Comm comm, MPI_Request *request)

int MPI_Probe(int source, int tag, MPI_Comm comm, MPI_Status *status)

int MPI_Recv_init(void* buf, int count, MPI_Datatype datatype, int source,
                 int tag, MPI_Comm comm, MPI_Request *request)

int MPI_Recv(void* buf, int count, MPI_Datatype datatype, int source,
             int tag, MPI_Comm comm, MPI_Status *status)

int MPI_Request_free(MPI_Request *request)

int MPI_Request_get_status(MPI_Request request, int *flag,
                          MPI_Status *status)

int MPI_Rsend_init(void* buf, int count, MPI_Datatype datatype, int dest,
                  int tag, MPI_Comm comm, MPI_Request *request)

int MPI_Rsend(void* buf, int count, MPI_Datatype datatype, int dest,
              int tag, MPI_Comm comm)

int MPI_Send_init(void* buf, int count, MPI_Datatype datatype, int dest,
                 int tag, MPI_Comm comm, MPI_Request *request)

```

```

1  int MPI_Sendrecv_replace(void* buf, int count, MPI_Datatype datatype,
2      int dest, int sendtag, int source, int recvtag, MPI_Comm comm,
3      MPI_Status *status)
4
5  int MPI_Sendrecv(void *sendbuf, int sendcount, MPI_Datatype sendtype,
6      int dest, int sendtag, void *recvbuf, int recvcount,
7      MPI_Datatype recvtype, int source, int recvtag, MPI_Comm comm,
8      MPI_Status *status)
9
10 int MPI_Send(void* buf, int count, MPI_Datatype datatype, int dest,
11     int tag, MPI_Comm comm)
12
13 int MPI_Ssend_init(void* buf, int count, MPI_Datatype datatype, int dest,
14     int tag, MPI_Comm comm, MPI_Request *request)
15
16 int MPI_Ssend(void* buf, int count, MPI_Datatype datatype, int dest,
17     int tag, MPI_Comm comm)
18
19 int MPI_Startall(int count, MPI_Request *array_of_requests)
20
21 int MPI_Start(MPI_Request *request)
22
23 int MPI_Testall(int count, MPI_Request *array_of_requests, int *flag,
24     MPI_Status *array_of_statuses)
25
26 int MPI_Testany(int count, MPI_Request *array_of_requests, int *index,
27     int *flag, MPI_Status *status)
28
29 int MPI_Test_cancelled(MPI_Status *status, int *flag)
30
31 int MPI_Test(MPI_Request *request, int *flag, MPI_Status *status)
32
33 int MPI_Testsome(int incount, MPI_Request *array_of_requests,
34     int *outcount, int *array_of_indices,
35     MPI_Status *array_of_statuses)
36
37 int MPI_Waitall(int count, MPI_Request *array_of_requests,
38     MPI_Status *array_of_statuses)
39
40 int MPI_Waitany(int count, MPI_Request *array_of_requests, int *index,
41     MPI_Status *status)
42
43 int MPI_Wait(MPI_Request *request, MPI_Status *status)
44
45 int MPI_Waitsome(int incount, MPI_Request *array_of_requests,
46     int *outcount, int *array_of_indices,
47     MPI_Status *array_of_statuses)
48

```

## A.2.2 Datatypes C Bindings

```

44 int MPI_Get_address(void *location, MPI_Aint *address)
45
46 int MPI_Get_elements(MPI_Status *status, MPI_Datatype datatype, int *count)
47
48 int MPI_Pack_external(char *datarep, void *inbuf, int incount,

```

```

        MPI_Datatype datatype, void *outbuf, MPI_Aint outsize,
        MPI_Aint *position)
1
2
3
int MPI_Pack_external_size(char *datarep, int incout,
        MPI_Datatype datatype, MPI_Aint *size)
4
5
int MPI_Pack_size(int incout, MPI_Datatype datatype, MPI_Comm comm,
        int *size)
6
7
int MPI_Pack(void* inbuf, int incout, MPI_Datatype datatype, void *outbuf,
        int outsize, int *position, MPI_Comm comm)
8
9
10
int MPI_Type_commit(MPI_Datatype *datatype)
11
12
int MPI_Type_contiguous(int count, MPI_Datatype oldtype,
        MPI_Datatype *newtype)
13
14
int MPI_Type_create_darray(int size, int rank, int ndims,
        int array_of_gsizes[], int array_of_distribs[], int
        array_of_dargs[], int array_of_psizes[], int order,
        MPI_Datatype oldtype, MPI_Datatype *newtype)
15
16
17
18
19
int MPI_Type_create_hindexed(int count, int array_of_blocklengths[],
        MPI_Aint array_of_displacements[], MPI_Datatype oldtype,
        MPI_Datatype *newtype)
20
21
22
int MPI_Type_create_hvector(int count, int blocklength, MPI_Aint stride,
        MPI_Datatype oldtype, MPI_Datatype *newtype)
23
24
25
int MPI_Type_create_indexed_block(int count, int blocklength,
        int array_of_displacements[], MPI_Datatype oldtype,
        MPI_Datatype *newtype)
26
27
28
int MPI_Type_create_resized(MPI_Datatype oldtype, MPI_Aint lb, MPI_Aint
        extent, MPI_Datatype *newtype)
29
30
31
int MPI_Type_create_struct(int count, int array_of_blocklengths[],
        MPI_Aint array_of_displacements[],
        MPI_Datatype array_of_types[], MPI_Datatype *newtype)
32
33
34
int MPI_Type_create_subarray(int ndims, int array_of_sizes[],
        int array_of_subsizes[], int array_of_starts[], int order,
        MPI_Datatype oldtype, MPI_Datatype *newtype)
35
36
37
38
int MPI_Type_dup(MPI_Datatype type, MPI_Datatype *newtype)
39
40
int MPI_Type_free(MPI_Datatype *datatype)
41
42
int MPI_Type_get_contents(MPI_Datatype datatype, int max_integers,
        int max_addresses, int max_datatypes, int array_of_integers[],
        MPI_Aint array_of_addresses[],
        MPI_Datatype array_of_datatypes[])
43
44
45
int MPI_Type_get_envelope(MPI_Datatype datatype, int *num_integers,
        int *num_addresses, int *num_datatypes, int *combiner)
46
47
48

```

```

1  int MPI_Type_get_extent(MPI_Datatype datatype, MPI_Aint *lb,
2      MPI_Aint *extent)
3
4  int MPI_Type_get_true_extent(MPI_Datatype datatype, MPI_Aint *true_lb,
5      MPI_Aint *true_extent)
6
7  int MPI_Type_indexed(int count, int *array_of_blocklengths,
8      int *array_of_displacements, MPI_Datatype oldtype,
9      MPI_Datatype *newtype)
10
11 int MPI_Type_size(MPI_Datatype datatype, int *size)
12
13 int MPI_Type_vector(int count, int blocklength, int stride,
14     MPI_Datatype oldtype, MPI_Datatype *newtype)
15
16 int MPI_Unpack_external(char *datarep, void *inbuf, MPI_Aint insize,
17     MPI_Aint *position, void *outbuf, int outcount,
18     MPI_Datatype datatype)
19
20 int MPI_Unpack(void* inbuf, int insize, int *position, void *outbuf,
21     int outcount, MPI_Datatype datatype, MPI_Comm comm)

```

### A.2.3 Collective Communication C Bindings

```

22 int MPI_Allgather(void* sendbuf, int sendcount, MPI_Datatype sendtype,
23     void* recvbuf, int recvcount, MPI_Datatype recvtype,
24     MPI_Comm comm)
25
26 int MPI_Allgatherv(void* sendbuf, int sendcount, MPI_Datatype sendtype,
27     void* recvbuf, int *recvcounts, int *displs,
28     MPI_Datatype recvtype, MPI_Comm comm)
29
30 int MPI_Allreduce(void* sendbuf, void* recvbuf, int count,
31     MPI_Datatype datatype, MPI_Op op, MPI_Comm comm)
32
33 int MPI_Alltoall(void* sendbuf, int sendcount, MPI_Datatype sendtype,
34     void* recvbuf, int recvcount, MPI_Datatype recvtype,
35     MPI_Comm comm)
36
37 int MPI_Alltoallv(void* sendbuf, int *sendcounts, int *sdispls,
38     MPI_Datatype sendtype, void* recvbuf, int *recvcounts,
39     int *rdispls, MPI_Datatype recvtype, MPI_Comm comm)
40
41 int MPI_Alltoallw(void *sendbuf, int sendcounts[], int sdispls[],
42     MPI_Datatype sendtypes[], void *recvbuf, int recvcounts[],
43     int rdispls[], MPI_Datatype recvtypes[], MPI_Comm comm)
44
45 int MPI_Barrier(MPI_Comm comm)
46
47 int MPI_Bcast(void* buffer, int count, MPI_Datatype datatype, int root,
48     MPI_Comm comm )
49
50 int MPI_Exscan(void *sendbuf, void *recvbuf, int count,
51     MPI_Datatype datatype, MPI_Op op, MPI_Comm comm)

```



```

int MPI_Gather(void* sendbuf, int sendcount, MPI_Datatype sendtype,
               void* recvbuf, int recvcount, MPI_Datatype recvtype, int root,
               MPI_Comm comm)
int MPI_Gatherv(void* sendbuf, int sendcount, MPI_Datatype sendtype,
                void* recvbuf, int *recvcounts, int *displs,
                MPI_Datatype recvtype, int root, MPI_Comm comm)
int MPI_Op_commutative(MPI_Op op, int *commute)
int MPI_Op_create(MPI_User_function *function, int commute, MPI_Op *op)
int MPI_op_free( MPI_Op *op)
int MPI_Reduce_local(void* inbuf, void* inoutbuf, int count,
                    MPI_Datatype datatype, MPI_Op op)
int MPI_Reduce_scatter_block(void* sendbuf, void* recvbuf, int recvcount,
                             MPI_Datatype datatype, MPI_Op op, MPI_Comm comm)
int MPI_Reduce_scatter(void* sendbuf, void* recvbuf, int *recvcounts,
                       MPI_Datatype datatype, MPI_Op op, MPI_Comm comm)
int MPI_Reduce(void* sendbuf, void* recvbuf, int count,
               MPI_Datatype datatype, MPI_Op op, int root, MPI_Comm comm)
int MPI_Scan(void* sendbuf, void* recvbuf, int count,
             MPI_Datatype datatype, MPI_Op op, MPI_Comm comm )
int MPI_Scatter(void* sendbuf, int sendcount, MPI_Datatype sendtype,
                void* recvbuf, int recvcount, MPI_Datatype recvtype, int root,
                MPI_Comm comm)
int MPI_Scatterv(void* sendbuf, int *sendcounts, int *displs,
                 MPI_Datatype sendtype, void* recvbuf, int recvcount,
                 MPI_Datatype recvtype, int root, MPI_Comm comm)

```

#### A.2.4 Groups, Contexts, Communicators, and Caching C Bindings

```

int MPI_Comm_compare(MPI_Comm comm1, MPI_Comm comm2, int *result)
int MPI_Comm_create_keyval(MPI_Comm_copy_attr_function *comm_copy_attr_fn,
                           MPI_Comm_delete_attr_function *comm_delete_attr_fn,
                           int *comm_keyval, void *extra_state)
int MPI_Comm_create(MPI_Comm comm, MPI_Group group, MPI_Comm *newcomm)
int MPI_Comm_delete_attr(MPI_Comm comm, int comm_keyval)
int MPI_COMM_DUP_FN(MPI_Comm oldcomm, int comm_keyval, void *extra_state,
                    void *attribute_val_in, void *attribute_val_out, int *flag)
int MPI_Comm_dup(MPI_Comm comm, MPI_Comm *newcomm)
int MPI_Comm_free_keyval(int *comm_keyval)

```

[illegible]

```

int MPI_Group_union(MPI_Group group1, MPI_Group group2,      1
                    MPI_Group *newgroup)                    2
                                                            3
int MPI_Intercomm_create(MPI_Comm local_comm, int local_leader, 4
                        MPI_Comm peer_comm, int remote_leader, int tag,
                        MPI_Comm *newintercomm)              5
                                                            6
int MPI_Intercomm_merge(MPI_Comm intercomm, int high,        7
                        MPI_Comm *newintracomm)              8
                                                            9
int MPI_Type_create_keyval(MPI_Type_copy_attr_function *type_copy_attr_fn, 10
                        MPI_Type_delete_attr_function *type_delete_attr_fn,
                        int *type_keyval, void *extra_state) 11
                                                            12
int MPI_Type_delete_attr(MPI_Datatype type, int type_keyval) 13
                                                            14
int MPI_TYPE_DUP_FN(MPI_Datatype oldtype, int type_keyval,   15
                    void *extra_state, void *attribute_val_in,
                    void *attribute_val_out, int *flag)       16
                                                            17
int MPI_Type_free_keyval(int *type_keyval)                   18
                                                            19
int MPI_Type_get_attr(MPI_Datatype type, int type_keyval, void 20
                    *attribute_val, int *flag)                21
                                                            22
int MPI_Type_get_name(MPI_Datatype type, char *type_name, int *resultlen) 23
                                                            24
int MPI_TYPE_NULL_COPY_FN(MPI_Datatype oldtype, int type_keyval, 25
                        void *extra_state, void *attribute_val_in,
                        void *attribute_val_out, int *flag)   26
                                                            27
int MPI_TYPE_NULL_DELETE_FN(MPI_Datatype type, int type_keyval, void 28
                        *attribute_val, void *extra_state)     29
                                                            30
int MPI_Type_set_attr(MPI_Datatype type, int type_keyval,     31
                    void *attribute_val)                      32
                                                            33
int MPI_Type_set_name(MPI_Datatype type, char *type_name)     34
                                                            35
int MPI_Win_create_keyval(MPI_Win_copy_attr_function *win_copy_attr_fn, 36
                        MPI_Win_delete_attr_function *win_delete_attr_fn,
                        int *win_keyval, void *extra_state)   37
                                                            38
int MPI_Win_delete_attr(MPI_Win win, int win_keyval)          39
                                                            40
int MPI_WIN_DUP_FN(MPI_Win oldwin, int win_keyval, void *extra_state,
                    void *attribute_val_in, void *attribute_val_out, int *flag) 41
                                                            42
int MPI_Win_free_keyval(int *win_keyval)                     43
                                                            44
int MPI_Win_get_attr(MPI_Win win, int win_keyval, void *attribute_val,
                    int *flag)                                45
                                                            46
int MPI_Win_get_name(MPI_Win win, char *win_name, int *resultlen) 47
                                                            48
int MPI_WIN_NULL_COPY_FN(MPI_Win oldwin, int win_keyval, void *extra_state,

```

```

1         void *attribute_val_in, void *attribute_val_out, int *flag)
2
3     int MPI_WIN_NULL_DELETE_FN(MPI_Win win, int win_keyval, void
4         *attribute_val, void *extra_state)
5
6     int MPI_Win_set_attr(MPI_Win win, int win_keyval, void *attribute_val)
7
8     int MPI_Win_set_name(MPI_Win win, char *win_name)

```

## A.2.5 Process Topologies C Bindings

```

10
11     int MPI_Cart_coords(MPI_Comm comm, int rank, int maxdims, int *coords)
12
13     int MPI_Cart_create(MPI_Comm comm_old, int ndims, int *dims, int *periods,
14         int reorder, MPI_Comm *comm_cart)
15
16     int MPI_Cartdim_get(MPI_Comm comm, int *ndims)
17
18     int MPI_Cart_get(MPI_Comm comm, int maxdims, int *dims, int *periods,
19         int *coords)
20
21     int MPI_Cart_map(MPI_Comm comm, int ndims, int *dims, int *periods,
22         int *newrank)
23
24     int MPI_Cart_rank(MPI_Comm comm, int *coords, int *rank)
25
26     int MPI_Cart_shift(MPI_Comm comm, int direction, int disp,
27         int *rank_source, int *rank_dest)
28
29     int MPI_Cart_sub(MPI_Comm comm, int *remain_dims, MPI_Comm *newcomm)
30
31     int MPI_Dims_create(int nnodes, int ndims, int *dims)
32
33     int MPI_Dist_graph_create_adjacent(MPI_Comm comm_old, int indegree,
34         int sources[], int sourceweights[], int outdegree,
35         int destinations[], int destweights[], MPI_Info info,
36         int reorder, MPI_Comm *comm_dist_graph)
37
38     int MPI_Dist_graph_create(MPI_Comm comm_old, int n, int sources[],
39         int degrees[], int destinations[], int weights[],
40         MPI_Info info, int reorder, MPI_Comm *comm_dist_graph)
41
42     int MPI_Dist_graph_neighbors_count(MPI_Comm comm, int *indegree,
43         int *outdegree, int *weighted)
44
45     int MPI_Dist_graph_neighbors(MPI_Comm comm, int maxindegree, int sources[],
46         int sourceweights[], int maxoutdegree, int destinations[],
47         int destweights[])
48
49     int MPI_Graph_create(MPI_Comm comm_old, int nnodes, int *index, int *edges,
50         int reorder, MPI_Comm *comm_graph)
51
52     int MPI_Graphdims_get(MPI_Comm comm, int *nnodes, int *nedges)
53
54     int MPI_Graph_get(MPI_Comm comm, int maxindex, int maxedges, int *index,
55         int *edges)

```

```

int MPI_Graph_map(MPI_Comm comm, int nnodes, int *index, int *edges,
                  int *newrank)
int MPI_Graph_neighbors_count(MPI_Comm comm, int rank, int *nneighbors)
int MPI_Graph_neighbors(MPI_Comm comm, int rank, int maxneighbors,
                        int *neighbors)
int MPI_Topo_test(MPI_Comm comm, int *status)

A.2.6 MPI Environmenta Management C Bindings
int MPI_Abort(MPI_Comm comm, int errorcode)
int MPI_Add_error_class(int *errorclass)
int MPI_Add_error_code(int errorclass, int *errorcode)
int MPI_Add_error_string(int errorcode, char *string)
int MPI_Alloc_mem(MPI_Aint size, MPI_Info info, void *baseptr)
int MPI_Comm_call_errhandler(MPI_Comm comm, int errorcode)
int MPI_Comm_create_errhandler(MPI_Comm_errhandler_ [fn]function *function,
                             MPI_Errhandler *errhandler)
int MPI_Comm_get_errhandler(MPI_Comm comm, MPI_Errhandler *errhandler)
int MPI_Comm_set_errhandler(MPI_Comm comm, MPI_Errhandler errhandler)
int MPI_Errhandler_free(MPI_Errhandler *errhandler)
int MPI_Error_class(int errorcode, int *errorclass)
int MPI_Error_string(int errorcode, char *string, int *resultlen)
int MPI_File_call_errhandler(MPI_File fh, int errorcode)
int MPI_File_create_errhandler(MPI_File_errhandler_function *function,
                             MPI_Errhandler *errhandler)
int MPI_File_get_errhandler(MPI_File file, MPI_Errhandler *errhandler)
int MPI_File_set_errhandler(MPI_File file, MPI_Errhandler errhandler)
int MPI_Finalized(int *flag)
int MPI_Finalize(void)
int MPI_Free_mem(void *base)
int MPI_Get_processor_name(char *name, int *resultlen)
int MPI_Get_version(int *version, int *subversion)
int MPI_Initialized(int *flag)
int MPI_Init(int *argc, char ***argv)

```

ticket7.

```

1  int MPI_Win_call_errhandler(MPI_Win win, int errorcode)
2
3  int MPI_Win_create_errhandler(MPI_Win_errhandler_function *function,
4                               MPI_Errhandler *errhandler)
5
6  int MPI_Win_get_errhandler(MPI_Win win, MPI_Errhandler *errhandler)
7
8  int MPI_Win_set_errhandler(MPI_Win win, MPI_Errhandler errhandler)
9
10 double MPI_Wtick(void)
11
12 double MPI_Wtime(void)

```

### A.2.7 The Info Object C Bindings

```

14 int MPI_Info_create(MPI_Info *info)
15
16 int MPI_Info_delete(MPI_Info info, char *key)
17
18 int MPI_Info_dup(MPI_Info info, MPI_Info *newinfo)
19
20 int MPI_Info_free(MPI_Info *info)
21
22 int MPI_Info_get(MPI_Info info, char *key, int valuelen, char *value,
23                 int *flag)
24
25 int MPI_Info_get_nkeys(MPI_Info info, int *nkeys)
26
27 int MPI_Info_get_nthkey(MPI_Info info, int n, char *key)
28
29 int MPI_Info_get_valuelen(MPI_Info info, char *key, int *valuelen,
30                           int *flag)
31
32 int MPI_Info_set(MPI_Info info, char *key, char *value)

```

### A.2.8 Process Creation and Management C Bindings

```

32 int MPI_Close_port(char *port_name)
33
34 int MPI_Comm_accept(char *port_name, MPI_Info info, int root,
35                   MPI_Comm comm, MPI_Comm *newcomm)
36
37 int MPI_Comm_connect(char *port_name, MPI_Info info, int root,
38                   MPI_Comm comm, MPI_Comm *newcomm)
39
40 int MPI_Comm_disconnect(MPI_Comm *comm)
41
42 int MPI_Comm_get_parent(MPI_Comm *parent)
43
44 int MPI_Comm_join(int fd, MPI_Comm *intercomm)
45
46 int MPI_Comm_spawn(char *command, char *argv[], int maxprocs, MPI_Info
47                   info, int root, MPI_Comm comm, MPI_Comm *intercomm,
48                   int array_of_errcodes[])
49
50 int MPI_Comm_spawn_multiple(int count, char *array_of_commands[],
51                             char **array_of_argv[], int array_of_maxprocs[],

```

```

        MPI_Info array_of_info[], int root, MPI_Comm comm,
        MPI_Comm *intercomm, int array_of_errcodes[])
int MPI_Lookup_name(char *service_name, MPI_Info info, char *port_name)
int MPI_Open_port(MPI_Info info, char *port_name)
int MPI_Publish_name(char *service_name, MPI_Info info, char *port_name)
int MPI_Unpublish_name(char *service_name, MPI_Info info, char *port_name)

```

### A.2.9 One-Sided Communications C Bindings

```

int MPI_Accumulate(void *origin_addr, int origin_count,
        MPI_Datatype origin_datatype, int target_rank,
        MPI_Aint target_disp, int target_count,
        MPI_Datatype target_datatype, MPI_Op op, MPI_Win win)
int MPI_Get(void *origin_addr, int origin_count, MPI_Datatype
        origin_datatype, int target_rank, MPI_Aint target_disp, int
        target_count, MPI_Datatype target_datatype, MPI_Win win)
int MPI_Put(void *origin_addr, int origin_count, MPI_Datatype
        origin_datatype, int target_rank, MPI_Aint target_disp, int
        target_count, MPI_Datatype target_datatype, MPI_Win win)
int MPI_Win_complete(MPI_Win win)
int MPI_Win_create(void *base, MPI_Aint size, int disp_unit, MPI_Info info,
        MPI_Comm comm, MPI_Win *win)
int MPI_Win_fence(int assert, MPI_Win win)
int MPI_Win_free(MPI_Win *win)
int MPI_Win_get_group(MPI_Win win, MPI_Group *group)
int MPI_Win_lock(int lock_type, int rank, int assert, MPI_Win win)
int MPI_Win_post(MPI_Group group, int assert, MPI_Win win)
int MPI_Win_start(MPI_Group group, int assert, MPI_Win win)
int MPI_Win_test(MPI_Win win, int *flag)
int MPI_Win_unlock(int rank, MPI_Win win)
int MPI_Win_wait(MPI_Win win)

```

### A.2.10 External Interfaces C Bindings

```

int MPI_Grequest_complete(MPI_Request request)
int MPI_Grequest_start(MPI_Grequest_query_function *query_fn,
        MPI_Grequest_free_function *free_fn,

```

```

1         MPI_Grequest_cancel_function *cancel_fn, void *extra_state,
2         MPI_Request *request)
3
4     int MPI_Init_thread(int *argc, char *((*argv)[]), int required,
5         int *provided)
6
7     int MPI_Is_thread_main(int *flag)
8
9     int MPI_Query_thread(int *provided)
10
11    int MPI_Status_set_cancelled(MPI_Status *status, int flag)
12
13    int MPI_Status_set_elements(MPI_Status *status, MPI_Datatype datatype,
14        int count)

```

#### A.2.11 I/O C Bindings

```

15    int MPI_File_close(MPI_File *fh)
16
17    int MPI_File_delete(char *filename, MPI_Info info)
18
19    int MPI_File_get_amode(MPI_File fh, int *amode)
20
21    int MPI_File_get_atomicity(MPI_File fh, int *flag)
22
23    int MPI_File_get_byte_offset(MPI_File fh, MPI_Offset offset,
24        MPI_Offset *disp)
25
26    int MPI_File_get_group(MPI_File fh, MPI_Group *group)
27
28    int MPI_File_get_info(MPI_File fh, MPI_Info *info_used)
29
30    int MPI_File_get_position(MPI_File fh, MPI_Offset *offset)
31
32    int MPI_File_get_position_shared(MPI_File fh, MPI_Offset *offset)
33
34    int MPI_File_get_size(MPI_File fh, MPI_Offset *size)
35
36    int MPI_File_get_type_extent(MPI_File fh, MPI_Datatype datatype,
37        MPI_Aint *extent)
38
39    int MPI_File_get_view(MPI_File fh, MPI_Offset *disp, MPI_Datatype *etype,
40        MPI_Datatype *filetype, char *datarep)
41
42    int MPI_File_iread_at(MPI_File fh, MPI_Offset offset, void *buf, int count,
43        MPI_Datatype datatype, MPI_Request *request)
44
45    int MPI_File_iread(MPI_File fh, void *buf, int count,
46        MPI_Datatype datatype, MPI_Request *request)
47
48    int MPI_File_iread_shared(MPI_File fh, void *buf, int count,
49        MPI_Datatype datatype, MPI_Request *request)
50
51    int MPI_File_iwrite_at(MPI_File fh, MPI_Offset offset, void *buf,
52        int count, MPI_Datatype datatype, MPI_Request *request)

```



```

int MPI_File_iread(MPI_File fh, void *buf, int count,
    MPI_Datatype datatype, MPI_Request *request)
int MPI_File_iread_shared(MPI_File fh, void *buf, int count,
    MPI_Datatype datatype, MPI_Request *request)
int MPI_File_open(MPI_Comm comm, char *filename, int amode, MPI_Info info,
    MPI_File *fh)
int MPI_File_preallocate(MPI_File fh, MPI_Offset size)
int MPI_File_read_all_begin(MPI_File fh, void *buf, int count,
    MPI_Datatype datatype)
int MPI_File_read_all_end(MPI_File fh, void *buf, MPI_Status *status)
int MPI_File_read_all(MPI_File fh, void *buf, int count,
    MPI_Datatype datatype, MPI_Status *status)
int MPI_File_read_at_all_begin(MPI_File fh, MPI_Offset offset, void *buf,
    int count, MPI_Datatype datatype)
int MPI_File_read_at_all_end(MPI_File fh, void *buf, MPI_Status *status)
int MPI_File_read_at_all(MPI_File fh, MPI_Offset offset, void *buf,
    int count, MPI_Datatype datatype, MPI_Status *status)
int MPI_File_read_at(MPI_File fh, MPI_Offset offset, void *buf, int count,
    MPI_Datatype datatype, MPI_Status *status)
int MPI_File_read(MPI_File fh, void *buf, int count, MPI_Datatype datatype,
    MPI_Status *status)
int MPI_File_read_ordered_begin(MPI_File fh, void *buf, int count,
    MPI_Datatype datatype)
int MPI_File_read_ordered_end(MPI_File fh, void *buf, MPI_Status *status)
int MPI_File_read_ordered(MPI_File fh, void *buf, int count,
    MPI_Datatype datatype, MPI_Status *status)
int MPI_File_read_shared(MPI_File fh, void *buf, int count,
    MPI_Datatype datatype, MPI_Status *status)
int MPI_File_seek(MPI_File fh, MPI_Offset offset, int whence)
int MPI_File_seek_shared(MPI_File fh, MPI_Offset offset, int whence)
int MPI_File_set_atomicity(MPI_File fh, int flag)
int MPI_File_set_info(MPI_File fh, MPI_Info info)
int MPI_File_set_size(MPI_File fh, MPI_Offset size)
int MPI_File_set_view(MPI_File fh, MPI_Offset disp, MPI_Datatype etype,
    MPI_Datatype filetype, char *datarep, MPI_Info info)
int MPI_File_sync(MPI_File fh)

```

```

1  int MPI_File_write_all_begin(MPI_File fh, void *buf, int count,
2      MPI_Datatype datatype)
3
4  int MPI_File_write_all_end(MPI_File fh, void *buf, MPI_Status *status)
5
6  int MPI_File_write_all(MPI_File fh, void *buf, int count,
7      MPI_Datatype datatype, MPI_Status *status)
8
9  int MPI_File_write_at_all_begin(MPI_File fh, MPI_Offset offset, void *buf,
10     int count, MPI_Datatype datatype)
11
12 int MPI_File_write_at_all_end(MPI_File fh, void *buf, MPI_Status *status)
13
14 int MPI_File_write_at_all(MPI_File fh, MPI_Offset offset, void *buf,
15     int count, MPI_Datatype datatype, MPI_Status *status)
16
17 int MPI_File_write_at(MPI_File fh, MPI_Offset offset, void *buf, int count,
18     MPI_Datatype datatype, MPI_Status *status)
19
20 int MPI_File_write(MPI_File fh, void *buf, int count,
21     MPI_Datatype datatype, MPI_Status *status)
22
23 int MPI_File_write_ordered_begin(MPI_File fh, void *buf, int count,
24     MPI_Datatype datatype)
25
26 int MPI_File_write_ordered_end(MPI_File fh, void *buf, MPI_Status *status)
27
28 int MPI_File_write_ordered(MPI_File fh, void *buf, int count,
29     MPI_Datatype datatype, MPI_Status *status)
30
31 int MPI_File_write_shared(MPI_File fh, void *buf, int count,
32     MPI_Datatype datatype, MPI_Status *status)
33
34 int MPI_Register_datarep(char *datarep,
35     MPI_Datarep_conversion_function *read_conversion_fn,
36     MPI_Datarep_conversion_function *write_conversion_fn,
37     MPI_Datarep_extent_function *dtype_file_extent_fn,
38     void *extra_state)

```

#### A.2.12 Language Bindings C Bindings

```

36 int MPI_Type_create_f90_complex(int p, int r, MPI_Datatype *newtype)
37
38 int MPI_Type_create_f90_integer(int r, MPI_Datatype *newtype)
39
40 int MPI_Type_create_f90_real(int p, int r, MPI_Datatype *newtype)
41
42 int MPI_Type_match_size(int typeclass, int size, MPI_Datatype *type)
43
44 MPI_Fint MPI_Comm_c2f(MPI_Comm comm)
45
46 MPI_Comm MPI_Comm_f2c(MPI_Fint comm)
47
48 MPI_Fint MPI_Errhandler_c2f(MPI_Errhandler errhandler)
49
50 MPI_Errhandler MPI_Errhandler_f2c(MPI_Fint errhandler)

```

```

MPI_Fint MPI_File_c2f(MPI_File file) 1
MPI_File MPI_File_f2c(MPI_Fint file) 2
MPI_Fint MPI_Group_c2f(MPI_Group group) 3
MPI_Group MPI_Group_f2c(MPI_Fint group) 4
MPI_Fint MPI_Info_c2f(MPI_Info info) 5
MPI_Info MPI_Info_f2c(MPI_Fint info) 6
MPI_Fint MPI_Op_c2f(MPI_Op op) 7
MPI_Op MPI_Op_f2c(MPI_Fint op) 8
MPI_Fint MPI_Request_c2f(MPI_Request request) 9
MPI_Request MPI_Request_f2c(MPI_Fint request) 10
int MPI_Status_c2f(MPI_Status *c_status, MPI_Fint *f_status) 11
int MPI_Status_f2c(MPI_Fint *f_status, MPI_Status *c_status) 12
MPI_Fint MPI_Type_c2f(MPI_Datatype datatype) 13
MPI_Datatype MPI_Type_f2c(MPI_Fint datatype) 14
MPI_Fint MPI_Win_c2f(MPI_Win win) 15
MPI_Win MPI_Win_f2c(MPI_Fint win) 16

```

### A.2.13 Profiling Interface C Bindings

```

int MPI_Pcontrol(const int level, ...) 17

```

### A.2.14 Deprecated C Bindings

```

int MPI_Address(void* location, MPI_Aint *address) 18
int MPI_Attr_delete(MPI_Comm comm, int keyval) 19
int MPI_Attr_get(MPI_Comm comm, int keyval, void *attribute_val, int *flag) 20
int MPI_Attr_put(MPI_Comm comm, int keyval, void* attribute_val) 21
int MPI_DUP_FN(MPI_Comm oldcomm, int keyval, void *extra_state, 22
               void *attribute_val_in, void *attribute_val_out, int *flag) 23
int MPI_Errhandler_create(MPI_Handler_function *function, 24
                          MPI_Errhandler *errhandler) 25
int MPI_Errhandler_get(MPI_Comm comm, MPI_Errhandler *errhandler) 26
int MPI_Errhandler_set(MPI_Comm comm, MPI_Errhandler errhandler) 27
int MPI_Keyval_create(MPI_Copy_function *copy_fn, MPI_Delete_function 28
                     *delete_fn, int *keyval, void* extra_state) 29

```

```
1  int MPI_Keyval_free(int *keyval)
2
3  int MPI_NULL_COPY_FN(MPI_Comm oldcomm, int keyval, void *extra_state,
4                        void *attribute_val_in, void *attribute_val_out, int *flag)
5
6  int MPI_NULL_DELETE_FN(MPI_Comm comm, int keyval, void *attribute_val,
7                          void *extra_state)
8
9  int MPI_Type_extent(MPI_Datatype datatype, MPI_Aint *extent)
10
11 int MPI_Type_hindexed(int count, int *array_of_blocklengths,
12                       MPI_Aint *array_of_displacements, MPI_Datatype oldtype,
13                       MPI_Datatype *newtype)
14
15 int MPI_Type_hvector(int count, int blocklength, MPI_Aint stride,
16                     MPI_Datatype oldtype, MPI_Datatype *newtype)
17
18 int MPI_Type_lb(MPI_Datatype datatype, MPI_Aint* displacement)
19
20 int MPI_Type_struct(int count, int *array_of_blocklengths,
21                    MPI_Aint *array_of_displacements,
22                    MPI_Datatype *array_of_types, MPI_Datatype *newtype)
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
```

## A.3 Fortran Bindings

### A.3.1 Point-to-Point Communication Fortran Bindings

```

MPI_BSEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, IERROR)
    <type> BUF(*)
    INTEGER COUNT, DATATYPE, DEST, TAG, COMM, IERROR

MPI_BSEND_INIT(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)
    <type> BUF(*)
    INTEGER REQUEST, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR

MPI_BUFFER_ATTACH(BUFFER, SIZE, IERROR)
    <type> BUFFER(*)
    INTEGER SIZE, IERROR

MPI_BUFFER_DETACH(BUFFER_ADDR, SIZE, IERROR)
    <type> BUFFER_ADDR(*)
    INTEGER SIZE, IERROR

MPI_CANCEL(REQUEST, IERROR)
    INTEGER REQUEST, IERROR

MPI_GET_COUNT(STATUS, DATATYPE, COUNT, IERROR)
    INTEGER STATUS(MPI_STATUS_SIZE), DATATYPE, COUNT, IERROR

MPI_IBSEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)
    <type> BUF(*)
    INTEGER COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR

MPI_IPROBE(SOURCE, TAG, COMM, FLAG, STATUS, IERROR)
    LOGICAL FLAG
    INTEGER SOURCE, TAG, COMM, STATUS(MPI_STATUS_SIZE), IERROR

MPI_IRECV(BUF, COUNT, DATATYPE, SOURCE, TAG, COMM, REQUEST, IERROR)
    <type> BUF(*)
    INTEGER COUNT, DATATYPE, SOURCE, TAG, COMM, REQUEST, IERROR

MPI_IRSEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)
    <type> BUF(*)
    INTEGER COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR

MPI_ISEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)
    <type> BUF(*)
    INTEGER COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR

MPI_ISSEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)
    <type> BUF(*)
    INTEGER COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR

MPI_PROBE(SOURCE, TAG, COMM, STATUS, IERROR)
    INTEGER SOURCE, TAG, COMM, STATUS(MPI_STATUS_SIZE), IERROR

MPI_RECV(BUF, COUNT, DATATYPE, SOURCE, TAG, COMM, STATUS, IERROR)

```

```

1      <type> BUF(*)
2      INTEGER COUNT, DATATYPE, SOURCE, TAG, COMM, STATUS(MPI_STATUS_SIZE),
3      IERROR
4
5      MPI_RECV_INIT(BUF, COUNT, DATATYPE, SOURCE, TAG, COMM, REQUEST, IERROR)
6      <type> BUF(*)
7      INTEGER COUNT, DATATYPE, SOURCE, TAG, COMM, REQUEST, IERROR
8
9      MPI_REQUEST_FREE(REQUEST, IERROR)
10     INTEGER REQUEST, IERROR
11
12     MPI_REQUEST_GET_STATUS( REQUEST, FLAG, STATUS, IERROR)
13     INTEGER REQUEST, STATUS(MPI_STATUS_SIZE), IERROR
14     LOGICAL FLAG
15
16     MPI_RSEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, IERROR)
17     <type> BUF(*)
18     INTEGER COUNT, DATATYPE, DEST, TAG, COMM, IERROR
19
20     MPI_RSEND_INIT(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)
21     <type> BUF(*)
22     INTEGER COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR
23
24     MPI_SEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, IERROR)
25     <type> BUF(*)
26     INTEGER COUNT, DATATYPE, DEST, TAG, COMM, IERROR
27
28     MPI_SEND_INIT(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)
29     <type> BUF(*)
30     INTEGER REQUEST, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR
31
32     MPI_SENDRECV_REPLACE(BUF, COUNT, DATATYPE, DEST, SENDTAG, SOURCE, RECVTAG,
33     COMM, STATUS, IERROR)
34     <type> BUF(*)
35     INTEGER COUNT, DATATYPE, DEST, SENDTAG, SOURCE, RECVTAG, COMM,
36     STATUS(MPI_STATUS_SIZE), IERROR
37
38     MPI_SENDRECV(SENDBUF, SENDCOUNT, SENDTYPE, DEST, SENDTAG, RECVBUF,
39     RECVCOUNT, RECVMODE, SOURCE, RECVTAG, COMM, STATUS, IERROR)
40     <type> SENDBUF(*), RECVBUF(*)
41     INTEGER SENDCOUNT, SENDTYPE, DEST, SENDTAG, RECVCOUNT, RECVMODE,
42     SOURCE, RECVTAG, COMM, STATUS(MPI_STATUS_SIZE), IERROR
43
44     MPI_SSEND(BUF, COUNT, DATATYPE, DEST, TAG, COMM, IERROR)
45     <type> BUF(*)
46     INTEGER COUNT, DATATYPE, DEST, TAG, COMM, IERROR
47
48     MPI_SSEND_INIT(BUF, COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR)
49     <type> BUF(*)
50     INTEGER COUNT, DATATYPE, DEST, TAG, COMM, REQUEST, IERROR
51
52     MPI_STARTALL(COUNT, ARRAY_OF_REQUESTS, IERROR)
53     INTEGER COUNT, ARRAY_OF_REQUESTS(*), IERROR

```

```

MPI_START(REQUEST, IERROR) 1
    INTEGER REQUEST, IERROR 2
3
MPI_TESTALL(COUNT, ARRAY_OF_REQUESTS, FLAG, ARRAY_OF_STATUSES, IERROR) 4
    LOGICAL FLAG 5
    INTEGER COUNT, ARRAY_OF_REQUESTS(*), 6
    ARRAY_OF_STATUSES(MPI_STATUS_SIZE,*), IERROR 7
8
MPI_TESTANY(COUNT, ARRAY_OF_REQUESTS, INDEX, FLAG, STATUS, IERROR) 8
    LOGICAL FLAG 9
    INTEGER COUNT, ARRAY_OF_REQUESTS(*), INDEX, STATUS(MPI_STATUS_SIZE), 10
    IERROR 11
12
MPI_TEST_CANCELLED(STATUS, FLAG, IERROR) 13
    LOGICAL FLAG 14
    INTEGER STATUS(MPI_STATUS_SIZE), IERROR 15
16
MPI_TEST(REQUEST, FLAG, STATUS, IERROR) 16
    LOGICAL FLAG 17
    INTEGER REQUEST, STATUS(MPI_STATUS_SIZE), IERROR 18
19
MPI_TESTSOME(INCOUNT, ARRAY_OF_REQUESTS, OUTCOUNT, ARRAY_OF_INDICES, 20
    ARRAY_OF_STATUSES, IERROR) 21
    INTEGER INCOUNT, ARRAY_OF_REQUESTS(*), OUTCOUNT, ARRAY_OF_INDICES(*), 22
    ARRAY_OF_STATUSES(MPI_STATUS_SIZE,*), IERROR 23
24
MPI_WAITALL(COUNT, ARRAY_OF_REQUESTS, ARRAY_OF_STATUSES, IERROR) 24
    INTEGER COUNT, ARRAY_OF_REQUESTS(*) 25
    INTEGER ARRAY_OF_STATUSES(MPI_STATUS_SIZE,*), IERROR 26
27
MPI_WAITANY(COUNT, ARRAY_OF_REQUESTS, INDEX, STATUS, IERROR) 28
    INTEGER COUNT, ARRAY_OF_REQUESTS(*), INDEX, STATUS(MPI_STATUS_SIZE), 29
    IERROR 30
31
MPI_WAIT(REQUEST, STATUS, IERROR) 31
    INTEGER REQUEST, STATUS(MPI_STATUS_SIZE), IERROR 32
33
MPI_WAITSOME(INCOUNT, ARRAY_OF_REQUESTS, OUTCOUNT, ARRAY_OF_INDICES, 34
    ARRAY_OF_STATUSES, IERROR) 35
    INTEGER INCOUNT, ARRAY_OF_REQUESTS(*), OUTCOUNT, ARRAY_OF_INDICES(*), 36
    ARRAY_OF_STATUSES(MPI_STATUS_SIZE,*), IERROR 37
38

```

### A.3.2 Datatypes Fortran Bindings

```

MPI_GET_ADDRESS(LOCATION, ADDRESS, IERROR) 41
    <type> LOCATION(*) 42
    INTEGER IERROR 43
    INTEGER(KIND=MPI_ADDRESS_KIND) ADDRESS 44
45
MPI_GET_ELEMENTS(STATUS, DATATYPE, COUNT, IERROR) 46
    INTEGER STATUS(MPI_STATUS_SIZE), DATATYPE, COUNT, IERROR 47
48

```

```

1  MPI_PACK_EXTERNAL(DATAREP, INBUF, INCOUNT, DATATYPE, OUTBUF, OUTSIZE,
2      POSITION, IERROR)
3      INTEGER INCOUNT, DATATYPE, IERROR
4      INTEGER(KIND=MPI_ADDRESS_KIND) OUTSIZE, POSITION
5      CHARACTER*(*) DATAREP
6      <type> INBUF(*), OUTBUF(*)
7
8  MPI_PACK_EXTERNAL_SIZE(DATAREP, INCOUNT, DATATYPE, SIZE, IERROR)
9      INTEGER INCOUNT, DATATYPE, IERROR
10     INTEGER(KIND=MPI_ADDRESS_KIND) SIZE
11     CHARACTER*(*) DATAREP
12
13 MPI_PACK(INBUF, INCOUNT, DATATYPE, OUTBUF, OUTSIZE, POSITION, COMM, IERROR)
14     <type> INBUF(*), OUTBUF(*)
15     INTEGER INCOUNT, DATATYPE, OUTSIZE, POSITION, COMM, IERROR
16
17 MPI_PACK_SIZE(INCOUNT, DATATYPE, COMM, SIZE, IERROR)
18     INTEGER INCOUNT, DATATYPE, COMM, SIZE, IERROR
19
20 MPI_TYPE_COMMIT(DATATYPE, IERROR)
21     INTEGER DATATYPE, IERROR
22
23 MPI_TYPE_CONTIGUOUS(COUNT, OLDTYPE, NEWTYPE, IERROR)
24     INTEGER COUNT, OLDTYPE, NEWTYPE, IERROR
25
26 MPI_TYPE_CREATE_DARRAY(SIZE, RANK, NDIMS, ARRAY_OF_GSIZES,
27     ARRAY_OF_DISTRIBS, ARRAY_OF_DARGS, ARRAY_OF_PSIZEs, ORDER,
28     OLDTYPE, NEWTYPE, IERROR)
29     INTEGER SIZE, RANK, NDIMS, ARRAY_OF_GSIZES(*), ARRAY_OF_DISTRIBS(*),
30     ARRAY_OF_DARGS(*), ARRAY_OF_PSIZEs(*), ORDER, OLDTYPE, NEWTYPE, IERROR
31
32 MPI_TYPE_CREATE_HINDEXED(COUNT, ARRAY_OF_BLOCKLENGTHS,
33     ARRAY_OF_DISPLACEMENTS, OLDTYPE, NEWTYPE, IERROR)
34     INTEGER COUNT, ARRAY_OF_BLOCKLENGTHS(*), OLDTYPE, NEWTYPE, IERROR
35     INTEGER(KIND=MPI_ADDRESS_KIND) ARRAY_OF_DISPLACEMENTS(*)
36
37 MPI_TYPE_CREATE_HVECTOR(COUNT, BLOCKLENGTH, STRIDE, OLDTYPE, NEWTYPE,
38     IERROR)
39     INTEGER COUNT, BLOCKLENGTH, OLDTYPE, NEWTYPE, IERROR
40     INTEGER(KIND=MPI_ADDRESS_KIND) STRIDE
41
42 MPI_TYPE_CREATE_INDEXED_BLOCK(COUNT, BLOCKLENGTH, ARRAY_OF_DISPLACEMENTS,
43     OLDTYPE, NEWTYPE, IERROR)
44     INTEGER COUNT, BLOCKLENGTH, ARRAY_OF_DISPLACEMENTS(*), OLDTYPE,
45     NEWTYPE, IERROR
46
47 MPI_TYPE_CREATE_RESIZED(OLDTYPE, LB, EXTENT, NEWTYPE, IERROR)
48     INTEGER OLDTYPE, NEWTYPE, IERROR
49     INTEGER(KIND=MPI_ADDRESS_KIND) LB, EXTENT
50
51 MPI_TYPE_CREATE_STRUCT(COUNT, ARRAY_OF_BLOCKLENGTHS,
52     ARRAY_OF_DISPLACEMENTS, ARRAY_OF_TYPES, NEWTYPE, IERROR)
53     INTEGER COUNT, ARRAY_OF_BLOCKLENGTHS(*), ARRAY_OF_TYPES(*), NEWTYPE,

```



```

IERROR 1
INTEGER(KIND=MPI_ADDRESS_KIND) ARRAY_OF_DISPLACEMENTS(*) 2
3
MPI_TYPE_CREATE_SUBARRAY(NDIMS, ARRAY_OF_SIZES, ARRAY_OF_SUBSIZES, 4
    ARRAY_OF_STARTS, ORDER, OLDTYPE, NEWTYPE, IERROR) 5
INTEGER NDIMS, ARRAY_OF_SIZES(*), ARRAY_OF_SUBSIZES(*), 6
    ARRAY_OF_STARTS(*), ORDER, OLDTYPE, NEWTYPE, IERROR 7
MPI_TYPE_DUP(TYPE, NEWTYPE, IERROR) 8
INTEGER TYPE, NEWTYPE, IERROR 9
MPI_TYPE_FREE(DATATYPE, IERROR) 10
INTEGER DATATYPE, IERROR 11
MPI_TYPE_GET_CONTENTS(DATATYPE, MAX_INTEGERS, MAX_ADDRESSES, MAX_DATATYPES, 13
    ARRAY_OF_INTEGERS, ARRAY_OF_ADDRESSES, ARRAY_OF_DATATYPES, 14
    IERROR) 15
INTEGER DATATYPE, MAX_INTEGERS, MAX_ADDRESSES, MAX_DATATYPES, 16
    ARRAY_OF_INTEGERS(*), ARRAY_OF_DATATYPES(*), IERROR 17
INTEGER(KIND=MPI_ADDRESS_KIND) ARRAY_OF_ADDRESSES(*) 18
MPI_TYPE_GET_ENVELOPE(DATATYPE, NUM_INTEGERS, NUM_ADDRESSES, NUM_DATATYPES, 20
    COMBINER, IERROR) 21
INTEGER DATATYPE, NUM_INTEGERS, NUM_ADDRESSES, NUM_DATATYPES, COMBINER, 22
    IERROR 23
MPI_TYPE_GET_EXTENT(DATATYPE, LB, EXTENT, IERROR) 24
INTEGER DATATYPE, IERROR 25
INTEGER(KIND = MPI_ADDRESS_KIND) LB, EXTENT 26
MPI_TYPE_GET_TRUE_EXTENT(DATATYPE, TRUE_LB, TRUE_EXTENT, IERROR) 28
INTEGER DATATYPE, IERROR 29
INTEGER(KIND = MPI_ADDRESS_KIND) TRUE_LB, TRUE_EXTENT 30
MPI_TYPE_INDEXED(COUNT, ARRAY_OF_BLOCKLENGTHS, ARRAY_OF_DISPLACEMENTS, 31
    OLDTYPE, NEWTYPE, IERROR) 32
INTEGER COUNT, ARRAY_OF_BLOCKLENGTHS(*), ARRAY_OF_DISPLACEMENTS(*), 33
    OLDTYPE, NEWTYPE, IERROR 34
MPI_TYPE_SIZE(DATATYPE, SIZE, IERROR) 36
INTEGER DATATYPE, SIZE, IERROR 37
MPI_TYPE_VECTOR(COUNT, BLOCKLENGTH, STRIDE, OLDTYPE, NEWTYPE, IERROR) 38
INTEGER COUNT, BLOCKLENGTH, STRIDE, OLDTYPE, NEWTYPE, IERROR 39
MPI_UNPACK_EXTERNAL(DATAREP, INBUF, INSIZE, POSITION, OUTBUF, OUTCOUNT, 41
    DATATYPE, IERROR) 42
INTEGER OUTCOUNT, DATATYPE, IERROR 43
INTEGER(KIND=MPI_ADDRESS_KIND) INSIZE, POSITION 44
CHARACTER*(*) DATAREP 45
<type> INBUF(*), OUTBUF(*) 46
MPI_UNPACK(INBUF, INSIZE, POSITION, OUTBUF, OUTCOUNT, DATATYPE, COMM, 47
48

```

```

1         IERROR)
2         <type> INBUF(*), OUTBUF(*)
3         INTEGER INSIZE, POSITION, OUTCOUNT, DATATYPE, COMM, IERROR
4
5

```

### A.3.3 Collective Communication Fortran Bindings

```

7 MPI_ALLGATHER(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, REVCOUNT, RECVTYPE,
8             COMM, IERROR)
9         <type> SENDBUF(*), RECVBUF(*)
10        INTEGER SENDCOUNT, SENDTYPE, REVCOUNT, RECVTYPE, COMM, IERROR
11
12 MPI_ALLGATHERV(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, REVCOUNTS, DISPLS,
13             RECVTYPE, COMM, IERROR)
14        <type> SENDBUF(*), RECVBUF(*)
15        INTEGER SENDCOUNT, SENDTYPE, REVCOUNTS(*), DISPLS(*), RECVTYPE, COMM,
16        IERROR
17
18 MPI_ALLREDUCE(SENDBUF, RECVBUF, COUNT, DATATYPE, OP, COMM, IERROR)
19        <type> SENDBUF(*), RECVBUF(*)
20        INTEGER COUNT, DATATYPE, OP, COMM, IERROR
21
22 MPI_ALLTOALL(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, REVCOUNT, RECVTYPE,
23             COMM, IERROR)
24        <type> SENDBUF(*), RECVBUF(*)
25        INTEGER SENDCOUNT, SENDTYPE, REVCOUNT, RECVTYPE, COMM, IERROR
26
27 MPI_ALLTOALLV(SENDBUF, SENDCOUNTS, SDISPLS, SENDTYPE, RECVBUF, REVCOUNTS,
28             RDISPLS, RECVTYPE, COMM, IERROR)
29        <type> SENDBUF(*), RECVBUF(*)
30        INTEGER SENDCOUNTS(*), SDISPLS(*), SENDTYPE, REVCOUNTS(*), RDISPLS(*),
31        RECVTYPE, COMM, IERROR
32
33 MPI_ALLTOALLW(SENDBUF, SENDCOUNTS, SDISPLS, SENDTYPES, RECVBUF, REVCOUNTS,
34             RDISPLS, RECVTYPES, COMM, IERROR)
35        <type> SENDBUF(*), RECVBUF(*)
36        INTEGER SENDCOUNTS(*), SDISPLS(*), SENDTYPES(*), REVCOUNTS(*),
37        RDISPLS(*), RECVTYPES(*), COMM, IERROR
38
39 MPI_BARRIER(COMM, IERROR)
40        INTEGER COMM, IERROR
41
42 MPI_BCAST(BUFFER, COUNT, DATATYPE, ROOT, COMM, IERROR)
43        <type> BUFFER(*)
44        INTEGER COUNT, DATATYPE, ROOT, COMM, IERROR
45
46 MPI_EXSCAN(SENDBUF, RECVBUF, COUNT, DATATYPE, OP, COMM, IERROR)
47        <type> SENDBUF(*), RECVBUF(*)
48        INTEGER COUNT, DATATYPE, OP, COMM, IERROR
49
50 MPI_GATHER(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, REVCOUNT, RECVTYPE,
51             ROOT, COMM, IERROR)
52        <type> SENDBUF(*), RECVBUF(*)
53

```

```

    INTEGER SENDCOUNT, SENDTYPE, RECVCOUNT, RECVTYPE, ROOT, COMM, IERROR
1
MPI_GATHERV(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, RECVCOUNTS, DISPLS,
2
    RECVTYPE, ROOT, COMM, IERROR)
3
    <type> SENDBUF(*), RECVBUF(*)
4
    INTEGER SENDCOUNT, SENDTYPE, RECVCOUNTS(*), DISPLS(*), RECVTYPE, ROOT,
5
    COMM, IERROR
6
MPI_OP_COMMUTATIVE(OP, COMMUTE, IERROR)
7
    LOGICAL COMMUTE
8
    INTEGER OP, IERROR
9
MPI_OP_CREATE( FUNCTION, COMMUTE, OP, IERROR)
10
    EXTERNAL FUNCTION
11
    LOGICAL COMMUTE
12
    INTEGER OP, IERROR
13
MPI_OP_FREE( OP, IERROR)
14
    INTEGER OP, IERROR
15
MPI_REDUCE_LOCAL(INBUF, INOUTBUF, COUNT, DATATYPE, OP, IERROR)
16
    <type> INBUF(*), INOUTBUF(*)
17
    INTEGER COUNT, DATATYPE, OP, IERROR
18
MPI_REDUCE_SCATTER_BLOCK(SENDBUF, RECVBUF, RECVCOUNT, DATATYPE, OP, COMM,
19
    IERROR)
20
    <type> SENDBUF(*), RECVBUF(*)
21
    INTEGER RECVCOUNT, DATATYPE, OP, COMM, IERROR
22
MPI_REDUCE_SCATTER(SENDBUF, RECVBUF, RECVCOUNTS, DATATYPE, OP, COMM,
23
    IERROR)
24
    <type> SENDBUF(*), RECVBUF(*)
25
    INTEGER RECVCOUNTS(*), DATATYPE, OP, COMM, IERROR
26
MPI_SCAN(SENDBUF, RECVBUF, COUNT, DATATYPE, OP, COMM, IERROR)
27
    <type> SENDBUF(*), RECVBUF(*)
28
    INTEGER COUNT, DATATYPE, OP, COMM, IERROR
29
MPI_SCATTER(SENDBUF, SENDCOUNT, SENDTYPE, RECVBUF, RECVCOUNT, RECVTYPE,
30
    ROOT, COMM, IERROR)
31
    <type> SENDBUF(*), RECVBUF(*)
32
    INTEGER SENDCOUNT, SENDTYPE, RECVCOUNT, RECVTYPE, ROOT, COMM, IERROR
33
MPI_SCATTERV(SENDBUF, SENDCOUNTS, DISPLS, SENDTYPE, RECVBUF, RECVCOUNT,
34
    RECVTYPE, ROOT, COMM, IERROR)
35
    <type> SENDBUF(*), RECVBUF(*)
36
    INTEGER SENDCOUNTS(*), DISPLS(*), SENDTYPE, RECVCOUNT, RECVTYPE, ROOT,
37
    COMM, IERROR
38

```

## A.3.4 Groups, Contexts, Communicators, and Caching Fortran Bindings

```

1  MPI_COMM_COMPARE(COMM1, COMM2, RESULT, IERROR)
2      INTEGER COMM1, COMM2, RESULT, IERROR
3
4  MPI_COMM_CREATE(COMM, GROUP, NEWCOMM, IERROR)
5      INTEGER COMM, GROUP, NEWCOMM, IERROR
6
7  MPI_COMM_CREATE_KEYVAL(COMM_COPY_ATTR_FN, COMM_DELETE_ATTR_FN, COMM_KEYVAL,
8      EXTRA_STATE, IERROR)
9      EXTERNAL COMM_COPY_ATTR_FN, COMM_DELETE_ATTR_FN
10     INTEGER COMM_KEYVAL, IERROR
11     INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE
12
13 MPI_COMM_DELETE_ATTR(COMM, COMM_KEYVAL, IERROR)
14     INTEGER COMM, COMM_KEYVAL, IERROR
15
16 MPI_COMM_DUP(COMM, NEWCOMM, IERROR)
17     INTEGER COMM, NEWCOMM, IERROR
18
19 MPI_COMM_DUP_FN(OLDCOMM, COMM_KEYVAL, EXTRA_STATE, ATTRIBUTE_VAL_IN,
20     ATTRIBUTE_VAL_OUT, FLAG, IERROR)
21     INTEGER OLDCOMM, COMM_KEYVAL, IERROR
22     INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE, ATTRIBUTE_VAL_IN,
23     ATTRIBUTE_VAL_OUT
24     LOGICAL FLAG
25
26 MPI_COMM_FREE(COMM, IERROR)
27     INTEGER COMM, IERROR
28
29 MPI_COMM_FREE_KEYVAL(COMM_KEYVAL, IERROR)
30     INTEGER COMM_KEYVAL, IERROR
31
32 MPI_COMM_GET_ATTR(COMM, COMM_KEYVAL, ATTRIBUTE_VAL, FLAG, IERROR)
33     INTEGER COMM, COMM_KEYVAL, IERROR
34     INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL
35     LOGICAL FLAG
36
37 MPI_COMM_GET_NAME(COMM, COMM_NAME, RESULTLEN, IERROR)
38     INTEGER COMM, RESULTLEN, IERROR
39     CHARACTER*(*) COMM_NAME
40
41 MPI_COMM_GROUP(COMM, GROUP, IERROR)
42     INTEGER COMM, GROUP, IERROR
43
44 MPI_COMM_NULL_COPY_FN(OLDCOMM, COMM_KEYVAL, EXTRA_STATE, ATTRIBUTE_VAL_IN,
45     ATTRIBUTE_VAL_OUT, FLAG, IERROR)
46     INTEGER OLDCOMM, COMM_KEYVAL, IERROR
47     INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE, ATTRIBUTE_VAL_IN,
48     ATTRIBUTE_VAL_OUT
49     LOGICAL FLAG
50
51 MPI_COMM_NULL_DELETE_FN(COMM, COMM_KEYVAL, ATTRIBUTE_VAL, EXTRA_STATE,
52     IERROR)

```

INTEGER COMM, COMM_KEYVAL, IERROR	1
INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL, EXTRA_STATE	2
	3
MPI_COMM_RANK(COMM, RANK, IERROR)	4
INTEGER COMM, RANK, IERROR	5
	6
MPI_COMM_REMOTE_GROUP(COMM, GROUP, IERROR)	7
INTEGER COMM, GROUP, IERROR	8
	9
MPI_COMM_REMOTE_SIZE(COMM, SIZE, IERROR)	10
INTEGER COMM, SIZE, IERROR	11
	12
MPI_COMM_SET_ATTR(COMM, COMM_KEYVAL, ATTRIBUTE_VAL, IERROR)	13
INTEGER COMM, COMM_KEYVAL, IERROR	14
INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL	15
	16
MPI_COMM_SET_NAME(COMM, COMM_NAME, IERROR)	17
INTEGER COMM, IERROR	18
CHARACTER*(*) COMM_NAME	19
	20
MPI_COMM_SIZE(COMM, SIZE, IERROR)	21
INTEGER COMM, SIZE, IERROR	22
	23
MPI_COMM_SPLIT(COMM, COLOR, KEY, NEWCOMM, IERROR)	24
INTEGER COMM, COLOR, KEY, NEWCOMM, IERROR	25
	26
MPI_COMM_TEST_INTER(COMM, FLAG, IERROR)	27
INTEGER COMM, IERROR	28
LOGICAL FLAG	29
	30
MPI_GROUP_COMPARE(GROUP1, GROUP2, RESULT, IERROR)	31
INTEGER GROUP1, GROUP2, RESULT, IERROR	32
	33
MPI_GROUP_DIFFERENCE(GROUP1, GROUP2, NEWGROUP, IERROR)	34
INTEGER GROUP1, GROUP2, NEWGROUP, IERROR	35
	36
MPI_GROUP_EXCL(GROUP, N, RANKS, NEWGROUP, IERROR)	37
INTEGER GROUP, N, RANKS(*), NEWGROUP, IERROR	38
	39
MPI_GROUP_FREE(GROUP, IERROR)	40
INTEGER GROUP, IERROR	41
	42
MPI_GROUP_INCL(GROUP, N, RANKS, NEWGROUP, IERROR)	43
INTEGER GROUP, N, RANKS(*), NEWGROUP, IERROR	44
	45
MPI_GROUP_INTERSECTION(GROUP1, GROUP2, NEWGROUP, IERROR)	46
INTEGER GROUP1, GROUP2, NEWGROUP, IERROR	47
	48
MPI_GROUP_RANGE_EXCL(GROUP, N, RANGES, NEWGROUP, IERROR)	
INTEGER GROUP, N, RANGES(3,*), NEWGROUP, IERROR	
MPI_GROUP_RANGE_INCL(GROUP, N, RANGES, NEWGROUP, IERROR)	
INTEGER GROUP, N, RANGES(3,*), NEWGROUP, IERROR	
MPI_GROUP_RANK(GROUP, RANK, IERROR)	

```

1      INTEGER GROUP, RANK, IERROR
2
3      MPI_GROUP_SIZE(GROUP, SIZE, IERROR)
4      INTEGER GROUP, SIZE, IERROR
5
6      MPI_GROUP_TRANSLATE_RANKS(GROUP1, N, RANKS1, GROUP2, RANKS2, IERROR)
7      INTEGER GROUP1, N, RANKS1(*), GROUP2, RANKS2(*), IERROR
8
9      MPI_GROUP_UNION(GROUP1, GROUP2, NEWGROUP, IERROR)
10     INTEGER GROUP1, GROUP2, NEWGROUP, IERROR
11
12     MPI_INTERCOMM_CREATE(LOCAL_COMM, LOCAL_LEADER, PEER_COMM, REMOTE_LEADER,
13     TAG, NEWINTERCOMM, IERROR)
14     INTEGER LOCAL_COMM, LOCAL_LEADER, PEER_COMM, REMOTE_LEADER, TAG,
15     NEWINTERCOMM, IERROR
16
17     MPI_INTERCOMM_MERGE(INTERCOMM, HIGH, INTRACOMM, IERROR)
18     INTEGER INTERCOMM, INTRACOMM, IERROR
19     LOGICAL HIGH
20
21     MPI_TYPE_CREATE_KEYVAL(TYPE_COPY_ATTR_FN, TYPE_DELETE_ATTR_FN, TYPE_KEYVAL,
22     EXTRA_STATE, IERROR)
23     EXTERNAL TYPE_COPY_ATTR_FN, TYPE_DELETE_ATTR_FN
24     INTEGER TYPE_KEYVAL, IERROR
25     INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE
26
27     MPI_TYPE_DELETE_ATTR(TYPE, TYPE_KEYVAL, IERROR)
28     INTEGER TYPE, TYPE_KEYVAL, IERROR
29
30     MPI_TYPE_DUP_FN(OLDTYPE, TYPE_KEYVAL, EXTRA_STATE, ATTRIBUTE_VAL_IN,
31     ATTRIBUTE_VAL_OUT, FLAG, IERROR)
32     INTEGER OLDTYPE, TYPE_KEYVAL, IERROR
33     INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE, ATTRIBUTE_VAL_IN,
34     ATTRIBUTE_VAL_OUT
35     LOGICAL FLAG
36
37     MPI_TYPE_FREE_KEYVAL(TYPE_KEYVAL, IERROR)
38     INTEGER TYPE_KEYVAL, IERROR
39
40     MPI_TYPE_GET_ATTR(TYPE, TYPE_KEYVAL, ATTRIBUTE_VAL, FLAG, IERROR)
41     INTEGER TYPE, TYPE_KEYVAL, IERROR
42     INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL
43     LOGICAL FLAG
44
45     MPI_TYPE_GET_NAME(TYPE, TYPE_NAME, RESULTLEN, IERROR)
46     INTEGER TYPE, RESULTLEN, IERROR
47     CHARACTER*(*) TYPE_NAME
48
49     MPI_TYPE_NULL_COPY_FN(OLDTYPE, TYPE_KEYVAL, EXTRA_STATE, ATTRIBUTE_VAL_IN,
50     ATTRIBUTE_VAL_OUT, FLAG, IERROR)
51     INTEGER OLDTYPE, TYPE_KEYVAL, IERROR
52     INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE, ATTRIBUTE_VAL_IN,
53     ATTRIBUTE_VAL_OUT

```

```

LOGICAL FLAG
1
MPI_TYPE_NULL_DELETE_FN(TYPE, TYPE_KEYVAL, ATTRIBUTE_VAL, EXTRA_STATE,
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48

```

```

1  MPI_WIN_SET_ATTR(WIN, WIN_KEYVAL, ATTRIBUTE_VAL, IERROR)
2      INTEGER WIN, WIN_KEYVAL, IERROR
3      INTEGER(KIND=MPI_ADDRESS_KIND) ATTRIBUTE_VAL

```

```

4  MPI_WIN_SET_NAME(WIN, WIN_NAME, IERROR)
5      INTEGER WIN, IERROR
6      CHARACTER*(*) WIN_NAME

```

### A.3.5 Process Topologies Fortran Bindings

```

10 MPI_CART_COORDS(COMM, RANK, MAXDIMS, COORDS, IERROR)
11     INTEGER COMM, RANK, MAXDIMS, COORDS(*), IERROR
13 MPI_CART_CREATE(COMM_OLD, NDIMS, DIMS, PERIODS, REORDER, COMM_CART, IERROR)
14     INTEGER COMM_OLD, NDIMS, DIMS(*), COMM_CART, IERROR
15     LOGICAL PERIODS(*), REORDER
16
17 MPI_CARTDIM_GET(COMM, NDIMS, IERROR)
18     INTEGER COMM, NDIMS, IERROR
19
20 MPI_CART_GET(COMM, MAXDIMS, DIMS, PERIODS, COORDS, IERROR)
21     INTEGER COMM, MAXDIMS, DIMS(*), COORDS(*), IERROR
22     LOGICAL PERIODS(*)
23
24 MPI_CART_MAP(COMM, NDIMS, DIMS, PERIODS, NEWRANK, IERROR)
25     INTEGER COMM, NDIMS, DIMS(*), NEWRANK, IERROR
26     LOGICAL PERIODS(*)
27
28 MPI_CART_RANK(COMM, COORDS, RANK, IERROR)
29     INTEGER COMM, COORDS(*), RANK, IERROR
30
31 MPI_CART_SHIFT(COMM, DIRECTION, DISP, RANK_SOURCE, RANK_DEST, IERROR)
32     INTEGER COMM, DIRECTION, DISP, RANK_SOURCE, RANK_DEST, IERROR
33
34 MPI_CART_SUB(COMM, REMAIN_DIMS, NEWCOMM, IERROR)
35     INTEGER COMM, NEWCOMM, IERROR
36     LOGICAL REMAIN_DIMS(*)
37
38 MPI_DIMS_CREATE(NNODES, NDIMS, DIMS, IERROR)
39     INTEGER NNODES, NDIMS, DIMS(*), IERROR
40
41 MPI_DIST_GRAPH_CREATE_ADJACENT(COMM_OLD, INDEGREE, SOURCES, SOURCEWEIGHTS,
42     OUTDEGREE, DESTINATIONS, DESTWEIGHTS, INFO, REORDER,
43     COMM_DIST_GRAPH, IERROR)
44     INTEGER COMM_OLD, INDEGREE, SOURCES(*), SOURCEWEIGHTS(*), OUTDEGREE,
45     DESTINATIONS(*), DESTWEIGHTS(*), INFO, COMM_DIST_GRAPH, IERROR
46     LOGICAL REORDER
47
48 MPI_DIST_GRAPH_CREATE(COMM_OLD, N, SOURCES, DEGREES, DESTINATIONS, WEIGHTS,
49     INFO, REORDER, COMM_DIST_GRAPH, IERROR)
50     INTEGER COMM_OLD, N, SOURCES(*), DEGREES(*), DESTINATIONS(*),
51     WEIGHTS(*), INFO, COMM_DIST_GRAPH, IERROR
52     LOGICAL REORDER

```



```

MPI_DIST_GRAPH_NEIGHBORS(COMM, MAXINDEGREE, SOURCES, SOURCEWEIGHTS,
    MAXOUTDEGREE, DESTINATIONS, DESTWEIGHTS, IERROR)
    INTEGER COMM, MAXINDEGREE, SOURCES(*), SOURCEWEIGHTS(*), MAXOUTDEGREE,
    DESTINATIONS(*), DESTWEIGHTS(*), IERROR

MPI_DIST_GRAPH_NEIGHBORS_COUNT(COMM, INDEGREE, OUTDEGREE, WEIGHTED, IERROR)
    INTEGER COMM, INDEGREE, OUTDEGREE, IERROR
    LOGICAL WEIGHTED

MPI_GRAPH_CREATE(COMM_OLD, NNODES, INDEX, EDGES, REORDER, COMM_GRAPH,
    IERROR)
    INTEGER COMM_OLD, NNODES, INDEX(*), EDGES(*), COMM_GRAPH, IERROR
    LOGICAL REORDER

MPI_GRAPHDIMS_GET(COMM, NNODES, NEDGES, IERROR)
    INTEGER COMM, NNODES, NEDGES, IERROR

MPI_GRAPH_GET(COMM, MAXINDEX, MAXEDGES, INDEX, EDGES, IERROR)
    INTEGER COMM, MAXINDEX, MAXEDGES, INDEX(*), EDGES(*), IERROR

MPI_GRAPH_MAP(COMM, NNODES, INDEX, EDGES, NEWRANK, IERROR)
    INTEGER COMM, NNODES, INDEX(*), EDGES(*), NEWRANK, IERROR

MPI_GRAPH_NEIGHBORS(COMM, RANK, MAXNEIGHBORS, NEIGHBORS, IERROR)
    INTEGER COMM, RANK, MAXNEIGHBORS, NEIGHBORS(*), IERROR

MPI_GRAPH_NEIGHBORS_COUNT(COMM, RANK, NNEIGHBORS, IERROR)
    INTEGER COMM, RANK, NNEIGHBORS, IERROR

MPI_TOPO_TEST(COMM, STATUS, IERROR)
    INTEGER COMM, STATUS, IERROR

```

### A.3.6 MPI Environmenta Management Fortran Bindings

```

DOUBLE PRECISION MPI_WTICK()

DOUBLE PRECISION MPI_WTIME()

MPI_ABORT(COMM, ERRORCODE, IERROR)
    INTEGER COMM, ERRORCODE, IERROR

MPI_ADD_ERROR_CLASS(ERRORCLASS, IERROR)
    INTEGER ERRORCLASS, IERROR

MPI_ADD_ERROR_CODE(ERRORCLASS, ERRORCODE, IERROR)
    INTEGER ERRORCLASS, ERRORCODE, IERROR

MPI_ADD_ERROR_STRING(ERRORCODE, STRING, IERROR)
    INTEGER ERRORCODE, IERROR
    CHARACTER*(*) STRING

MPI_ALLOC_MEM(SIZE, INFO, BASEPTR, IERROR)
    INTEGER INFO, IERROR
    INTEGER(KIND=MPI_ADDRESS_KIND) SIZE, BASEPTR

```

```
1  MPI_COMM_CALL_ERRHANDLER(COMM, ERRORCODE, IERROR)
2      INTEGER COMM, ERRORCODE, IERROR
3
4  MPI_COMM_CREATE_ERRHANDLER(FUNCTION, ERRHANDLER, IERROR)
5      EXTERNAL FUNCTION
6      INTEGER ERRHANDLER, IERROR
7
8  MPI_COMM_GET_ERRHANDLER(COMM, ERRHANDLER, IERROR)
9      INTEGER COMM, ERRHANDLER, IERROR
10
11 MPI_COMM_SET_ERRHANDLER(COMM, ERRHANDLER, IERROR)
12     INTEGER COMM, ERRHANDLER, IERROR
13
14 MPI_ERRHANDLER_FREE(ERRHANDLER, IERROR)
15     INTEGER ERRHANDLER, IERROR
16
17 MPI_ERROR_CLASS(ERRORCODE, ERRORCLASS, IERROR)
18     INTEGER ERRORCODE, ERRORCLASS, IERROR
19
20 MPI_ERROR_STRING(ERRORCODE, STRING, RESULTLEN, IERROR)
21     INTEGER ERRORCODE, RESULTLEN, IERROR
22     CHARACTER*(*) STRING
23
24 MPI_FILE_CALL_ERRHANDLER(FH, ERRORCODE, IERROR)
25     INTEGER FH, ERRORCODE, IERROR
26
27 MPI_FILE_CREATE_ERRHANDLER(FUNCTION, ERRHANDLER, IERROR)
28     EXTERNAL FUNCTION
29     INTEGER ERRHANDLER, IERROR
30
31 MPI_FILE_GET_ERRHANDLER(FILE, ERRHANDLER, IERROR)
32     INTEGER FILE, ERRHANDLER, IERROR
33
34 MPI_FILE_SET_ERRHANDLER(FILE, ERRHANDLER, IERROR)
35     INTEGER FILE, ERRHANDLER, IERROR
36
37 MPI_FINALIZED(FLAG, IERROR)
38     LOGICAL FLAG
39     INTEGER IERROR
40
41 MPI_FINALIZE(IERROR)
42     INTEGER IERROR
43
44 MPI_FREE_MEM(BASE, IERROR)
45     <type> BASE(*)
46     INTEGER IERROR
47
48 MPI_GET_PROCESSOR_NAME( NAME, RESULTLEN, IERROR)
49     CHARACTER*(*) NAME
50     INTEGER RESULTLEN, IERROR
51
52 MPI_GET_VERSION(VERSION, SUBVERSION, IERROR)
53     INTEGER VERSION, SUBVERSION, IERROR
54
55 MPI_INITIALIZED(FLAG, IERROR)
```

LOGICAL FLAG	1
INTEGER IERROR	2
	3
MPI_INIT(IERROR)	4
INTEGER IERROR	5
	6
MPI_WIN_CALL_ERRHANDLER(WIN, ERRORCODE, IERROR)	7
INTEGER WIN, ERRORCODE, IERROR	8
	9
MPI_WIN_CREATE_ERRHANDLER(FUNCTION, ERRHANDLER, IERROR)	10
EXTERNAL FUNCTION	11
INTEGER ERRHANDLER, IERROR	12
	13
MPI_WIN_GET_ERRHANDLER(WIN, ERRHANDLER, IERROR)	14
INTEGER WIN, ERRHANDLER, IERROR	15
	16
MPI_WIN_SET_ERRHANDLER(WIN, ERRHANDLER, IERROR)	17
INTEGER WIN, ERRHANDLER, IERROR	18
	19
A.3.7 The Info Object Fortran Bindings	20
MPI_INFO_CREATE(INFO, IERROR)	21
INTEGER INFO, IERROR	22
	23
MPI_INFO_DELETE(INFO, KEY, IERROR)	24
INTEGER INFO, IERROR	25
CHARACTER*(*) KEY	26
	27
MPI_INFO_DUP(INFO, NEWINFO, IERROR)	28
INTEGER INFO, NEWINFO, IERROR	29
	30
MPI_INFO_FREE(INFO, IERROR)	31
INTEGER INFO, IERROR	32
	33
MPI_INFO_GET(INFO, KEY, VALUELEN, VALUE, FLAG, IERROR)	34
INTEGER INFO, VALUELEN, IERROR	35
CHARACTER*(*) KEY, VALUE	36
LOGICAL FLAG	37
	38
MPI_INFO_GET_NKEYS(INFO, NKEYS, IERROR)	39
INTEGER INFO, NKEYS, IERROR	40
	41
MPI_INFO_GET_NTHKEY(INFO, N, KEY, IERROR)	42
INTEGER INFO, N, IERROR	43
CHARACTER*(*) KEY	44
	45
MPI_INFO_GET_VALUELEN(INFO, KEY, VALUELEN, FLAG, IERROR)	46
INTEGER INFO, VALUELEN, IERROR	47
LOGICAL FLAG	48
CHARACTER*(*) KEY	
MPI_INFO_SET(INFO, KEY, VALUE, IERROR)	
INTEGER INFO, IERROR	

```
1      CHARACTER*(*) KEY, VALUE
```

### 4 A.3.8 Process Creation and Management Fortran Bindings

```
5      MPI_CLOSE_PORT(PORT_NAME, IERROR)
```

```
6          CHARACTER*(*) PORT_NAME
```

```
7          INTEGER IERROR
```

```
9      MPI_COMM_ACCEPT(PORT_NAME, INFO, ROOT, COMM, NEWCOMM, IERROR)
```

```
10         CHARACTER*(*) PORT_NAME
```

```
11         INTEGER INFO, ROOT, COMM, NEWCOMM, IERROR
```

```
12     MPI_COMM_CONNECT(PORT_NAME, INFO, ROOT, COMM, NEWCOMM, IERROR)
```

```
13         CHARACTER*(*) PORT_NAME
```

```
14         INTEGER INFO, ROOT, COMM, NEWCOMM, IERROR
```

```
16     MPI_COMM_DISCONNECT(COMM, IERROR)
```

```
17         INTEGER COMM, IERROR
```

```
18     MPI_COMM_GET_PARENT(PARENT, IERROR)
```

```
19         INTEGER PARENT, IERROR
```

```
21     MPI_COMM_JOIN(FD, INTERCOMM, IERROR)
```

```
22         INTEGER FD, INTERCOMM, IERROR
```

```
23     MPI_COMM_SPAWN(COMMAND, ARGV, MAXPROCS, INFO, ROOT, COMM, INTERCOMM,
```

```
24         ARRAY_OF_ERRCODES, IERROR)
```

```
25         CHARACTER*(*) COMMAND, ARGV(*)
```

```
26         INTEGER INFO, MAXPROCS, ROOT, COMM, INTERCOMM, ARRAY_OF_ERRCODES(*),
```

```
27         IERROR
```

```
29     MPI_COMM_SPAWN_MULTIPLE(COUNT, ARRAY_OF_COMMANDS, ARRAY_OF_ARGV,
```

```
30         ARRAY_OF_MAXPROCS, ARRAY_OF_INFO, ROOT, COMM, INTERCOMM,
```

```
31         ARRAY_OF_ERRCODES, IERROR)
```

```
32         INTEGER COUNT, ARRAY_OF_INFO(*), ARRAY_OF_MAXPROCS(*), ROOT, COMM,
```

```
33         INTERCOMM, ARRAY_OF_ERRCODES(*), IERROR
```

```
34         CHARACTER*(*) ARRAY_OF_COMMANDS(*), ARRAY_OF_ARGV(COUNT, *)
```

```
35     MPI_LOOKUP_NAME(SERVICE_NAME, INFO, PORT_NAME, IERROR)
```

```
36         CHARACTER*(*) SERVICE_NAME, PORT_NAME
```

```
37         INTEGER INFO, IERROR
```

```
39     MPI_OPEN_PORT(INFO, PORT_NAME, IERROR)
```

```
40         CHARACTER*(*) PORT_NAME
```

```
41         INTEGER INFO, IERROR
```

```
42     MPI_PUBLISH_NAME(SERVICE_NAME, INFO, PORT_NAME, IERROR)
```

```
43         INTEGER INFO, IERROR
```

```
44         CHARACTER*(*) SERVICE_NAME, PORT_NAME
```

```
46     MPI_UNPUBLISH_NAME(SERVICE_NAME, INFO, PORT_NAME, IERROR)
```

```
47         INTEGER INFO, IERROR
```

```
48         CHARACTER*(*) SERVICE_NAME, PORT_NAME
```

## A.3.9 One-Sided Communications Fortran Bindings

```

MPI_ACCUMULATE(ORIGIN_ADDR, ORIGIN_COUNT, ORIGIN_DATATYPE, TARGET_RANK,
               TARGET_DISP, TARGET_COUNT, TARGET_DATATYPE, OP, WIN, IERROR)
    <type> ORIGIN_ADDR(*)
    INTEGER(KIND=MPI_ADDRESS_KIND) TARGET_DISP
    INTEGER ORIGIN_COUNT, ORIGIN_DATATYPE, TARGET_RANK, TARGET_COUNT,
    TARGET_DATATYPE, OP, WIN, IERROR

MPI_GET(ORIGIN_ADDR, ORIGIN_COUNT, ORIGIN_DATATYPE, TARGET_RANK,
        TARGET_DISP, TARGET_COUNT, TARGET_DATATYPE, WIN, IERROR)
    <type> ORIGIN_ADDR(*)
    INTEGER(KIND=MPI_ADDRESS_KIND) TARGET_DISP
    INTEGER ORIGIN_COUNT, ORIGIN_DATATYPE, TARGET_RANK, TARGET_COUNT,
    TARGET_DATATYPE, WIN, IERROR

MPI_PUT(ORIGIN_ADDR, ORIGIN_COUNT, ORIGIN_DATATYPE, TARGET_RANK,
        TARGET_DISP, TARGET_COUNT, TARGET_DATATYPE, WIN, IERROR)
    <type> ORIGIN_ADDR(*)
    INTEGER(KIND=MPI_ADDRESS_KIND) TARGET_DISP
    INTEGER ORIGIN_COUNT, ORIGIN_DATATYPE, TARGET_RANK, TARGET_COUNT,
    TARGET_DATATYPE, WIN, IERROR

MPI_WIN_COMPLETE(WIN, IERROR)
    INTEGER WIN, IERROR

MPI_WIN_CREATE(BASE, SIZE, DISP_UNIT, INFO, COMM, WIN, IERROR)
    <type> BASE(*)
    INTEGER(KIND=MPI_ADDRESS_KIND) SIZE
    INTEGER DISP_UNIT, INFO, COMM, WIN, IERROR

MPI_WIN_FENCE(ASSERT, WIN, IERROR)
    INTEGER ASSERT, WIN, IERROR

MPI_WIN_FREE(WIN, IERROR)
    INTEGER WIN, IERROR

MPI_WIN_GET_GROUP(WIN, GROUP, IERROR)
    INTEGER WIN, GROUP, IERROR

MPI_WIN_LOCK(LOCK_TYPE, RANK, ASSERT, WIN, IERROR)
    INTEGER LOCK_TYPE, RANK, ASSERT, WIN, IERROR

MPI_WIN_POST(GROUP, ASSERT, WIN, IERROR)
    INTEGER GROUP, ASSERT, WIN, IERROR

MPI_WIN_START(GROUP, ASSERT, WIN, IERROR)
    INTEGER GROUP, ASSERT, WIN, IERROR

MPI_WIN_TEST(WIN, FLAG, IERROR)
    INTEGER WIN, IERROR
    LOGICAL FLAG

MPI_WIN_UNLOCK(RANK, WIN, IERROR)

```

```
1      INTEGER RANK, WIN, IERROR
```

```
2      MPI_WIN_WAIT(WIN, IERROR)
```

```
3      INTEGER WIN, IERROR
```

### 6 A.3.10 External Interfaces Fortran Bindings

```
7      MPI_GREQUEST_COMPLETE(REQUEST, IERROR)
```

```
8      INTEGER REQUEST, IERROR
```

```
9      MPI_GREQUEST_START(QUERY_FN, FREE_FN, CANCEL_FN, EXTRA_STATE, REQUEST,  
10      IERROR)
```

```
11      INTEGER REQUEST, IERROR
```

```
12      EXTERNAL QUERY_FN, FREE_FN, CANCEL_FN
```

```
13      INTEGER (KIND=MPI_ADDRESS_KIND) EXTRA_STATE
```

```
14      MPI_INIT_THREAD(REQUIRED, PROVIDED, IERROR)
```

```
15      INTEGER REQUIRED, PROVIDED, IERROR
```

```
16      MPI_IS_THREAD_MAIN(FLAG, IERROR)
```

```
17      LOGICAL FLAG
```

```
18      INTEGER IERROR
```

```
19      MPI_QUERY_THREAD(PROVIDED, IERROR)
```

```
20      INTEGER PROVIDED, IERROR
```

```
21      MPI_STATUS_SET_CANCELLED(STATUS, FLAG, IERROR)
```

```
22      INTEGER STATUS(MPI_STATUS_SIZE), IERROR
```

```
23      LOGICAL FLAG
```

```
24      MPI_STATUS_SET_ELEMENTS(STATUS, DATATYPE, COUNT, IERROR)
```

```
25      INTEGER STATUS(MPI_STATUS_SIZE), DATATYPE, COUNT, IERROR
```

### 31 A.3.11 I/O Fortran Bindings

```
32      MPI_FILE_CLOSE(FH, IERROR)
```

```
33      INTEGER FH, IERROR
```

```
34      MPI_FILE_DELETE(FILENAME, INFO, IERROR)
```

```
35      CHARACTER*(*) FILENAME
```

```
36      INTEGER INFO, IERROR
```

```
37      MPI_FILE_GET_AMODE(FH, AMODE, IERROR)
```

```
38      INTEGER FH, AMODE, IERROR
```

```
39      MPI_FILE_GET_ATOMICITY(FH, FLAG, IERROR)
```

```
40      INTEGER FH, IERROR
```

```
41      LOGICAL FLAG
```

```
42      MPI_FILE_GET_BYTE_OFFSET(FH, OFFSET, DISP, IERROR)
```

```
43      INTEGER FH, IERROR
```

```
44      INTEGER(KIND=MPI_OFFSET_KIND) OFFSET, DISP
```

MPI_FILE_GET_GROUP(FH, GROUP, IERROR)	1
INTEGER FH, GROUP, IERROR	2
	3
MPI_FILE_GET_INFO(FH, INFO_USED, IERROR)	4
INTEGER FH, INFO_USED, IERROR	5
	6
MPI_FILE_GET_POSITION(FH, OFFSET, IERROR)	7
INTEGER FH, IERROR	8
INTEGER(KIND=MPI_OFFSET_KIND) OFFSET	9
	10
MPI_FILE_GET_POSITION_SHARED(FH, OFFSET, IERROR)	11
INTEGER FH, IERROR	12
INTEGER(KIND=MPI_OFFSET_KIND) OFFSET	13
	14
MPI_FILE_GET_SIZE(FH, SIZE, IERROR)	15
INTEGER FH, IERROR	16
INTEGER(KIND=MPI_OFFSET_KIND) SIZE	17
	18
MPI_FILE_GET_TYPE_EXTENT(FH, DATATYPE, EXTENT, IERROR)	19
INTEGER FH, DATATYPE, IERROR	20
INTEGER(KIND=MPI_ADDRESS_KIND) EXTENT	21
	22
MPI_FILE_GET_VIEW(FH, DISP, ETYPE, FILETYPE, DATAREP, IERROR)	23
INTEGER FH, ETYPE, FILETYPE, IERROR	24
CHARACTER*(*) DATAREP	25
INTEGER(KIND=MPI_OFFSET_KIND) DISP	26
	27
MPI_FILE_IREAD_AT(FH, OFFSET, BUF, COUNT, DATATYPE, REQUEST, IERROR)	28
<type> BUF(*)	29
INTEGER FH, COUNT, DATATYPE, REQUEST, IERROR	30
INTEGER(KIND=MPI_OFFSET_KIND) OFFSET	31
	32
MPI_FILE_IREAD(FH, BUF, COUNT, DATATYPE, REQUEST, IERROR)	33
<type> BUF(*)	34
INTEGER FH, COUNT, DATATYPE, REQUEST, IERROR	35
	36
MPI_FILE_IREAD_SHARED(FH, BUF, COUNT, DATATYPE, REQUEST, IERROR)	37
<type> BUF(*)	38
INTEGER FH, COUNT, DATATYPE, REQUEST, IERROR	39
	40
MPI_FILE_IWRITE_AT(FH, OFFSET, BUF, COUNT, DATATYPE, REQUEST, IERROR)	41
<type> BUF(*)	42
INTEGER FH, COUNT, DATATYPE, REQUEST, IERROR	43
INTEGER(KIND=MPI_OFFSET_KIND) OFFSET	44
	45
MPI_FILE_IWRITE(FH, BUF, COUNT, DATATYPE, REQUEST, IERROR)	46
<type> BUF(*)	47
INTEGER FH, COUNT, DATATYPE, REQUEST, IERROR	48
MPI_FILE_OPEN(COMM, FILENAME, AMODE, INFO, FH, IERROR)	

```

1      CHARACTER*(*) FILENAME
2      INTEGER COMM, AMODE, INFO, FH, IERROR
3
4      MPI_FILE_PREALLOCATE(FH, SIZE, IERROR)
5      INTEGER FH, IERROR
6      INTEGER(KIND=MPI_OFFSET_KIND) SIZE
7
8      MPI_FILE_READ_ALL_BEGIN(FH, BUF, COUNT, DATATYPE, IERROR)
9      <type> BUF(*)
10     INTEGER FH, COUNT, DATATYPE, IERROR
11
12     MPI_FILE_READ_ALL_END(FH, BUF, STATUS, IERROR)
13     <type> BUF(*)
14     INTEGER FH, STATUS(MPI_STATUS_SIZE), IERROR
15
16     MPI_FILE_READ_ALL(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)
17     <type> BUF(*)
18     INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
19
20     MPI_FILE_READ_AT_ALL_BEGIN(FH, OFFSET, BUF, COUNT, DATATYPE, IERROR)
21     <type> BUF(*)
22     INTEGER FH, COUNT, DATATYPE, IERROR
23     INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
24
25     MPI_FILE_READ_AT_ALL_END(FH, BUF, STATUS, IERROR)
26     <type> BUF(*)
27     INTEGER FH, STATUS(MPI_STATUS_SIZE), IERROR
28
29     MPI_FILE_READ_AT_ALL(FH, OFFSET, BUF, COUNT, DATATYPE, STATUS, IERROR)
30     <type> BUF(*)
31     INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
32     INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
33
34     MPI_FILE_READ_AT(FH, OFFSET, BUF, COUNT, DATATYPE, STATUS, IERROR)
35     <type> BUF(*)
36     INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
37
38     MPI_FILE_READ_ORDERED_BEGIN(FH, BUF, COUNT, DATATYPE, IERROR)
39     <type> BUF(*)
40     INTEGER FH, COUNT, DATATYPE, IERROR
41
42     MPI_FILE_READ_ORDERED_END(FH, BUF, STATUS, IERROR)
43     <type> BUF(*)
44     INTEGER FH, STATUS(MPI_STATUS_SIZE), IERROR
45
46     MPI_FILE_READ_ORDERED(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)
47     <type> BUF(*)
48     INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR

```



MPI_FILE_READ_SHARED(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)	1
<type> BUF(*)	2
INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR	3
	4
MPI_FILE_SEEK(FH, OFFSET, WHENCE, IERROR)	5
INTEGER FH, WHENCE, IERROR	6
INTEGER(KIND=MPI_OFFSET_KIND) OFFSET	7
	8
MPI_FILE_SEEK_SHARED(FH, OFFSET, WHENCE, IERROR)	9
INTEGER FH, WHENCE, IERROR	10
INTEGER(KIND=MPI_OFFSET_KIND) OFFSET	11
	12
MPI_FILE_SET_ATOMICITY(FH, FLAG, IERROR)	13
INTEGER FH, IERROR	14
LOGICAL FLAG	15
	16
MPI_FILE_SET_INFO(FH, INFO, IERROR)	17
INTEGER FH, INFO, IERROR	18
	19
MPI_FILE_SET_SIZE(FH, SIZE, IERROR)	20
INTEGER FH, IERROR	21
INTEGER(KIND=MPI_OFFSET_KIND) SIZE	22
	23
MPI_FILE_SET_VIEW(FH, DISP, ETYPE, FILETYPE, DATAREP, INFO, IERROR)	24
INTEGER FH, ETYPE, FILETYPE, INFO, IERROR	25
CHARACTER*(*) DATAREP	26
INTEGER(KIND=MPI_OFFSET_KIND) DISP	27
	28
MPI_FILE_SYNC(FH, IERROR)	29
INTEGER FH, IERROR	30
	31
MPI_FILE_WRITE_ALL_BEGIN(FH, BUF, COUNT, DATATYPE, IERROR)	32
<type> BUF(*)	33
INTEGER FH, COUNT, DATATYPE, IERROR	34
	35
MPI_FILE_WRITE_ALL_END(FH, BUF, STATUS, IERROR)	36
<type> BUF(*)	37
INTEGER FH, STATUS(MPI_STATUS_SIZE), IERROR	38
	39
MPI_FILE_WRITE_ALL(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)	40
<type> BUF(*)	41
INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR	42
	43
MPI_FILE_WRITE_AT_ALL_BEGIN(FH, OFFSET, BUF, COUNT, DATATYPE, IERROR)	44
<type> BUF(*)	45
INTEGER FH, COUNT, DATATYPE, IERROR	46
INTEGER(KIND=MPI_OFFSET_KIND) OFFSET	47
	48
MPI_FILE_WRITE_AT_ALL_END(FH, BUF, STATUS, IERROR)	
<type> BUF(*)	
INTEGER FH, STATUS(MPI_STATUS_SIZE), IERROR	
MPI_FILE_WRITE_AT_ALL(FH, OFFSET, BUF, COUNT, DATATYPE, STATUS, IERROR)	
<type> BUF(*)	

```

1      INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
2      INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
3
4      MPI_FILE_WRITE_AT(FH, OFFSET, BUF, COUNT, DATATYPE, STATUS, IERROR)
5          <type> BUF(*)
6      INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
7      INTEGER(KIND=MPI_OFFSET_KIND) OFFSET
8
9      MPI_FILE_WRITE(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)
10         <type> BUF(*)
11     INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
12
13     MPI_FILE_WRITE_ORDERED_BEGIN(FH, BUF, COUNT, DATATYPE, IERROR)
14         <type> BUF(*)
15     INTEGER FH, COUNT, DATATYPE, IERROR
16
17     MPI_FILE_WRITE_ORDERED_END(FH, BUF, STATUS, IERROR)
18         <type> BUF(*)
19     INTEGER FH, STATUS(MPI_STATUS_SIZE), IERROR
20
21     MPI_FILE_WRITE_ORDERED(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)
22         <type> BUF(*)
23     INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
24
25     MPI_FILE_WRITE_SHARED(FH, BUF, COUNT, DATATYPE, STATUS, IERROR)
26         <type> BUF(*)
27     INTEGER FH, COUNT, DATATYPE, STATUS(MPI_STATUS_SIZE), IERROR
28
29     MPI_REGISTER_DATAREP(DATAREP, READ_CONVERSION_FN, WRITE_CONVERSION_FN,
30         DTYPE_FILE_EXTENT_FN, EXTRA_STATE, IERROR)
31     CHARACTER*(*) DATAREP
32     EXTERNAL READ_CONVERSION_FN, WRITE_CONVERSION_FN, DTYPE_FILE_EXTENT_FN
33     INTEGER(KIND=MPI_ADDRESS_KIND) EXTRA_STATE
34     INTEGER IERROR

```

### A.3.12 Language Bindings Fortran Bindings

```

35     MPI_SIZEOF(X, SIZE, IERROR)
36         <type> X
37     INTEGER SIZE, IERROR
38
39     MPI_TYPE_CREATE_F90_COMPLEX(P, R, NEWTYPE, IERROR)
40         INTEGER P, R, NEWTYPE, IERROR
41
42     MPI_TYPE_CREATE_F90_INTEGER(R, NEWTYPE, IERROR)
43         INTEGER R, NEWTYPE, IERROR
44
45     MPI_TYPE_CREATE_F90_REAL(P, R, NEWTYPE, IERROR)
46         INTEGER P, R, NEWTYPE, IERROR
47
48     MPI_TYPE_MATCH_SIZE(TYPECLASS, SIZE, TYPE, IERROR)
49         INTEGER TYPECLASS, SIZE, TYPE, IERROR

```

## A.3.13 Profiling Interface Fortran Bindings

```
MPI_PCONTROL(LEVEL)
```

```
    INTEGER LEVEL[, ...]
```

## A.3.14 Deprecated Fortran Bindings

```
MPI_ADDRESS(LOCATION, ADDRESS, IERROR)
```

```
    <type> LOCATION(*)
```

```
    INTEGER ADDRESS, IERROR
```

```
MPI_ATTR_DELETE(COMM, KEYVAL, IERROR)
```

```
    INTEGER COMM, KEYVAL, IERROR
```

```
MPI_ATTR_GET(COMM, KEYVAL, ATTRIBUTE_VAL, FLAG, IERROR)
```

```
    INTEGER COMM, KEYVAL, ATTRIBUTE_VAL, IERROR
```

```
    LOGICAL FLAG
```

```
MPI_ATTR_PUT(COMM, KEYVAL, ATTRIBUTE_VAL, IERROR)
```

```
    INTEGER COMM, KEYVAL, ATTRIBUTE_VAL, IERROR
```

```
MPI_DUP_FN(OLDCOMM, KEYVAL, EXTRA_STATE, ATTRIBUTE_VAL_IN,
```

```
           ATTRIBUTE_VAL_OUT, FLAG, IERR)
```

```
    INTEGER OLDCOMM, KEYVAL, EXTRA_STATE, ATTRIBUTE_VAL_IN,
```

```
    ATTRIBUTE_VAL_OUT, IERR
```

```
    LOGICAL FLAG
```

```
MPI_ERRHANDLER_CREATE(FUNCTION, ERRHANDLER, IERROR)
```

```
    EXTERNAL FUNCTION
```

```
    INTEGER ERRHANDLER, IERROR
```

```
MPI_ERRHANDLER_GET(COMM, ERRHANDLER, IERROR)
```

```
    INTEGER COMM, ERRHANDLER, IERROR
```

```
MPI_ERRHANDLER_SET(COMM, ERRHANDLER, IERROR)
```

```
    INTEGER COMM, ERRHANDLER, IERROR
```

```
MPI_KEYVAL_CREATE(COPY_FN, DELETE_FN, KEYVAL, EXTRA_STATE, IERROR)
```

```
    EXTERNAL COPY_FN, DELETE_FN
```

```
    INTEGER KEYVAL, EXTRA_STATE, IERROR
```

```
MPI_KEYVAL_FREE(KEYVAL, IERROR)
```

```
    INTEGER KEYVAL, IERROR
```

```
MPI_NULL_COPY_FN(OLDCOMM, KEYVAL, EXTRA_STATE, ATTRIBUTE_VAL_IN,
```

```
           ATTRIBUTE_VAL_OUT, FLAG, IERR)
```

```
    INTEGER OLDCOMM, KEYVAL, EXTRA_STATE, ATTRIBUTE_VAL_IN,
```

```
    ATTRIBUTE_VAL_OUT, IERR
```

```
    LOGICAL FLAG
```

```
MPI_NULL_DELETE_FN(COMM, KEYVAL, ATTRIBUTE_VAL, EXTRA_STATE, IERROR)
```

```
    INTEGER COMM, KEYVAL, ATTRIBUTE_VAL, EXTRA_STATE, IERROR
```

ticket1.

```
1  MPI_TYPE_EXTENT(DATATYPE, EXTENT, IERROR)
2      INTEGER DATATYPE, EXTENT, IERROR
3
4  MPI_TYPE_HINDEXED(COUNT, ARRAY_OF_BLOCKLENGTHS, ARRAY_OF_DISPLACEMENTS,
5      OLDTYPE, NEWTYPE, IERROR)
6      INTEGER COUNT, ARRAY_OF_BLOCKLENGTHS(*), ARRAY_OF_DISPLACEMENTS(*),
7      OLDTYPE, NEWTYPE, IERROR
8
9  MPI_TYPE_HVECTOR(COUNT, BLOCKLENGTH, STRIDE, OLDTYPE, NEWTYPE, IERROR)
10     INTEGER COUNT, BLOCKLENGTH, STRIDE, OLDTYPE, NEWTYPE, IERROR
11
12 MPI_TYPE_LB( DATATYPE, DISPLACEMENT, IERROR)
13     INTEGER DATATYPE, DISPLACEMENT, IERROR
14
15 MPI_TYPE_STRUCT(COUNT, ARRAY_OF_BLOCKLENGTHS, ARRAY_OF_DISPLACEMENTS,
16     ARRAY_OF_TYPES, NEWTYPE, IERROR)
17     INTEGER COUNT, ARRAY_OF_BLOCKLENGTHS(*), ARRAY_OF_DISPLACEMENTS(*),
18     ARRAY_OF_TYPES(*), NEWTYPE, IERROR
19
20 MPI_TYPE_UB( DATATYPE, DISPLACEMENT, IERROR)
21     INTEGER DATATYPE, DISPLACEMENT, IERROR
22
23 SUBROUTINE COPY_FUNCTION(OLDCOMM, KEYVAL, EXTRA_STATE, ATTRIBUTE_VAL_IN,
24     ATTRIBUTE_VAL_OUT, FLAG, IERR)
25     INTEGER OLDCOMM, KEYVAL, EXTRA_STATE, ATTRIBUTE_VAL_IN,
26     ATTRIBUTE_VAL_OUT, IERR
27     LOGICAL FLAG
28
29 SUBROUTINE DELETE_FUNCTION(COMM, KEYVAL, ATTRIBUTE_VAL, EXTRA_STATE, IERR)
30     INTEGER COMM, KEYVAL, ATTRIBUTE_VAL, EXTRA_STATE, IERR
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
```

## A.4 C++ Bindings (deprecated)

### A.4.1 Point-to-Point Communication C++ Bindings

```

namespace MPI {
    {void Attach_buffer(void* buffer, int size) (binding deprecated, see
        Section 15.2) }
    {void Comm::Bsend(const void* buf, int count, const Datatype& datatype,
        int dest, int tag) const (binding deprecated, see Section 15.2) }
    {Prequest Comm::Bsend_init(const void* buf, int count, const
        Datatype& datatype, int dest, int tag) const (binding deprecated,
        see Section 15.2) }
    {void Request::Cancel() const (binding deprecated, see Section 15.2) }
    {int Detach_buffer(void*& buffer) (binding deprecated, see Section 15.2) }
    {void Request::Free() (binding deprecated, see Section 15.2) }
    {int Status::Get_count(const Datatype& datatype) const (binding deprecated,
        see Section 15.2) }
    {int Status::Get_error() const (binding deprecated, see Section 15.2) }
    {int Status::Get_source() const (binding deprecated, see Section 15.2) }
    {bool Request::Get_status() const (binding deprecated, see Section 15.2) }
    {bool Request::Get_status(Status& status) const (binding deprecated, see
        Section 15.2) }
    {int Status::Get_tag() const (binding deprecated, see Section 15.2) }
    {Request Comm::Ibsend(const void* buf, int count, const
        Datatype& datatype, int dest, int tag) const (binding deprecated,
        see Section 15.2) }
    {bool Comm::Iprobe(int source, int tag) const (binding deprecated, see
        Section 15.2) }
    {bool Comm::Iprobe(int source, int tag, Status& status) const (binding
        deprecated, see Section 15.2) }
    {Request Comm::Irecv(void* buf, int count, const Datatype& datatype,
        int source, int tag) const (binding deprecated, see Section 15.2) }
    {Request Comm::Irsend(const void* buf, int count, const
        Datatype& datatype, int dest, int tag) const (binding deprecated,
        see Section 15.2) }
    {bool Status::Is_cancelled() const (binding deprecated, see Section 15.2) }

```

```

ticket150. 1      {Request Comm::Isend(const void* buf, int count, const
ticket150. 2          Datatype& datatype, int dest, int tag) const (binding deprecated,
3              see Section 15.2) }
4
ticket150. 5      {Request Comm::Issend(const void* buf, int count, const
ticket150. 6          Datatype& datatype, int dest, int tag) const (binding deprecated,
7              see Section 15.2) }
8
ticket150. 9      {void Comm::Probe(int source, int tag) const (binding deprecated, see
ticket150. 10         Section 15.2) }
11
ticket150. 12     {void Comm::Probe(int source, int tag, Status& status) const (binding
ticket150. 13         deprecated, see Section 15.2) }
14
ticket150. 15     {Prequest Comm::Recv_init(void* buf, int count, const Datatype& datatype,
ticket150. 16         int source, int tag) const (binding deprecated, see Section 15.2) }
17
ticket150. 18     {void Comm::Recv(void* buf, int count, const Datatype& datatype,
ticket150. 19         int source, int tag) const (binding deprecated, see Section 15.2) }
ticket150. 20
21
ticket150. 22     {void Comm::Rsend(const void* buf, int count, const Datatype& datatype,
ticket150. 23         int dest, int tag) const (binding deprecated, see Section 15.2) }
24
ticket150. 25     {Prequest Comm::Rsend_init(const void* buf, int count, const
ticket150. 26         Datatype& datatype, int dest, int tag) const (binding deprecated,
27             see Section 15.2) }
28
ticket150. 29     {void Comm::Send(const void* buf, int count, const Datatype& datatype,
ticket150. 30         int dest, int tag) const (binding deprecated, see Section 15.2) }
31
ticket150. 32     {Prequest Comm::Send_init(const void* buf, int count, const
ticket150. 33         Datatype& datatype, int dest, int tag) const (binding deprecated,
34             see Section 15.2) }
35
ticket150. 36     {void Comm::Sendrecv(const void *sendbuf, int sendcount, const
37         Datatype& sendtype, int dest, int sendtag, void *recvbuf,
38         int recvcount, const Datatype& recvtype, int source,
39         int recvtag) const (binding deprecated, see Section 15.2) }
40
ticket150. 41     {void Comm::Sendrecv(const void *sendbuf, int sendcount, const
42         Datatype& sendtype, int dest, int sendtag, void *recvbuf,
43         int recvcount, const Datatype& recvtype, int source,
44         int recvtag, Status& status) const (binding deprecated, see
45             Section 15.2) }
46
ticket150. 47     {void Comm::Sendrecv_replace(void* buf, int count, const
48         Datatype& datatype, int dest, int sendtag, int source,
49         int recvtag) const (binding deprecated, see Section 15.2) }

```

```

        Datatype& datatype, int dest, int sendtag, int source,
        int recvtag, Status& status) const (binding deprecated, see
        Section 15.2) }
1
2 ticket150.
3
4
5 {void Status::Set_error(int error) (binding deprecated, see Section 15.2) }
6 ticket150.
7 {void Status::Set_source(int source) (binding deprecated, see Section 15.2) }
8 ticket150.
9 {void Status::Set_tag(int tag) (binding deprecated, see Section 15.2) }
10 ticket150.
11 {void Comm::Ssend(const void* buf, int count, const Datatype& datatype,
12 int dest, int tag) const (binding deprecated, see Section 15.2) }
13 ticket150.
14
15 {Prequest Comm::Ssend_init(const void* buf, int count, const
16 Datatype& datatype, int dest, int tag) const (binding deprecated,
17 see Section 15.2) }
18 ticket150.
19 {static void Prequest::Startall(int count, Prequest array_of_requests[])
20 (binding deprecated, see Section 15.2) }
21 ticket150.
22 {void Prequest::Start() (binding deprecated, see Section 15.2) }
23 ticket150.
24 {static bool Request::Testall(int count, Request array_of_requests[],
25 Status array_of_statuses[]) (binding deprecated, see Section 15.2) }
26 ticket150.
27 {static bool Request::Testall(int count, Request array_of_requests[])
28 (binding deprecated, see Section 15.2) }
29 ticket150.
30 {static bool Request::Testany(int count, Request array_of_requests[],
31 int& index, Status& status) (binding deprecated, see Section 15.2) }
32 ticket150.
33 {static bool Request::Testany(int count, Request array_of_requests[],
34 int& index) (binding deprecated, see Section 15.2) }
35 ticket150.
36 {bool Request::Test() (binding deprecated, see Section 15.2) }
37 ticket150.
38 {bool Request::Test(Status& status) (binding deprecated, see Section 15.2) }
39 ticket150.
40 {static int Request::Testsome(int incount, Request array_of_requests[],
41 int array_of_indices[], Status array_of_statuses[]) (binding
42 deprecated, see Section 15.2) }
43 ticket150.
44 {static int Request::Testsome(int incount, Request array_of_requests[],
45 int array_of_indices[]) (binding deprecated, see Section 15.2) }
46 ticket150.
47 {static void Request::Waitall(int count, Request array_of_requests[],
48 Status array_of_statuses[]) (binding deprecated, see Section 15.2) }
49 ticket150.
50 {static void Request::Waitall(int count, Request array_of_requests[])
51 (binding deprecated, see Section 15.2) }
52 ticket150.
53 {static int Request::Waitany(int count, Request array_of_requests[],
54 Status& status) (binding deprecated, see Section 15.2) }
55 ticket150.
56 {static int Request::Waitany(int count, Request array_of_requests[])
57 (binding deprecated, see Section 15.2) }
58 ticket150.
59

```

```

ticket150. 1      {void Request::Wait(Status& status) (binding deprecated, see Section 15.2) }
ticket150. 2
ticket150. 3      {static int Request::Waitsome(int incount, Request array_of_requests[],
ticket150. 4          int array_of_indices[], Status array_of_statuses[]) (binding
deprecated, see Section 15.2) }
5
ticket150. 6      {static int Request::Waitsome(int incount, Request array_of_requests[],
ticket150. 7          int array_of_indices[]) (binding deprecated, see Section 15.2) }
8
ticket150. 9      {void Request::Wait() (binding deprecated, see Section 15.2) }
ticket150. 10
11      };
12

```

#### A.4.2 Datatypes C++ Bindings

```

13      namespace MPI {
14
15      {
16
17      ticket150. 1      {void Datatype::Commit() (binding deprecated, see Section 15.2) }
18
19      ticket150. 2      {Datatype Datatype::Create_contiguous(int count) const (binding deprecated,
20          see Section 15.2) }
21
22      ticket150. 3      {Datatype Datatype::Create_darray(int size, int rank, int ndims,
23          const int array_of_gsizes[], const int array_of_distrib[],
24          const int array_of_dargs[], const int array_of_psize[],
25          int order) const (binding deprecated, see Section 15.2) }
26
27      ticket150. 4      {Datatype Datatype::Create_hindexed(int count,
28          const int array_of_blocklengths[],
29          const Aint array_of_displacements[]) const (binding deprecated,
30          see Section 15.2) }
31
32      ticket150. 5      {Datatype Datatype::Create_hvector(int count, int blocklength, Aint
33          stride) const (binding deprecated, see Section 15.2) }
34
35      ticket150. 6      {Datatype Datatype::Create_indexed_block(int count, int blocklength,
36          const int array_of_displacements[]) const (binding deprecated, see
37          Section 15.2) }
38
39      ticket150. 7      {Datatype Datatype::Create_indexed(int count,
40          const int array_of_blocklengths[],
41          const int array_of_displacements[]) const (binding deprecated, see
42          Section 15.2) }
43
44      ticket150. 8      {Datatype Datatype::Create_resized(const Aint lb, const Aint extent)
45          const (binding deprecated, see Section 15.2) }
46
47      ticket150. 9      {static Datatype Datatype::Create_struct(int count,
48          const int array_of_blocklengths[], const Aint
49          array_of_displacements[], const Datatype array_of_types[])
50          (binding deprecated, see Section 15.2) }
51
52      ticket150. 10     {Datatype Datatype::Create_subarray(int ndims,

```



```

    const int array_of_sizes[], const int array_of_subsizes[],
    const int array_of_starts[], int order) const (binding
    deprecated, see Section 15.2) }
{Datatype Datatype::Create_vector(int count, int blocklength, int stride)
    const (binding deprecated, see Section 15.2) }
{Datatype Datatype::Dup() const (binding deprecated, see Section 15.2) }
{void Datatype::Free() (binding deprecated, see Section 15.2) }
{Aint Get_address(void* location) (binding deprecated, see Section 15.2) }
{void Datatype::Get_contents(int max_integers, int max_addresses,
    int max_datatypes, int array_of_integers[],
    Aint array_of_addresses[], Datatype array_of_datatypes[])
    const (binding deprecated, see Section 15.2) }
{int Status::Get_elements(const Datatype& datatype) const (binding
    deprecated, see Section 15.2) }
{void Datatype::Get_envelope(int& num_integers, int& num_addresses,
    int& num_datatypes, int& combiner) const (binding deprecated, see
    Section 15.2) }
{void Datatype::Get_extent(Aint& lb, Aint& extent) const (binding deprecated,
    see Section 15.2) }
{int Datatype::Get_size() const (binding deprecated, see Section 15.2) }
{void Datatype::Get_true_extent(Aint& true_lb, Aint& true_extent) const
    (binding deprecated, see Section 15.2) }
{void Datatype::Pack(const void* inbuf, int incount, void *outbuf,
    int outsize, int& position, const Comm &comm) const (binding
    deprecated, see Section 15.2) }
{void Datatype::Pack_external(const char* datarep, const void* inbuf,
    int incount, void* outbuf, Aint outsize, Aint& position) const
    (binding deprecated, see Section 15.2) }
{Aint Datatype::Pack_external_size(const char* datarep, int incount)
    const (binding deprecated, see Section 15.2) }
{int Datatype::Pack_size(int incount, const Comm& comm) const (binding
    deprecated, see Section 15.2) }
{void Datatype::Unpack(const void* inbuf, int insize, void *outbuf,
    int outcount, int& position, const Comm& comm) const (binding
    deprecated, see Section 15.2) }
{void Datatype::Unpack_external(const char* datarep, const void* inbuf,
    Aint insize, Aint& position, void* outbuf, int outcount) const
    (binding deprecated, see Section 15.2) }

```

```
1 };
2
```

### 3 A.4.3 Collective Communication C++ Bindings

```
4 namespace MPI {
5
```

```
6
ticket150. 7 {void Comm::Allgather(const void* sendbuf, int sendcount, const
8           Datatype& sendtype, void* recvbuf, int recvcount,
ticket150. 9           const Datatype& recvttype) const = 0 (binding deprecated, see
10           Section 15.2) }
11
ticket150. 12 {void Comm::Allgatherv(const void* sendbuf, int sendcount, const
13           Datatype& sendtype, void* recvbuf, const int recvcounts[],
14           const int displs[], const Datatype& recvttype) const = 0
15           (binding deprecated, see Section 15.2) }
16
ticket150. 17 {void Comm::Allreduce(const void* sendbuf, void* recvbuf, int count,
18           const Datatype& datatype, const Op& op) const = 0 (binding
19           deprecated, see Section 15.2) }
20
ticket150. 21 {void Comm::Alltoall(const void* sendbuf, int sendcount, const
22           Datatype& sendtype, void* recvbuf, int recvcount,
23           const Datatype& recvttype) const = 0 (binding deprecated, see
24           Section 15.2) }
25
ticket150. 26 {void Comm::Alltoallv(const void* sendbuf, const int sendcounts[],
27           const int sdispls[], const Datatype& sendtype, void* recvbuf,
28           const int recvcounts[], const int rdispls[],
29           const Datatype& recvttype) const = 0 (binding deprecated, see
30           Section 15.2) }
31
ticket150. 32 {void Comm::Alltoallw(const void* sendbuf, const int sendcounts[], const
33           int sdispls[], const Datatype& sendtypes[], void* recvbuf,
34           const int recvcounts[], const int rdispls[], const Datatype
35           recvtypes[]) const = 0 (binding deprecated, see Section 15.2) }
36
ticket150. 37 {void Comm::Barrier() const = 0 (binding deprecated, see Section 15.2) }
38
ticket150. 39 {void Comm::Bcast(void* buffer, int count, const Datatype& datatype,
40           int root) const = 0 (binding deprecated, see Section 15.2) }
41
ticket150. 42 {void Intracomm::Exscan(const void* sendbuf, void* recvbuf, int count,
43           const Datatype& datatype, const Op& op) const (binding
44           deprecated, see Section 15.2) }
45
ticket150. 46 {void Op::Free() (binding deprecated, see Section 15.2) }
47
ticket150. 48 {void Comm::Gather(const void* sendbuf, int sendcount, const
49           Datatype& sendtype, void* recvbuf, int recvcount,
50           const Datatype& recvttype, int root) const = 0 (binding
51           deprecated, see Section 15.2) }
52
ticket150. 53 {void Comm::Gatherv(const void* sendbuf, int sendcount, const
```

```

        Datatype& sendtype, void* recvbuf, const int recvcnts[],
        const int displs[], const Datatype& recvtype, int root)
        const = 0 (binding deprecated, see Section 15.2) }
    {void Op::Init(User_function* function, bool commute) (binding deprecated,
        see Section 15.2) }
    {bool Op::Is_commutative() const (binding deprecated, see Section 15.2) }
    {void Comm::Reduce(const void* sendbuf, void* recvbuf, int count,
        const Datatype& datatype, const Op& op, int root) const = 0
        (binding deprecated, see Section 15.2) }
    {void Op::Reduce_local(const void* inbuf, void* inoutbuf, int count,
        const Datatype& datatype) const (binding deprecated, see
        Section 15.2) }
    {void Comm::Reduce_scatter_block(const void* sendbuf, void* recvbuf,
        int recvcnt, const Datatype& datatype, const Op& op)
        const = 0 (binding deprecated, see Section 15.2) }
    {void Comm::Reduce_scatter(const void* sendbuf, void* recvbuf,
        int recvcnts[], const Datatype& datatype, const Op& op)
        const = 0 (binding deprecated, see Section 15.2) }
    {void Intracomm::Scan(const void* sendbuf, void* recvbuf, int count,
        const Datatype& datatype, const Op& op) const (binding
        deprecated, see Section 15.2) }
    {void Comm::Scatter(const void* sendbuf, int sendcount, const
        Datatype& sendtype, void* recvbuf, int recvcnt,
        const Datatype& recvtype, int root) const = 0 (binding
        deprecated, see Section 15.2) }
    {void Comm::Scatterv(const void* sendbuf, const int sendcounts[],
        const int displs[], const Datatype& sendtype, void* recvbuf,
        int recvcnt, const Datatype& recvtype, int root) const = 0
        (binding deprecated, see Section 15.2) }
};

```

#### A.4.4 Groups, Contexts, Communicators, and Caching C++ Bindings

```

namespace MPI {
    {Comm& Comm::Clone() const = 0 (binding deprecated, see Section 15.2) }
    {Cartcomm& Cartcomm::Clone() const (binding deprecated, see Section 15.2) }
    {Distgraphcomm& Distgraphcomm::Clone() const (binding deprecated, see
        Section 15.2) }
    {Graphcomm& Graphcomm::Clone() const (binding deprecated, see Section 15.2) }
}

```

1	<code>{Intercomm&amp; Intercomm::Clone() const</code>	<i>(binding deprecated, see Section 15.2)</i>	ticket150.
2	<code>{Intracomm&amp; Intracomm::Clone() const</code>	<i>(binding deprecated, see Section 15.2)</i>	ticket150.
ticket150. 3	<code>{static int Comm::Compare(const Comm&amp; comm1, const Comm&amp; comm2)</code>	<i>(binding deprecated, see Section 15.2)</i>	
ticket150. 4	<code>{static int Group::Compare(const Group&amp; group1, const Group&amp; group2)</code>	<i>(binding deprecated, see Section 15.2)</i>	
ticket150. 5	<code>{static int Group::Compare(const Group&amp; group1, const Group&amp; group2)</code>	<i>(binding deprecated, see Section 15.2)</i>	
6	<code>{static int Group::Compare(const Group&amp; group1, const Group&amp; group2)</code>	<i>(binding deprecated, see Section 15.2)</i>	
ticket150. 7	<code>{static int Group::Compare(const Group&amp; group1, const Group&amp; group2)</code>	<i>(binding deprecated, see Section 15.2)</i>	
ticket150. 8	<code>{static int Group::Compare(const Group&amp; group1, const Group&amp; group2)</code>	<i>(binding deprecated, see Section 15.2)</i>	
9	<code>{Intercomm Intercomm::Create(const Group&amp; group) const</code>	<i>(binding deprecated, see Section 15.2)</i>	
ticket150. 10	<code>{Intercomm Intercomm::Create(const Group&amp; group) const</code>	<i>(binding deprecated, see Section 15.2)</i>	
11	<code>{Intercomm Intercomm::Create(const Group&amp; group) const</code>	<i>(binding deprecated, see Section 15.2)</i>	
ticket150. 12	<code>{Intracomm Intracomm::Create(const Group&amp; group) const</code>	<i>(binding deprecated, see Section 15.2)</i>	
ticket150. 13	<code>{Intracomm Intracomm::Create(const Group&amp; group) const</code>	<i>(binding deprecated, see Section 15.2)</i>	
14	<code>{Intercomm Intracomm::Create_intercomm(int local_leader, const</code>		
ticket150. 15	<code>Comm&amp; peer_comm, int remote_leader, int tag) const</code>	<i>(binding deprecated, see Section 15.2)</i>	
16	<code>Comm&amp; peer_comm, int remote_leader, int tag) const</code>	<i>(binding deprecated, see Section 15.2)</i>	
17	<code>{static int Comm::Create_keyval(Comm::Copy_attr_function*</code>		
ticket150. 18	<code>comm_copy_attr_fn,</code>		
19	<code>Comm::Delete_attr_function* comm_delete_attr_fn,</code>		
20	<code>Comm::Delete_attr_function* comm_delete_attr_fn,</code>		
ticket150. 21	<code>void* extra_state) (binding deprecated, see Section 15.2) }</code>		
22	<code>{static int Datatype::Create_keyval(Datatype::Copy_attr_function*</code>		
ticket150. 23	<code>type_copy_attr_fn, Datatype::Delete_attr_function*</code>		
24	<code>type_delete_attr_fn, void* extra_state) (binding deprecated, see</code>		
ticket150. 25	<code>Section 15.2) }</code>		
26	<code>{static int Win::Create_keyval(Win::Copy_attr_function* win_copy_attr_fn,</code>		
ticket150. 27	<code>Win::Delete_attr_function* win_delete_attr_fn,</code>		
28	<code>Win::Delete_attr_function* win_delete_attr_fn,</code>		
ticket150. 29	<code>void* extra_state) (binding deprecated, see Section 15.2) }</code>		
30	<code>{void Comm::Delete_attr(int comm_keyval) (binding deprecated, see Section 15.2) }</code>		
ticket150. 31	<code>{void Comm::Delete_attr(int comm_keyval) (binding deprecated, see</code>		
ticket150. 32	<code>Section 15.2) }</code>		
33	<code>{void Datatype::Delete_attr(int type_keyval) (binding deprecated, see</code>		
34	<code>Section 15.2) }</code>		
ticket150. 35	<code>{void Win::Delete_attr(int win_keyval) (binding deprecated, see Section 15.2) }</code>		
ticket150. 36	<code>{static Group Group::Difference(const Group&amp; group1, const Group&amp; group2)</code>	<i>(binding deprecated, see Section 15.2)</i>	
ticket150. 37	<code>{static Group Group::Difference(const Group&amp; group1, const Group&amp; group2)</code>	<i>(binding deprecated, see Section 15.2)</i>	
38	<code>{Cartcomm Cartcomm::Dup() const</code>	<i>(binding deprecated, see Section 15.2)</i>	
ticket150. 39	<code>{Distgraphcomm Distgraphcomm::Dup() const</code>	<i>(binding deprecated, see Section 15.2)</i>	
ticket150. 40	<code>{Distgraphcomm Distgraphcomm::Dup() const</code>	<i>(binding deprecated, see Section 15.2)</i>	
ticket150. 41	<code>}</code>		
42	<code>{Graphcomm Graphcomm::Dup() const</code>	<i>(binding deprecated, see Section 15.2)</i>	
ticket150. 43	<code>{Intercomm Intercomm::Dup() const</code>	<i>(binding deprecated, see Section 15.2)</i>	
ticket150. 44	<code>{Intracomm Intracomm::Dup() const</code>	<i>(binding deprecated, see Section 15.2)</i>	
ticket150. 45	<code>{Group Group::Excl(int n, const int ranks[]) const</code>	<i>(binding deprecated, see</i>	
ticket150. 46	<code>{Group Group::Excl(int n, const int ranks[]) const</code>	<i>(binding deprecated, see</i>	
ticket150. 47	<code>{Group Group::Excl(int n, const int ranks[]) const</code>	<i>(binding deprecated, see</i>	
ticket150. 48	<code>{Group Group::Excl(int n, const int ranks[]) const</code>	<i>(binding deprecated, see</i>	
ticket150.			

```

    Section 15.2) }
{static void Comm::Free_keyval(int& comm_keyval) (binding deprecated, see
    Section 15.2) }
{static void Datatype::Free_keyval(int& type_keyval) (binding deprecated, see
    Section 15.2) }
{static void Win::Free_keyval(int& win_keyval) (binding deprecated, see
    Section 15.2) }
{void Comm::Free() (binding deprecated, see Section 15.2) }
{void Group::Free() (binding deprecated, see Section 15.2) }
{bool Comm::Get_attr(int comm_keyval, void* attribute_val) const (binding
    deprecated, see Section 15.2) }
{bool Datatype::Get_attr(int type_keyval, void* attribute_val) const
    (binding deprecated, see Section 15.2) }
{bool Win::Get_attr(int win_keyval, void* attribute_val) const (binding
    deprecated, see Section 15.2) }
{Group Comm::Get_group() const (binding deprecated, see Section 15.2) }
{void Comm::Get_name(char* comm_name, int& resultlen) const (binding
    deprecated, see Section 15.2) }
{void Datatype::Get_name(char* type_name, int& resultlen) const (binding
    deprecated, see Section 15.2) }
{void Win::Get_name(char* win_name, int& resultlen) const (binding
    deprecated, see Section 15.2) }
{int Comm::Get_rank() const (binding deprecated, see Section 15.2) }
{int Group::Get_rank() const (binding deprecated, see Section 15.2) }
{Group Intercomm::Get_remote_group() const (binding deprecated, see
    Section 15.2) }
{int Intercomm::Get_remote_size() const (binding deprecated, see Section 15.2) }
{int Comm::Get_size() const (binding deprecated, see Section 15.2) }
{int Group::Get_size() const (binding deprecated, see Section 15.2) }
{Group Group::Incl(int n, const int ranks[]) const (binding deprecated, see
    Section 15.2) }
{static Group Group::Intersect(const Group& group1, const Group& group2)
    (binding deprecated, see Section 15.2) }
{bool Comm::Is_inter() const (binding deprecated, see Section 15.2) }
{Intracomm Intercomm::Merge(bool high) const (binding deprecated, see
    Section 15.2) }

```

```

ticket150. 1      {Group Group::Range_excl(int n, const int ranges[][3]) const (binding
ticket150. 2              deprecated, see Section 15.2) }
ticket150. 3
ticket150. 4      {Group Group::Range_incl(int n, const int ranges[][3]) const (binding
ticket150. 5              deprecated, see Section 15.2) }
ticket150. 6
ticket150. 7      {void Comm::Set_attr(int comm_keyval, const void* attribute_val) const
ticket150. 8              (binding deprecated, see Section 15.2) }
ticket150. 9
ticket150. 10     {void Datatype::Set_attr(int type_keyval, const void* attribute_val)
ticket150. 11              (binding deprecated, see Section 15.2) }
ticket150. 12
ticket150. 13     {void Win::Set_attr(int win_keyval, const void* attribute_val) (binding
ticket150. 14              deprecated, see Section 15.2) }
ticket150. 15
ticket150. 16     {void Comm::Set_name(const char* comm_name) (binding deprecated, see
ticket150. 17              Section 15.2) }
ticket150. 18
ticket150. 19     {void Datatype::Set_name(const char* type_name) (binding deprecated, see
ticket150. 20              Section 15.2) }
ticket150. 21
ticket150. 22     {void Win::Set_name(const char* win_name) (binding deprecated, see Section 15.2)
ticket150. 23              }
ticket150. 24
ticket150. 25     {Intercomm Intercomm::Split(int color, int key) const (binding deprecated,
ticket150. 26              see Section 15.2) }
ticket150. 27
ticket150. 28     {Intracomm Intracomm::Split(int color, int key) const (binding deprecated,
ticket150. 29              see Section 15.2) }
ticket150. 30
ticket150. 31     {static void Group::Translate_ranks (const Group& group1, int n,
ticket150. 32              const int ranks1[], const Group& group2, int ranks2[]) (binding
ticket150. 33              deprecated, see Section 15.2) }
ticket150. 34
ticket150. 35     {static Group Group::Union(const Group& group1, const Group& group2)
ticket150. 36              (binding deprecated, see Section 15.2) }
ticket150. 37
ticket150. 38     };

```

#### A.4.5 Process Topologies C++ Bindings

```
namespace MPI {
```

```

ticket150. 38     {void Compute_dims(int nnodes, int ndims, int dims[]) (binding deprecated,
ticket150. 39              see Section 15.2) }
ticket150. 40
ticket150. 41     {Cartcomm Intracomm::Create_cart(int ndims, const int dims[],
ticket150. 42              const bool periods[], bool reorder) const (binding deprecated, see
ticket150. 43              Section 15.2) }
ticket150. 44
ticket150. 45     {Graphcomm Intracomm::Create_graph(int nnodes, const int index[],
ticket150. 46              const int edges[], bool reorder) const (binding deprecated, see
ticket150. 47              Section 15.2) }
ticket150. 48
ticket150. 49     {Distgraphcomm Intracomm::Dist_graph_create_adjacent(int indegree,

```



```

    const int sources[], const int sourceweights[], int outdegree,
    const int destinations[], const int destweights[],
    const Info& info, bool reorder) const (binding deprecated, see
    Section 15.2) }

{Distgraphcomm Intracomm::Dist_graph_create_adjacent(int indegree,
    const int sources[], int outdegree, const int destinations[],
    const Info& info, bool reorder) const (binding deprecated, see
    Section 15.2) }

{Distgraphcomm Intracomm::Dist_graph_create(int n, const int sources[],
    const int degrees[], const int destinations[],
    const int weights[], const Info& info, bool reorder) const
    (binding deprecated, see Section 15.2) }

{Distgraphcomm Intracomm::Dist_graph_create(int n, const int sources[],
    const int degrees[], const int destinations[],
    const Info& info, bool reorder) const (binding deprecated, see
    Section 15.2) }

{int Cartcomm::Get_cart_rank(const int coords[]) const (binding deprecated,
    see Section 15.2) }

{void Cartcomm::Get_coords(int rank, int maxdims, int coords[]) const
    (binding deprecated, see Section 15.2) }

{int Cartcomm::Get_dim() const (binding deprecated, see Section 15.2) }

{void Graphcomm::Get_dims(int nnodes[], int nedges[]) const (binding
    deprecated, see Section 15.2) }

{void Distgraphcomm::Get_dist_neighbors_count(int rank, int indegree[],
    int outdegree[], bool& weighted) const (binding deprecated, see
    Section 15.2) }

{void Distgraphcomm::Get_dist_neighbors(int maxindegree, int sources[],
    int sourceweights[], int maxoutdegree, int destinations[],
    int destweights[]) (binding deprecated, see Section 15.2) }

{int Graphcomm::Get_neighbors_count(int rank) const (binding deprecated, see
    Section 15.2) }

{void Graphcomm::Get_neighbors(int rank, int maxneighbors, int
    neighbors[]) const (binding deprecated, see Section 15.2) }

{void Cartcomm::Get_topo(int maxdims, int dims[], bool periods[],
    int coords[]) const (binding deprecated, see Section 15.2) }

{void Graphcomm::Get_topo(int maxindex, int maxedges, int index[],
    int edges[]) const (binding deprecated, see Section 15.2) }

{int Comm::Get_topology() const (binding deprecated, see Section 15.2) }

{int Cartcomm::Map(int ndims, const int dims[], const bool periods[])
    const (binding deprecated, see Section 15.2) }

```

```

ticket150. 1      {int Graphcomm::Map(int nnodes, const int index[], const int edges[])
ticket150. 2          const (binding deprecated, see Section 15.2) }
3
ticket150. 4      {void Cartcomm::Shift(int direction, int disp, int& rank_source,
ticket150. 5          int& rank_dest) const (binding deprecated, see Section 15.2) }
6
ticket150. 7      {Cartcomm Cartcomm::Sub(const bool remain_dims[]) const (binding deprecated,
ticket150. 8          see Section 15.2) }
9
10     };
11

```

#### A.4.6 MPI Environmenta Management C++ Bindings

```

13     namespace MPI {
14
ticket150. 15         {void Comm::Abort(int errorcode) (binding deprecated, see Section 15.2) }
ticket150. 16         {int Add_error_class() (binding deprecated, see Section 15.2) }
ticket150. 17         {int Add_error_code(int errorclass) (binding deprecated, see Section 15.2) }
ticket150. 18         {void Add_error_string(int errorcode, const char* string) (binding
ticket150. 19             deprecated, see Section 15.2) }
ticket150. 20         {void* Alloc_mem(Aint size, const Info& info) (binding deprecated, see
ticket150. 21             Section 15.2) }
ticket150. 22         {void Comm::Call_errhandler(int errorcode) const (binding deprecated, see
ticket150. 23             Section 15.2) }
ticket150. 24
ticket150. 25         {void File::Call_errhandler(int errorcode) const (binding deprecated, see
ticket150. 26             Section 15.2) }
27
ticket150. 28         {void Win::Call_errhandler(int errorcode) const (binding deprecated, see
ticket150. 29             Section 15.2) }
30
ticket150. 30         {void Win::Call_errhandler(int errorcode) const (binding deprecated, see
ticket150. 31             Section 15.2) }
32
ticket150. 32         {static Errhandler Comm::Create_errhandler(Comm::Errhandler_ [fn] function*
ticket7. 33             function) (binding deprecated, see Section 15.2) }
ticket150. 34
ticket150. 35         {static Errhandler File::Create_errhandler(File::Errhandler_function*
ticket150. 36             function) (binding deprecated, see Section 15.2) }
37
ticket150. 37         {static Errhandler Win::Create_errhandler(Win::Errhandler_function*
ticket150. 38             function) (binding deprecated, see Section 15.2) }
ticket150. 39
ticket150. 40         {void Finalize() (binding deprecated, see Section 15.2) }
ticket150. 41
ticket150. 42         {void Free_mem(void *base) (binding deprecated, see Section 15.2) }
ticket150. 43
ticket150. 44         {void Errhandler::Free() (binding deprecated, see Section 15.2) }
ticket150. 45
ticket150. 46         {Errhandler Comm::Get_errhandler() const (binding deprecated, see Section 15.2) }
ticket150. 47
ticket150. 48         {Errhandler File::Get_errhandler() const (binding deprecated, see Section 15.2) }
ticket150. 49
ticket150. 50         {Errhandler Win::Get_errhandler() const (binding deprecated, see Section 15.2) }

```



```

{int Get_error_class(int errorcode) (binding deprecated, see Section 15.2) }
{void Get_error_string(int errorcode, char* name, int& resultlen) (binding
    deprecated, see Section 15.2) }
{void Get_processor_name(char* name, int& resultlen) (binding deprecated, see
    Section 15.2) }
{void Get_version(int& version, int& subversion) (binding deprecated, see
    Section 15.2) }
{void Init(int& argc, char**& argv) (binding deprecated, see Section 15.2) }
{void Init() (binding deprecated, see Section 15.2) }
{bool Is_finalized() (binding deprecated, see Section 15.2) }
{bool Is_initialized() (binding deprecated, see Section 15.2) }
{void Comm::Set_errhandler(const Errhandler& errhandler) (binding deprecated,
    see Section 15.2) }
{void File::Set_errhandler(const Errhandler& errhandler) (binding deprecated,
    see Section 15.2) }
{void Win::Set_errhandler(const Errhandler& errhandler) (binding deprecated,
    see Section 15.2) }
{double Wtick() (binding deprecated, see Section 15.2) }
{double Wtime() (binding deprecated, see Section 15.2) }

};

```

#### A.4.7 The Info Object C++ Bindings

```

namespace MPI {

    {static Info Info::Create() (binding deprecated, see Section 15.2) }
    {void Info::Delete(const char* key) (binding deprecated, see Section 15.2) }
    {Info Info::Dup() const (binding deprecated, see Section 15.2) }
    {void Info::Free() (binding deprecated, see Section 15.2) }
    {bool Info::Get(const char* key, int valuelen, char* value) const (binding
        deprecated, see Section 15.2) }
    {int Info::Get_nkeys() const (binding deprecated, see Section 15.2) }
    {void Info::Get_nthkey(int n, char* key) const (binding deprecated, see
        Section 15.2) }
    {bool Info::Get_valuelen(const char* key, int& valuelen) const (binding
        deprecated, see Section 15.2) }

}

```

```

1      {void Info::Set(const char* key, const char* value) (binding deprecated, see
2          Section 15.2) }
3
4  };
5
6

```

ticket150.  
ticket150.

#### A.4.8 Process Creation and Management C++ Bindings

```

8  namespace MPI {
9

```

```

ticket150.10      {Intercomm Intracomm::Accept(const char* port_name, const Info& info,
ticket150.11          int root) const (binding deprecated, see Section 15.2) }
12
ticket150.13      {void Close_port(const char* port_name) (binding deprecated, see Section 15.2) }
ticket150.14      {Intercomm Intracomm::Connect(const char* port_name, const Info& info,
ticket150.15          int root) const (binding deprecated, see Section 15.2) }
16
ticket150.17      {void Comm::Disconnect() (binding deprecated, see Section 15.2) }
ticket150.18      {static Intercomm Comm::Get_parent() (binding deprecated, see Section 15.2) }
ticket150.19      {static Intercomm Comm::Join(const int fd) (binding deprecated, see
ticket150.20          Section 15.2) }
21
ticket150.22      {void Lookup_name(const char* service_name, const Info& info,
ticket150.23          char* port_name) (binding deprecated, see Section 15.2) }
24
ticket150.25      {void Open_port(const Info& info, char* port_name) (binding deprecated, see
ticket150.26          Section 15.2) }
27
ticket150.28      {void Publish_name(const char* service_name, const Info& info,
ticket150.29          const char* port_name) (binding deprecated, see Section 15.2) }
30
ticket150.31      {Intercomm Intracomm::Spawn(const char* command, const char* argv[],
ticket150.32          int maxprocs, const Info& info, int root) const (binding
deprecated, see Section 15.2) }
33
ticket150.34      {Intercomm Intracomm::Spawn(const char* command, const char* argv[],
35          int maxprocs, const Info& info, int root,
ticket150.36          int array_of_errcodes[]) const (binding deprecated, see
37          Section 15.2) }
38
ticket150.39      {Intercomm Intracomm::Spawn_multiple(int count,
40          const char* array_of_commands[], const char** array_of_argv[],
41          const int array_of_maxprocs[], const Info array_of_info[],
ticket150.42          int root, int array_of_errcodes[]) (binding deprecated, see
43          Section 15.2) }
44
ticket150.45      {Intercomm Intracomm::Spawn_multiple(int count,
46          const char* array_of_commands[], const char** array_of_argv[],
47          const int array_of_maxprocs[], const Info array_of_info[],
48          int root) (binding deprecated, see Section 15.2) }

```

```

{void Unpublish_name(const char* service_name, const Info& info,

```

ticket150.	<code>const char* port_name)</code>	<i>(binding deprecated, see Section 15.2)</i>	}	1
				2
				3
	<code>};</code>			4

#### A.4.9 One-Sided Communications C++ Bindings

```

namespace MPI {
    {void Win::Accumulate(const void* origin_addr, int origin_count, const
        Datatype& origin_datatype, int target_rank, Aint target_disp,
        int target_count, const Datatype& target_datatype, const Op&
        op) const (binding deprecated, see Section 15.2) }
    {void Win::Complete() const (binding deprecated, see Section 15.2) }
    {static Win Win::Create(const void* base, Aint size, int disp_unit, const
        Info& info, const Intracomm& comm) (binding deprecated, see
        Section 15.2) }
    {void Win::Fence(int assert) const (binding deprecated, see Section 15.2) }
    {void Win::Free() (binding deprecated, see Section 15.2) }
    {Group Win::Get_group() const (binding deprecated, see Section 15.2) }
    {void Win::Get(void *origin_addr, int origin_count, const Datatype&
        origin_datatype, int target_rank, Aint target_disp, int
        target_count, const Datatype& target_datatype) const (binding
        deprecated, see Section 15.2) }
    {void Win::Lock(int lock_type, int rank, int assert) const (binding
        deprecated, see Section 15.2) }
    {void Win::Post(const Group& group, int assert) const (binding deprecated,
        see Section 15.2) }
    {void Win::Put(const void* origin_addr, int origin_count, const Datatype&
        origin_datatype, int target_rank, Aint target_disp, int
        target_count, const Datatype& target_datatype) const (binding
        deprecated, see Section 15.2) }
    {void Win::Start(const Group& group, int assert) const (binding deprecated,
        see Section 15.2) }
    {bool Win::Test() const (binding deprecated, see Section 15.2) }
    {void Win::Unlock(int rank) const (binding deprecated, see Section 15.2) }
    {void Win::Wait() const (binding deprecated, see Section 15.2) }
};

```

## A.4.10 External Interfaces C++ Bindings

```

namespace MPI {
    {void Grequest::Complete() (binding deprecated, see Section 15.2) }
    {int Init_thread(int& argc, char**& argv, int required) (binding deprecated,
        see Section 15.2) }
    {int Init_thread(int required) (binding deprecated, see Section 15.2) }
    {bool Is_thread_main() (binding deprecated, see Section 15.2) }
    {int Query_thread() (binding deprecated, see Section 15.2) }
    {void Status::Set_cancelled(bool flag) (binding deprecated, see Section 15.2) }
    {void Status::Set_elements(const Datatype& datatype, int count) (binding
        deprecated, see Section 15.2) }
    {static Grequest Grequest::Start(const Grequest::Query_function*
        query_fn, const Grequest::Free_function* free_fn,
        const Grequest::Cancel_function* cancel_fn, void *extra_state)
        (binding deprecated, see Section 15.2) }
};

```

## A.4.11 I/O C++ Bindings

```

namespace MPI {
    {void File::Close() (binding deprecated, see Section 15.2) }
    {static void File::Delete(const char* filename, const Info& info) (binding
        deprecated, see Section 15.2) }
    {int File::Get_amode() const (binding deprecated, see Section 15.2) }
    {bool File::Get_atomicity() const (binding deprecated, see Section 15.2) }
    {Offset File::Get_byte_offset(const Offset disp) const (binding deprecated,
        see Section 15.2) }
    {Group File::Get_group() const (binding deprecated, see Section 15.2) }
    {Info File::Get_info() const (binding deprecated, see Section 15.2) }
    {Offset File::Get_position() const (binding deprecated, see Section 15.2) }
    {Offset File::Get_position_shared() const (binding deprecated, see Section 15.2)
        }
    {Offset File::Get_size() const (binding deprecated, see Section 15.2) }
    {Aint File::Get_type_extent(const Datatype& datatype) const (binding
        deprecated, see Section 15.2) }
}

```

ticket150.	<code>{void File::Get_view(Offset&amp; disp, Datatype&amp; etype, Datatype&amp; filetype,</code>	1
	<code>char* datarep) const</code> <i>(binding deprecated, see Section 15.2)</i> <code>}</code>	2 ticket150.
	<code>{Request File::Iread_at(Offset offset, void* buf, int count,</code>	3
	<code>const Datatype&amp; datatype)</code> <i>(binding deprecated, see Section 15.2)</i> <code>}</code>	4 ticket150.
	<code>{Request File::Iread_shared(void* buf, int count,</code>	5 ticket150.
	<code>const Datatype&amp; datatype)</code> <i>(binding deprecated, see Section 15.2)</i> <code>}</code>	6 ticket150.
	<code>{Request File::Iread(void* buf, int count, const Datatype&amp; datatype)</code>	7 ticket150.
	<i>(binding deprecated, see Section 15.2)</i> <code>}</code>	8
	<code>{Request File::Iwrite_at(Offset offset, const void* buf, int count,</code>	9 ticket150.
	<code>const Datatype&amp; datatype)</code> <i>(binding deprecated, see Section 15.2)</i> <code>}</code>	10 ticket150.
	<code>{Request File::Iwrite(const void* buf, int count,</code>	11 ticket150.
	<code>const Datatype&amp; datatype)</code> <i>(binding deprecated, see Section 15.2)</i> <code>}</code>	12 ticket150.
	<code>{Request File::Iwrite_shared(const void* buf, int count,</code>	13
	<code>const Datatype&amp; datatype)</code> <i>(binding deprecated, see Section 15.2)</i> <code>}</code>	14 ticket150.
	<code>{static File File::Open(const Intracomm&amp; comm, const char* filename,</code>	15 ticket150.
	<code>int amode, const Info&amp; info)</code> <i>(binding deprecated, see Section 15.2)</i> <code>}</code>	16 ticket150.
	<code>{void File::Preallocate(Offset size)</code> <i>(binding deprecated, see Section 15.2)</i> <code>}</code>	17 ticket150.
	<code>{void File::Read_all_begin(void* buf, int count,</code>	18
	<code>const Datatype&amp; datatype)</code> <i>(binding deprecated, see Section 15.2)</i> <code>}</code>	19 ticket150.
	<code>{void File::Read_all_end(void* buf, Status&amp; status)</code> <i>(binding deprecated, see</i>	20 ticket150.
	<i>Section 15.2)</i> <code>}</code>	21 ticket150.
	<code>{void File::Read_all_end(void* buf)</code> <i>(binding deprecated, see Section 15.2)</i> <code>}</code>	22 ticket150.
	<code>{void File::Read_all(void* buf, int count, const Datatype&amp; datatype,</code>	23 ticket150.
	<code>Status&amp; status)</code> <i>(binding deprecated, see Section 15.2)</i> <code>}</code>	24 ticket150.
	<code>{void File::Read_all(void* buf, int count, const Datatype&amp; datatype)</code>	25 ticket150.
	<i>(binding deprecated, see Section 15.2)</i> <code>}</code>	26 ticket150.
	<code>{void File::Read_at_all_begin(Offset offset, void* buf, int count,</code>	27
	<code>const Datatype&amp; datatype)</code> <i>(binding deprecated, see Section 15.2)</i> <code>}</code>	28 ticket150.
	<code>{void File::Read_at_all_end(void* buf, Status&amp; status)</code> <i>(binding deprecated,</i>	29 ticket150.
	<i>see Section 15.2)</i> <code>}</code>	30 ticket150.
	<code>{void File::Read_at_all_end(void* buf)</code> <i>(binding deprecated, see Section 15.2)</i> <code>}</code>	31 ticket150.
	<code>{void File::Read_at_all(Offset offset, void* buf, int count,</code>	32 ticket150.
	<code>const Datatype&amp; datatype, Status&amp; status)</code> <i>(binding deprecated, see</i>	33 ticket150.
	<i>Section 15.2)</i> <code>}</code>	34
	<code>{void File::Read_at_all(Offset offset, void* buf, int count,</code>	35 ticket150.
	<code>const Datatype&amp; datatype)</code> <i>(binding deprecated, see Section 15.2)</i> <code>}</code>	36 ticket150.
	<code>{void File::Read_at(Offset offset, void* buf, int count,</code>	37 ticket150.
		38 ticket150.
		39
		40 ticket150.
		41 ticket150.
		42 ticket150.
		43
		44
		45 ticket150.
		46 ticket150.
		47 ticket150.
		48

```

ticket150. 1      const Datatype& datatype, Status& status) (binding deprecated, see
2      Section 15.2) }
3
ticket150. 4      {void File::Read_at(Offset offset, void* buf, int count,
ticket150. 5      const Datatype& datatype) (binding deprecated, see Section 15.2) }
6
ticket150. 7      {void File::Read_ordered_begin(void* buf, int count,
ticket150. 8      const Datatype& datatype) (binding deprecated, see Section 15.2) }
9
ticket150. 10     {void File::Read_ordered_end(void* buf, Status& status) (binding deprecated,
ticket150. 11     see Section 15.2) }
12
ticket150. 13     {void File::Read_ordered_end(void* buf) (binding deprecated, see Section 15.2) }
ticket150. 14
ticket150. 15     {void File::Read_ordered(void* buf, int count, const Datatype& datatype,
ticket150. 16     Status& status) (binding deprecated, see Section 15.2) }
17
ticket150. 18     {void File::Read_shared(void* buf, int count, const Datatype& datatype,
ticket150. 19     Status& status) (binding deprecated, see Section 15.2) }
20
ticket150. 21     {void File::Read_shared(void* buf, int count, const Datatype& datatype)
ticket150. 22     (binding deprecated, see Section 15.2) }
23
ticket150. 24     {void File::Read(void* buf, int count, const Datatype& datatype, Status&
ticket150. 25     status) (binding deprecated, see Section 15.2) }
26
ticket150. 27     {void File::Read(void* buf, int count, const Datatype& datatype) (binding
ticket150. 28     deprecated, see Section 15.2) }
29
ticket150. 30     {void Register_datarep(const char* datarep,
31     Datarep_conversion_function* read_conversion_fn,
32     Datarep_conversion_function* write_conversion_fn,
33     Datarep_extent_function* dtype_file_extent_fn,
34     void* extra_state) (binding deprecated, see Section 15.2) }
35
ticket150. 36     {void File::Seek(Offset offset, int whence) (binding deprecated, see
ticket150. 37     Section 15.2) }
38
ticket150. 39     {void File::Seek_shared(Offset offset, int whence) (binding deprecated, see
ticket150. 40     Section 15.2) }
41
ticket150. 42     {void File::Set_atomicity(bool flag) (binding deprecated, see Section 15.2) }
ticket150. 43
ticket150. 44     {void File::Set_info(const Info& info) (binding deprecated, see Section 15.2) }
45
ticket150. 46     {void File::Set_size(Offset size) (binding deprecated, see Section 15.2) }
47
ticket150. 48     {void File::Set_view(Offset disp, const Datatype& etype,
49     const Datatype& filetype, const char* datarep,
50     const Info& info) (binding deprecated, see Section 15.2) }
51
ticket150. 52     {void File::Sync() (binding deprecated, see Section 15.2) }
53

```



```

{void File::Write_all_begin(const void* buf, int count,
    const Datatype& datatype) (binding deprecated, see Section 15.2) }
{void File::Write_all(const void* buf, int count,
    const Datatype& datatype, Status& status) (binding deprecated, see
Section 15.2) }
{void File::Write_all(const void* buf, int count,
    const Datatype& datatype) (binding deprecated, see Section 15.2) }
{void File::Write_all_end(const void* buf, Status& status) (binding
deprecated, see Section 15.2) }
{void File::Write_all_end(const void* buf) (binding deprecated, see
Section 15.2) }
{void File::Write_at_all_begin(Offset offset, const void* buf, int count,
    const Datatype& datatype) (binding deprecated, see Section 15.2) }
{void File::Write_at_all_end(const void* buf, Status& status) (binding
deprecated, see Section 15.2) }
{void File::Write_at_all_end(const void* buf) (binding deprecated, see
Section 15.2) }
{void File::Write_at_all(Offset offset, const void* buf, int count,
    const Datatype& datatype, Status& status) (binding deprecated, see
Section 15.2) }
{void File::Write_at_all(Offset offset, const void* buf, int count,
    const Datatype& datatype) (binding deprecated, see Section 15.2) }
{void File::Write_at(Offset offset, const void* buf, int count,
    const Datatype& datatype, Status& status) (binding deprecated, see
Section 15.2) }
{void File::Write_at(Offset offset, const void* buf, int count,
    const Datatype& datatype) (binding deprecated, see Section 15.2) }
{void File::Write(const void* buf, int count, const Datatype& datatype,
    Status& status) (binding deprecated, see Section 15.2) }
{void File::Write(const void* buf, int count, const Datatype& datatype)
    (binding deprecated, see Section 15.2) }
{void File::Write_ordered_begin(const void* buf, int count,
    const Datatype& datatype) (binding deprecated, see Section 15.2) }
{void File::Write_ordered(const void* buf, int count,
    const Datatype& datatype, Status& status) (binding deprecated, see
Section 15.2) }
{void File::Write_ordered(const void* buf, int count,
    const Datatype& datatype) (binding deprecated, see Section 15.2) }

```

1 ticket150.  
 2 ticket150.  
 3  
 4 ticket150.  
 5 ticket150.  
 6  
 7 ticket150.  
 8 ticket150.  
 9  
 10 ticket150.  
 11 ticket150.  
 12 ticket150.  
 13 ticket150.  
 14  
 15 ticket150.  
 16 ticket150.  
 17 ticket150.  
 18 ticket150.  
 19  
 20 ticket150.  
 21 ticket150.  
 22 ticket150.  
 23 ticket150.  
 24  
 25  
 26 ticket150.  
 27 ticket150.  
 28 ticket150.  
 29 ticket150.  
 30  
 31  
 32 ticket150.  
 33 ticket150.  
 34 ticket150.  
 35 ticket150.  
 36  
 37 ticket150.  
 38 ticket150.  
 39  
 40 ticket150.  
 41 ticket150.  
 42 ticket150.  
 43 ticket150.  
 44  
 45  
 46 ticket150.  
 47 ticket150.  
 48

```

ticket150. 1      {void File::Write_ordered_end(const void* buf, Status& status) (binding
ticket150. 2          deprecated, see Section 15.2) }
3
ticket150. 4      {void File::Write_ordered_end(const void* buf) (binding deprecated, see
ticket150. 5          Section 15.2) }
6
ticket150. 7      {void File::Write_shared(const void* buf, int count,
ticket150. 8          const Datatype& datatype, Status& status) (binding deprecated, see
9          Section 15.2) }
10
ticket150. 11     {void File::Write_shared(const void* buf, int count,
ticket150. 12         const Datatype& datatype) (binding deprecated, see Section 15.2) }
13
14     };

```

#### A.4.12 Language Bindings C++ Bindings

```

15     namespace MPI {
16
17         {static Datatype Datatype::Create_f90_complex(int p, int r) (binding
ticket150. 18             deprecated, see Section 15.2) }
ticket150. 19
20         {static Datatype Datatype::Create_f90_integer(int r) (binding deprecated, see
ticket150. 21             Section 15.2) }
ticket150. 22
23         {static Datatype Datatype::Create_f90_real(int p, int r) (binding deprecated,
ticket150. 24             see Section 15.2) }
ticket150. 25
26         Exception::Exception(int error_code)
27
ticket150. 28         {int Exception::Get_error_class() const (binding deprecated, see Section 15.2) }
ticket150. 29         {int Exception::Get_error_code() const (binding deprecated, see Section 15.2) }
ticket150. 30         {const char* Exception::Get_error_string() const (binding deprecated, see
ticket150. 31             Section 15.2) }
ticket150. 32
ticket150. 33         {static Datatype Datatype::Match_size(int typeclass, int size) (binding
ticket150. 34             deprecated, see Section 15.2) }
35
36     };
37
38

```

#### A.4.13 Profiling Interface C++ Bindings

```

39     namespace MPI {
40
41         {void Pcontrol(const int level, ...) (binding deprecated, see Section 15.2) }
ticket150. 42
ticket150. 43     };
44
45

```

[C++ Depreciated Functions section]



## A.4.14 C++ Bindings on all MPI Classes

The C++ language requires all classes to have four special functions: a default constructor, a copy constructor, a destructor, and an assignment operator. The bindings for these functions are listed below; their semantics are discussed in Section 16.1.5. The two constructors are *not virtual*. The bindings prototype functions are using the type `<CLASS>` rather than listing each function for every MPI class. The token `<CLASS>` can be replaced with valid MPI-2 class names, such as `Group`, `Datatype`, etc., except when noted. In addition, bindings are provided for comparison and inter-language operability from Sections 16.1.5 and 16.1.9.

## A.4.15 Construction / Destruction

```
namespace MPI {
    <CLASS>::<CLASS>()
    <CLASS>::~~<CLASS>()

};
```

## A.4.16 Copy / Assignment

```
namespace MPI {
    <CLASS>::<CLASS>(const <CLASS>& data)
    <CLASS>& <CLASS>::operator=(const <CLASS>& data)

};
```

## A.4.17 Comparison

Since `Status` instances are not handles to underlying MPI objects, the `operator==( )` and `operator!=( )` functions are not defined on the `Status` class.

```
namespace MPI {
    bool <CLASS>::operator==(const <CLASS>& data) const
    bool <CLASS>::operator!=(const <CLASS>& data) const

};
```

## A.4.18 Inter-language Operability

Since there are no C++ `MPI::STATUS_IGNORE` and `MPI::STATUSES_IGNORE` objects, the result of promoting the C or Fortran handles (`MPI_STATUS_IGNORE` and `MPI_STATUSES_IGNORE`) to C++ is undefined.

```
namespace MPI {
```

```
1      <CLASS>& <CLASS>::operator=(const MPI_<CLASS>& data)
2
3      <CLASS>::<CLASS>(const MPI_<CLASS>& data)
4
5      <CLASS>::operator MPI_<CLASS>() const
6
7  };
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
```

# Annex B

## Change-Log

This annex summarizes changes from the previous version of the MPI standard to the version presented by this document. [ Only changes (i.e., clarifications and new features) are presented that may cause implementation effort in the MPI libraries. ]Only significant changes (i.e., clarifications and new features) that might either require implementation effort in the MPI libraries or change the understanding of MPI from a user's perspective are presented. Editorial modifications, formatting, typo corrections and minor clarifications are not shown.

### B.1 Changes from Version 2.1 to Version 2.2

1. Section 2.5.4 on page 14.  
It is now guaranteed that predefined named constant handles (as other constants) can be used in initialization expressions or assignments, i.e., also before the call to MPI\_INIT.
2. Section 2.6 on page 16, Section 2.6.4 on page 19, and Section 16.1 on page 485.  
The C++ language bindings have been deprecated and may be removed in a future version of the MPI specification.
3. Section 3.2.2 on page 29.  
MPI\_CHAR for printable characters is now defined for C type char (instead of signed char). This change should not have any impact on applications nor on MPI libraries (except some comment lines), because printable characters could and can be stored in any of the C types char, signed char, and unsigned char, and MPI\_CHAR is not allowed for predefined reduction operations.
4. Section 3.2.2 on page 29.  
MPI\_(U)INT{8,16,32,64}\_T, MPI\_AINT, MPI\_OFFSET, MPI\_C\_BOOL, MPI\_C\_COMPLEX, MPI\_C\_FLOAT\_COMPLEX, MPI\_C\_DOUBLE\_COMPLEX, and MPI\_C\_LONG\_DOUBLE\_COMPLEX are now valid predefined MPI datatypes.
5. Section 3.4 on page 40, Section 3.7.2 on page 52, Section 3.9 on page 72, and Section 5.1 on page 135.  
The read access restriction on the send buffer for blocking, non blocking and collective API has been lifted. It is permitted to access for read the send buffer while the operation is in progress.

- 1        6. Section 3.7 on page 50.
- ticket143. 2        The Advice to users for IBSEND and IRSEND was slightly changed.
- 3
- 4        7. Section 3.7.3 on page 55.
- 5        The advice to free an active request was removed in the Advice to users for
- ticket137. 6        MPI\_REQUEST\_FREE.
- 7
- 8        8. Section 3.7.6 on page 67.
- ticket31. 9        MPI\_REQUEST\_GET\_STATUS changed to permit inactive or null requests as input.
- 10
- 11        9. Section 5.8 on page 161.
- 12        “In place” option is added to MPI\_ALLTOALL, MPI\_ALLTOALLV, and
- ticket64. 13        MPI\_ALLTOALLW for intracommunicators.
- 14
- 15        10. Section 5.9.2 on page 169.
- 16        Predefined parameterized datatypes (e.g., returned by MPI\_TYPE\_CREATE\_F90\_REAL)
- ticket18. 17        and optional named predefined datatypes (e.g. MPI\_REAL8) have been added to the
- 18        list of valid datatypes in reduction operations.
- 19
- 20        11. Section 5.9.2 on page 169.
- 21        MPI\_(U)INT{8,16,32,64}\_T are all considered C integer types for the purposes of the
- 22        predefined reduction operators. MPI\_AINT and MPI\_OFFSET are considered Fortran
- 23        integer types. MPI\_C\_BOOL is considered a Logical type.
- ticket24. 24        MPI\_C\_COMPLEX, MPI\_C\_FLOAT\_COMPLEX, MPI\_C\_DOUBLE\_COMPLEX, and
- 25        MPI\_C\_LONG\_DOUBLE\_COMPLEX are considered Complex types.
- 26
- 27        12. Section 5.9.7 on page 180.
- 28        The local routines MPI\_REDUCE\_LOCAL and MPI\_OP\_COMMUTATIVE have been
- ticket27. 29        added.
- 30
- 31        13. Section 5.10.1 on page 182.
- 32        The collective function MPI\_REDUCE\_SCATTER\_BLOCK is added to the MPI stan-
- ticket94. 33        dard.
- 34
- 35        14. Section 5.11.2 on page 185.
- 36        Added in place argument to MPI\_EXSCAN.
- 37
- 38        15. Section 6.4.2 on page 204, and Section 6.6 on page 224.
- 39        Implementations that did not implement MPI\_COMM\_CREATE on intercommuni-
- ticket66. 40        cators will need to add that functionality. As the standard described the behav-
- 41        ior of this operation on intercommunicators, it is believed that most implementa-
- 42        tions already provide this functionality. Note also that the C++ binding for both
- 43        MPI\_COMM\_CREATE and MPI\_COMM\_SPLIT explicitly allow Intercomms.
- 44
- 45        16. Section 6.4.2 on page 204.
- 46        MPI\_COMM\_CREATE is extended to allow several disjoint subgroups as input if comm
- ticket33. 47        is an intracommunicator. If comm is an intercommunicator it was clarified that all
- 48        processes in the same local group of comm must specify the same value for group.
- 49
- 50        17. Section 7.5.4 on page 268.
- 51        New functions for a scalable distributed graph topology interface has been added.
- 52        In this section, the functions MPI\_DIST\_GRAPH\_CREATE\_ADJACENT and

- MPI\_DIST\_GRAPH\_CREATE, the constants MPI\_UNWEIGHTED, and the derived C++ class Distgraphcomm were added. 1  
2 ticket33.  
3  
4  
5  
6  
7 ticket3.  
8  
9  
10 ticket101.  
11  
12  
13 ticket7.  
14  
15  
16 ticket71.  
17  
18  
19  
20  
21 ticket43.  
22  
23  
24  
25  
26  
27  
28  
29 ticket6.  
30  
31  
32  
33 ticket18.  
34  
35  
36  
37  
38  
39 ticket55.  
40  
41  
42  
43  
44  
45 ticket4.  
46  
47  
48 ticket18.
18. Section 7.5.5 on page 273.  
For the scalable distributed graph topology interface, the functions MPI\_DIST\_NEIGHBORS\_COUNT and MPI\_DIST\_NEIGHBORS and the constant MPI\_DIST\_GRAPH were added.
  19. Section 7.5.5 on page 273.  
Remove ambiguity regarding duplicated neighbors with MPI\_GRAPH\_NEIGHBORS and MPI\_GRAPH\_NEIGHBORS\_COUNT.
  20. Section 8.1.1 on page 287.  
The subversion number changed from 1 to 2.
  21. Section 8.3 on page 292, Section 15.2 on page 484, and Annex A.1.3 on page 543.  
Changed function pointer typedef names MPI\_{Comm,File,Win}\_errhandler\_fn to MPI\_{Comm,File,Win}\_errhandler\_function. Deprecated old “\_fn” names.
  22. Section 8.7.1 on page 312.  
Attribute deletion callbacks on MPI\_COMM\_SELF are now called in LIFO order. Implementors must now also register all implementation-internal attribute deletion callbacks on MPI\_COMM\_SELF before returning from MPI\_INIT/MPI\_INIT\_THREAD.
  23. Section 11.3.4 on page 363.  
The restriction added in MPI 2.1 that the operation MPI\_REPLACE in MPI\_ACCUMULATE can be used only with predefined datatypes has been removed. MPI\_REPLACE can now be used even with derived datatypes, as it was in MPI 2.0. Also, a clarification has been made that MPI\_REPLACE can be used only in MPI\_ACCUMULATE, not in collective operations that do reductions, such as MPI\_REDUCE and others.
  24. Section 12.2 on page 391.  
Add “\*” to the query\_fn, free\_fn, and cancel\_fn arguments to the C++ binding for MPI::Grequest::Start() for consistency with the rest of MPI functions that take function pointer arguments.
  25. Section 13.5.2 on page 449, and Table 13.2 on page 451.  
MPI\_(U)INT{8,16,32,64}\_T, MPI\_AINT, MPI\_OFFSET, MPI\_C\_COMPLEX, MPI\_C\_FLOAT\_COMPLEX, MPI\_C\_DOUBLE\_COMPLEX, MPI\_C\_LONG\_DOUBLE\_COMPLEX, and MPI\_C\_BOOL are added as predefined datatypes in the external32 representation.
  26. Section 16.3.7 on page 523.  
The description was modified that it only describes how an MPI implementation behaves, but not how MPI stores attributes internally. The erroneous MPI-2.1 Example 16.17 was replaced with three new examples 16.18, 16.19, and 16.20 on pages 525-527 explicitly detailing cross-language attribute behavior. Implementations that matched the behavior of the old example will need to be updated.
  27. Annex A.1.1 on page 531.  
Removed type MPI::Fint (compare MPI\_Fint in Section A.1.2 on page 542).

28. Annex A.1.1 on page 531. Table *Named Predefined Datatypes*.  
 Added MPI\_(U)INT{8,16,32,64}\_T, MPI\_AINT, MPI\_OFFSET, MPI\_C\_BOOL,  
 MPI\_C\_FLOAT\_COMPLEX, MPI\_C\_COMPLEX, MPI\_C\_DOUBLE\_COMPLEX, and  
 MPI\_C\_LONG\_DOUBLE\_COMPLEX are added as predefined datatypes.

## B.2 Changes from Version 2.0 to Version 2.1

1. Section 3.2.2 on page 29, Section 16.1.6 on page 489, and Annex A.1 on page 531.  
 In addition, the MPI\_LONG\_LONG should be added as an optional type; it is a synonym for MPI\_LONG\_LONG\_INT.
2. Section 3.2.2 on page 29, Section 16.1.6 on page 489, and Annex A.1 on page 531.  
 MPI\_LONG\_LONG\_INT, MPI\_LONG\_LONG (as synonym), MPI\_UNSIGNED\_LONG\_LONG, MPI\_SIGNED\_CHAR, and MPI\_WCHAR are moved from optional to official and they are therefore defined for all three language bindings.
3. Section 3.2.5 on page 33.  
 MPI\_GET\_COUNT with zero-length datatypes: The value returned as the count argument of MPI\_GET\_COUNT for a datatype of length zero where zero bytes have been transferred is zero. If the number of bytes transferred is greater than zero, MPI\_UNDEFINED is returned.
4. Section 4.1 on page 81.  
 General rule about derived datatypes: Most datatype constructors have replication count or block length arguments. Allowed values are [nonnegative]non-negative integers. If the value is zero, no elements are generated in the type map and there is no effect on datatype bounds or extent.
5. Section 4.3 on page 131.  
 MPI\_BYTE should be used to send and receive data that is packed using MPI\_PACK\_EXTERNAL.
6. Section 5.9.6 on page 179.  
 If comm is an intercommunicator in MPI\_ALLREDUCE, then both groups should provide count and datatype arguments that specify the same type signature (i.e., it is not necessary that both groups provide the same count value).
7. Section 6.3.1 on page 196.  
 MPI\_GROUP\_TRANSLATE\_RANKS and MPI\_PROC\_NULL: MPI\_PROC\_NULL is a valid rank for input to MPI\_GROUP\_TRANSLATE\_RANKS, which returns MPI\_PROC\_NULL as the translated rank.
8. Section 6.7 on page 240.  
 About the attribute caching functions:  

*Advice to implementors.* High-quality implementations should raise an error when a keyval that was created by a call to MPI\_XXX\_CREATE\_KEYVAL is used with an object of the wrong type with a call to MPI\_YYY\_GET\_ATTR, MPI\_YYY\_SET\_ATTR, MPI\_YYY\_DELETE\_ATTR, or

ticket74.

MPI\_YYY\_FREE\_KEYVAL. To do so, it is necessary to maintain, with each keyval, information on the type of the associated user function. (*End of advice to implementors.*)

9. Section 6.8 on page 254.  
In MPI\_COMM\_GET\_NAME: In C, a null character is additionally stored at name[resultlen]. resultlen cannot be larger then [MPI\_MAX\_OBJECT] MPI\_MAX\_OBJECT\_NAME-1. In Fortran, name is padded on the right with blank characters. resultlen cannot be larger then [MPI\_MAX\_OBJECT]MPI\_MAX\_OBJECT\_NAME. ticket49.
10. Section 7.4 on page 263.  
About MPI\_GRAPH\_CREATE and MPI\_CART\_CREATE: All input arguments must have identical values on all processes of the group of comm\_old. ticket49.
11. Section 7.5.1 on page 264.  
In MPI\_CART\_CREATE: If ndims is zero then a zero-dimensional Cartesian topology is created. The call is erroneous if it specifies a grid that is larger than the group size or if ndims is negative.
12. Section 7.5.3 on page 266.  
In MPI\_GRAPH\_CREATE: If the graph is empty, i.e., nnodes == 0, then MPI\_COMM\_NULL is returned in all processes.
13. Section 7.5.3 on page 266.  
In MPI\_GRAPH\_CREATE: A single process is allowed to be defined multiple times in the list of neighbors of a process (i.e., there may be multiple edges between two processes). A process is also allowed to be a neighbor to itself (i.e., a self loop in the graph). The adjacency matrix is allowed to be non-symmetric.  
*Advice to users.* Performance implications of using multiple edges or a non-symmetric adjacency matrix are not defined. The definition of a node-neighbor edge does not imply a direction of the communication. (*End of advice to users.*)
14. Section 7.5.5 on page 273.  
In MPI\_CARTDIM\_GET and MPI\_CART\_GET: If comm is associated with a zero-dimensional Cartesian topology, MPI\_CARTDIM\_GET returns ndims=0 and MPI\_CART\_GET will keep all output arguments unchanged.
15. Section 7.5.5 on page 273.  
In MPI\_CART\_RANK: If comm is associated with a zero-dimensional Cartesian topology, coord is not significant and 0 is returned in rank.
16. Section 7.5.5 on page 273.  
In MPI\_CART\_COORDS: If comm is associated with a zero-dimensional Cartesian topology, coords will be unchanged.
17. Section 7.5.6 on page 281.  
In MPI\_CART\_SHIFT: It is erroneous to call MPI\_CART\_SHIFT with a direction that is either negative or greater than or equal to the number of dimensions in the Cartesian communicator. This implies that it is erroneous to call MPI\_CART\_SHIFT with a comm that is associated with a zero-dimensional Cartesian topology.

18. Section 7.5.7 on page 283.

In MPI\_CART\_SUB: If all entries in `remain_dims` are false or `comm` is already associated with a zero-dimensional Cartesian topology then `newcomm` is associated with a zero-dimensional Cartesian topology.

- 18.1. Section 8.1.1 on page 287.

The subversion number changed from 0 to 1.

19. Section 8.1.2 on page 288.

In MPI\_GET\_PROCESSOR\_NAME: In C, a null character is additionally stored at `name[resultlen]`. `resultlen` cannot be larger than `MPI_MAX_PROCESSOR_NAME-1`. In Fortran, `name` is padded on the right with blank characters. `resultlen` cannot be larger than `MPI_MAX_PROCESSOR_NAME`.

20. Section 8.3 on page 292.

`MPI_{COMM,WIN,FILE}_GET_ERRHANDLER` behave as if a new error handler object is created. That is, once the error handler is no longer needed, `MPI_ERRHANDLER_FREE` should be called with the error handler returned from `MPI_ERRHANDLER_GET` or `MPI_{COMM,WIN,FILE}_GET_ERRHANDLER` to mark the error handler for deallocation. This provides behavior similar to that of `MPI_COMM_GROUP` and `MPI_GROUP_FREE`.

21. Section 8.7 on page 307, see explanations to MPI\_FINALIZE.

`MPI_FINALIZE` is collective over all connected processes. If no processes were spawned, accepted or connected then this means over `MPI_COMM_WORLD`; otherwise it is collective over the union of all processes that have been and continue to be connected, as explained in Section 10.5.4 on page 348.

22. Section 8.7 on page 307.

About MPI\_ABORT:

*Advice to users.* Whether the errorcode is returned from the executable or from the MPI process startup mechanism (e.g., `mpiexec`), is an aspect of quality of the MPI library but not mandatory. (*End of advice to users.*)

*Advice to implementors.* Where possible, a high-quality implementation will try to return the errorcode from the MPI process startup mechanism (e.g. `mpiexec` or singleton init). (*End of advice to implementors.*)

23. Section 9 on page 317.

An implementation must support info objects as caches for arbitrary (key, value) pairs, regardless of whether it recognizes the key. Each function that takes hints in the form of an `MPI_Info` must be prepared to ignore any key it does not recognize. This description of info objects does not attempt to define how a particular function should react if it recognizes a key but not the associated value. `MPI_INFO_GET_NKEYS`, `MPI_INFO_GET_NTHKEY`, `MPI_INFO_GET_VALUELEN`, and `MPI_INFO_GET` must retain all (key,value) pairs so that layered functionality can also use the `Info` object.

24. Section 11.3 on page 357.

`MPI_PROC_NULL` is a valid target rank in the MPI RMA calls `MPI_ACCUMULATE`,



MPI\_GET, and MPI\_PUT. The effect is the same as for MPI\_PROC\_NULL in MPI point-to-point communication. See also item 25 in this list.

25. Section 11.3 on page 357.

After any RMA operation with rank MPI\_PROC\_NULL, it is still necessary to finish the RMA epoch with the synchronization method that started the epoch. See also item 24 in this list.

26. Section 11.3.4 on page 363.

MPI\_REPLACE in MPI\_ACCUMULATE, like the other predefined operations, is defined only for the predefined MPI datatypes.

27. Section 13.2.8 on page 416.

About MPI\_FILE\_SET\_VIEW and MPI\_FILE\_SET\_INFO: When an info object that specifies a subset of valid hints is passed to MPI\_FILE\_SET\_VIEW or MPI\_FILE\_SET\_INFO, there will be no effect on previously set or defaulted hints that the info does not specify.

28. Section 13.2.8 on page 416.

About MPI\_FILE\_GET\_INFO: If no hint exists for the file associated with fh, a handle to a newly created info object is returned that contains no key/value pair.

29. Section 13.3 on page 419.

If a file does not have the mode MPI\_MODE\_SEQUENTIAL, then MPI\_DISPLACEMENT\_CURRENT is invalid as disp in MPI\_FILE\_SET\_VIEW.

30. Section 13.5.2 on page 449.

The bias of 16 byte doubles was defined with 10383. The correct value is 16383.

31. Section 16.1.4 on page 486.

In the example in this section, the buffer should be declared as `const void* buf`.

32. Section 16.2.5 on page 507.

About MPI\_TYPE\_CREATE\_F90\_XXXX:

*Advice to implementors.* An application may often repeat a call to MPI\_TYPE\_CREATE\_F90\_XXXX with the same combination of (XXXX,p,r). The application is not allowed to free the returned predefined, unnamed datatype handles. To prevent the creation of a potentially huge amount of handles, the MPI implementation should return the same datatype handle for the same (REAL/COMPLEX/INTEGER,p,r) combination. Checking for the combination (p,r) in the preceding call to MPI\_TYPE\_CREATE\_F90\_XXXX and using a hash-table to find formerly generated handles should limit the overhead of finding a previously generated datatype with same combination of (XXXX,p,r). (*End of advice to implementors.*)

33. Section A.1.1 on page 531.

MPI\_BOTTOM is defined as `void * const MPI::BOTTOM`.

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24
- 25
- 26
- 27
- 28
- 29
- 30
- 31
- 32
- 33
- 34
- 35
- 36
- 37
- 38
- 39
- 40
- 41
- 42
- 43
- 44
- 45
- 46
- 47
- 48

# Bibliography

- [1] V. Bala and S. Kipnis. Process groups: a mechanism for the coordination of and communication among processes in the Venus collective communication library. Technical report, IBM T. J. Watson Research Center, October 1992. Preprint. [1.2](#)
- [2] V. Bala, S. Kipnis, L. Rudolph, and Marc Snir. Designing efficient, scalable, and portable collective communication libraries. Technical report, IBM T. J. Watson Research Center, October 1992. Preprint. [1.2](#)
- [3] Purushotham V. Bangalore, Nathan E. Doss, and Anthony Skjellum. MPI++: Issues and Features. In *OON-SKI '94*, page in press, 1994. [6.1](#)
- [4] A. Beguelin, J. Dongarra, A. Geist, R. Manchek, and V. Sunderam. Visualization and debugging in a heterogeneous environment. *IEEE Computer*, 26(6):88–95, June 1993. [1.2](#)
- [5] Luc Bomans and Rolf Hempel. The Argonne/GMD macros in FORTRAN for portable parallel programming and their implementation on the Intel iPSC/2. *Parallel Computing*, 15:119–132, 1990. [1.2](#), [7.2](#)
- [6] Rajesh Bordawekar, Juan Miguel del Rosario, and Alok Choudhary. Design and evaluation of primitives for parallel I/O. In *Proceedings of Supercomputing '93*, pages 452–461, 1993. [13.1](#)
- [7] R. Butler and E. Lusk. User's guide to the p4 programming system. Technical Report TM-ANL-92/17, Argonne National Laboratory, 1992. [1.2](#)
- [8] Ralph Butler and Ewing Lusk. Monitors, messages, and clusters: The p4 parallel programming system. *Parallel Computing*, 20(4):547–564, April 1994. Also Argonne National Laboratory Mathematics and Computer Science Division preprint P362-0493. [1.2](#)
- [9] Robin Calkin, Rolf Hempel, Hans-Christian Hoppe, and Peter Wypior. Portable programming with the PARMACS message-passing library. *Parallel Computing*, 20(4):615–632, April 1994. [1.2](#), [7.2](#)
- [10] S. Chittor and R. J. Enbody. Performance evaluation of mesh-connected wormhole-routed networks for interprocessor communication in multicomputers. In *Proceedings of the 1990 Supercomputing Conference*, pages 647–656, 1990. [7.1](#)
- [11] S. Chittor and R. J. Enbody. Predicting the effect of mapping on the communication performance of large multicomputers. In *Proceedings of the 1991 International Conference on Parallel Processing, vol. II (Software)*, pages II-1 – II-4, 1991. [7.1](#)

- [12] Parasoftware Corporation. Express version 1.0: A communication environment for parallel computers, 1988. [1.2](#), [7.4](#)
- [13] Juan Miguel del Rosario, Rajesh Bordawekar, and Alok Choudhary. Improved parallel I/O via a two-phase run-time access strategy. In *IPPS '93 Workshop on Input/Output in Parallel Computer Systems*, pages 56–70, 1993. Also published in *Computer Architecture News* 21(5), December 1993, pages 31–38. [13.1](#)
- [14] J. Dongarra, A. Geist, R. Manchek, and V. Sunderam. Integrated PVM framework supports heterogeneous network computing. *Computers in Physics*, 7(2):166–75, April 1993. [1.2](#)
- [15] J. J. Dongarra, R. Hempel, A. J. G. Hey, and D. W. Walker. A proposal for a user-level, message passing interface in a distributed memory environment. Technical Report TM-12231, Oak Ridge National Laboratory, February 1993. [1.2](#)
- [16] Edinburgh Parallel Computing Centre, University of Edinburgh. *CHIMP Concepts*, June 1991. [1.2](#)
- [17] Edinburgh Parallel Computing Centre, University of Edinburgh. *CHIMP Version 1.0 Interface*, May 1992. [1.2](#)
- [18] Margaret A. Ellis and Bjarne Stroustrup. *The Annotated C++ Reference Manual*. Addison Wesley, 1990.
- [19] D. Feitelson. Communicators: Object-based multiparty interactions for parallel programming. Technical Report 91-12, Dept. Computer Science, The Hebrew University of Jerusalem, November 1991. [6.1.2](#)
- [20] C++ Forum. Working paper for draft proposed international standard for information systems — programming language C++. Technical report, American National Standards Institute, 1995.
- [21] Message Passing Interface Forum. MPI: A Message-Passing Interface standard. *The International Journal of Supercomputer Applications and High Performance Computing*, 8, 1994. [1.3](#)
- [22] Message Passing Interface Forum. MPI: A Message-Passing Interface standard (version 1.1). Technical report, 1995. <http://www.mpi-forum.org>. [1.3](#)
- [23] Al Geist, Adam Beguelin, Jack Dongarra, Weicheng Jiang, Bob Manchek, and Vaidy Sunderam. *PVM: Parallel Virtual Machine—A User's Guide and Tutorial for Network Parallel Computing*. MIT Press, 1994. [10.1](#)
- [24] G. A. Geist, M. T. Heath, B. W. Peyton, and P. H. Worley. PICL: A portable instrumented communications library, C reference manual. Technical Report TM-11130, Oak Ridge National Laboratory, Oak Ridge, TN, July 1990. [1.2](#)
- [25] William D. Gropp and Barry Smith. Chameleon parallel programming tools users manual. Technical Report ANL-93/23, Argonne National Laboratory, March 1993. [1.2](#)

- [26] Michael Hennecke. A Fortran 90 interface to MPI version 1.1. Technical Report Internal Report 63/96, Rechenzentrum, Universität Karlsruhe, D-76128 Karlsruhe, Germany, June 1996. Available via world wide web from [http://www.uni-karlsruhe.de/~Michael.Hennecke/Publications/#MPI\\_F90](http://www.uni-karlsruhe.de/~Michael.Hennecke/Publications/#MPI_F90). 16.2.4
- [27] Institute of Electrical and Electronics Engineers, New York. *IEEE Standard for Binary Floating-Point Arithmetic, ANSI/IEEE Standard 754-1985*, 1985. 13.5.2
- [28] International Organization for Standardization, Geneva. *Information processing — 8-bit single-byte coded graphic character sets — Part 1: Latin alphabet No. 1*, 1987. 13.5.2
- [29] International Organization for Standardization, Geneva. *Information technology — Portable Operating System Interface (POSIX) — Part 1: System Application Program Interface (API) [C Language]*, December 1996. 12.4, 13.2.1
- [30] Charles H. Koelbel, David B. Loveman, Robert S. Schreiber, Guy L. Steele Jr., and Mary E. Zosel. *The High Performance Fortran Handbook*. MIT Press, 1993. 4.1.4
- [31] David Kotz. Disk-directed I/O for MIMD multiprocessors. In *Proceedings of the 1994 Symposium on Operating Systems Design and Implementation*, pages 61–74, November 1994. Updated as Dartmouth TR PCS-TR94-226 on November 8, 1994. 13.1
- [32] O. Krämer and H. Mühlenbein. Mapping strategies in message-based multiprocessor systems. *Parallel Computing*, 9:213–225, 1989. 7.1
- [33] S. J. Lefflet, R. S. Fabry, W. N. Joy, P. Lapsley, S. Miller, and C. Torek. An advanced 4.4BSD interprocess communication tutorial, Unix programmer’s supplementary documents (PSD) 21. Technical report, Computer Systems Research Group, Department of Electrical Engineering and Computer Science, University of California, Berkeley, 1993. Also available at <http://www.netbsd.org/Documentation/lite2/psd/>. 10.5.5
- [34] nCUBE Corporation. *nCUBE 2 Programmers Guide, r2.0*, December 1990. 1.2
- [35] Bill Nitzberg. Performance of the iPSC/860 Concurrent File System. Technical Report RND-92-020, NAS Systems Division, NASA Ames, December 1992. 13.1
- [36] William J. Nitzberg. *Collective Parallel I/O*. PhD thesis, Department of Computer and Information Science, University of Oregon, December 1995. 13.1
- [37] *4.4BSD Programmer’s Supplementary Documents (PSD)*. O’Reilly and Associates, 1994. 10.5.5
- [38] Paul Pierce. The NX/2 operating system. In *Proceedings of the Third Conference on Hypercube Concurrent Computers and Applications*, pages 384–390. ACM Press, 1988. 1.2
- [39] K. E. Seamons, Y. Chen, P. Jones, J. Jozwiak, and M. Winslett. Server-directed collective I/O in Panda. In *Proceedings of Supercomputing ’95*, December 1995. 13.1

- [40] A. Skjellum and A. Leung. Zipcode: a portable multicomputer communication library atop the reactive kernel. In D. W. Walker and Q. F. Stout, editors, *Proceedings of the Fifth Distributed Memory Concurrent Computing Conference*, pages 767–776. IEEE Press, 1990. [1.2](#), [6.1.2](#)
- [41] A. Skjellum, S. Smith, C. Still, A. Leung, and M. Morari. The Zipcode message passing system. Technical report, Lawrence Livermore National Laboratory, September 1992. [1.2](#)
- [42] Anthony Skjellum, Nathan E. Doss, and Purushotham V. Bangalore. Writing Libraries in MPI. In Anthony Skjellum and Donna S. Reese, editors, *Proceedings of the Scalable Parallel Libraries Conference*, pages 166–173. IEEE Computer Society Press, October 1993. [6.1](#)
- [43] Anthony Skjellum, Nathan E. Doss, and Kishore Viswanathan. Inter-communicator extensions to MPI in the MPIX (MPI eXtension) Library. Technical Report MSU-940722, Mississippi State University — Dept. of Computer Science, April 1994. <http://www.erc.msstate.edu/mpi/mpix.html>. [5.2.2](#)
- [44] Anthony Skjellum, Ziyang Lu, Purushotham V. Bangalore, and Nathan E. Doss. Explicit parallel programming in C++ based on the message-passing interface (MPI). In Gregory V. Wilson, editor, *Parallel Programming Using C++*, Engineering Computation Series. MIT Press, July 1996. ISBN 0-262-73118-5.
- [45] Anthony Skjellum, Steven G. Smith, Nathan E. Doss, Alvin P. Leung, and Manfred Morari. The Design and Evolution of Zipcode. *Parallel Computing*, 20(4):565–596, April 1994. [6.1.2](#), [6.5.6](#)
- [46] Rajeev Thakur and Alok Choudhary. An Extended Two-Phase Method for Accessing Sections of Out-of-Core Arrays. *Scientific Programming*, 5(4):301–317, Winter 1996. [13.1](#)
- [47] *The Unicode Standard, Version 2.0*. Addison-Wesley, 1996. ISBN 0-201-48345-9. [13.5.2](#)
- [48] D. Walker. Standards for message passing in a distributed memory environment. Technical Report TM-12147, Oak Ridge National Laboratory, August 1992. [1.2](#)

# Examples Index

This index lists code examples throughout the text. Some examples are referred to by content; others are listed by the major MPI function that they are demonstrating. MPI functions listed in all capital letter are Fortran examples; MPI functions listed in mixed case are C/C++ examples.

- Attributes between languages, [524](#), [525](#)
- C++ declarations in `mpi.h`, [496](#)
- C++ deriving from C++ MPI class, [487](#)
- C++ handle assignment and comparison operators, [493](#)
- C++ handle assignment operator, [488](#)
- C++ handle scope destruction, [488](#)
- C++ illegal communicator handle initialization, [493](#)
- C++ MPI class comparison operator, [487](#)
- C++ profiling example, [497](#), [498](#)
- C/C++ handle conversion, [519](#)
- C/Fortran handle conversion, [518](#)
- Client-server code, [66](#)
  - with blocking probe, [69](#)
  - with blocking probe, wrong, [70](#)
- Datatype
  - 3D array, [116](#)
  - absolute addresses, [121](#)
  - array of structures, [118](#)
  - elaborate example, [128](#), [130](#)
  - matching type, [106](#)
  - matrix transpose, [117](#)
  - union, [123](#)
- Datatypes
  - matching, [37](#)
  - not matching, [37](#)
  - untyped, [38](#)
- Deadlock
  - if not buffered, [47](#)
  - with `MPI_Bcast`, [188](#)
  - wrong message exchange, [46](#)
- Fortran 90 copying and sequence problem, [500–502](#)
- Fortran 90 derived types, [503](#)
- Fortran 90 heterogeneous communication, [514](#)
- Fortran 90 illegal KIND, [510](#)
- Fortran 90 `MPI_TYPE_MATCH_SIZE` implementation, [513](#)
- Fortran 90 register optimization, [504](#)
- Intercommunicator, [208](#), [210](#)
- Interlanguage communication, [529](#)
- Intertwined matching pairs, [45](#)
- Message exchange, [46](#)
- `MPI::Comm::Probe`, [36](#)
- `MPI_ACCUMULATE`, [365](#)
- `MPI_ADDRESS`, [99](#)
- `MPI_Address`, [118](#), [121](#), [123](#), [128](#)
- `MPI_Aint`, [118](#)
- `MPI_Allgather`, [161](#)
- `MPI_ALLOC_MEM`, [291](#)
- `MPI_Alloc_mem`, [292](#)
- `MPI_ALLREDUCE`, [180](#)
- `MPI_Barrier`, [309](#), [310](#), [380](#), [385–387](#)
- `MPI_Bcast`, [143](#), [188](#), [189](#)
- `MPI_BSEND`, [45](#)
- `MPI_Buffer_attach`, [48](#), [310](#)
- `MPI_Buffer_detach`, [48](#)
- `MPI_BYTE`, [38](#)
- `MPI_Cancel`, [310](#)
- `MPI_CART_COORDS`, [282](#)
- `MPI_CART_GET`, [285](#)
- `MPI_CART_RANK`, [282](#), [285](#)
- `MPI_CART_SHIFT`, [282](#)

- 1 MPI\_CART\_SUB, 283
- 2 MPI\_CHARACTER, 38
- 3 MPI\_Comm\_create, 208
- 4 MPI\_Comm\_group, 208
- 5 MPI\_Comm\_remote\_size, 210
- 6 MPI\_COMM\_SPAWN, 328
- 7 MPI\_Comm\_spawn, 328
- 8 MPI\_COMM\_SPAWN\_MULTIPLE, 333
- 9 MPI\_Comm\_spawn\_multiple, 333
- 10 MPI\_Comm\_split, 210
- 11 MPI\_DIMS\_CREATE, 265, 285
- 12 MPI\_DIST\_GRAPH\_CREATE, 272
- 13 MPI\_Dist\_graph\_create, 272
- 14 MPI\_DIST\_GRAPH\_CREATE\_ADJACENT,
- 15 272
- 16 MPI\_FILE\_CLOSE, 429, 432
- 17 MPI\_FILE\_GET\_AMODE, 415
- 18 MPI\_FILE\_IREAD, 432
- 19 MPI\_FILE\_OPEN, 429, 432
- 20 MPI\_FILE\_READ, 429
- 21 MPI\_FILE\_SET\_ATOMICITY, 461
- 22 MPI\_FILE\_SET\_VIEW, 429, 432
- 23 MPI\_FILE\_SYNC, 461
- 24 MPI\_Finalize, 309–311
- 25 MPI\_FREE\_MEM, 291
- 26 MPI\_Gather, 130, 146, 147, 151
- 27 MPI\_Gatherv, 130, 148–151
- 28 MPI\_GET, 360, 362
- 29 MPI\_Get, 379, 380, 385, 386
- 30 MPI\_GET\_ADDRESS, 99, 521
- 31 MPI\_Get\_address, 118, 121, 123, 128
- 32 MPI\_GET\_COUNT, 107
- 33 MPI\_GET\_ELEMENTS, 107
- 34 MPI\_GRAPH\_CREATE, 266, 278, 279
- 35 MPI\_GRAPH\_NEIGHBORS, 278
- 36 MPI\_GRAPH\_NEIGHBORS\_COUNT, 278
- 37 MPI\_Grequest\_complete, 395
- 38 MPI\_Grequest\_start, 395
- 39 MPI\_Group\_free, 208
- 40 MPI\_Group\_incl, 208
- 41 MPI\_Iprobe, 310
- 42 MPI\_IRECV, 57–60, 66
- 43 MPI\_ISEND, 57–59, 66
- 44 MPI\_Op\_create, 178, 186
- 45 MPI\_Pack, 128, 130
- 46 MPI\_Pack\_size, 130
- 47 MPI\_PROBE, 69, 70
- 48 MPI\_Put, 372, 377, 379, 380, 385, 387
- MPI\_RECV, 37, 38, 45–47, 60, 69, 70, 106
- MPI\_REDUCE, 170, 174
- MPI\_Reduce, 173, 174, 178
- MPI\_REQUEST\_FREE, 58
- MPI\_Request\_free, 309
- MPI\_Scan, 186
- MPI\_Scatter, 156
- MPI\_Scatterv, 156, 157
- MPI\_SEND, 37, 38, 46, 47, 60, 69, 70, 106
- MPI\_Send, 118, 121, 123, 128
- MPI\_SENDRECV, 116, 117
- MPI\_SENDRECV\_REPLACE, 282
- MPI\_SSEND, 45, 60
- MPI\_Test\_cancelled, 310
- MPI\_TYPE\_COMMIT, 103, 116, 117, 360
- MPI\_Type\_commit, 118, 121, 123, 128,
- 147–151, 157, 186
- MPI\_TYPE\_CONTIGUOUS, 83, 100, 106,
- 107
- MPI\_Type\_contiguous, 147
- MPI\_TYPE\_CREATE\_DARRAY, 97
- MPI\_TYPE\_CREATE\_HVECTOR, 116,
- 117
- MPI\_Type\_create\_hvector, 118, 121
- MPI\_TYPE\_CREATE\_INDEXED\_BLOCK,
- 360
- MPI\_TYPE\_CREATE\_STRUCT, 90, 100,
- 117
- MPI\_Type\_create\_struct, 118, 121, 123,
- 128, 149, 151, 186
- MPI\_TYPE\_CREATE\_SUBARRAY, 469
- MPI\_TYPE\_EXTENT, 116, 117, 360, 362,
- 365
- MPI\_Type\_extent, 118
- MPI\_TYPE\_FREE, 360
- MPI\_Type\_get\_contents, 123
- MPI\_Type\_get\_envelope, 123
- MPI\_TYPE\_HVECTOR, 116, 117
- MPI\_Type\_hvector, 118, 121
- MPI\_TYPE\_INDEXED, 87, 116
- MPI\_Type\_indexed, 118, 121
- MPI\_TYPE\_STRUCT, 90, 100, 117
- MPI\_Type\_struct, 118, 121, 123, 128, 149,
- 151, 186
- MPI\_TYPE\_VECTOR, 84, 85, 116, 117
- MPI\_Type\_vector, 148, 150, 157
- MPI\_Unpack, 128, 130
- MPI\_WAIT, 57–60, 66, 432



MPI_WAITANY, <a href="#">66</a>	1
MPI_WAITSOME, <a href="#">66</a>	2
MPI_Win_complete, <a href="#">372</a> , <a href="#">380</a> , <a href="#">386</a> , <a href="#">387</a>	3
MPI_WIN_CREATE, <a href="#">360</a> , <a href="#">362</a> , <a href="#">365</a>	4
MPI_WIN_FENCE, <a href="#">360</a> , <a href="#">362</a> , <a href="#">365</a>	5
MPI_Win_fence, <a href="#">379</a>	6
MPI_Win_lock, <a href="#">377</a> , <a href="#">385–387</a>	7
MPI_Win_post, <a href="#">380</a> , <a href="#">386</a> , <a href="#">387</a>	8
MPI_Win_start, <a href="#">372</a> , <a href="#">380</a> , <a href="#">386</a> , <a href="#">387</a>	9
MPI_Win_unlock, <a href="#">377</a> , <a href="#">385–387</a>	10
MPI_Win_wait, <a href="#">380</a> , <a href="#">386</a> , <a href="#">387</a>	11
mpiexec, <a href="#">315</a>	12
	13
Non-deterministic program with MPI_Bcast,	14
<a href="#">189</a>	15
Non-overtaking messages, <a href="#">45</a>	16
Nonblocking operations, <a href="#">57</a> , <a href="#">58</a>	17
message ordering, <a href="#">59</a>	18
progress, <a href="#">60</a>	19
	20
Profiling interface, <a href="#">473</a>	21
	22
Threads and MPI, <a href="#">400</a>	23
Typemap, <a href="#">83–85</a> , <a href="#">87</a> , <a href="#">90</a> , <a href="#">97</a>	24
	25
	26
	27
	28
	29
	30
	31
	32
	33
	34
	35
	36
	37
	38
	39
	40
	41
	42
	43
	44
	45
	46
	47
	48

# MPI Constant and Predefined Handle Index

This index lists predefined MPI constants and handles.

MPI::[\\*\\_NULL](#), [487](#)  
MPI::[\\_LONG\\_LONG](#), [489](#)  
MPI::[ANY\\_SOURCE](#), [533](#)  
MPI::[ANY\\_TAG](#), [533](#)  
MPI::[APPNUM](#), [539](#)  
MPI::[ARGV\\_NULL](#), [541](#)  
MPI::[ARGVS\\_NULL](#), [541](#)  
MPI::[BAND](#), [537](#)  
MPI::[BOOL](#), [490](#), [492](#), [535](#)  
MPI::[BOR](#), [537](#)  
MPI::[BOTTOM](#), [532](#)  
MPI::[BSEND\\_OVERHEAD](#), [533](#)  
MPI::[BXOR](#), [537](#)  
MPI::[BYTE](#), [489](#), [490](#), [492](#), [534](#), [535](#)  
MPI::[CART](#), [538](#)  
MPI::[CHAR](#), [490](#), [534](#)  
MPI::[CHARACTER](#), [490](#), [535](#)  
MPI::[COMBINER\\_CONTIGUOUS](#), [540](#)  
MPI::[COMBINER\\_DARRAY](#), [540](#)  
MPI::[COMBINER\\_DUP](#), [540](#)  
MPI::[COMBINER\\_F90\\_COMPLEX](#), [540](#)  
MPI::[COMBINER\\_F90\\_INTEGER](#), [540](#)  
MPI::[COMBINER\\_F90\\_REAL](#), [540](#)  
MPI::[COMBINER\\_HINDEXED](#), [540](#)  
MPI::[COMBINER\\_HINDEXED\\_INTEGER](#),  
    [540](#)  
MPI::[COMBINER\\_HVECTOR](#), [540](#)  
MPI::[COMBINER\\_HVECTOR\\_INTEGER](#),  
    [540](#)  
MPI::[COMBINER\\_INDEXED](#), [540](#)  
MPI::[COMBINER\\_INDEXED\\_BLOCK](#), [540](#)  
MPI::[COMBINER\\_NAMED](#), [540](#)  
MPI::[COMBINER\\_RESIZED](#), [540](#)  
MPI::[COMBINER\\_STRUCT](#), [540](#)  
MPI::[COMBINER\\_STRUCT\\_INTEGER](#),  
    [540](#)  
MPI::[COMBINER\\_SUBARRAY](#), [540](#)  
MPI::[COMBINER\\_VECTOR](#), [540](#)  
MPI::[COMM\\_NULL](#), [489](#), [493](#), [537](#)  
MPI::[COMM\\_SELF](#), [536](#)  
MPI::[COMM\\_WORLD](#), [536](#)  
MPI::[COMPLEX](#), [490](#), [492](#), [535](#)  
MPI::[CONGRUENT](#), [536](#)  
MPI::[DATATYPE\\_NULL](#), [537](#)  
MPI::[DISPLACEMENT\\_CURRENT](#), [540](#)  
MPI::[DIST\\_GRAPH](#), [538](#)  
MPI::[DISTRIBUTE\\_BLOCK](#), [541](#)  
MPI::[DISTRIBUTE\\_CYCLIC](#), [541](#)  
MPI::[DISTRIBUTE\\_DFLT\\_DARG](#), [541](#)  
MPI::[DISTRIBUTE\\_NONE](#), [541](#)  
MPI::[DOUBLE](#), [490](#), [492](#), [534](#)  
MPI::[DOUBLE\\_COMPLEX](#), [490](#), [492](#), [535](#)  
MPI::[DOUBLE\\_INT](#), [491](#), [536](#)  
MPI::[DOUBLE\\_PRECISION](#), [490](#), [492](#), [535](#)  
MPI::[DUP\\_FN](#), [539](#)  
MPI::[ERR\\_ACCESS](#), [532](#)  
MPI::[ERR\\_AMODE](#), [532](#)  
MPI::[ERR\\_ARG](#), [531](#)  
MPI::[ERR\\_ASSERT](#), [532](#)  
MPI::[ERR\\_BAD\\_FILE](#), [532](#)  
MPI::[ERR\\_BASE](#), [532](#)  
MPI::[ERR\\_BUFFER](#), [531](#)  
MPI::[ERR\\_COMM](#), [531](#)  
MPI::[ERR\\_CONVERSION](#), [532](#)  
MPI::[ERR\\_COUNT](#), [531](#)  
MPI::[ERR\\_DIMS](#), [531](#)  
MPI::[ERR\\_DISP](#), [532](#)  
MPI::[ERR\\_DUP\\_DATAREP](#), [532](#)  
MPI::[ERR\\_FILE](#), [532](#)

MPI::ERR_FILE_EXISTS, <a href="#">532</a>	MPI::F_COMPLEX16, <a href="#">491</a> , <a href="#">492</a>	1
MPI::ERR_FILE_IN_USE, <a href="#">532</a>	MPI::F_COMPLEX32, <a href="#">491</a> , <a href="#">492</a>	2
MPI::ERR_GROUP, <a href="#">531</a>	MPI::F_COMPLEX4, <a href="#">491</a> , <a href="#">492</a>	3
MPI::ERR_IN_STATUS, <a href="#">532</a>	MPI::F_COMPLEX8, <a href="#">491</a> , <a href="#">492</a>	4
MPI::ERR_INFO, <a href="#">532</a>	MPI::F_DOUBLE_COMPLEX, <a href="#">491</a> , <a href="#">492</a> , <a href="#">535</a>	5 6
MPI::ERR_INFO_KEY, <a href="#">532</a>	MPI::FILE_NULL, <a href="#">537</a>	7
MPI::ERR_INFO_NOKEY, <a href="#">532</a>	MPI::FLOAT, <a href="#">490</a> , <a href="#">492</a> , <a href="#">534</a>	8
MPI::ERR_INFO_VALUE, <a href="#">532</a>	MPI::FLOAT_INT, <a href="#">491</a> , <a href="#">536</a>	9
MPI::ERR_INTERN, <a href="#">531</a>	MPI::GRAPH, <a href="#">538</a>	10
MPI::ERR_IO, <a href="#">532</a>	MPI::GROUP_EMPTY, <a href="#">537</a>	11
MPI::ERR_KEYVAL, <a href="#">532</a>	MPI::GROUP_NULL, <a href="#">537</a>	12
MPI::ERR_LASTCODE, <a href="#">532</a>	MPI::HOST, <a href="#">536</a>	13
MPI::ERR_LOCKTYPE, <a href="#">532</a>	MPI::IDENT, <a href="#">536</a>	14
MPI::ERR_NAME, <a href="#">532</a>	MPI::IN_PLACE, <a href="#">532</a>	15
MPI::ERR_NO_MEM, <a href="#">532</a>	MPI::INFO_NULL, <a href="#">537</a>	16
MPI::ERR_NO_SPACE, <a href="#">532</a>	MPI::INT, <a href="#">489</a> , <a href="#">490</a> , <a href="#">534</a>	17
MPI::ERR_NO_SUCH_FILE, <a href="#">532</a>	MPI::INTEGER, <a href="#">489</a> , <a href="#">490</a> , <a href="#">535</a>	18
MPI::ERR_NOT_SAME, <a href="#">532</a>	MPI::INTEGER1, <a href="#">491</a> , <a href="#">492</a> , <a href="#">535</a>	19
MPI::ERR_OP, <a href="#">531</a>	MPI::INTEGER16, <a href="#">491</a> , <a href="#">492</a>	20
MPI::ERR_OTHER, <a href="#">531</a>	MPI::INTEGER2, <a href="#">491</a> , <a href="#">492</a> , <a href="#">535</a>	21
MPI::ERR_PENDING, <a href="#">531</a>	MPI::INTEGER4, <a href="#">491</a> , <a href="#">492</a> , <a href="#">535</a>	22
MPI::ERR_PORT, <a href="#">532</a>	MPI::INTEGER8, <a href="#">491</a> , <a href="#">492</a> , <a href="#">535</a>	23
MPI::ERR_QUOTA, <a href="#">532</a>	MPI::IO, <a href="#">536</a>	24
MPI::ERR_RANK, <a href="#">531</a>	MPI::KEYVAL_INVALID, <a href="#">533</a>	25
MPI::ERR_READ_ONLY, <a href="#">532</a>	MPI::LAND, <a href="#">537</a>	26
MPI::ERR_REQUEST, <a href="#">531</a>	MPI::LASTUSED_CODE, <a href="#">539</a>	27
MPI::ERR_RMA_CONFLICT, <a href="#">532</a>	MPI::LB, <a href="#">536</a>	28
MPI::ERR_RMA_SYNC, <a href="#">532</a>	MPI::LOCK_EXCLUSIVE, <a href="#">533</a>	29
MPI::ERR_ROOT, <a href="#">531</a>	MPI::LOCK_SHARED, <a href="#">533</a>	30
MPI::ERR_SERVICE, <a href="#">532</a>	MPI::LOGICAL, <a href="#">490</a> , <a href="#">492</a> , <a href="#">535</a>	31
MPI::ERR_SIZE, <a href="#">532</a>	MPI::LONG, <a href="#">489</a> , <a href="#">490</a> , <a href="#">534</a>	32
MPI::ERR_SPAWN, <a href="#">532</a>	MPI::LONG_DOUBLE, <a href="#">490</a> , <a href="#">492</a> , <a href="#">534</a>	33
MPI::ERR_TAG, <a href="#">531</a>	MPI::LONG_DOUBLE_COMPLEX, <a href="#">490</a> , <a href="#">492</a> , <a href="#">535</a>	34 35
MPI::ERR_TOPOLOGY, <a href="#">531</a>	MPI::LONG_DOUBLE_INT, <a href="#">491</a> , <a href="#">536</a>	36
MPI::ERR_TRUNCATE, <a href="#">531</a>	MPI::LONG_INT, <a href="#">491</a> , <a href="#">536</a>	37
MPI::ERR_TYPE, <a href="#">531</a>	MPI::LONG_LONG, <a href="#">490</a> , <a href="#">534</a>	38
MPI::ERR_UNKNOWN, <a href="#">531</a>	MPI::LONG_LONG_INT, <a href="#">534</a>	39
MPI::ERR_UNSUPPORTED_DATAREP, <a href="#">532</a>	MPI::LOR, <a href="#">537</a>	40
MPI::ERR_UNSUPPORTED_OPERATION, <a href="#">532</a>	MPI::LXOR, <a href="#">537</a>	41
MPI::ERR_WIN, <a href="#">532</a>	MPI::MAX, <a href="#">537</a>	42
MPI::ERRHANDLER_NULL, <a href="#">537</a>	MPI::MAX_DATAREP_STRING, <a href="#">533</a>	43
MPI::ERRORS_ARE_FATAL, <a href="#">20</a> , <a href="#">533</a>	MPI::MAX_ERROR_STRING, <a href="#">533</a>	44
MPI::ERRORS_RETURN, <a href="#">20</a> , <a href="#">533</a>	MPI::MAX_INFO_KEY, <a href="#">533</a>	45
MPI::ERRORS_THROW_EXCEPTIONS, <a href="#">20</a> , <a href="#">23</a> , <a href="#">293</a> , <a href="#">533</a>	MPI::MAX_INFO_VAL, <a href="#">533</a>	46
MPI::F_COMPLEX, <a href="#">490</a> , <a href="#">492</a> , <a href="#">535</a>	MPI::MAX_OBJECT_NAME, <a href="#">533</a>	47
	MPI::MAX_PORT_NAME, <a href="#">533</a>	48

1	MPI::MAX_PROCESSOR_NAME, 533	MPI::TWODOUBLE_PRECISION, 491, 536
2	MPI::MAXLOC, 492, 537	MPI::TWOINT, 491, 536
3	MPI::MIN, 537	MPI::TWOINTEGER, 491, 536
4	MPI::MINLOC, 492, 537	MPI::TWOREAL, 491, 536
5	MPI::MODE_APPEND, 539	MPI::TYPECLASS_COMPLEX, 541
6	MPI::MODE_CREATE, 539	MPI::TYPECLASS_INTEGER, 541
7	MPI::MODE_DELETE_ON_CLOSE, 539	MPI::TYPECLASS_REAL, 541
8	MPI::MODE_EXCL, 539	MPI::UB, 536
9	MPI::MODE_NOCHECK, 539	MPI::UNDEFINED, 533
10	MPI::MODE_NOPRECEDE, 539	MPI::UNEQUAL, 536
11	MPI::MODE_NOPUT, 539	MPI::UNIVERSE_SIZE, 539
12	MPI::MODE_NOSTORE, 539	MPI::UNSIGNED, 489, 490, 534
13	MPI::MODE_NOSUCCEED, 539	MPI::UNSIGNED_CHAR, 489, 490, 534
14	MPI::MODE_RDONLY, 539	MPI::UNSIGNED_LONG, 489, 490, 534
15	MPI::MODE_RDWR, 539	MPI::UNSIGNED_LONG_LONG, 489, 490,
16	MPI::MODE_SEQUENTIAL, 539	534
17	MPI::MODE_UNIQUE_OPEN, 539	MPI::UNSIGNED_SHORT, 489, 490, 534
18	MPI::MODE_WRONLY, 539	MPI::WCHAR, 490, 534
19	MPI::NULL_COPY_FN, 539	MPI::WIN_BASE, 539
20	MPI::NULL_DELETE_FN, 539	MPI::WIN_DISP_UNIT, 539
21	MPI::OP_NULL, 537	MPI::WIN_NULL, 537
22	MPI::ORDER_C, 541	MPI::WIN_SIZE, 539
23	MPI::ORDER_FORTRAN, 541	MPI::WTIME_IS_GLOBAL, 536
24	MPI::PACKED, 489, 490, 534, 535	MPI_2DOUBLE_PRECISION, 172, 173,
25	MPI::PROC_NULL, 533	536
26	MPI::PROD, 537	MPI_2INT, 173, 536
27	MPI::REAL, 490, 492, 535	MPI_2INTEGER, 172, 173, 536
28	MPI::REAL16, 491, 492	MPI_2REAL, 172, 173, 536
29	MPI::REAL2, 491, 492, 535	MPI_ADDRESS_KIND, 15, 16, 16, 18, 110,
30	MPI::REAL4, 491, 492, 535	500, 523, 524, 533
31	MPI::REAL8, 491, 492, 535	MPI_AINT, 31, 169, 534, 535, 611–614
32	MPI::REPLACE, 537	MPI_ANY_SOURCE, 32, 33, 44, 54, 55,
33	MPI::REQUEST_NULL, 537	68–70, 74, 77, 78, 259, 289, 533
34	MPI::ROOT, 533	MPI_ANY_TAG, 14, 32, 33, 35, 54, 55,
35	MPI::SEEK_CUR, 541	68–70, 74, 77–79, 533
36	MPI::SEEK_END, 541	MPI_APPNUM, 347, 348, 539
37	MPI::SEEK_SET, 541	MPI_ARGV_NULL, 15, 328, 329, 499, 541
38	MPI::SHORT, 489, 490, 534	MPI_ARGVS_NULL, 15, 332, 499, 541
39	MPI::SHORT_INT, 491, 536	MPI_BAND, 169, 170, 537
40	MPI::SIGNED_CHAR, 489, 490, 534	MPI_BOR, 169, 170, 537
41	MPI::SIMILAR, 536	MPI_BOTTOM, 10, 15, 16, 18, 36, 98,
42	MPI::SUCCESS, 531	108, 138, 270, 271, 330, 499, 502,
43	MPI::SUM, 537	504, 507, 521, 522, 529, 532, 617
44	MPI::TAG_UB, 536	MPI_BSEND_OVERHEAD, 50, 290, 533
45	MPI::THREAD_FUNNELED, 540	MPI_BXOR, 169, 170, 537
46	MPI::THREAD_MULTIPLE, 540	MPI_BYTE, 29, 30, 37–39, 131, 170, 408,
47	MPI::THREAD_SERIALIZED, 540	447, 459, 489, 529, 534, 535, 614
48	MPI::THREAD_SINGLE, 540	MPI_C_BOOL, 30, 170, 534, 611–614

MPI_C_COMPLEX, 30, 534, 611–614	264, 288, 289, 292, 295, 303, 310–	1
MPI_C_DOUBLE_COMPLEX, 30, 170, 534, 611–614	312, 314, 323, 324, 326, 327, 331–	2
MPI_C_FLOAT_COMPLEX, 30, 170, 534, 611–614	333, 346–349, 403, 446, 465, 516,	3
MPI_C_LONG_DOUBLE_COMPLEX, 30, 170, 534, 611–614	529, 536, 616	4
MPI_CART, 274, 538	MPI_COMPLEX, 29, 170, 449, 508, 535	5
MPI_CHAR, 30, 40, 90, 171, 534, 611	MPI_COMPLEX16, 170, 535	6
MPI_CHARACTER, 29, 38–40, 171, 535	MPI_COMPLEX32, 170, 535	7
MPI_COMBINER_CONTIGUOUS, 110, 114, 540	MPI_COMPLEX4, 170, 535	8
MPI_COMBINER_DARRAY, 110, 115, 540	MPI_COMPLEX8, 170, 535	9
MPI_COMBINER_DUP, 110, 113, 540	MPI_CONGRUENT, 204, 227, 536	10
MPI_COMBINER_F90_COMPLEX, 110, 115, 540	MPI_CONVERSION_FN_NULL, 454	11
MPI_COMBINER_F90_INTEGER, 110, 115, 540	MPI_DATATYPE, 20	12
MPI_COMBINER_F90_REAL, 110, 115, 540	MPI_DATATYPE_NULL, 104, 537	13
MPI_COMBINER_HINDEXED, 110, 114, 540	MPI_DISPLACEMENT_CURRENT, 420, 540, 617	14
MPI_COMBINER_HINDEXED_INTEGER, 110, 114, 540	MPI_DIST_GRAPH, 274, 538, 613	15
MPI_COMBINER_HVECTOR, 110, 114, 540	MPI_DISTRIBUTE_BLOCK, 95, 541	16
MPI_COMBINER_HVECTOR_INTEGER, 110, 114, 540	MPI_DISTRIBUTE_CYCLIC, 95, 541	17
MPI_COMBINER_INDEXED, 110, 114, 540	MPI_DISTRIBUTE_DFLT_DARG, 95, 541	18
MPI_COMBINER_INDEXED_BLOCK, 110, 114, 540	MPI_DISTRIBUTE_NONE, 95, 541	19
MPI_COMBINER_NAMED, 110, 113, 540	MPI_DOUBLE, 30, 169, 507, 534	20
MPI_COMBINER_RESIZED, 110, 115, 540	MPI_DOUBLE_COMPLEX, 29, 170, 449, 508, 535	21
MPI_COMBINER_STRUCT, 110, 114, 540	MPI_DOUBLE_INT, 173, 536	22
MPI_COMBINER_STRUCT_INTEGER, 110, 114, 540	MPI_DOUBLE_PRECISION, 29, 169, 508, 535	23
MPI_COMBINER_SUBARRAY, 110, 115, 540	MPI_DUP_FN, 539	24
MPI_COMBINER_VECTOR, 110, 114, 540	MPI_ERR_ACCESS, 302, 412, 466, 532	25
MPI_COMM_NULL, 195, 206–210, 213, 256, 264, 266, 330, 349, 350, 537, 615	MPI_ERR_AMODE, 302, 411, 466, 532	26
MPI_COMM_PARENT, 256	MPI_ERR_ARG, 301, 531	27
MPI_COMM_SELF, 195, 240, 256, 312, 313, 349, 409, 536, 613	MPI_ERR_ASSERT, 301, 382, 532	28
MPI_COMM_WORLD, 14, 24, 31, 195–197, 203, 204, 217, 228, 229, 256,	MPI_ERR_BAD_FILE, 302, 466, 532	29
	MPI_ERR_BASE, 291, 301, 382, 532	30
	MPI_ERR_BUFFER, 301, 531	31
	MPI_ERR_COMM, 301, 531	32
	MPI_ERR_CONVERSION, 302, 454, 466, 532	33
	MPI_ERR_COUNT, 301, 531	34
	MPI_ERR_DIMS, 301, 531	35
	MPI_ERR_DISP, 301, 382, 532	36
	MPI_ERR_DUP_DATAREP, 302, 452, 466, 532	37
	MPI_ERR_FILE, 302, 466, 532	38
	MPI_ERR_FILE_EXISTS, 302, 466, 532	39
	MPI_ERR_FILE_IN_USE, 302, 412, 466, 532	40
	MPI_ERR_GROUP, 301, 531	41
		42
		43
		44
		45
		46
		47
		48

MPI\_ERR\_IN\_STATUS, 34, 36, 55, 63,  
 65, 294, 301, 394, 424, 495, 532  
 MPI\_ERR\_INFO, 301, 532  
 MPI\_ERR\_INFO\_KEY, 301, 318, 532  
 MPI\_ERR\_INFO\_NOKEY, 301, 319, 532  
 MPI\_ERR\_INFO\_VALUE, 301, 318, 532  
 MPI\_ERR\_INTERN, 301, 531  
 MPI\_ERR\_IO, 302, 466, 532  
 MPI\_ERR\_KEYVAL, 252, 301, 532  
 MPI\_ERR\_LASTCODE, 300, 302–304, 532  
 MPI\_ERR\_LOCKTYPE, 301, 382, 532  
 MPI\_ERR\_NAME, 301, 343, 532  
 MPI\_ERR\_NO\_MEM, 291, 301, 532  
 MPI\_ERR\_NO\_SPACE, 302, 466, 532  
 MPI\_ERR\_NO\_SUCH\_FILE, 302, 412, 466,  
 532  
 MPI\_ERR\_NOT\_SAME, 302, 466, 532  
 MPI\_ERR\_OP, 301, 531  
 MPI\_ERR\_OTHER, 300, 301, 531  
 MPI\_ERR\_PENDING, 63, 301, 531  
 MPI\_ERR\_PORT, 301, 340, 532  
 MPI\_ERR\_QUOTA, 302, 466, 532  
 MPI\_ERR\_RANK, 301, 531  
 MPI\_ERR\_READ\_ONLY, 302, 466, 532  
 MPI\_ERR\_REQUEST, 301, 531  
 MPI\_ERR\_RMA\_CONFLICT, 301, 382,  
 532  
 MPI\_ERR\_RMA\_SYNC, 301, 382, 532  
 MPI\_ERR\_ROOT, 301, 531  
 MPI\_ERR\_SERVICE, 301, 342, 532  
 MPI\_ERR\_SIZE, 301, 382, 532  
 MPI\_ERR\_SPAWN, 301, 329, 330, 532  
 MPI\_ERR\_TAG, 301, 531  
 MPI\_ERR\_TOPOLOGY, 301, 531  
 MPI\_ERR\_TRUNCATE, 301, 531  
 MPI\_ERR\_TYPE, 301, 531  
 MPI\_ERR\_UNKNOWN, 300, 301, 531  
 MPI\_ERR\_UNSUPPORTED\_DATAREP,  
 302, 466, 532  
 MPI\_ERR\_UNSUPPORTED\_OPERATION,  
 302, 466, 532  
 MPI\_ERR\_WIN, 301, 382, 532  
 MPI\_ERRCODES\_IGNORE, 15, 18, 330,  
 499, 502, 541  
 MPI\_ERRHANDLER\_NULL, 299, 537  
 MPI\_ERROR, 34, 55, 533  
 MPI\_ERROR\_STRING, 300  
 MPI\_ERRORS\_ARE\_FATAL, 292, 293, 305,  
 381, 465, 533  
 MPI\_ERRORS\_RETURN, 292, 293, 306,  
 465, 529, 533  
 MPI\_F\_STATUS\_IGNORE, 520, 542  
 MPI\_F\_STATUSES\_IGNORE, 520, 542  
 MPI\_FILE\_NULL, 412, 465, 537  
 MPI\_FLOAT, 30, 90, 167, 169, 448, 534  
 MPI\_FLOAT\_INT, 12, 172, 173, 536  
 MPI\_GRAPH, 274, 538  
 MPI\_GROUP\_EMPTY, 194, 199, 200, 207,  
 208, 537  
 MPI\_GROUP\_NULL, 194, 202, 537  
 MPI\_HOST, 288, 536  
 MPI\_IDENT, 197, 204, 536  
 MPI\_IN\_PLACE, 15, 138, 164, 499, 502,  
 507, 532  
 MPI\_INFO\_NULL, 272, 321, 329, 339, 411,  
 412, 421, 537  
 MPI\_INT, 12, 30, 82, 169, 448, 449, 507,  
 529, 530, 534  
 MPI\_INT16\_T, 30, 169, 534, 611–614  
 MPI\_INT32\_T, 30, 169, 534, 611–614  
 MPI\_INT64\_T, 30, 169, 534, 611–614  
 MPI\_INT8\_T, 30, 169, 534, 611–614  
 MPI\_INTEGER, 29, 37, 169, 507, 508,  
 530, 535  
 MPI\_INTEGER1, 29, 169, 535  
 MPI\_INTEGER16, 169, 535  
 MPI\_INTEGER2, 29, 169, 449, 535  
 MPI\_INTEGER4, 29, 169, 535  
 MPI\_INTEGER8, 169, 512, 535  
 MPI\_INTEGER\_KIND, 15, 110, 523, 533  
 MPI\_IO, 288, 289, 536  
 MPI\_KEYVAL\_INVALID, 244, 245, 533  
 MPI\_LAND, 169, 170, 537  
 MPI\_LASTUSED\_CODE, 303, 539  
 MPI\_LB, 16, 17, 93, 96, 100–102, 105,  
 448, 536  
 MPI\_LOCK\_EXCLUSIVE, 375, 533  
 MPI\_LOCK\_SHARED, 375, 533  
 MPI\_LOGICAL, 29, 170, 535  
 MPI\_LONG, 30, 169, 534  
 MPI\_LONG\_DOUBLE, 30, 169, 534  
 MPI\_LONG\_DOUBLE\_INT, 173, 536  
 MPI\_LONG\_INT, 173, 536  
 MPI\_LONG\_LONG, 30, 169, 534, 614  
 MPI\_LONG\_LONG\_INT, 30, 169, 534, 614

MPI_LOR, 169, 170, 537	1
MPI_LXOR, 169, 170, 537	2
MPI_MAX, 167, 169, 170, 186, 537	3
MPI_MAX_DATAREP_STRING, 15, 422, 452, 533	4
MPI_MAX_ERROR_STRING, 15, 300, 304, 533	5
MPI_MAX_INFO_KEY, 15, 301, 317, 319, 320, 533	6
MPI_MAX_INFO_VAL, 15, 301, 317, 533	7
MPI_MAX_OBJECT, 255, 615	8
MPI_MAX_OBJECT_NAME, 15, 255, 533, 615	9
MPI_MAX_PORT_NAME, 15, 338, 533	10
MPI_MAX_PROCESSOR_NAME, 15, 290, 533, 616	11
MPI_MAXLOC, 169, 171, 172, 175, 537	12
MPI_MIN, 169, 170, 537	13
MPI_MINLOC, 169, 171, 172, 175, 537	14
MPI_MODE_APPEND, 410, 411, 539	15
MPI_MODE_CREATE, 410, 411, 418, 539	16
MPI_MODE_DELETE_ON_CLOSE, 410–412, 539	17
MPI_MODE_EXCL, 410, 411, 539	18
MPI_MODE_NOCHECK, 377, 378, 539	19
MPI_MODE_NOPRECEDE, 377, 378, 539	20
MPI_MODE_NOPUT, 377, 378, 539	21
MPI_MODE_NOSTORE, 377, 378, 539	22
MPI_MODE_NOSUCCEED, 377, 378, 539	23
MPI_MODE_RDONLY, 410, 411, 416, 539	24
MPI_MODE_RDWR, 410, 411, 539	25
MPI_MODE_SEQUENTIAL, 410, 411, 413, 414, 420, 425, 428, 438, 458, 539, 617	26
MPI_MODE_UNIQUE_OPEN, 410, 411, 539	27
MPI_MODE_WRONLY, 410, 411, 539	28
MPI_NULL_COPY_FN, 539	29
MPI_NULL_DELETE_FN, 539	30
MPI_OFFSET, 31, 169, 534, 535, 611–614	31
MPI_OFFSET_KIND, 15, 16, 18, 31, 460, 500, 533	32
MPI_OP_NULL, 178, 537	33
MPI_ORDER_C, 14, 92, 95, 96, 541	34
MPI_ORDER_FORTRAN, 14, 92, 95, 541	35
MPI_PACKED, 29, 30, 37, 126, 127, 131, 450, 489, 529, 534, 535	36
MPI_PROC_NULL, 28, 79, 140, 142, 144, 146, 154, 155, 168, 197, 282, 288, 289, 358, 533, 614, 616, 617	37
MPI_PROD, 169, 170, 537	38
MPI_REAL, 29, 37, 169, 449, 507, 508, 514, 535	39
MPI_REAL16, 170, 535	40
MPI_REAL2, 29, 170, 535	41
MPI_REAL4, 29, 170, 507, 512, 535	42
MPI_REAL8, 29, 170, 507, 535, 612	43
MPI_REPLACE, 365, 537, 613, 617	44
MPI_REQUEST_NULL, 55–58, 61–64, 394, 537	45
MPI_ROOT, 140, 533	46
MPI_SEEK_CUR, 433, 439, 541	47
MPI_SEEK_END, 433, 439, 541	48
MPI_SEEK_SET, 433, 434, 439, 541	
MPI_SHORT, 30, 169, 534	
MPI_SHORT_INT, 173, 536	
MPI_SIGNED_CHAR, 30, 169, 171, 534, 614	
MPI_SIMILAR, 197, 204, 227, 536	
MPI_SOURCE, 34, 533	
MPI_STATUS, 21, 35, 36, 55	
MPI_STATUS_IGNORE, 10, 15, 18, 35, 36, 393, 424, 499, 502, 507, 520, 529, 541, 609	
MPI_STATUS_SIZE, 15, 34, 533	
MPI_STATUSES_IGNORE, 14, 15, 36, 393, 394, 499, 502, 520, 541, 609	
MPI_SUBVERSION, 288, 542	
MPI_SUCCESS, 18, 19, 55, 63, 65, 243, 245–250, 300, 301, 305, 306, 330, 454, 480, 481, 531	
MPI_SUM, 169, 170, 529, 537	
MPI_TAG, 34, 533	
MPI_TAG_UB, 31, 288, 523, 528, 536	
MPI_THREAD_FUNNELED, 402, 403, 540	
MPI_THREAD_MULTIPLE, 403, 405, 540	
MPI_THREAD_SERIALIZED, 403, 540	
MPI_THREAD_SINGLE, 402–404, 540	
MPI_TYPECLASS_COMPLEX, 513, 541	
MPI_TYPECLASS_INTEGER, 513, 541	
MPI_TYPECLASS_REAL, 513, 541	
MPI_UB, 12, 16, 17, 93, 97, 100–102, 105, 448, 536	
MPI_UINT16_T, 30, 169, 534, 611–614	
MPI_UINT32_T, 30, 169, 534, 611–614	



MPI\_UINT64\_T, 30, 169, 534, 611–614  
MPI\_UINT8\_T, 30, 169, 534, 611–614  
MPI\_UNDEFINED, 35, 61, 62, 64, 65,  
107, 196, 197, 210, 274, 284, 285,  
509, 510, 533, 614  
MPI\_UNEQUAL, 197, 204, 227, 536  
MPI\_UNIVERSE\_SIZE, 326, 346, 539  
MPI\_UNSIGNED, 30, 169, 534  
MPI\_UNSIGNED\_CHAR, 30, 169, 171,  
534  
MPI\_UNSIGNED\_LONG, 30, 169, 534  
MPI\_UNSIGNED\_LONG\_LONG, 30, 169,  
534, 614  
MPI\_UNSIGNED\_SHORT, 30, 169, 534  
MPI\_UNWEIGHTED, 15, 269–272, 280,  
281, 499, 541, 613  
MPI\_VERSION, 288, 542  
MPI\_WCHAR, 30, 171, 257, 449, 534, 614  
MPI\_WIN\_BASE, 356, 528, 539  
MPI\_WIN\_DISP\_UNIT, 356, 539  
MPI\_WIN\_NULL, 356, 537  
MPI\_WIN\_SIZE, 356, 539  
MPI\_WTIME\_IS\_GLOBAL, 288, 289, 307,  
523, 536



# MPI Declarations Index

This index refers to declarations needed in C/C++, such as address kind integers, handles, etc. The underlined page numbers is the “main” reference (sometimes there are more than one when key concepts are discussed in multiple areas).

- MPI::Aint, [15](#), [15](#), [20](#), [83](#), [83](#), [85](#), [88](#), [90](#),  
[98](#), [101](#), [102](#), [111](#), [131](#), [132](#), [354](#),  
[358](#), [360](#), [364](#), [449](#), [452](#), [477–480](#),  
[523](#), [523](#), [542](#)
- MPI::Cartcomm, [264](#), [486](#), [492](#), [542](#)
- MPI::Comm, [28](#), [198](#), [203–206](#), [209](#), [212](#),  
[226](#), [227](#), [229](#), [242](#), [244–246](#), [486](#),  
[492](#), [493](#), [542](#)
- MPI::Datatype, [20](#), [83](#), [486](#), [542](#)
- MPI::Distgraphcomm, [492](#), [542](#), [612](#)
- MPI::Errhandler, [294](#), [295–299](#), [482](#), [483](#),  
[486](#), [517](#), [542](#)
- MPI::Exception, [20](#), [23](#), [486](#), [494](#), [542](#)
- MPI::File, [298](#), [299](#), [305](#), [409](#), [411](#), [413–](#)  
[417](#), [419](#), [421](#), [425–439](#), [441–445](#),  
[449](#), [457](#), [458](#), [486](#), [517](#), [541](#), [543](#)
- MPI::Fint, [535](#)
- MPI::Graphcomm, [266](#), [486](#), [492](#), [542](#)
- MPI::Grequest, [392](#), [392](#), [486](#), [543](#)
- MPI::Group, [196](#), [196](#), [197–202](#), [206](#), [227](#),  
[356](#), [371](#), [373](#), [415](#), [486](#), [517](#), [543](#)
- MPI::Info, [290](#), [317](#), [317](#), [318–321](#), [326](#),  
[329](#), [331](#), [338–343](#), [409](#), [412](#), [416](#),  
[417](#), [419](#), [486](#), [517](#), [541](#), [543](#)
- MPI::Intercomm, [486](#), [492](#), [542](#)
- MPI::Intracomm, [486](#), [492](#), [542](#)
- MPI::Offset, [16](#), [16](#), [20](#), [413](#), [414](#), [419](#), [421](#),  
[425–428](#), [433](#), [434](#), [438](#), [439](#), [441](#),  
[442](#), [452](#), [459](#), [542](#)
- MPI::Op, [167](#), [175](#), [178](#), [179](#), [181–186](#), [364](#),  
[486](#), [517](#), [543](#)
- MPI::Prequest, [73](#), [486](#), [543](#)
- MPI::Request, [52–54](#), [56](#), [56](#), [58](#), [60–65](#),  
[67](#), [70](#), [72–75](#), [392](#), [395](#), [427](#), [428](#),  
[431](#), [432](#), [436](#), [486](#), [517](#), [543](#)
- MPI::Status, [32](#), [34](#), [56](#), [60–65](#), [67–69](#), [71](#),  
[77](#), [78](#), [106](#), [392](#), [398](#), [425–427](#),  
[429–431](#), [435](#), [437](#), [438](#), [441–445](#),  
[486](#), [487](#), [520](#), [542](#)
- MPI::Win, [247–249](#), [257](#), [296](#), [297](#), [305](#),  
[354](#), [355](#), [356](#), [358](#), [360](#), [364](#), [369](#),  
[371–373](#), [375](#), [376](#), [486](#), [517](#), [541](#),  
[543](#)
- MPI\_Aint, [15](#), [15](#), [19](#), [31](#), [83](#), [83](#), [85](#), [88](#),  
[90](#), [98](#), [101](#), [102](#), [111](#), [131](#), [132](#),  
[354](#), [358](#), [360](#), [364](#), [449](#), [452](#), [477–](#)  
[480](#), [500](#), [523](#), [523](#), [524](#), [542](#)
- MPI\_Comm, [28](#), [198](#), [203–206](#), [209](#), [212](#),  
[226](#), [227](#), [229](#), [242](#), [244–246](#), [536](#),  
[537](#), [542](#)
- MPI\_Datatype, [83](#), [504](#), [534–537](#), [542](#)
- MPI\_Errhandler, [294](#), [295–299](#), [482](#), [483](#),  
[517](#), [533](#), [537](#), [542](#)
- MPI\_File, [298](#), [299](#), [305](#), [409](#), [411](#), [413–](#)  
[417](#), [419](#), [421](#), [425–439](#), [441–445](#),  
[449](#), [457](#), [458](#), [517](#), [537](#), [541](#), [542](#)
- MPI\_Fint, [517](#), [535](#), [542](#), [613](#)
- MPI\_Group, [196](#), [196](#), [197–202](#), [206](#), [227](#),  
[356](#), [371](#), [373](#), [415](#), [517](#), [537](#), [542](#)
- MPI\_Info, [290](#), [317](#), [317](#), [318–321](#), [326](#),  
[329](#), [331](#), [338–343](#), [409](#), [412](#), [416](#),  
[417](#), [419](#), [517](#), [537](#), [541](#), [542](#), [616](#)
- MPI\_Offset, [16](#), [16](#), [19](#), [31](#), [413](#), [414](#), [419](#),  
[421](#), [425–428](#), [433](#), [434](#), [438](#), [439](#),  
[441](#), [442](#), [452](#), [459](#), [459](#), [460](#), [516](#),  
[542](#)
- MPI\_Op, [167](#), [175](#), [178](#), [179](#), [181–186](#), [364](#),  
[517](#), [537](#), [542](#)
- MPI\_Request, [52–54](#), [56](#), [56](#), [58](#), [60–65](#),  
[67](#), [70](#), [72–75](#), [392](#), [395](#), [427](#), [428](#),  
[431](#), [432](#), [436](#), [486](#), [517](#), [543](#)

1           431, 432, 436, 517, 537, 542  
2 MPI\_Status, [32](#), [34](#), [56](#), 60–65, 67–69, 71,  
3           [77](#), [78](#), [106](#), [392](#), [398](#), 425–427,  
4           429–431, [435](#), [437](#), [438](#), 441–445,  
5           [520](#), [541](#), [542](#)  
6 MPI\_Win, 247–249, 257, 296, 297, 305,  
7           [354](#), [355](#), [356](#), [358](#), 360, 364, 369,  
8           371–373, [375](#), [376](#), 517, 537, 541,  
9           [542](#)

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

# MPI Callback Function Prototype Index

This index lists the C typedef names for callback routines, such as those used with attribute caching or user-defined reduction operations. C++ names for these typedefs and Fortran example prototypes are given near the text of the C name.

MPI\_Comm\_copy\_attr\_function, [17](#), [242](#),  
[538](#), [543](#)  
MPI\_Comm\_delete\_attr\_function, [17](#), [242](#),  
[538](#), [543](#)  
MPI\_Comm\_errhandler\_fn, [294](#), [484](#), [613](#)  
MPI\_Comm\_errhandler\_function, [17](#), [294](#),  
[484](#), [543](#), [613](#)  
MPI\_Copy\_function, [17](#), [480](#), [539](#), [547](#)  
MPI\_Datarep\_conversion\_function, [453](#), [544](#)  
MPI\_Datarep\_extent\_function, [452](#), [543](#)  
MPI\_Delete\_function, [17](#), [481](#), [539](#), [547](#)  
MPI\_File\_errhandler\_fn, [298](#), [484](#), [613](#)  
MPI\_File\_errhandler\_function, [298](#), [484](#),  
[543](#), [613](#)  
MPI\_Grequest\_cancel\_function, [394](#), [543](#)  
MPI\_Grequest\_free\_function, [393](#), [543](#)  
MPI\_Grequest\_query\_function, [392](#), [543](#)  
MPI\_Handler\_function, [17](#), [482](#), [547](#)  
MPI\_Type\_copy\_attr\_function, [250](#), [538](#),  
[543](#)  
MPI\_Type\_delete\_attr\_function, [250](#), [538](#),  
[543](#)  
MPI\_User\_function, [176](#), [543](#)  
MPI\_Win\_copy\_attr\_function, [247](#), [538](#),  
[543](#)  
MPI\_Win\_delete\_attr\_function, [247](#), [538](#),  
[543](#)  
MPI\_Win\_errhandler\_fn, [296](#), [484](#), [613](#)  
MPI\_Win\_errhandler\_function, [296](#), [484](#),  
[543](#), [613](#)

# MPI Function Index

The underlined page numbers refer to the function definitions.

- CONST:MPI\_2DOUBLE\_PRECISION, [172](#),  
[173](#), [536](#)
- CONST:MPI\_2INT, [173](#), [536](#)
- CONST:MPI\_2INTEGER, [172](#), [173](#), [536](#)
- CONST:MPI\_2REAL, [172](#), [173](#), [536](#)
- CONST:MPI\_ADDRESS\_KIND, [15](#), [16](#),  
[16](#), [18](#), [110](#), [500](#), [523](#), [524](#), [533](#)
- CONST:MPI\_ADDRESS\_KIND), [31](#)
- CONST:MPI\_AINT, [31](#), [169](#), [534](#), [535](#), [611](#)–  
[614](#)
- CONST:MPI\_Aint, [15](#), [15](#), [19](#), [31](#), [83](#), [83](#),  
[85](#), [88](#), [90](#), [98](#), [101](#), [102](#), [111](#), [131](#),  
[132](#), [354](#), [358](#), [360](#), [364](#), [449](#), [452](#),  
[477](#)–[480](#), [500](#), [523](#), [523](#), [524](#), [542](#)
- CONST:MPI\_ANY\_SOURCE, [32](#), [33](#), [44](#),  
[54](#), [55](#), [68](#)–[70](#), [74](#), [77](#), [78](#), [259](#), [289](#),  
[533](#)
- CONST:MPI\_ANY\_TAG, [14](#), [32](#), [33](#), [35](#),  
[54](#), [55](#), [68](#)–[70](#), [74](#), [77](#)–[79](#), [533](#)
- CONST:MPI\_APPNUM, [347](#), [348](#), [539](#)
- CONST:MPI\_ARGV\_NULL, [15](#), [328](#), [329](#),  
[499](#), [541](#)
- CONST:MPI\_ARGVS\_NULL, [15](#), [332](#), [499](#),  
[541](#)
- CONST:MPI\_BAND, [169](#), [170](#), [537](#)
- CONST:MPI\_BOR, [169](#), [170](#), [537](#)
- CONST:MPI\_BOTTOM, [10](#), [15](#), [16](#), [18](#),  
[36](#), [98](#), [108](#), [138](#), [270](#), [271](#), [330](#),  
[499](#), [502](#), [504](#), [507](#), [521](#), [522](#), [529](#),  
[532](#), [617](#)
- CONST:MPI\_BSEND\_OVERHEAD, [50](#),  
[290](#), [533](#)
- CONST:MPI\_BXOR, [169](#), [170](#), [537](#)
- CONST:MPI\_BYTE, [29](#), [30](#), [37](#)–[39](#), [131](#),  
[170](#), [408](#), [447](#), [459](#), [489](#), [529](#), [534](#),  
[535](#), [614](#)
- CONST:MPI\_C\_BOOL, [30](#), [170](#), [534](#), [611](#)–  
[614](#)
- CONST:MPI\_C\_COMPLEX, [30](#), [534](#), [611](#)–  
[614](#)
- CONST:MPI\_C\_DOUBLE\_COMPLEX, [30](#),  
[170](#), [534](#), [611](#)–[614](#)
- CONST:MPI\_C\_FLOAT\_COMPLEX, [30](#),  
[170](#), [534](#), [611](#)–[614](#)
- CONST:MPI\_C\_LONG\_DOUBLE\_COMPLEX,  
[30](#), [170](#), [534](#), [611](#)–[614](#)
- CONST:MPI\_CART, [274](#), [538](#)
- CONST:MPI\_CHAR, [30](#), [40](#), [90](#), [171](#), [534](#),  
[611](#)
- CONST:MPI\_CHARACTER, [29](#), [38](#)–[40](#),  
[171](#), [535](#)
- CONST:MPI\_COMBINER\_CONTIGUOUS,  
[110](#), [114](#), [540](#)
- CONST:MPI\_COMBINER\_DARRAY, [110](#),  
[115](#), [540](#)
- CONST:MPI\_COMBINER\_DUP, [110](#), [113](#),  
[540](#)
- CONST:MPI\_COMBINER\_F90\_COMPLEX,  
[110](#), [115](#), [540](#)
- CONST:MPI\_COMBINER\_F90\_INTEGER,  
[110](#), [115](#), [540](#)
- CONST:MPI\_COMBINER\_F90\_REAL, [110](#),  
[115](#), [540](#)
- CONST:MPI\_COMBINER\_HINDEXED,  
[110](#), [114](#), [540](#)
- CONST:MPI\_COMBINER\_HINDEXED\_INTEGER,  
[110](#), [114](#), [540](#)
- CONST:MPI\_COMBINER\_HVECTOR, [110](#),  
[114](#), [540](#)
- CONST:MPI\_COMBINER\_HVECTOR\_INTEGER,  
[110](#), [114](#), [540](#)
- CONST:MPI\_COMBINER\_INDEXED, [110](#),  
[114](#), [540](#)

CONST:MPI_COMBINER_INDEXED_BLOCK,	CONST:MPI_DISTRIBUTE_CYCLIC, 95,	1
110, 114, 540	541	2
CONST:MPI_COMBINER_NAMED, 110,	CONST:MPI_DISTRIBUTE_DFLT_DARG,	3
113, 540	95, 541	4
CONST:MPI_COMBINER_RESIZED, 110,	CONST:MPI_DISTRIBUTE_NONE, 95,	5
115, 540	541	6
CONST:MPI_COMBINER_STRUCT, 110,	CONST:MPI_DOUBLE, 30, 169, 507, 534	7
114, 540	CONST:MPI_DOUBLE_COMPLEX, 29,	8
CONST:MPI_COMBINER_STRUCT_INTEGER,	170, 449, 508, 535	9
110, 114, 540	CONST:MPI_DOUBLE_INT, 173, 536	10
CONST:MPI_COMBINER_SUBARRAY,	CONST:MPI_DOUBLE_PRECISION, 29,	11
110, 115, 540	169, 508, 535	12
CONST:MPI_COMBINER_VECTOR, 110,	CONST:MPI_DUP_FN, 539	13
114, 540	CONST:MPI_ERR_..., 300	14
CONST:MPI_Comm, 28, 198, 203–206, 209,	CONST:MPI_ERR_ACCESS, 302, 412, 466,	15
212, 226, 227, 229, 242, 244–246,	532	16
536, 537, 542	CONST:MPI_ERR_AMODE, 302, 411, 466,	17
CONST:MPI_COMM-, 292	532	18
CONST:MPI_COMM_NULL, 195, 206–210,	CONST:MPI_ERR_ARG, 301, 531	19
213, 256, 264, 266, 330, 349, 350,	CONST:MPI_ERR_ASSERT, 301, 382, 532	20
537, 615	CONST:MPI_ERR_BAD_FILE, 302, 466,	21
CONST:MPI_COMM_PARENT, 256	532	22
CONST:MPI_COMM_SELF, 195, 240, 256,	CONST:MPI_ERR_BASE, 291, 301, 382,	23
312, 313, 349, 409, 536, 613	532	24
CONST:MPI_COMM_WORLD, 14, 24, 31,	CONST:MPI_ERR_BUFFER, 301, 531	25
195–197, 203, 204, 217, 228, 229,	CONST:MPI_ERR_COMM, 301, 531	26
256, 264, 288, 289, 292, 295, 303,	CONST:MPI_ERR_CONVERSION, 302,	27
310–312, 314, 323, 324, 326, 327,	454, 466, 532	28
331–333, 346–349, 403, 446, 465,	CONST:MPI_ERR_COUNT, 301, 531	29
516, 529, 536, 616	CONST:MPI_ERR_DIMS, 301, 531	30
CONST:MPI_COMPLEX, 29, 170, 449,	CONST:MPI_ERR_DISP, 301, 382, 532	31
508, 535	CONST:MPI_ERR_DUP_DATAREP, 302,	32
CONST:MPI_COMPLEX16, 170, 535	452, 466, 532	33
CONST:MPI_COMPLEX32, 170, 535	CONST:MPI_ERR_FILE, 302, 466, 532	34
CONST:MPI_COMPLEX4, 170, 535	CONST:MPI_ERR_FILE_EXISTS, 302, 466,	35
CONST:MPI_COMPLEX8, 170, 535	532	36
CONST:MPI_CONGRUENT, 204, 227, 536	CONST:MPI_ERR_FILE_IN_USE, 302, 412,	37
CONST:MPI_CONVERSION_FN_NULL,	466, 532	38
454	CONST:MPI_ERR_GROUP, 301, 531	39
CONST:MPI_DATATYPE, 20	CONST:MPI_ERR_IN_STATUS, 34, 36,	40
CONST:MPI_Datatype, 83, 504, 534–537,	55, 63, 65, 294, 301, 394, 424, 495,	41
542	532	42
CONST:MPI_DATATYPE_NULL, 104, 537	CONST:MPI_ERR_INFO, 301, 532	43
CONST:MPI_DISPLACEMENT_CURRENT,	CONST:MPI_ERR_INFO_KEY, 301, 318,	44
420, 540, 617	532	45
CONST:MPI_DIST_GRAPH, 274, 538, 613	CONST:MPI_ERR_INFO_NOKEY, 301,	46
CONST:MPI_DISTRIBUTE_BLOCK, 95,	319, 532	47
541		48

- 1   CONST:MPI\_ERR\_INFO\_VALUE, 301, 318,
- 2       532
- 3   CONST:MPI\_ERR\_INTERN, 301, 531
- 4   CONST:MPI\_ERR\_IO, 302, 466, 532
- 5   CONST:MPI\_ERR\_KEYVAL, 252, 301, 532
- 6   CONST:MPI\_ERR\_LASTCODE, 300, 302–
- 7       304, 532
- 8   CONST:MPI\_ERR\_LOCKTYPE, 301, 382,
- 9       532
- 10   CONST:MPI\_ERR\_NAME, 301, 343, 532
- 11   CONST:MPI\_ERR\_NO\_MEM, 291, 301,
- 12       532
- 13   CONST:MPI\_ERR\_NO\_SPACE, 302, 466,
- 14       532
- 15   CONST:MPI\_ERR\_NO\_SUCH\_FILE, 302,
- 16       412, 466, 532
- 17   CONST:MPI\_ERR\_NOT\_SAME, 302, 466,
- 18       532
- 19   CONST:MPI\_ERR\_OP, 301, 531
- 20   CONST:MPI\_ERR\_OTHER, 300, 301, 531
- 21   CONST:MPI\_ERR\_PENDING, 63, 301,
- 22       531
- 23   CONST:MPI\_ERR\_PORT, 301, 340, 532
- 24   CONST:MPI\_ERR\_QUOTA, 302, 466, 532
- 25   CONST:MPI\_ERR\_RANK, 301, 531
- 26   CONST:MPI\_ERR\_READ\_ONLY, 302, 466,
- 27       532
- 28   CONST:MPI\_ERR\_REQUEST, 301, 531
- 29   CONST:MPI\_ERR\_RMA\_CONFLICT, 301,
- 30       382, 532
- 31   CONST:MPI\_ERR\_RMA\_SYNC, 301, 382,
- 32       532
- 33   CONST:MPI\_ERR\_ROOT, 301, 531
- 34   CONST:MPI\_ERR\_SERVICE, 301, 342,
- 35       532
- 36   CONST:MPI\_ERR\_SIZE, 301, 382, 532
- 37   CONST:MPI\_ERR\_SPAWN, 301, 329, 330,
- 38       532
- 39   CONST:MPI\_ERR\_TAG, 301, 531
- 40   CONST:MPI\_ERR\_TOPOLOGY, 301, 531
- 41   CONST:MPI\_ERR\_TRUNCATE, 301, 531
- 42   CONST:MPI\_ERR\_TYPE, 301, 531
- 43   CONST:MPI\_ERR\_UNKNOWN, 300, 301,
- 44       531
- 45   CONST:MPI\_ERR\_UNSUPPORTED\_DATAREP,
- 46       302, 466, 532
- 47   CONST:MPI\_ERR\_UNSUPPORTED\_OPERATION,
- 48       302, 466, 532
- CONST:MPI\_ERR\_WIN, 301, 382, 532
- CONST:MPI\_ERRCODES\_IGNORE, 15,
- 18, 330, 499, 502, 541
- CONST:MPI\_Errhandler, 294, 295–299, 482,
- 483, 517, 533, 537, 542
- CONST:MPI\_ERRHANDLER\_NULL, 299,
- 537
- CONST:MPI\_ERROR, 34, 55, 533
- CONST:MPI\_ERROR\_STRING, 300
- CONST:MPI\_ERRORS\_ARE\_FATAL, 292,
- 293, 305, 381, 465, 533
- CONST:MPI\_ERRORS\_RETURN, 292, 293,
- 306, 465, 529, 533
- CONST:MPI\_F\_STATUS\_IGNORE, 520,
- 542
- CONST:MPI\_F\_STATUSES\_IGNORE, 520,
- 542
- CONST:MPI\_File, 298, 299, 305, 409, 411,
- 413–417, 419, 421, 425–439, 441–
- 445, 449, 457, 458, 517, 537, 541,
- 542
- CONST:MPI\_FILE\_NULL, 412, 465, 537
- CONST:MPI\_Fint, 517, 535, 542, 613
- CONST:MPI\_FLOAT, 30, 90, 167, 169,
- 448, 534
- CONST:MPI\_FLOAT\_INT, 12, 172, 173,
- 536
- CONST:MPI\_GRAPH, 274, 538
- CONST:MPI\_Group, 196, 196, 197–202,
- 206, 227, 356, 371, 373, 415, 517,
- 537, 542
- CONST:MPI\_GROUP\_EMPTY, 194, 199,
- 200, 207, 208, 537
- CONST:MPI\_GROUP\_NULL, 194, 202,
- 537
- CONST:MPI\_HOST, 288, 536
- CONST:MPI\_IDENT, 197, 204, 536
- CONST:MPI\_IN\_PLACE, 15, 138, 164,
- 499, 502, 507, 532
- CONST:MPI\_Info, 290, 317, 317, 318–321,
- 326, 329, 331, 338–343, 409, 412,
- 416, 417, 419, 517, 537, 541, 542,
- 616
- CONST:MPI\_INFO\_NULL, 272, 321, 329,
- 339, 411, 412, 421, 537
- CONST:MPI\_INT, 12, 30, 82, 169, 448,
- 449, 507, 529, 530, 534

CONST:MPI_INT16_T, 30, 169, 534, 611–614	1
CONST:MPI_INT32_T, 30, 169, 534, 611–614	2
CONST:MPI_INT64_T, 30, 169, 534, 611–614	3
CONST:MPI_INT8_T, 30, 169, 534, 611–614	4
CONST:MPI_INTEGER, 29, 37, 169, 507, 508, 530, 535	5
CONST:MPI_INTEGER1, 29, 169, 535	6
CONST:MPI_INTEGER16, 169, 535	7
CONST:MPI_INTEGER2, 29, 169, 449, 535	8
CONST:MPI_INTEGER4, 29, 169, 535	9
CONST:MPI_INTEGER8, 169, 512, 535	10
CONST:MPI_INTEGER_KIND, 15, 110, 523, 533	11
CONST:MPI_IO, 288, 289, 536	12
CONST:MPI_KEYVAL_INVALID, 244, 245, 533	13
CONST:MPI_LAND, 169, 170, 537	14
CONST:MPI_LASTUSED_CODE, 303, 539	15
CONST:MPI_LB, 16, 17, 93, 96, 100–102, 105, 448, 536	16
CONST:MPI_LOCK_EXCLUSIVE, 375, 533	17
CONST:MPI_LOCK_SHARED, 375, 533	18
CONST:MPI_LOGICAL, 29, 170, 535	19
CONST:MPI_LONG, 30, 169, 534	20
CONST:MPI_LONG_DOUBLE, 30, 169, 534	21
CONST:MPI_LONG_DOUBLE_INT, 173, 536	22
CONST:MPI_LONG_INT, 173, 536	23
CONST:MPI_LONG_LONG, 30, 169, 534, 614	24
CONST:MPI_LONG_LONG_INT, 30, 169, 534, 614	25
CONST:MPI_LOR, 169, 170, 537	26
CONST:MPI_LXOR, 169, 170, 537	27
CONST:MPI_MAX, 167, 169, 170, 186, 537	28
CONST:MPI_MAX_DATAREP_STRING, 15, 422, 452, 533	29
CONST:MPI_MAX_ERROR_STRING, 15, 300, 304, 533	30
CONST:MPI_MAX_INFO_KEY, 15, 301, 317, 319, 320, 533	31
CONST:MPI_MAX_INFO_VAL, 15, 301, 317, 533	32
CONST:MPI_MAX_OBJECT, 255, 615	33
CONST:MPI_MAX_OBJECT_NAME, 15, 255, 533, 615	34
CONST:MPI_MAX_PORT_NAME, 15, 338, 533	35
CONST:MPI_MAX_PROCESSOR_NAME, 15, 290, 533, 616	36
CONST:MPI_MAXLOC, 169, 171, 172, 175, 537	37
CONST:MPI_MIN, 169, 170, 537	38
CONST:MPI_MINLOC, 169, 171, 172, 175, 537	39
CONST:MPI_MODE_APPEND, 410, 411, 539	40
CONST:MPI_MODE_CREATE, 410, 411, 418, 539	41
CONST:MPI_MODE_DELETE_ON_CLOSE, 410–412, 539	42
CONST:MPI_MODE_EXCL, 410, 411, 539	43
CONST:MPI_MODE_NOCHECK, 377, 378, 539	44
CONST:MPI_MODE_NOPRECEDE, 377, 378, 539	45
CONST:MPI_MODE_NOPUT, 377, 378, 539	46
CONST:MPI_MODE_NOSTORE, 377, 378, 539	47
CONST:MPI_MODE_NOSUCCEED, 377, 378, 539	48
CONST:MPI_MODE_RDONLY, 410, 411, 416, 539	
CONST:MPI_MODE_RDWR, 410, 411, 539	
CONST:MPI_MODE_SEQUENTIAL, 410, 411, 413, 414, 420, 425, 428, 438, 458, 539, 617	
CONST:MPI_MODE_UNIQUE_OPEN, 410, 411, 539	
CONST:MPI_MODE_WRONLY, 410, 411, 539	
CONST:MPI_NULL_COPY_FN, 539	
CONST:MPI_NULL_DELETE_FN, 539	
CONST:MPI_OFFSET, 31, 169, 534, 535, 611–614	
CONST:MPI_Offset, 16, 16, 19, 31, 413, 414, 419, 421, 425–428, 433, 434, 438, 439, 441, 442, 452, 459, 459	

- 1           460, 516, 542
- 2   CONST:MPI\_OFFSET\_KIND, 15, 16, 18,
- 3       31, 460, 500, 533
- 4   CONST:MPI\_Op, 167, 175, 178, 179, 181–
- 5       186, 364, 517, 537, 542
- 6   CONST:MPI\_OP\_NULL, 178, 537
- 7   CONST:MPI\_ORDER\_C, 14, 92, 95, 96,
- 8       541
- 9   CONST:MPI\_ORDER\_FORTRAN, 14, 92,
- 10       95, 541
- 11   CONST:MPI\_PACKED, 29, 30, 37, 126,
- 12       127, 131, 450, 489, 529, 534, 535
- 13   CONST:MPI\_PROC\_NULL, 28, 79, 140,
- 14       142, 144, 146, 154, 155, 168, 197,
- 15       282, 288, 289, 358, 533, 614, 616,
- 16       617
- 17   CONST:MPI\_PROD, 169, 170, 537
- 18   CONST:MPI\_REAL, 29, 37, 169, 449, 507,
- 19       508, 514, 535
- 20   CONST:MPI\_REAL16, 170, 535
- 21   CONST:MPI\_REAL2, 29, 170, 535
- 22   CONST:MPI\_REAL4, 29, 170, 507, 512,
- 23       535
- 24   CONST:MPI\_REAL8, 29, 170, 507, 535,
- 25       612
- 26   CONST:MPI\_REPLACE, 365, 537, 613,
- 27       617
- 28   CONST:MPI\_Request, 52–54, 56, 56, 58,
- 29       60–65, 67, 70, 72–75, 392, 395,
- 30       427, 428, 431, 432, 436, 517, 537,
- 31       542
- 32   CONST:MPI\_REQUEST\_NULL, 55–58, 61–
- 33       64, 394, 537
- 34   CONST:MPI\_ROOT, 140, 533
- 35   CONST:MPI\_SEEK\_CUR, 433, 439, 541
- 36   CONST:MPI\_SEEK\_END, 433, 439, 541
- 37   CONST:MPI\_SEEK\_SET, 433, 434, 439,
- 38       541
- 39   CONST:MPI\_SHORT, 30, 169, 534
- 40   CONST:MPI\_SHORT\_INT, 173, 536
- 41   CONST:MPI\_SIGNED\_CHAR, 30, 169, 171,
- 42       534, 614
- 43   CONST:MPI\_SIMILAR, 197, 204, 227, 536
- 44   CONST:MPI\_SOURCE, 34, 533
- 45   CONST:MPI\_STATUS, 21, 35, 36, 55
- 46   CONST:MPI\_Status, 32, 34, 56, 60–65,
- 47       67–69, 71, 77, 78, 106, 392, 398,
- 48       425–427, 429–431, 435, 437, 438,
- 441–445, 520, 541, 542
- CONST:MPI\_STATUS\_IGNORE, 10, 15,
- 18, 35, 36, 393, 424, 499, 502, 507,
- 520, 529, 541, 609
- CONST:MPI\_STATUS\_SIZE, 15, 34, 533
- CONST:MPI\_STATUSES\_IGNORE, 14, 15,
- 36, 393, 394, 499, 502, 520, 541,
- 609
- CONST:MPI\_SUBVERSION, 288, 542
- CONST:MPI\_SUCCESS, 18, 19, 55, 63,
- 65, 243, 245–250, 300, 301, 305,
- 306, 330, 454, 480, 481, 531
- CONST:MPI\_SUM, 169, 170, 529, 537
- CONST:MPI\_TAG, 34, 533
- CONST:MPI\_TAG\_UB, 31, 288, 523, 528,
- 536
- CONST:MPI\_THREAD\_FUNNELED, 402,
- 403, 540
- CONST:MPI\_THREAD\_MULTIPLE, 403,
- 405, 540
- CONST:MPI\_THREAD\_SERIALIZED, 403,
- 540
- CONST:MPI\_THREAD\_SINGLE, 402–404,
- 540
- CONST:MPI\_TYPECLASS\_COMPLEX,
- 513, 541
- CONST:MPI\_TYPECLASS\_INTEGER, 513,
- 541
- CONST:MPI\_TYPECLASS\_REAL, 513,
- 541
- CONST:MPI\_UB, 12, 16, 17, 93, 97, 100–
- 102, 105, 448, 536
- CONST:MPI\_UINT16\_T, 30, 169, 534, 611–
- 614
- CONST:MPI\_UINT32\_T, 30, 169, 534, 611–
- 614
- CONST:MPI\_UINT64\_T, 30, 169, 534, 611–
- 614
- CONST:MPI\_UINT8\_T, 30, 169, 534, 611–
- 614
- CONST:MPI\_UNDEFINED, 35, 61, 62,
- 64, 65, 107, 196, 197, 210, 274,
- 284, 285, 509, 510, 533, 614
- CONST:MPI\_UNEQUAL, 197, 204, 227,
- 536
- CONST:MPI\_UNIVERSE\_SIZE, 326, 346,
- 539
- CONST:MPI\_UNSIGNED, 30, 169, 534



- CONST:MPI\_UNSIGNED\_CHAR, [30](#), [169](#), [171](#), [534](#)
- CONST:MPI\_UNSIGNED\_LONG, [30](#), [169](#), [534](#)
- CONST:MPI\_UNSIGNED\_LONG\_LONG, [30](#), [169](#), [534](#), [614](#)
- CONST:MPI\_UNSIGNED\_SHORT, [30](#), [169](#), [534](#)
- CONST:MPI\_UNWEIGHTED, [15](#), [269](#)–[272](#), [280](#), [281](#), [499](#), [541](#), [613](#)
- CONST:MPI\_VERSION, [288](#), [542](#)
- CONST:MPI\_WCHAR, [30](#), [171](#), [257](#), [449](#), [534](#), [614](#)
- CONST:MPI\_Win, [247](#)–[249](#), [257](#), [296](#), [297](#), [305](#), [354](#), [355](#), [356](#), [358](#), [360](#), [364](#), [369](#), [371](#)–[373](#), [375](#), [376](#), [517](#), [537](#), [541](#), [542](#)
- CONST:MPI\_WIN\_BASE, [356](#), [528](#), [539](#)
- CONST:MPI\_WIN\_DISP\_UNIT, [356](#), [539](#)
- CONST:MPI\_WIN\_NULL, [356](#), [537](#)
- CONST:MPI\_WIN\_SIZE, [356](#), [539](#)
- CONST:MPI\_WTIME\_IS\_GLOBAL, [288](#), [289](#), [307](#), [523](#), [536](#)
- EXAMPLES:Deadlock  
with MPI\_Bcast, [188](#)
- EXAMPLES:Fortran 90 MPI\_TYPE\_MATCH\_SIZE  
implementation, [513](#)
- EXAMPLES:MPI\_ACCUMULATE, [365](#)
- EXAMPLES:MPI\_ADDRESS, [99](#)
- EXAMPLES:MPI\_Address, [118](#), [121](#), [123](#), [128](#)
- EXAMPLES:MPI\_Aint, [118](#)
- EXAMPLES:MPI\_Allgather, [161](#)
- EXAMPLES:MPI\_ALLOC\_MEM, [291](#)
- EXAMPLES:MPI\_Alloc\_mem, [292](#)
- EXAMPLES:MPI\_ALLREDUCE, [180](#)
- EXAMPLES:MPI\_Barrier, [309](#), [310](#), [380](#), [385](#)–[387](#)
- EXAMPLES:MPI\_Bcast, [143](#), [188](#), [189](#)
- EXAMPLES:MPI\_BSEND, [45](#)
- EXAMPLES:MPI\_Buffer\_attach, [48](#), [310](#)
- EXAMPLES:MPI\_Buffer\_detach, [48](#)
- EXAMPLES:MPI\_BYTE, [38](#)
- EXAMPLES:MPI\_Cancel, [310](#)
- EXAMPLES:MPI\_CART\_COORDS, [282](#)
- EXAMPLES:MPI\_CART\_GET, [285](#)
- EXAMPLES:MPI\_CART\_RANK, [282](#), [285](#)
- EXAMPLES:MPI\_CART\_SHIFT, [282](#) 1
- EXAMPLES:MPI\_CART\_SUB, [283](#) 2
- EXAMPLES:MPI\_CHARACTER, [38](#) 3
- EXAMPLES:MPI\_Comm\_create, [208](#) 4
- EXAMPLES:MPI\_Comm\_group, [208](#) 5
- EXAMPLES:MPI\_Comm\_remote\_size, [210](#) 6
- EXAMPLES:MPI\_COMM\_SPAWN, [328](#) 7
- EXAMPLES:MPI\_Comm\_spawn, [328](#) 8
- EXAMPLES:MPI\_COMM\_SPAWN\_MULTIPLE,  
[333](#) 10
- EXAMPLES:MPI\_Comm\_spawn\_multiple,  
[333](#) 11
- EXAMPLES:MPI\_Comm\_split, [210](#) 12
- EXAMPLES:MPI\_DIMS\_CREATE, [265](#), [285](#) 13
- EXAMPLES:MPI\_DIST\_GRAPH\_CREATE,  
[272](#) 14
- EXAMPLES:MPI\_Dist\_graph\_create, [272](#) 15
- EXAMPLES:MPI\_DIST\_GRAPH\_CREATE\_ADJACENT,  
[272](#) 16
- EXAMPLES:MPI\_FILE\_CLOSE, [429](#), [432](#) 17
- EXAMPLES:MPI\_FILE\_GET\_AMODE, [415](#) 18
- EXAMPLES:MPI\_FILE\_IREAD, [432](#) 19
- EXAMPLES:MPI\_FILE\_OPEN, [429](#), [432](#) 20
- EXAMPLES:MPI\_FILE\_READ, [429](#) 21
- EXAMPLES:MPI\_FILE\_SET\_ATOMICITY,  
[461](#) 22
- EXAMPLES:MPI\_FILE\_SET\_VIEW, [429](#), [432](#) 23
- EXAMPLES:MPI\_FILE\_SYNC, [461](#) 24
- EXAMPLES:MPI\_Finalize, [309](#)–[311](#) 25
- EXAMPLES:MPI\_FREE\_MEM, [291](#) 26
- EXAMPLES:MPI\_Gather, [130](#), [146](#), [147](#), [151](#) 27
- EXAMPLES:MPI\_Gatherv, [130](#), [148](#)–[151](#) 28
- EXAMPLES:MPI\_GET, [360](#), [362](#) 29
- EXAMPLES:MPI\_Get, [379](#), [380](#), [385](#), [386](#) 30
- EXAMPLES:MPI\_GET\_ADDRESS, [99](#), [521](#) 31
- EXAMPLES:MPI\_Get\_address, [118](#), [121](#), [123](#), [128](#) 32
- EXAMPLES:MPI\_GET\_COUNT, [107](#) 33
- EXAMPLES:MPI\_GET\_ELEMENTS, [107](#) 34
- EXAMPLES:MPI\_GRAPH\_CREATE, [266](#), [278](#), [279](#) 35
- EXAMPLES:MPI\_GRAPH\_NEIGHBORS,  
[278](#) 36
- EXAMPLES:MPI\_GRAPH\_NEIGHBORS\_COUNT,  
[278](#) 37
- EXAMPLES:MPI\_GRAPH\_NEIGHBORS\_COUNT,  
[278](#) 38
- EXAMPLES:MPI\_GRAPH\_NEIGHBORS\_COUNT,  
[278](#) 39
- EXAMPLES:MPI\_GRAPH\_NEIGHBORS\_COUNT,  
[278](#) 40
- EXAMPLES:MPI\_GRAPH\_NEIGHBORS\_COUNT,  
[278](#) 41
- EXAMPLES:MPI\_GRAPH\_NEIGHBORS\_COUNT,  
[278](#) 42
- EXAMPLES:MPI\_GRAPH\_NEIGHBORS\_COUNT,  
[278](#) 43
- EXAMPLES:MPI\_GRAPH\_NEIGHBORS\_COUNT,  
[278](#) 44
- EXAMPLES:MPI\_GRAPH\_NEIGHBORS\_COUNT,  
[278](#) 45
- EXAMPLES:MPI\_GRAPH\_NEIGHBORS\_COUNT,  
[278](#) 46
- EXAMPLES:MPI\_GRAPH\_NEIGHBORS\_COUNT,  
[278](#) 47
- EXAMPLES:MPI\_GRAPH\_NEIGHBORS\_COUNT,  
[278](#) 48

- 1   EXAMPLES:MPI\_Grequest\_complete, 395
- 2   EXAMPLES:MPI\_Grequest\_start, 395
- 3   EXAMPLES:MPI\_Group\_free, 208
- 4   EXAMPLES:MPI\_Group\_incl, 208
- 5   EXAMPLES:MPI\_Iprobe, 310
- 6   EXAMPLES:MPI\_IRECV, 57–60, 66
- 7   EXAMPLES:MPI\_ISEND, 57–59, 66
- 8   EXAMPLES:MPI\_Op\_create, 178, 186
- 9   EXAMPLES:MPI\_Pack, 128, 130
- 10   EXAMPLES:MPI\_Pack\_size, 130
- 11   EXAMPLES:MPI\_PROBE, 69, 70
- 12   EXAMPLES:MPI\_Put, 372, 377, 379, 380,
- 13       385, 387
- 14   EXAMPLES:MPI\_RECV, 37, 38, 45–47,
- 15       60, 69, 70, 106
- 16   EXAMPLES:MPI\_REDUCE, 170, 174
- 17   EXAMPLES:MPI\_Reduce, 173, 174, 178
- 18   EXAMPLES:MPI\_REQUEST\_FREE, 58
- 19   EXAMPLES:MPI\_Request\_free, 309
- 20   EXAMPLES:MPI\_Scan, 186
- 21   EXAMPLES:MPI\_Scatter, 156
- 22   EXAMPLES:MPI\_Scatterv, 156, 157
- 23   EXAMPLES:MPI\_SEND, 37, 38, 46, 47,
- 24       60, 69, 70, 106
- 25   EXAMPLES:MPI\_Send, 118, 121, 123, 128
- 26   EXAMPLES:MPI\_SENDRECV, 116, 117
- 27   EXAMPLES:MPI\_SENDRECV\_REPLACE,
- 28       282
- 29   EXAMPLES:MPI\_SSEND, 45, 60
- 30   EXAMPLES:MPI\_Test\_cancelled, 310
- 31   EXAMPLES:MPI\_TYPE\_COMMIT, 103,
- 32       116, 117, 360
- 33   EXAMPLES:MPI\_Type\_commit, 118, 121,
- 34       123, 128, 147–151, 157, 186
- 35   EXAMPLES:MPI\_TYPE\_CONTIGUOUS,
- 36       83, 100, 106, 107
- 37   EXAMPLES:MPI\_Type\_contiguous, 147
- 38   EXAMPLES:MPI\_TYPE\_CREATE\_DARRAY,
- 39       97
- 40   EXAMPLES:MPI\_TYPE\_CREATE\_HVECTOR,
- 41       116, 117
- 42   EXAMPLES:MPI\_Type\_create\_hvector, 118,
- 43       121
- 44   EXAMPLES:MPI\_TYPE\_CREATE\_INDEXED,
- 45       360
- 46   EXAMPLES:MPI\_TYPE\_CREATE\_STRUCT,
- 47       90, 100, 117
- 48   EXAMPLES:MPI\_Type\_create\_struct, 118,
- 121, 123, 128, 149, 151, 186
- EXAMPLES:MPI\_TYPE\_CREATE\_SUBARRAY,
- 469
- EXAMPLES:MPI\_TYPE\_EXTENT, 116,
- 117, 360, 362, 365
- EXAMPLES:MPI\_Type\_extent, 118
- EXAMPLES:MPI\_TYPE\_FREE, 360
- EXAMPLES:MPI\_Type\_get\_contents, 123
- EXAMPLES:MPI\_Type\_get\_envelope, 123
- EXAMPLES:MPI\_TYPE\_HVECTOR, 116,
- 117
- EXAMPLES:MPI\_Type\_hvector, 118, 121
- EXAMPLES:MPI\_TYPE\_INDEXED, 87,
- 116
- EXAMPLES:MPI\_Type\_indexed, 118, 121
- EXAMPLES:MPI\_TYPE\_STRUCT, 90, 100,
- 117
- EXAMPLES:MPI\_Type\_struct, 118, 121,
- 123, 128, 149, 151, 186
- EXAMPLES:MPI\_TYPE\_VECTOR, 84,
- 85, 116, 117
- EXAMPLES:MPI\_Type\_vector, 148, 150,
- 157
- EXAMPLES:MPI\_Unpack, 128, 130
- EXAMPLES:MPI\_WAIT, 57–60, 66, 432
- EXAMPLES:MPI\_WAITANY, 66
- EXAMPLES:MPI\_WAITSOME, 66
- EXAMPLES:MPI\_Win\_complete, 372, 380,
- 386, 387
- EXAMPLES:MPI\_WIN\_CREATE, 360, 362,
- 365
- EXAMPLES:MPI\_WIN\_FENCE, 360, 362,
- 365
- EXAMPLES:MPI\_Win\_fence, 379
- EXAMPLES:MPI\_Win\_lock, 377, 385–387
- EXAMPLES:MPI\_Win\_post, 380, 386, 387
- EXAMPLES:MPI\_Win\_start, 372, 380, 386,
- 387
- EXAMPLES:MPI\_Win\_unlock, 377, 385–
- 387
- EXAMPLES:MPI\_Win\_wait, 380, 386, 387
- EXAMPLES:mpiexec, 315
- EXAMPLES:Non-deterministic program with
- MPI\_Bcast, 189
- MPI\_ABORT, 176, 292, 308, 312, 348, 516,
- 616

- MPI\_ACCUMULATE, [353](#), [357](#), [358](#), [364](#),  
[365](#), [367](#), [387](#), [613](#), [616](#), [617](#)
- MPI\_ADD\_ERROR\_CLASS, [303](#), [303](#)
- MPI\_ADD\_ERROR\_CODE, [304](#)
- MPI\_ADD\_ERROR\_STRING, [304](#), [304](#)
- MPI\_ADDRESS, [17](#), [98](#), [479](#), [523](#)
- MPI\_ALLGATHER, [135](#), [139](#), [158](#), [158](#),  
[159](#), [161](#), [162](#)
- MPI\_ALLGATHERV, [135](#), [139](#), [160](#), [160](#),  
[161](#)
- MPI\_ALLOC\_MEM, [18](#), [290](#), [291](#), [301](#),  
[355](#), [359](#), [376](#), [499](#)
- MPI\_ALLREDUCE, [135](#), [138](#), [139](#), [169](#),  
[176](#), [179](#), [180](#), [614](#)
- MPI\_ALLTOALL, [135](#), [139](#), [161](#), [162](#)–[164](#),  
[612](#)
- MPI\_ALLTOALLV, [135](#), [138](#), [139](#), [163](#),  
[163](#), [164](#), [166](#), [612](#)
- MPI\_ALLTOALLW, [135](#), [139](#), [164](#), [165](#),  
[166](#), [612](#)
- MPI\_ATTR\_DELETE, [17](#), [246](#), [252](#), [481](#),  
[482](#)
- MPI\_ATTR\_GET, [17](#), [246](#), [252](#), [288](#), [482](#),  
[524](#)
- MPI\_ATTR\_PUT, [17](#), [245](#), [252](#), [481](#), [524](#),  
[528](#)
- MPI\_BARRIER, [135](#), [139](#), [141](#), [141](#), [461](#)
- MPI\_BCAST, [135](#), [139](#), [142](#), [142](#), [168](#), [487](#)
- MPI\_BSEND, [42](#), [50](#), [290](#), [309](#)
- MPI\_BSEND\_INIT, [73](#), [75](#)
- MPI\_BUFFER\_ATTACH, [22](#), [48](#), [56](#)
- MPI\_BUFFER\_DETACH, [48](#), [309](#)
- MPI\_CANCEL, [44](#), [56](#), [68](#), [70](#), [71](#), [72](#), [391](#),  
[394](#), [395](#)
- MPI\_CART\_COORDS, [263](#), [277](#), [277](#), [615](#)
- MPI\_CART\_CREATE, [226](#), [263](#), [264](#), [264](#),  
[265](#), [266](#), [275](#), [283](#), [284](#), [615](#)
- MPI\_CART\_GET, [263](#), [275](#), [276](#), [615](#)
- MPI\_CART\_MAP, [263](#), [284](#), [284](#)
- MPI\_CART\_RANK, [263](#), [276](#), [276](#), [615](#)
- MPI\_CART\_SHIFT, [263](#), [281](#), [282](#), [282](#),  
[615](#)
- MPI\_CART\_SUB, [263](#), [283](#), [283](#), [284](#), [616](#)
- MPI\_CARTDIM\_GET, [263](#), [275](#), [275](#), [615](#)
- MPI\_CLOSE\_PORT, [338](#), [339](#), [341](#)
- MPI\_COMM\_ACCEPT, [337](#)–[339](#), [339](#), [340](#),  
[347](#), [348](#)
- MPI\_COMM\_C2F, [517](#)
- MPI\_COMM\_CALL\_ERRHANDLER, [305](#),  
[306](#)
- MPI\_COMM\_CLONE, [493](#)
- MPI\_COMM\_COMPARE, [204](#), [227](#)
- MPI\_COMM\_CONNECT, [301](#), [340](#), [340](#),  
[347](#), [348](#)
- MPI\_COMM\_CREATE, [202](#), [206](#), [207](#)–[210](#),  
[226](#), [263](#), [612](#)
- MPI\_COMM\_CREATE\_ERRHANDLER,  
[17](#), [293](#), [294](#), [295](#), [482](#), [545](#)
- MPI\_COMM\_CREATE\_KEYVAL, [17](#), [240](#),  
[241](#), [244](#), [252](#), [480](#), [523](#), [544](#), [614](#)
- MPI\_COMM\_DELETE\_ATTR, [17](#), [240](#),  
[243](#)–[245](#), [246](#), [252](#), [482](#)
- MPI\_COMM\_DISCONNECT, [252](#), [331](#), [348](#),  
[349](#), [349](#)
- MPI\_COMM\_DUP, [198](#), [202](#), [205](#), [206](#), [207](#),  
[213](#), [228](#), [230](#), [240](#), [243](#), [246](#), [252](#),  
[259](#), [480](#)
- MPI\_COMM\_DUP\_FN, [17](#), [243](#), [243](#), [244](#),  
[538](#)
- MPI\_COMM\_F2C, [517](#)
- MPI\_COMM\_FREE, [202](#), [206](#), [212](#), [213](#),  
[228](#), [230](#), [243](#), [244](#), [246](#), [252](#), [312](#),  
[331](#), [348](#), [349](#), [481](#), [489](#)
- MPI\_COMM\_FREE\_KEYVAL, [17](#), [240](#),  
[244](#), [252](#), [481](#)
- MPI\_COMM\_GET\_ATTR, [17](#), [240](#), [245](#),  
[245](#), [252](#), [288](#), [481](#), [524](#), [528](#)
- MPI\_COMM\_GET\_ERRHANDLER, [17](#),  
[293](#), [295](#), [483](#), [616](#)
- MPI\_COMM\_GET\_NAME, [255](#), [255](#), [256](#),  
[615](#)
- MPI\_COMM\_GET\_PARENT, [256](#), [327](#),  
[330](#), [330](#), [331](#)
- MPI\_COMM\_GROUP, [14](#), [196](#), [198](#), [198](#),  
[202](#)–[204](#), [227](#), [293](#), [616](#)
- MPI\_COMM\_JOIN, [349](#), [350](#), [351](#)
- MPI\_COMM\_KEYVAL\_CREATE, [544](#)
- MPI\_COMM\_NULL\_COPY\_FN, [17](#), [243](#),  
[243](#), [244](#), [538](#)
- MPI\_COMM\_NULL\_DELETE\_FN, [17](#), [243](#),  
[243](#), [244](#), [538](#)
- MPI\_COMM\_RANK, [203](#), [203](#), [227](#)
- MPI\_COMM\_REMOTE\_GROUP, [227](#)
- MPI\_COMM\_REMOTE\_SIZE, [227](#), [228](#)
- MPI\_COMM\_SET\_ATTR, [17](#), [240](#), [243](#),  
[244](#), [252](#), [481](#), [524](#), [528](#)

- 1 MPI\_COMM\_SET\_ERRHANDLER, [17](#), [293](#),  
2 [295](#), [483](#)
- 3 MPI\_COMM\_SET\_NAME, [254](#), [254](#), [255](#)
- 4 MPI\_COMM\_SIZE, [21](#), [203](#), [203](#), [204](#), [227](#)
- 5 MPI\_COMM\_SPAWN, [314](#), [315](#), [324–326](#),  
6 [326](#), [327](#), [329–334](#), [346](#), [347](#)
- 7 MPI\_COMM\_SPAWN\_MULTIPLE, [314](#),  
8 [324](#), [325](#), [330](#), [331](#), [332](#), [333](#), [347](#)
- 9 MPI\_COMM\_SPLIT, [207](#), [209](#), [209](#), [210](#),  
10 [211](#), [259](#), [263](#), [264](#), [266](#), [283–285](#),  
11 [612](#)
- 12 MPI\_COMM\_TEST\_INTER, [225](#), [226](#)
- 13 MPI\_DIMS\_CREATE, [263–265](#), [265](#)
- 14 MPI\_DIST\_GRAPH\_CREATE, [263](#), [268](#),  
15 [270](#), [271–273](#), [281](#), [613](#)
- 16 MPI\_Dist\_graph\_create, [271](#)
- 17 MPI\_DIST\_GRAPH\_CREATE\_ADJACENT,  
18 [263](#), [268](#), [268](#), [269](#), [272](#), [281](#), [612](#)
- 19 MPI\_DIST\_GRAPH\_NEIGHBOR\_COUNT,  
20 [281](#)
- 21 MPI\_DIST\_GRAPH\_NEIGHBORS, [279](#),  
22 [280](#), [281](#)
- 23 MPI\_DIST\_GRAPH\_NEIGHBORS\_COUNT,  
24 [279](#), [280](#), [281](#)
- 25 MPI\_DIST\_NEIGHBORS, [263](#), [613](#)
- 26 MPI\_DIST\_NEIGHBORS\_COUNT, [263](#),  
27 [613](#)
- 28 MPI\_DUP\_FN, [17](#), [243](#), [480](#), [481](#)
- 29 MPI\_ERRHANDLER\_C2F, [517](#)
- 30 MPI\_ERRHANDLER\_CREATE, [17](#), [294](#),  
31 [482](#)
- 32 MPI\_ERRHANDLER\_F2C, [517](#)
- 33 MPI\_ERRHANDLER\_FREE, [293](#), [299](#), [616](#)
- 34 MPI\_ERRHANDLER\_GET, [17](#), [293](#), [296](#),  
35 [483](#), [616](#)
- 36 MPI\_ERRHANDLER\_SET, [17](#), [295](#), [483](#)
- 37 MPI\_ERROR\_CLASS, [300](#), [300](#), [302](#)
- 38 MPI\_ERROR\_STRING, [299](#), [300](#), [302](#), [304](#)
- 39 MPI\_EXSCAN, [135](#), [139](#), [169](#), [176](#), [185](#),  
40 [185](#), [186](#), [612](#)
- 41 MPI\_FILE\_C2F, [517](#)
- 42 MPI\_FILE\_CALL\_ERRHANDLER, [305](#),  
43 [306](#)
- 44 MPI\_FILE\_CLOSE, [349](#), [409](#), [411](#), [412](#)
- 45 MPI\_FILE\_CREATE\_ERRHANDLER, [293](#),  
46 [297](#), [299](#), [545](#)
- 47 MPI\_FILE\_DELETE, [411](#), [412](#), [412](#), [416](#),  
48 [418](#), [465](#)
- MPI\_FILE\_F2C, [517](#)
- MPI\_FILE\_GET\_AMODE, [415](#), [415](#)
- MPI\_FILE\_GET\_ATOMICITY, [457](#), [458](#)
- MPI\_FILE\_GET\_BYTE\_OFFSET, [428](#), [434](#),  
[434](#), [439](#)
- MPI\_FILE\_GET\_ERRHANDLER, [293](#), [299](#),  
[465](#), [616](#)
- MPI\_FILE\_GET\_GROUP, [415](#), [415](#)
- MPI\_FILE\_GET\_INFO, [417](#), [417](#), [418](#), [617](#)
- MPI\_FILE\_GET\_POSITION, [433](#), [433](#)
- MPI\_FILE\_GET\_POSITION\_SHARED, [438](#),  
[439](#), [439](#), [458](#)
- MPI\_FILE\_GET\_SIZE, [414](#), [414](#), [460](#)
- MPI\_FILE\_GET\_TYPE\_EXTENT, [448](#),  
[449](#), [454](#)
- MPI\_FILE\_GET\_VIEW, [421](#), [421](#), [422](#)
- MPI\_FILE\_IREAD, [422](#), [431](#), [432](#), [439](#),  
[456](#)
- MPI\_FILE\_IREAD\_AT, [422](#), [427](#), [428](#)
- MPI\_FILE\_IREAD\_SHARED, [422](#), [436](#),  
[436](#)
- MPI\_FILE\_IWRITE, [422](#), [432](#), [433](#)
- MPI\_FILE\_IWRITE\_AT, [422](#), [428](#), [428](#)
- MPI\_FILE\_IWRITE\_SHARED, [422](#), [436](#),  
[436](#)
- MPI\_FILE\_OPEN, [302](#), [401](#), [409](#), [409](#), [410](#),  
[411](#), [416–418](#), [420](#), [434](#), [459](#), [460](#),  
[465](#), [466](#)
- MPI\_FILE\_PREALLOCATE, [413](#), [413](#), [414](#),  
[456](#), [460](#)
- MPI\_FILE\_READ, [422](#), [429](#), [429](#), [430](#), [432](#),  
[459](#), [460](#)
- MPI\_FILE\_READ\_ALL, [422](#), [430](#), [430](#), [440](#)
- MPI\_FILE\_READ\_ALL\_BEGIN, [422](#), [440](#),  
[441](#), [442](#), [456](#)
- MPI\_FILE\_READ\_ALL\_END, [422](#), [440](#),  
[441](#), [443](#), [456](#)
- MPI\_FILE\_READ\_AT, [422](#), [425](#), [425](#), [426](#),  
[428](#)
- MPI\_FILE\_READ\_AT\_ALL, [422](#), [425](#), [426](#)
- MPI\_FILE\_READ\_AT\_ALL\_BEGIN, [422](#),  
[441](#)
- MPI\_FILE\_READ\_AT\_ALL\_END, [422](#), [441](#)
- MPI\_FILE\_READ\_ORDERED, [422](#), [437](#),  
[437](#)
- MPI\_FILE\_READ\_ORDERED\_BEGIN, [422](#),  
[444](#)

- MPI\_FILE\_READ\_ORDERED\_END, [422](#), [444](#)
- MPI\_FILE\_READ\_SHARED, [422](#), [435](#), [435](#), [436](#), [437](#)
- MPI\_FILE\_SEEK, [433](#), [433](#), [434](#)
- MPI\_FILE\_SEEK\_SHARED, [438](#), [438](#), [439](#), [458](#)
- MPI\_FILE\_SET\_ATOMICITY, [411](#), [456](#), [457](#), [457](#)
- MPI\_FILE\_SET\_ERRHANDLER, [293](#), [298](#), [465](#)
- MPI\_FILE\_SET\_INFO, [416](#), [416](#), [417](#), [418](#), [617](#)
- MPI\_FILE\_SET\_SIZE, [413](#), [413](#), [414](#), [456](#), [458](#), [460](#)
- MPI\_FILE\_SET\_VIEW, [93](#), [302](#), [410](#), [416](#)–[419](#), [419](#), [420](#), [421](#), [434](#), [439](#), [446](#), [452](#), [459](#), [466](#), [617](#)
- MPI\_FILE\_SYNC, [412](#), [422](#), [455](#)–[458](#), [458](#), [463](#)
- MPI\_FILE\_WRITE, [422](#), [423](#), [430](#), [431](#), [433](#), [459](#)
- MPI\_FILE\_WRITE\_ALL, [422](#), [431](#), [431](#)
- MPI\_FILE\_WRITE\_ALL\_BEGIN, [422](#), [443](#)
- MPI\_FILE\_WRITE\_ALL\_END, [422](#), [444](#)
- MPI\_FILE\_WRITE\_AT, [422](#), [423](#), [426](#), [426](#), [427](#), [428](#)
- MPI\_FILE\_WRITE\_AT\_ALL, [422](#), [427](#), [427](#)
- MPI\_FILE\_WRITE\_AT\_ALL\_BEGIN, [422](#), [442](#)
- MPI\_FILE\_WRITE\_AT\_ALL\_END, [422](#), [442](#)
- MPI\_FILE\_WRITE\_ORDERED, [422](#), [437](#), [438](#), [438](#)
- MPI\_FILE\_WRITE\_ORDERED\_BEGIN, [422](#), [445](#)
- MPI\_FILE\_WRITE\_ORDERED\_END, [422](#), [445](#)
- MPI\_FILE\_WRITE\_SHARED, [422](#), [423](#), [435](#), [436](#)–[438](#)
- MPI\_FINALIZE, [14](#), [24](#), [288](#), [308](#), [308](#), [309](#)–[313](#), [348](#), [349](#), [400](#), [409](#), [516](#), [520](#), [616](#)
- MPI\_FINALIZED, [20](#), [308](#), [310](#), [312](#), [313](#), [313](#), [516](#)
- MPI\_FREE\_MEM, [291](#), [291](#), [301](#)
- MPI\_GATHER, [135](#), [138](#), [139](#), [143](#), [145](#), [146](#), [153](#), [154](#), [158](#), [159](#), [168](#)
- MPI\_GATHERV, [135](#), [139](#), [145](#), [145](#), [146](#), [147](#), [155](#), [160](#)
- MPI\_GET, [353](#), [357](#), [358](#), [360](#), [367](#), [387](#), [617](#)
- MPI\_GET\_ADDRESS, [17](#), [83](#), [98](#), [98](#), [99](#), [108](#), [479](#), [502](#), [504](#), [521](#), [522](#)
- MPI\_GET\_COUNT, [34](#), [34](#), [35](#), [55](#), [106](#), [107](#), [398](#), [424](#), [614](#)
- MPI\_GET\_ELEMENTS, [55](#), [106](#), [106](#), [107](#), [398](#), [399](#), [424](#)
- MPI\_GET\_PROCESSOR\_NAME, [289](#), [290](#), [616](#)
- MPI\_GET\_VERSION, [287](#), [288](#), [308](#), [310](#)
- MPI\_GRAPH\_CREATE, [263](#), [266](#), [266](#), [272](#), [274](#), [275](#), [278](#), [285](#), [615](#)
- MPI\_GRAPH\_GET, [263](#), [274](#), [275](#)
- MPI\_GRAPH\_MAP, [263](#), [285](#), [285](#)
- MPI\_GRAPH\_NEIGHBORS, [263](#), [277](#), [278](#), [278](#), [613](#)
- MPI\_GRAPH\_NEIGHBORS\_COUNT, [263](#), [277](#), [277](#), [278](#), [613](#)
- MPI\_GRAPHDIMS\_GET, [263](#), [274](#), [274](#)
- MPI\_GREQUEST\_COMPLETE, [392](#)–[395](#), [395](#)
- MPI\_GREQUEST\_START, [392](#), [392](#), [545](#), [613](#)
- MPI\_GROUP\_C2F, [517](#)
- MPI\_GROUP\_COMPARE, [197](#), [200](#)
- MPI\_GROUP\_DIFFERENCE, [199](#)
- MPI\_GROUP\_EXCL, [200](#), [200](#), [202](#)
- MPI\_GROUP\_F2C, [517](#)
- MPI\_GROUP\_FREE, [202](#), [202](#), [203](#), [204](#), [293](#), [616](#)
- MPI\_GROUP\_INCL, [200](#), [200](#), [201](#)
- MPI\_GROUP\_INTERSECTION, [199](#)
- MPI\_GROUP\_RANGE\_EXCL, [201](#), [202](#)
- MPI\_GROUP\_RANGE\_INCL, [201](#), [201](#)
- MPI\_GROUP\_RANK, [196](#), [204](#)
- MPI\_GROUP\_SIZE, [196](#), [203](#)
- MPI\_GROUP\_TRANSLATE\_RANKS, [197](#), [197](#), [614](#)
- MPI\_GROUP\_UNION, [198](#)
- MPI\_IBSEND, [53](#), [56](#), [75](#)
- MPI\_INFO\_C2F, [517](#)
- MPI\_INFO\_CREATE, [318](#), [318](#)
- MPI\_INFO\_DELETE, [301](#), [318](#), [319](#), [320](#)

- 1 MPI\_INFO\_DUP, [321](#), [321](#)
- 2 MPI\_INFO\_F2C, [517](#)
- 3 MPI\_INFO\_FREE, [321](#), [417](#)
- 4 MPI\_INFO\_GET, [317](#), [319](#), [616](#)
- 5 MPI\_INFO\_GET\_NKEYS, [317](#), [320](#), [320](#),
- 6 [616](#)
- 7 MPI\_INFO\_GET\_NTHKEY, [317](#), [320](#), [616](#)
- 8 MPI\_INFO\_GET\_VALUELEN, [317](#), [319](#),
- 9 [616](#)
- 10 MPI\_INFO\_SET, [318](#), [318](#), [319](#), [320](#)
- 11 MPI\_INIT, [14](#), [24](#), [195](#), [235](#), [288](#), [307](#), [307](#),
- 12 [308](#), [310](#), [311](#), [313](#), [327–330](#), [346](#),
- 13 [347](#), [402–404](#), [473](#), [516](#), [520](#), [611](#),
- 14 [613](#)
- 15 MPI\_INIT\_THREAD, [195](#), [308](#), [313](#), [402](#),
- 16 [403–405](#), [516](#), [613](#)
- 17 MPI\_INITIALIZED, [308](#), [310](#), [311](#), [311](#),
- 18 [313](#), [404](#), [516](#)
- 19 MPI\_INTERCOMM\_CREATE, [205](#), [228](#),
- 20 [229](#), [230](#)
- 21 MPI\_INTERCOMM\_MERGE, [225](#), [228](#),
- 22 [229](#), [230](#)
- 23 MPI\_IPROBE, [35](#), [67](#), [68](#), [68](#), [69](#), [401](#)
- 24 MPI\_IRECV, [54](#), [501–505](#)
- 25 MPI\_IRSEND, [54](#)
- 26 MPI\_IS\_THREAD\_MAIN, [402](#), [404](#)
- 27 MPI\_ISEND, [11](#), [52](#), [75](#), [309](#), [501](#)
- 28 MPI\_ISSEND, [53](#)
- 29 MPI\_KEYVAL\_CREATE, [17](#), [242](#), [244](#),
- 30 [480](#), [481](#), [547](#)
- 31 MPI\_KEYVAL\_FREE, [17](#), [244](#), [252](#), [481](#)
- 32 MPI\_LOOKUP\_NAME, [301](#), [337](#), [341](#), [343](#),
- 33 [343](#)
- 34 MPI\_NULL\_COPY\_FN, [17](#), [243](#), [480](#), [481](#)
- 35 MPI\_NULL\_DELETE\_FN, [17](#), [243](#), [481](#)
- 36 MPI\_OP\_C2F, [517](#)
- 37 MPI\_OP\_COMMUTATIVE, [181](#), [612](#)
- 38 MPI\_OP\_CREATE, [175](#), [175](#), [177](#), [544](#)
- 39 MPI\_OP\_F2C, [517](#)
- 40 MPI\_OP\_FREE, [178](#)
- 41 MPI\_OPEN\_PORT, [337](#), [338](#), [338](#), [339–](#)
- 42 [341](#), [343](#)
- 43 MPI\_PACK, [50](#), [125](#), [128](#), [131](#), [450](#), [453](#)
- 44 MPI\_PACK\_EXTERNAL, [7](#), [131](#), [131](#), [512](#),
- 45 [614](#)
- 46 MPI\_PACK\_EXTERNAL\_SIZE, [132](#)
- 47 MPI\_PACK\_SIZE, [50](#), [128](#), [128](#)
- 48 MPI\_PCONTROL, [471–473](#), [473](#)
- MPI\_PROBE, [33](#), [35](#), [36](#), [67–69](#), [69](#), [70](#),
- [401](#)
- MPI\_PUBLISH\_NAME, [337](#), [341](#), [341](#), [342](#),
- [343](#)
- MPI\_PUT, [353](#), [357](#), [358](#), [358](#), [360](#), [364](#),
- [365](#), [367](#), [372](#), [377](#), [379](#), [387](#), [617](#)
- MPI\_QUERY\_THREAD, [404](#), [405](#)
- MPI\_RECV, [28](#), [32](#), [34–36](#), [68](#), [70](#), [82](#),
- [105](#), [106](#), [126](#), [137](#), [144](#), [399](#), [461](#),
- [487](#), [504](#), [505](#)
- MPI\_RECV\_INIT, [74](#), [75](#)
- MPI\_REDUCE, [135](#), [139](#), [167](#), [167](#), [168](#),
- [169](#), [176–178](#), [180](#), [182](#), [184](#), [185](#),
- [364](#), [365](#), [613](#)
- MPI\_REDUCE\_LOCAL, [168](#), [181](#), [612](#)
- MPI\_REDUCE\_SCATTER, [135](#), [139](#), [140](#),
- [169](#), [176](#), [183](#), [183](#), [184](#)
- MPI\_REDUCE\_SCATTER\_BLOCK, [182](#),
- [182](#), [183](#), [612](#)
- MPI\_REGISTER\_DATAREP, [302](#), [450](#), [452–](#)
- [454](#), [466](#), [545](#)
- MPI\_REQUEST\_C2F, [517](#)
- MPI\_REQUEST\_F2C, [517](#)
- MPI\_REQUEST\_FREE, [22](#), [58](#), [58](#), [71](#),
- [76](#), [309](#), [393–395](#), [612](#)
- MPI\_REQUEST\_GET\_STATUS, [36](#), [67](#),
- [67](#), [393](#), [612](#)
- MPI\_RSEND, [43](#)
- MPI\_RSEND\_INIT, [74](#)
- MPI\_SCAN, [135](#), [139](#), [169](#), [176](#), [184](#), [185](#),
- [186](#)
- MPI\_SCATTER, [135](#), [139](#), [153](#), [153](#), [155](#),
- [156](#), [182](#)
- MPI\_SCATTERV, [135](#), [139](#), [154](#), [155](#), [156](#),
- [184](#)
- MPI\_SEND, [27](#), [28](#), [29](#), [35](#), [38](#), [82](#), [105](#),
- [125](#), [285](#), [410](#), [461](#), [473](#), [487](#), [500](#),
- [504](#)
- MPI\_SEND\_INIT, [72](#), [75](#)
- MPI\_SENDRECV, [77](#), [281](#)
- MPI\_SENDRECV\_REPLACE, [78](#)
- MPI\_SIZEOF, [506](#), [512](#), [513](#)
- MPI\_SSEND, [42](#)
- MPI\_SSEND\_INIT, [73](#)
- MPI\_START, [75](#), [75](#), [76](#)
- MPI\_STARTALL, [75](#), [76](#)
- MPI\_STATUS\_C2F, [520](#)
- MPI\_STATUS\_F2C, [520](#)



- MPI\_STATUS\_SET\_CANCELLED, [398](#)
- MPI\_STATUS\_SET\_ELEMENTS, [398](#), [398](#)
- MPI\_TEST, [11](#), [36](#), [55](#), [56](#), [57](#), [58](#), [60](#), [62](#),  
[71](#), [76](#), [309](#), [394](#), [395](#), [423](#), [424](#)
- MPI\_TEST\_CANCELLED, [55–57](#), [71](#), [72](#),  
[393](#), [399](#), [424](#)
- MPI\_TESTALL, [60](#), [63](#), [64](#), [393](#), [394](#), [397](#),  
[400](#)
- MPI\_TESTANY, [55](#), [60](#), [61](#), [62](#), [65](#), [393](#),  
[394](#), [397](#), [400](#)
- MPI\_TESTSOME, [60](#), [65](#), [65](#), [66](#), [393](#), [394](#),  
[397](#), [400](#)
- MPI\_TOPO\_TEST, [263](#), [274](#), [274](#)
- MPI\_TYPE\_C2F, [517](#)
- MPI\_TYPE\_COMMIT, [103](#), [103](#), [518](#)
- MPI\_TYPE\_CONTIGUOUS, [12](#), [83](#), [83](#),  
[85](#), [100](#), [110](#), [408](#), [448](#)
- MPI\_TYPE\_CREATE\_DARRAY, [12](#), [35](#),  
[94](#), [94](#), [110](#)
- MPI\_TYPE\_CREATE\_F90\_COMPLEX, [12](#),  
[110](#), [112](#), [170](#), [450](#), [492](#), [506](#), [509](#),  
[511](#)
- MPI\_TYPE\_CREATE\_F90\_INTEGER, [12](#),  
[110](#), [112](#), [169](#), [450](#), [492](#), [506](#), [510](#),  
[511](#)
- MPI\_TYPE\_CREATE\_F90\_REAL, [12](#), [110](#),  
[112](#), [169](#), [450](#), [492](#), [506](#), [509](#), [509](#),  
[510](#), [511](#), [612](#)
- MPI\_TYPE\_CREATE\_HINDEXED, [12](#), [17](#),  
[83](#), [88](#), [88](#), [90](#), [91](#), [110](#), [477](#)
- MPI\_TYPE\_CREATE\_HVECTOR, [12](#), [17](#),  
[83](#), [85](#), [85](#), [110](#), [477](#)
- MPI\_TYPE\_CREATE\_INDEXED\_BLOCK,  
[12](#), [89](#), [110](#)
- MPI\_TYPE\_CREATE\_KEYVAL, [240](#), [249](#),  
[252](#), [523](#), [544](#), [614](#)
- MPI\_TYPE\_CREATE\_RESIZED, [16](#), [17](#),  
[101](#), [110](#), [448](#)
- MPI\_TYPE\_CREATE\_STRUCT, [12](#), [17](#),  
[83](#), [90](#), [91](#), [110](#), [165](#), [478](#)
- MPI\_TYPE\_CREATE\_SUBARRAY, [12](#),  
[14](#), [91](#), [93](#), [95](#), [110](#)
- MPI\_TYPE\_DELETE\_ATTR, [240](#), [251](#),  
[252](#)
- MPI\_TYPE\_DUP, [12](#), [104](#), [104](#), [110](#)
- MPI\_TYPE\_DUP\_FN, [249](#), [249](#), [538](#)
- MPI\_TYPE\_EXTENT, [17](#), [101](#), [479](#), [523](#)
- MPI\_TYPE\_F2C, [517](#)
- MPI\_TYPE\_FREE, [104](#), [112](#), [250](#)
- MPI\_TYPE\_FREE\_KEYVAL, [240](#), [250](#),  
[252](#)
- MPI\_TYPE\_GET\_ATTR, [240](#), [251](#), [252](#),  
[524](#)
- MPI\_TYPE\_GET\_CONTENTS, [109](#), [111](#),  
[112](#), [113](#)
- MPI\_TYPE\_GET\_ENVELOPE, [109](#), [109](#),  
[112](#), [113](#), [510](#)
- MPI\_TYPE\_GET\_EXTENT, [17](#), [101](#), [103](#),  
[479](#), [513](#), [521](#), [523](#)
- MPI\_TYPE\_GET\_NAME, [257](#)
- MPI\_TYPE\_GET\_TRUE\_EXTENT, [102](#)
- MPI\_TYPE\_HINDEXED, [17](#), [88](#), [110](#), [478](#),  
[523](#)
- MPI\_TYPE\_HVECTOR, [17](#), [86](#), [110](#), [477](#),  
[523](#)
- MPI\_TYPE\_INDEXED, [12](#), [86](#), [87](#), [87](#),  
[88](#), [89](#), [110](#)
- MPI\_TYPE\_KEYVAL\_CREATE, [544](#)
- MPI\_TYPE\_LB, [17](#), [101](#), [479](#)
- MPI\_TYPE\_MATCH\_SIZE, [506](#), [513](#), [513](#)
- MPI\_TYPE\_NULL\_COPY\_FN, [249](#), [249](#),  
[538](#)
- MPI\_TYPE\_NULL\_DELETE\_FN, [250](#), [538](#)
- MPI\_TYPE\_SET\_ATTR, [240](#), [251](#), [252](#),  
[524](#), [528](#)
- MPI\_TYPE\_SET\_NAME, [256](#)
- MPI\_TYPE\_SIZE, [99](#), [99](#), [473](#)
- MPI\_TYPE\_STRUCT, [17](#), [90](#), [100](#), [110](#),  
[478](#), [523](#)
- MPI\_TYPE\_UB, [17](#), [101](#), [480](#), [523](#)
- MPI\_TYPE\_VECTOR, [12](#), [84](#), [84](#), [85](#), [88](#),  
[110](#)
- MPI\_UNPACK, [126](#), [126](#), [127](#), [131](#), [453](#)
- MPI\_UNPACK\_EXTERNAL, [7](#), [132](#), [512](#)
- MPI\_UNPUBLISH\_NAME, [301](#), [342](#), [342](#)
- MPI\_WAIT, [34](#), [36](#), [55](#), [56](#), [56](#), [57–59](#), [61](#),  
[63](#), [71](#), [76](#), [309](#), [391](#), [394](#), [395](#), [401](#),  
[423](#), [424](#), [439](#), [456](#), [457](#), [504](#), [505](#)
- MPI\_WAITALL, [60](#), [62](#), [63](#), [64](#), [393](#), [394](#),  
[397](#), [400](#), [401](#), [495](#)
- MPI\_WAITANY, [44](#), [55](#), [60](#), [60](#), [61](#), [62](#),  
[66](#), [393](#), [394](#), [397](#), [400](#), [401](#)
- MPI\_WAITSOME, [60](#), [64](#), [64](#), [65](#), [66](#), [393](#),  
[394](#), [397](#), [400](#), [401](#)
- MPI\_WIN\_C2F, [517](#)

MPI\_WIN\_CALL\_ERRHANDLER, [305](#),  
[306](#)  
 MPI\_WIN\_COMPLETE, [356](#), [367](#), [372](#),  
[372](#), [373](#), [374](#), [383](#), [386](#)  
 MPI\_WIN\_CREATE, [354](#), [355](#), [381](#), [401](#)  
 MPI\_WIN\_CREATE\_ERRHANDLER, [293](#),  
[296](#), [297](#), [545](#)  
 MPI\_WIN\_CREATE\_KEYVAL, [240](#), [246](#),  
[252](#), [523](#), [544](#), [614](#)  
 MPI\_WIN\_DELETE\_ATTR, [240](#), [249](#), [252](#)  
 MPI\_WIN\_DUP\_FN, [247](#), [247](#), [538](#)  
 MPI\_WIN\_F2C, [517](#)  
 MPI\_WIN\_FENCE, [356](#), [367](#), [369](#), [371](#),  
[377](#), [383](#), [385](#), [388](#)  
 MPI\_WIN\_FREE, [248](#), [349](#), [355](#), [356](#)  
 MPI\_WIN\_FREE\_KEYVAL, [240](#), [248](#), [252](#)  
 MPI\_WIN\_GET\_ATTR, [240](#), [248](#), [252](#), [356](#),  
[524](#), [528](#)  
 MPI\_WIN\_GET\_ERRHANDLER, [293](#), [297](#),  
[616](#)  
 MPI\_WIN\_GET\_GROUP, [356](#), [357](#)  
 MPI\_WIN\_GET\_NAME, [257](#)  
 MPI\_WIN\_KEYVAL\_CREATE, [544](#)  
 MPI\_WIN\_LOCK, [290](#), [355](#), [367](#), [368](#), [375](#),  
[376](#), [377](#), [383](#)  
 MPI\_WIN\_NULL\_COPY\_FN, [247](#), [247](#),  
[538](#)  
 MPI\_WIN\_NULL\_DELETE\_FN, [247](#), [538](#)  
 MPI\_WIN\_POST, [356](#), [367](#), [372](#), [373](#), [373](#),  
[374–378](#), [383](#), [387](#), [388](#)  
 MPI\_WIN\_SET\_ATTR, [240](#), [248](#), [252](#), [524](#),  
[528](#)  
 MPI\_WIN\_SET\_ERRHANDLER, [293](#), [297](#)  
 MPI\_WIN\_SET\_NAME, [257](#)  
 MPI\_WIN\_START, [367](#), [371](#), [372–375](#), [377](#),  
[378](#), [381](#), [387](#)  
 MPI\_WIN\_TEST, [373](#), [374](#)  
 MPI\_WIN\_UNLOCK, [290](#), [367](#), [368](#), [376](#),  
[377](#), [383](#), [385](#)  
 MPI\_WIN\_WAIT, [356](#), [367](#), [373](#), [373](#), [374](#),  
[376](#), [383](#), [385–387](#)  
 MPI\_WTICK, [22](#), [307](#), [307](#)  
 MPI\_WTIME, [22](#), [289](#), [306](#), [306](#), [307](#), [473](#)  
 mpiexec, [308](#), [312](#), [314](#), [314](#), [403](#)  
 mpirun, [313](#), [314](#)  
 PMPI\_, [471](#)  
 PMPI\_WTICK, [22](#)

PMPI\_WTIME, [22](#)  
 TYPEDEF:MPI\_Comm\_copy\_attr\_function,  
[17](#), [242](#), [538](#), [543](#)  
 TYPEDEF:MPI\_Comm\_delete\_attr\_function,  
[17](#), [242](#), [538](#), [543](#)  
 TYPEDEF:MPI\_Comm\_errhandler\_fn, [294](#),  
[484](#), [613](#)  
 TYPEDEF:MPI\_Comm\_errhandler\_function,  
[17](#), [294](#), [484](#), [543](#), [613](#)  
 TYPEDEF:MPI\_Copy\_function, [17](#), [480](#),  
[539](#), [547](#)  
 TYPEDEF:MPI\_Datarep\_conversion\_function,  
[453](#), [544](#)  
 TYPEDEF:MPI\_Datarep\_extent\_function,  
[452](#), [543](#)  
 TYPEDEF:MPI\_Delete\_function, [17](#), [481](#),  
[539](#), [547](#)  
 TYPEDEF:MPI\_File\_errhandler\_fn, [298](#),  
[484](#), [613](#)  
 TYPEDEF:MPI\_File\_errhandler\_function,  
[298](#), [484](#), [543](#), [613](#)  
 TYPEDEF:MPI\_Grequest\_cancel\_function,  
[394](#), [543](#)  
 TYPEDEF:MPI\_Grequest\_free\_function, [393](#),  
[543](#)  
 TYPEDEF:MPI\_Grequest\_query\_function,  
[392](#), [543](#)  
 TYPEDEF:MPI\_Handler\_function, [17](#), [482](#),  
[547](#)  
 TYPEDEF:MPI\_Type\_copy\_attr\_function,  
[250](#), [538](#), [543](#)  
 TYPEDEF:MPI\_Type\_delete\_attr\_function,  
[250](#), [538](#), [543](#)  
 TYPEDEF:MPI\_User\_function, [176](#), [543](#)  
 TYPEDEF:MPI\_Win\_copy\_attr\_function,  
[247](#), [538](#), [543](#)  
 TYPEDEF:MPI\_Win\_delete\_attr\_function,  
[247](#), [538](#), [543](#)  
 TYPEDEF:MPI\_Win\_errhandler\_fn, [296](#),  
[484](#), [613](#)  
 TYPEDEF:MPI\_Win\_errhandler\_function,  
[296](#), [484](#), [543](#), [613](#)